


***Dual Common Anode diodes
Power Module***

**$V_{RRM} = 1700V$
 $I_C = 400A @ T_c = 55^\circ C$**

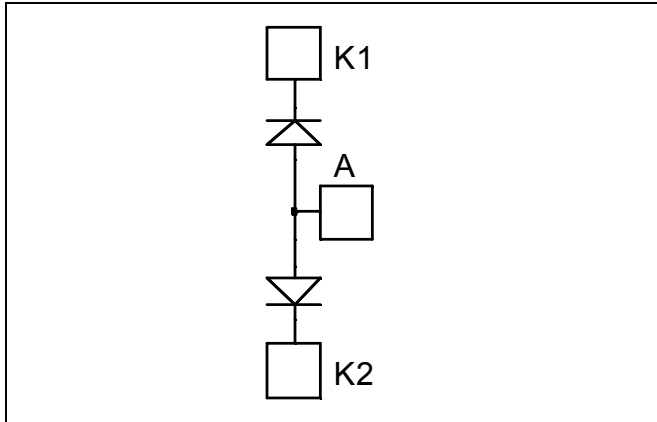

Application


- Uninterruptible Power Supply (UPS)
- Induction heating
- Welding equipment
- High speed rectifiers

Features

- Ultra fast recovery times
- Soft recovery characteristics
- High blocking voltage
- High current
- Low leakage current
- Very low stray inductance
 - Symmetrical design
 - M5 power connectors
- High level of integration

Benefits

- Outstanding performance at high frequency operation
- Low losses
- Low noise switching
- Direct mounting to heatsink (isolated package)
- Low junction to case thermal resistance

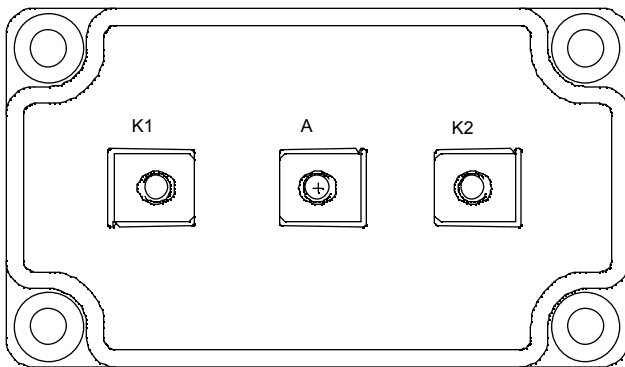

Absolute maximum ratings

Symbol	Parameter			Max ratings	Unit	
V _R	Maximum DC reverse Voltage			1700	V	
V _{RRM}	Maximum Peak Repetitive Reverse Voltage					
I _{F(AV)}	Maximum Average Forward Current	Duty cycle = 50%	T _c = 25°C	480	A	
			T _c = 55°C	400		
I _{F(RMS)}	RMS Forward Current			500		
I _{FSM}	Non-Repetitive Forward Surge Current		T _j = 25°C	1500		

CAUTION: These Devices are sensitive to Electrostatic Discharge. Proper Handling Procedures Should Be Followed.

All ratings @ $T_j = 25^\circ\text{C}$ unless otherwise specified

Electrical Characteristics

Symbol	Characteristic	Test Conditions	Min	Typ	Max	Unit
V_F	Diode Forward Voltage	$I_F = 400\text{A}$	$T_j = 25^\circ\text{C}$	2.2	2.5	V
			$T_j = 125^\circ\text{C}$	2.1		
I_{RM}	Maximum Reverse Leakage Current	$V_R = 1700\text{V}$	$T_j = 25^\circ\text{C}$		750	μA
			$T_j = 125^\circ\text{C}$		1000	


Dynamic Characteristics

Symbol	Characteristic	Test Conditions	Min	Typ	Max	Unit
t_{rr}	Reverse Recovery Time	$I_F = 400\text{A}$ $V_R = 900\text{V}$ $di/dt = 4000\text{A}/\mu\text{s}$	$T_j = 25^\circ\text{C}$	572		ns
			$T_j = 125^\circ\text{C}$	704		
Q_{rr}	Reverse Recovery Charge		$T_j = 25^\circ\text{C}$	80		μC
			$T_j = 125^\circ\text{C}$	140		
I_{RRM}	Reverse Recovery Current		$T_j = 25^\circ\text{C}$	280		A
			$T_j = 125^\circ\text{C}$	400		


Thermal and package characteristics

Symbol	Characteristic	Min	Typ	Max	Unit
R_{thJC}	Junction to Case			0.095	$^\circ\text{C}/\text{W}$
V_{ISOL}	RMS Isolation Voltage, any terminal to case $t = 1\text{ min}$, $I_{isol} < 1\text{mA}$, 50/60Hz	3400			V
T_j	Operating junction temperature range	-40		150	$^\circ\text{C}$
T_{STG}	Storage Temperature Range	-40		125	
T_C	Operating Case Temperature	-40		100	
Torque	Mounting torque	To heatsink	M6	3	N.m
		For terminals	M5	2	
Wt	Package Weight			280	g

Package outline (dimensions in mm)

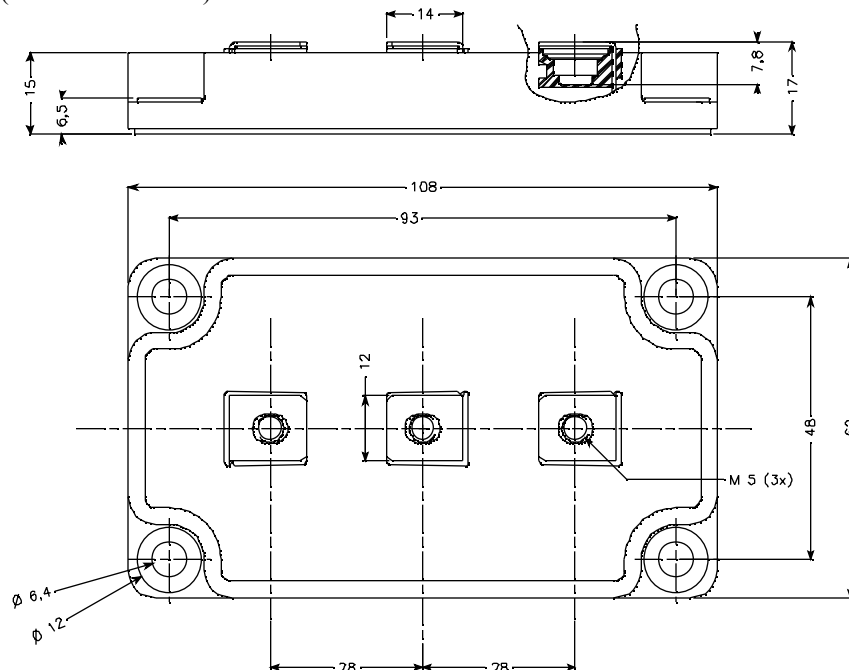

Typical Performance Curve

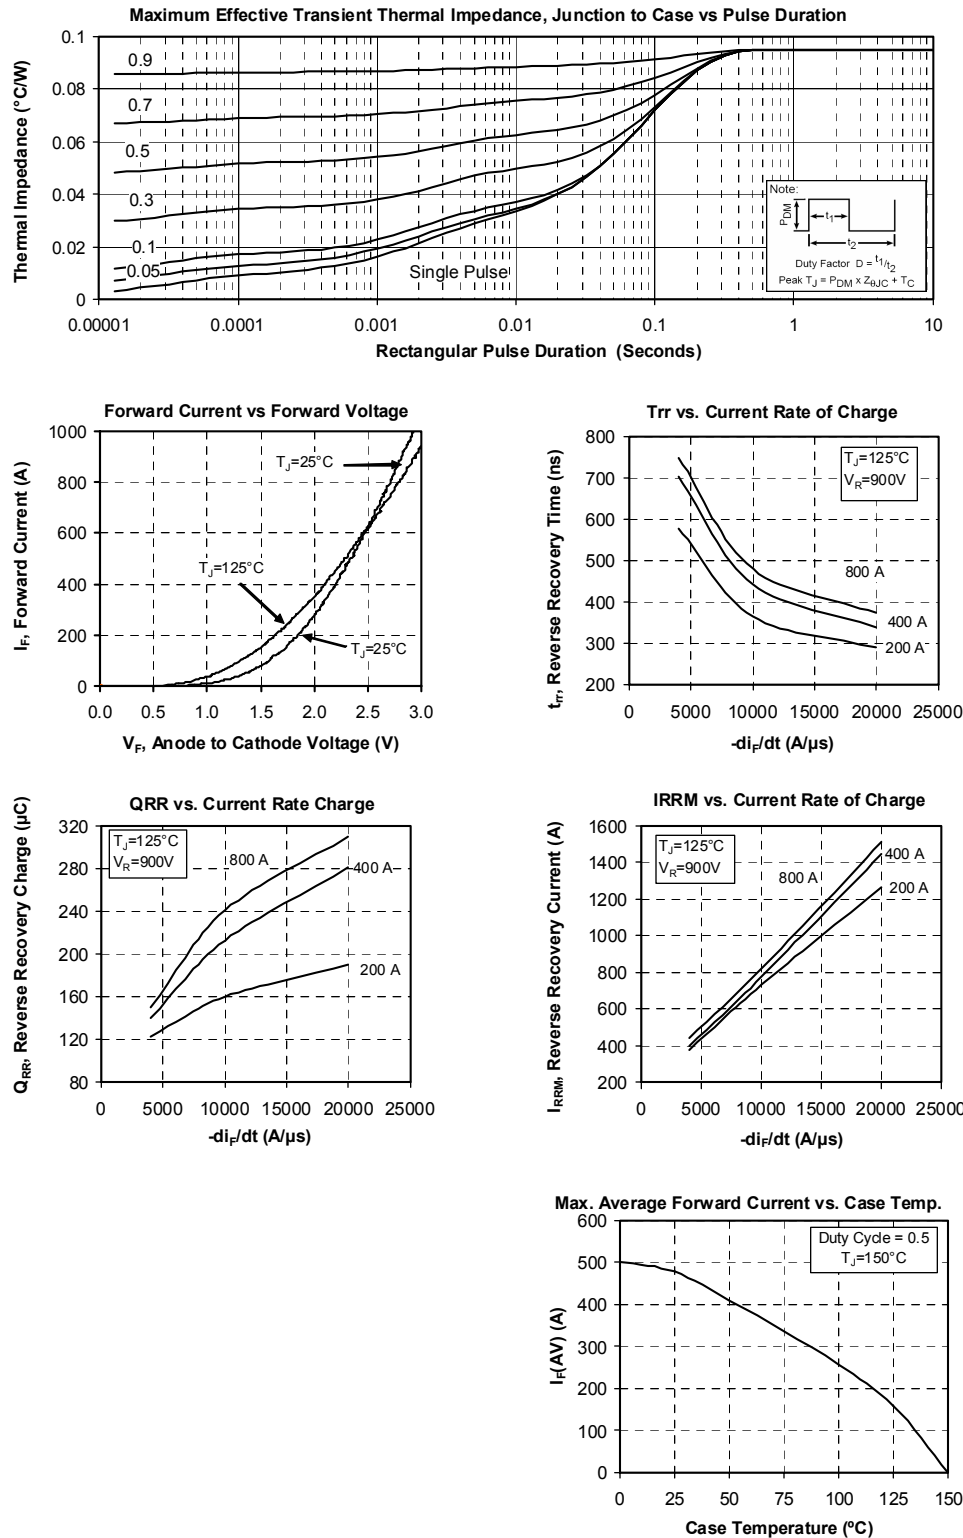

APT reserves the right to change, without notice, the specifications and information contained herein

APT's products are covered by one or more of U.S. patents 4,895,810 5,045,903 5,089,434 5,182,234 5,019,522 5,262,336 6,503,786 5,256,583 4,748,103 5,283,202 5,231,474 5,434,095 5,528,058 and foreign patents. U.S. and Foreign patents pending. All Rights Reserved.