




**Space-saving SOP4-pin
high capacity type
with built-in input resistor**

PhotoMOS®
GU SOP 1 Form A High Capacity
Voltage-sensitive (AQY212FG2S)



RoHS compliant

FEATURES

1. Built-in input resistor means less man-hours when mounting

The voltage-sensitive type, which eliminates the need to mount an external input resistor, is now available in a small package (recommended input voltage is 5 V). Man-hours spent mounting external input resistors are cut and board designing is simplified.

2. Saves space on PC board

Since the small package size remains the same while including a built-in input resistor, space on the PC board is saved. This makes it easier to incorporate space savings when designing miniature devices.


3. Continuous load current of 1.25A

This miniature SOP type controls 1.25A/60V load.

TYPICAL APPLICATIONS

1. Measuring and testing equipment
Semiconductor testing equipment, Probe cards, Datalogger, Board tester and other testing equipment.

2. Telecommunication, Broadcasting, and Medical equipment

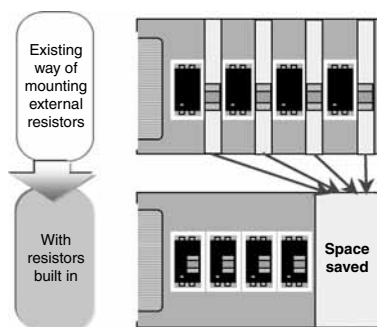

<Artistic impression of PC board space savings due to built-in resistor>

*Above is in case of SSOP.

TYPES

	Output rating*1		Package	Part No.*2			Packing quantity	
	Load voltage	Load current		Tube packing style	Tape and reel packing style		Tube	Tape and reel
					Picked from the 1/2-pin side	Picked from the 3/4-pin side		
AC/DC dual use	60V	1.25A	SOP4-pin	AQY212FG2S	AQY212FG2SX	AQY212FG2SZ	1 tube contains: 100 pcs. 1 batch contains: 2,000 pcs.	1,000 pcs.

Notes: *1 Indicate the peak AC and DC values.

*2 For space reasons, only "212FG2" is marked on the product. The three initial letters of the part number "AQY", the package (SOP) indicator "S", and the packing style indicator "X" or "Z" have been omitted.

RATING


1. Absolute maximum ratings (Condition: ambient temperature 25°C 77°F)

Item		Symbol	AQY212FG2S	Remarks
Input	Input voltage	V_{IN}	6V	
	Input reverse voltage	V_{RIN}	5V	
	Power dissipation	P_{in}	65mW	
Output	Load voltage (peak AC)	V_L	60V	
	Load current	I_L	1.25A	Peak AC, DC
	Peak load current	I_{peak}	3A	100ms (1shot), $V_L=DC$
	Power dissipation	P_{out}	400mW	
Total power dissipation		P_T	450mW	
I/O isolation voltage		V_{iso}	500Vrms	
Ambient temperature	Operating	T_{opr}	-40 to +85°C -40 to +185°F	(Non-icing at low temperatures)
	Storage	T_{stg}	-40 to +100°C -40 to +212°F	

2. Electrical characteristics (Condition: ambient temperature 25°C 77°F)

Item			Symbol	AQY212FG2S	Condition	
Input	Operate voltage	Typ.	V_{Fon}	1.4V	$I_L = 100mA$	
		Max.		4V		
	Turn off voltage	Min.	V_{Foff}	0.8V		
		Typ.		1.4V		
Input current	Typ.	I_{IN}	8.5mA	$V_{IN} = 5V$		
Output	On resistance	Typ.	R_{on}	0.2Ω	$V_{IN} = 5V, I_L = Max.$ Within 1 s	
		Max.		0.5Ω		
	Off state leakage current	Typ.	I_{Leak}	-		$V_{IN} = 0V, V_L = Max.$
		Max.		1μA		
Transfer characteristics	Turn on time*	Typ.	T_{on}	0.7ms	$V_{IN} = 5V, I_L = 100mA, V_L = 10V$	
		Max.		5ms		
	Turn off time*	Typ.	T_{off}	0.1ms		
		Max.		0.5ms		
	I/O capacitance	Typ.	C_{iso}	0.8pF		$f = 1MHz, V_B = 0V$
		Max.		1.5pF		$f = 1MHz, V_B = 0V$
Initial I/O isolation resistance	Min.	R_{iso}	1,000MΩ	500V DC		
Max. operating frequency	Max.	-	5 cps	$V_{IN} = 5V, duty = 50%$ $V_i \times I_i = 75V \cdot A$		

*Turn on/Turn off time

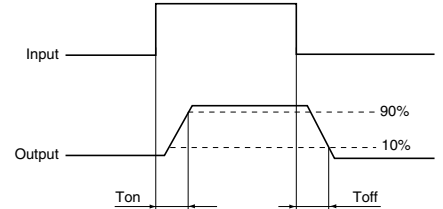

3. Recommended operating conditions (Ambient temperature: 25°C 77°F)

Please use under recommended operating conditions to obtain expected characteristics.

Item		Symbol	Min.	Max.	Unit
Input voltage		V_{IN}	4.5	5.5	V
AQY212FG2S	Load voltage (Peak AC)	V_L	—	48	V
	Continuous load current	I_L	—	1.25	A


■ These products are not designed for automotive use.

If you are considering to use these products for automotive applications, please contact your local Panasonic Corporation technical representative.

REFERENCE DATA


1. Load current vs. ambient temperature characteristics

Allowable ambient temperature: -40 to +85°C
-40 to +185°F

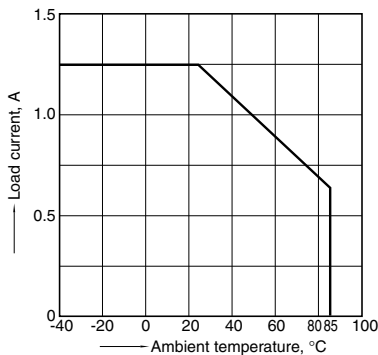


2. On resistance vs. ambient temperature characteristics

Measured portion: between terminals 3 and 4
Input voltage: 5V; Load voltage: Max. (DC);
Continuous load current: Max. (DC)

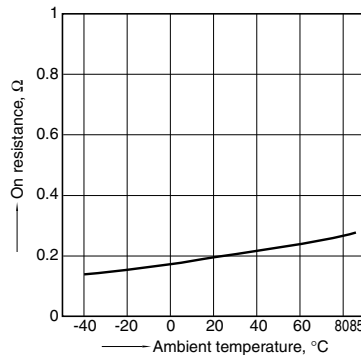


3. Turn on time vs. ambient temperature characteristics

Input voltage: 5V; Load voltage: 10V (DC);
Continuous load current: 100mA (DC)

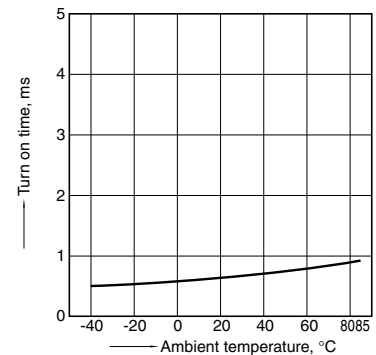


4. Turn off time vs. ambient temperature characteristics

Input voltage: 5V; Load voltage: 10V (DC);
Continuous load current: 100mA (DC)

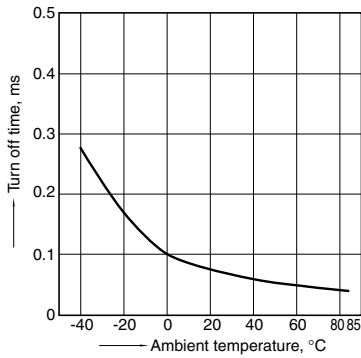


5. Turn on voltage vs. ambient temperature characteristics

Load voltage: 10V (DC);
Continuous load current: 100mA (DC)

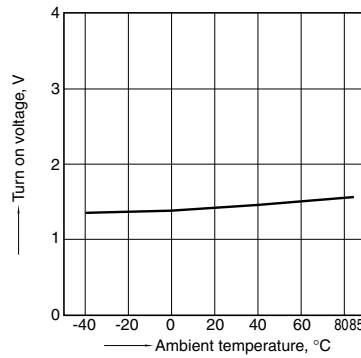


6. Turn off voltage vs. ambient temperature characteristics

Load voltage: 10V (DC);
Continuous load current: 100mA (DC)

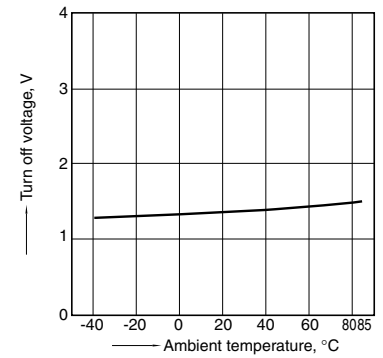


7. Input current vs. ambient temperature characteristics

Input voltage: 5V

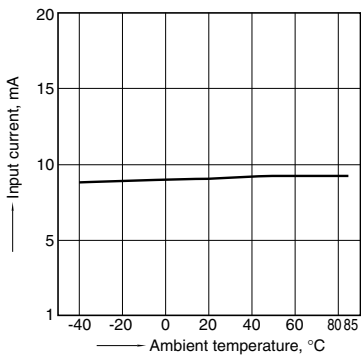


8. Current vs. voltage characteristics of output at MOS portion

Measured portion: between terminals 3 and 4
Ambient temperature: 25°C 77°F




9. Input current vs. input voltage characteristics

Ambient temperature: 25°C 77°F
(Recommended input voltage: 5±0.5V)

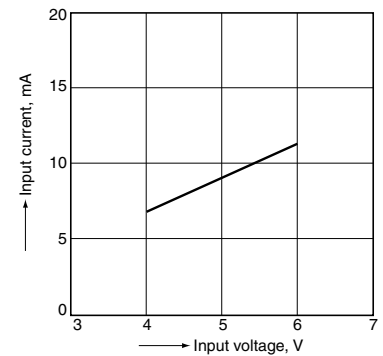


10. Off state leakage current vs. load voltage characteristics

Measured portion: between terminals 3 and 4
Ambient temperature: 25°C 77°F

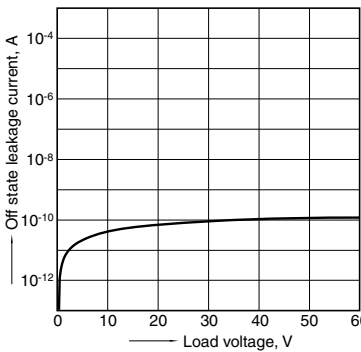


11. Turn on time vs. input voltage characteristics

Measured portion: between terminals 3 and 4
Load voltage: 10V (DC); Continuous load current: 100mA (DC); Ambient temperature: 25°C 77°F

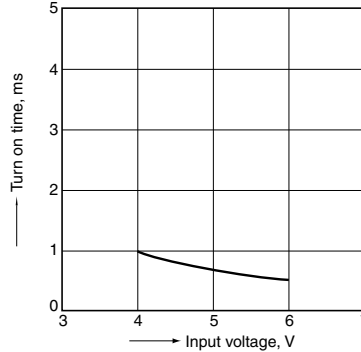


12. Turn off time vs. input voltage characteristics

Measured portion: between terminals 3 and 4
Load voltage: 10V (DC); Continuous load current: 100mA (DC); Ambient temperature: 25°C 77°F

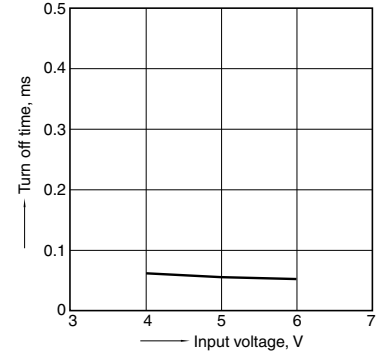


13. Output capacitance vs. applied voltage characteristics

Measured portion: between terminals 3 and 4
Frequency: 1 MHz, 30mVrms;
Ambient temperature: 25°C 77°F

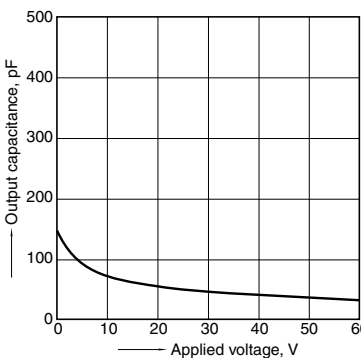

14. Max. operating frequency vs. load voltage-load current characteristics

Input voltage: 5V
Ambient temperature: 25°C 77°F

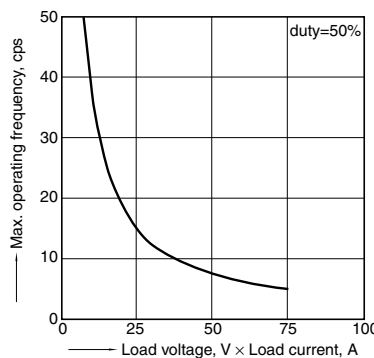

"PhotoMOS®", "PhotoMOS" and "PHOTOMOS" are registered trademarks of Panasonic Corporation.

*Recognized in Japan, the United States, all member states of European Union and other countries.

Please contact

Panasonic Corporation

Electromechanical Control Business Division

■ 1006, Oaza Kadoma, Kadoma-shi, Osaka 571-8506, Japan
industrial.panasonic.com/ac/e/

Panasonic®

©Panasonic Corporation 2017