


**Space-saving
SSOP 1 Form A type
with built-in resistor
40V load voltage**

**PhotoMOS®
RF SSOP C×R10
Voltage-sensitive (AQY221FO2V)**



RoHS compliant

FEATURES

1. Built-in input resistor means less man-hours when mounting

The voltage-sensitive type, which eliminates the need to mount an external input resistor, is now available in a small package. Man-hours spent mounting external input resistors are cut and board designing is simplified.

2. Save space on PC board

Since the small package size remains the same while including a built-in input resistor, space on the PC board is saved. This makes it easier to incorporate space savings when designing miniature devices.

3. Both low on-resistance (R type) and low capacitance (C type) available at excellent electrical characteristics of C×R10

- R type: On resistance Typ. 0.75Ω
Output resistance Typ. $12.5pF$
- C type: On resistance Typ. 9.5Ω
Output capacitance Typ. $1pF$

TYPICAL APPLICATIONS

1. Measuring and testing equipment


Semiconductor testing equipment, Probe cards, Datalogger, Board tester and other testing equipment.

2. Telecommunication and broadcasting equipment

3. Medical equipment

4. Multi-point recorder

Data logger, Warping and Thermocouple, etc.

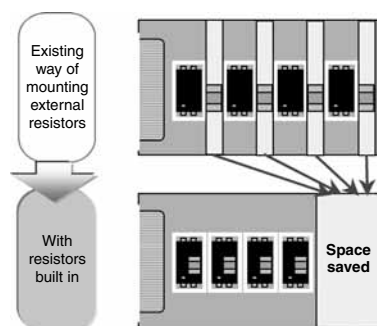

<Artistic impression of PC board space savings due to built-in resistor>

TYPES

	Type	Output rating*1		Package	Part No.*2		Packing quantity in tape and reel
		Load voltage	Load current		Tape and reel packing style (Picked from the 1 and 4-pin side)	Tape and reel packing style (Picked from the 2 and 3-pin side)	
AC/DC dual use	Low on-resistance (R type)	40 V	0.25A	SSOP	AQY221FR2VY	AQY221FR2VW	3,500 pcs.
	Low capacitance (C type)	40 V	0.12A		AQY221FN2VY	AQY221FN2VW	

Notes: *1 Indicate the peak AC and DC values.

*2 Packing quantity of 1,000 pieces is possible. Please contact our sales office.

For space reasons, the three initial letters of the part number "AQY", and the package (SSOP) indicator "V" and the packing style indicator "Y" or "W" are not marked on the device. (Ex. the label for product number AQY221FR2VY is 221FR2)

RF SSOP C×R10 Voltage-sensitive (AQY221F○2V)

RATING

1. Absolute maximum ratings (Condition: ambient temperature 25°C 77°F)

Item		Symbol	AQY221FR2V	AQY221FN2V	Remarks
Input	Input voltage	V_{IN}	6V		
	Input reverse voltage	V_{RIN}	5V		
	Power dissipation	P_{in}	65mW		
Output	Load voltage (peak AC)	V_L	40V		
	Load current	I_L	0.25A	0.12A	Peak AC, DC
	Peak load current	I_{peak}	0.75A	0.2A	100ms (1shot), $V_L=DC$
	Power dissipation	P_{out}	250mW		
Total power dissipation		P_T	300mW		
I/O isolation voltage		V_{iso}	500Vrms		
Ambient temperature	Operating	T_{opr}	-40 to +85°C -40 to +185°F		(Non-icing at low temperatures)
	Storage	T_{stg}	-40 to +100°C -40 to +212°F		


2. Electrical characteristics (Condition: ambient temperature 25°C 77°F)

Item			Symbol	AQY221FR2V		AQY221FN2V		Condition
Input	Operate voltage	Typ.	V _{Fon}	1.3V		AQY221FR2V: I _L = Max. AQY221FN2V: I _L = 80mA		
		Max.		4V				
	Turn off voltage	Min.	V _{Foff}	0.8V				
		Typ.		1.3V				
	Input current	Typ.	I _{IN}	8.5mA		V _{IN} = 5V		
Output	On resistance	Typ.	R _{on}	0.75Ω	9.5Ω	AQY221FR2V: V _{IN} = 5V, I _L = Max. AQY221FN2V: V _{IN} = 5V, I _L = 80mA Within 1 s		
		Max.		1.25Ω	12.5Ω			
	Output capacitance	Typ.	C _{out}	12.5pF	1pF	V _{IN} = 0V, V _B = 0V, f = 1MHz		
		Max.		18pF	1.5pF			
	Off state leakage current	Typ.	I _{Leak}	0.02nA	0.01nA	V _{IN} = 0V, V _L = Max.		
		Max.		*10nA				
Transfer characteristics	Turn on time**	Typ.	T _{on}	0.05ms	0.01ms	AQY221FR2V: V _{IN} = 5V, V _L = 10V, R _L = 40Ω AQY221FN2V: V _{IN} = 5V, V _L = 10V, R _L = 125Ω		
		Max.		0.5ms				
	Turn off time**	Typ.	T _{off}	0.06ms	0.03ms			
		Max.		0.2ms				
	I/O capacitance	Typ.	C _{iso}	0.8pF		f = 1MHz, V _B = 0V		
		Max.		1.5pF		f = 1MHz, V _B = 0V		
Initial I/O isolation resistance		Min.	R _{iso}	1.000MΩ		500V DC		

Note: If you wish to change the input voltage, rating or performance, please inquire with our sales.

*Available as custom orders (1 nA or less)

**Turn on/Turn off time

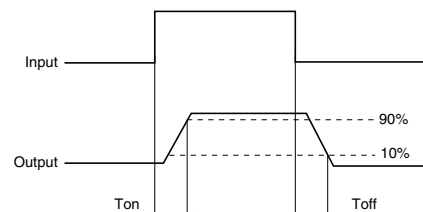

3. Recommended operating conditions (Ambient temperature: 25°C 77°F)

Please use under recommended operating conditions to obtain expected characteristics.

Item		Symbol	Min.	Max.	Unit
Input voltage		V_{IN}	4.5	5.5	V
AQY221FR2V	Load voltage (Peak AC)	V_L	—	15	V
	Continuous load current	I_L	—	0.25	A
AQY221FN2V	Load voltage (Peak AC)	V_L	—	15	V
	Continuous load current	I_L	—	0.12	A


■ These products are not designed for automotive use.

If you are considering to use these products for automotive applications, please contact your local Panasonic Corporation technical representative.

REFERENCE DATA


1. Load current vs. ambient temperature characteristics

Allowable ambient temperature: -40 to +85°C
-40 to +185°F

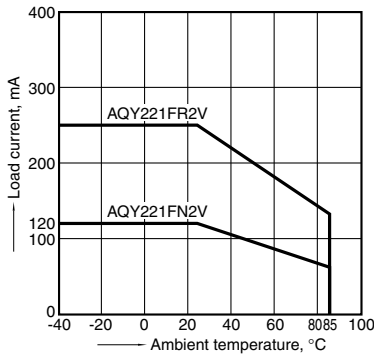


2. Load current vs. Load voltage characteristics

Ambient temperature: 25°C 77°F

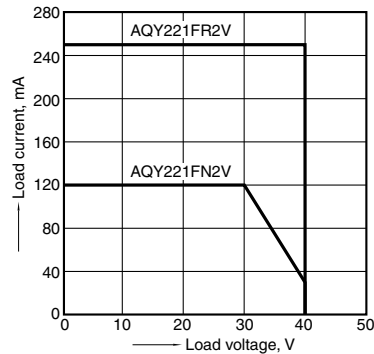


3. On resistance vs. ambient temperature characteristics

Measured portion: between terminals 3 and 4
Input voltage: 5V; Load voltage: 10V (DC);
Continuous load current: 250mA (DC) R type,
80mA (DC) C type

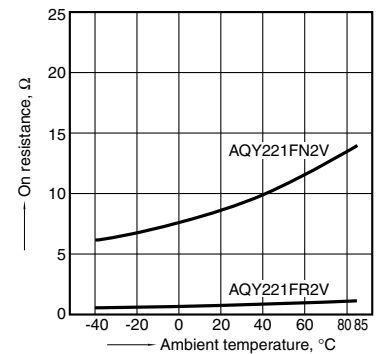


4. Turn on time vs. ambient temperature characteristics

Input voltage: 5V; Load voltage: 10V (DC);
Continuous load current: 250mA (DC) R type,
80mA (DC) C type

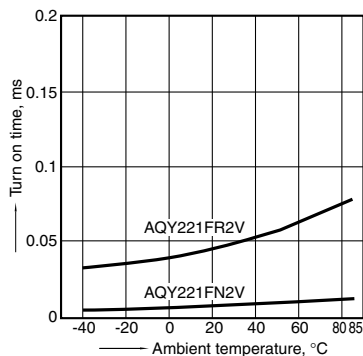


5. Turn off time vs. ambient temperature characteristics

Input voltage: 5V; Load voltage: 10V (DC);
Continuous load current: 250mA (DC) R type,
80mA (DC) C type

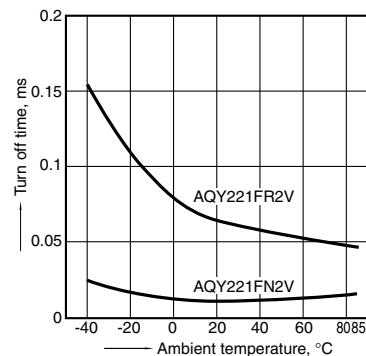


6. Operate voltage vs. ambient temperature characteristics

Load voltage: 10V (DC);
Continuous load current: 250mA (DC) R type,
80mA (DC) C type

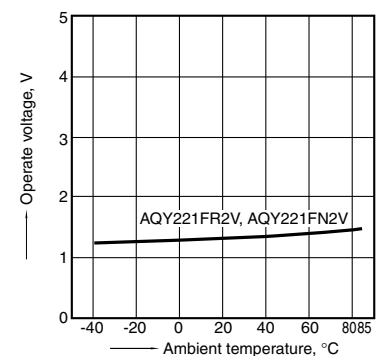


7. Turn off voltage vs. ambient temperature characteristics

Load voltage: 10V (DC);
Continuous load current: 250mA (DC) R type,
80mA (DC) C type

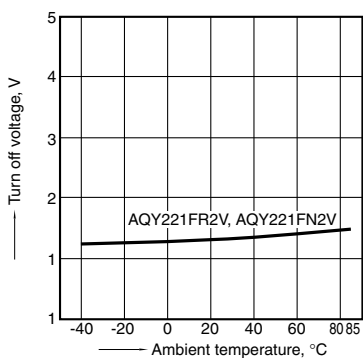


8. Input current vs. ambient temperature characteristics

Sample: All types
Input voltage: 5V

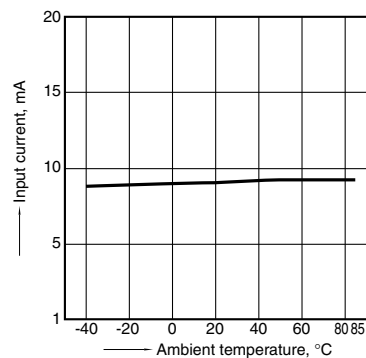

9. Current vs. voltage characteristics of output at MOS portion


Measured portion: between terminals 3 and 4
Ambient temperature: 25°C 77°F

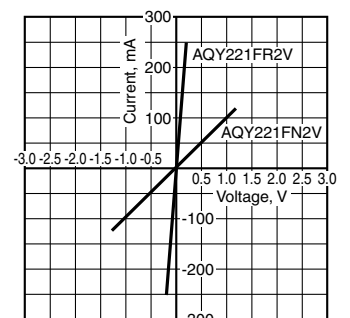

RF SSOP C×R10 Voltage-sensitive (AQY221F○2V)


10. Input current vs. input voltage characteristics

Sample: All types
Ambient temperature: 25°C 77°F
(Recommended input voltage: 5±0.5V)

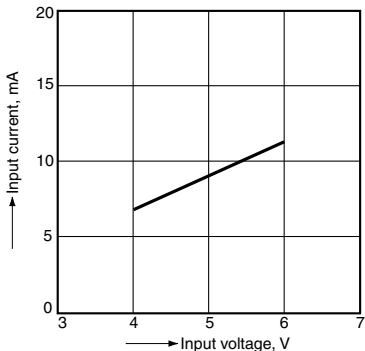


11. Off state leakage current vs. load voltage characteristics

Measured portion: between terminals 3 and 4
Ambient temperature: 25°C 77°F

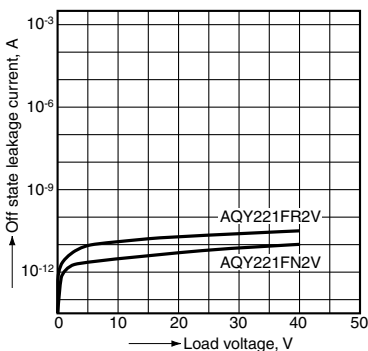


12. Turn on time vs. input voltage characteristics

Measured portion: between terminals 3 and 4
Load voltage: 10V (DC);
Continuous load current: 250mA (DC) R type,
80mA (DC) C type; Ambient temperature: 25°C 77°F

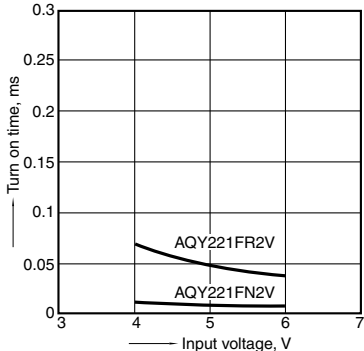


13. Turn off time vs. input voltage characteristics

Measured portion: between terminals 3 and 4
Load voltage: 10V (DC);
Continuous load current: 250mA (DC) R type,
80mA (DC) C type; Ambient temperature: 25°C 77°F

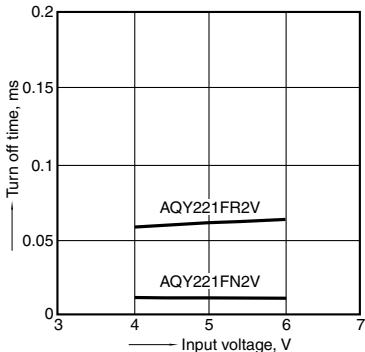


14. Output capacitance vs. applied voltage characteristics

Measured portion: between terminals 3 and 4
Frequency: 1 MHz, 30mVrms;
Ambient temperature: 25°C 77°F

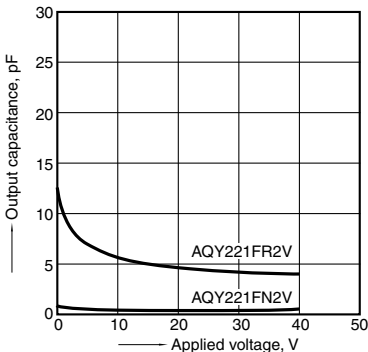


15. Isolation vs. frequency characteristics (50Ω impedance)

Measured portion: between terminals 3 and 4
Ambient temperature: 25°C 77°F

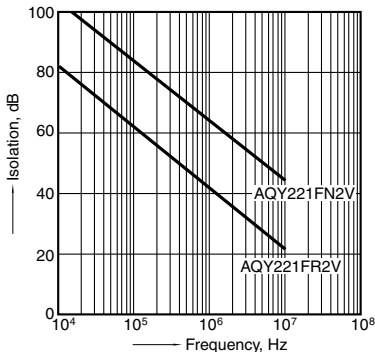

16. Insertion loss vs. frequency characteristics (50Ω impedance)

Measured portion: between terminals 3 and 4
Ambient temperature: 25°C 77°F

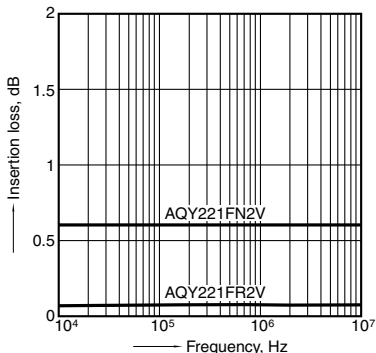

"PhotoMOS®", "PhotoMOS" and "PHOTOMOS" are registered trademarks of Panasonic Corporation.

*Recognized in Japan, the United States, all member states of European Union and other countries.

Please contact

Panasonic Corporation

Electromechanical Control Business Division

■ 1006, Oaza Kadoma, Kadoma-shi, Osaka 571-8506, Japan
industrial.panasonic.com/ac/e/

Panasonic®

©Panasonic Corporation 2017