


# AR-240320C •240(W) x ( 320x RGB(H)) dots 1/240 Duty

## FEATURE

- 1.Color-STN 3.9 inch display module with LED backlight , Touch panel.
- 2.FSTN: Color STN module, 6 o'clock view .
- 3.REAR POLARIZATION: Transmissive Type (PCF)
- 4.Pure driver type: External DC/DC supply .
- 5.Normal temperature type.

液晶之家 电话: 020-33819057  
<http://www.lcdfriends.com>

## BLOCK DIAGRAM

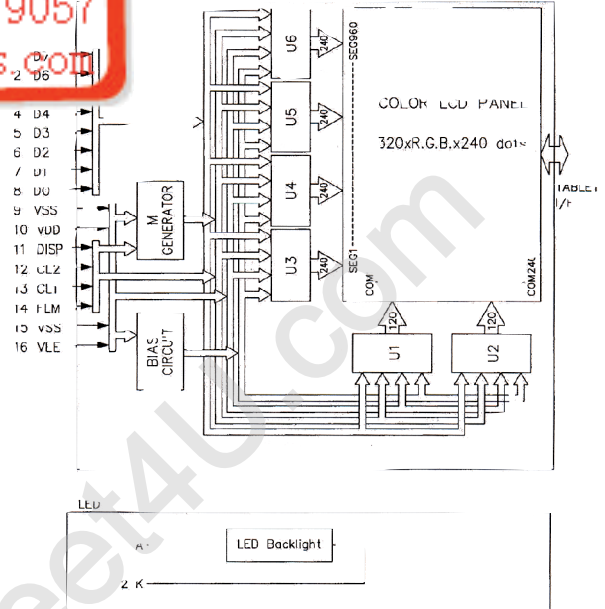

## ELECTRICAL CHARACTERISTICS

Parameter	Symbol	Condition	Typ. Value	Unit.
LCD driving voltage	VEE-VSS	25°C	23.6	V
Supply Current	IDD	VDD-VSS=3.3V	0.45	mA
	IEE	VDD-VSS=23.5V	2.9	mA
	IDD	VDD-VSS=5.0V	0.85	mA
	IEE	VDD-VSS=23.5V	2.9	mA

## INTERFACE

1	2	3	4	5	6	7	8
D7	D6	D5	D4	D3	D2	D1	D0
9	10	11	12	13	14	15	16
VSS	VDD	DISP	CL2	CL1	FLM	VSS	VEE

