

AUTOMOTIVE RECTIFIER


VOLTAGE RANGE: 50 --- 1000 V
CURRENT: 25 A

FEATURES

- ◇ Utilizing void-free molded plastic technique
- ◇ Low power loss
- ◇ High surge capability
- ◇ High temperature soldering guaranteed:
265°C/10s

MECHANICAL DATA

- ◇ Case: Molded with UL-94 class V-O recognized flame retardant epoxy
- ◇ Terminals: Plated axial terminals solderable per MIL-STD-202E, method 208
- ◇ Polarity: Color ring denotes cathode

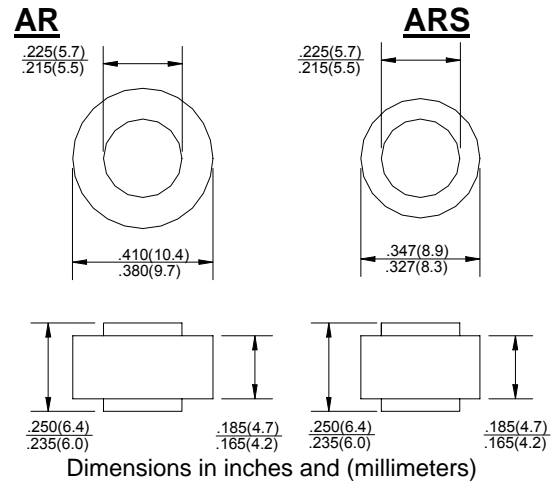

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load. For capacitive load, derate by 20%.

		AR	AR	AR	AR	AR	AR	AR	UNITS
		2505	251	252	254	256	258	2510	
		ARS	ARS	ARS	ARS	ARS	ARS	ARS	
		2505	251	252	254	256	258	2510	
Maximum recurrent peak reverse voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum DC blocking voltage	V_{DC}	50	100	200	400	600	800	1000	V
Maximum average forward rectified current @ $T_A=55^\circ\text{C}$	$I_{(AV)}$	25.0							A
Peak forward surge current 8.3ms single half-sine-wave superimposed on rated load	I_{FSM}	400							A
Maximum instantaneous forward voltage at 25 A	V_F	1.0							V
Maximum reverse current @ $T_A=25^\circ\text{C}$ at rated DC blocking voltage @ $T_A=150^\circ\text{C}$	I_R	10.0 1000							μA
Typical junction capacitance (Note1)	C_J	300							pF
Typical thermal resistance (Note2)	$R_{\theta JC}$	1							$^\circ\text{C}/\text{W}$
Operating junction temperature range	T_j	- 55 ---- + 150							$^\circ\text{C}$
Storage temperature range	T_{STG}	- 55 ---- + 150							$^\circ\text{C}$

NOTE: 1. Measured at 1.0MHz and applied reverse voltage of 4.0V DC.

2. Thermal resistance from junction to case.

www.galaxyen.com

FIG.1 – FORWARD CURRENT DERATING CURVE

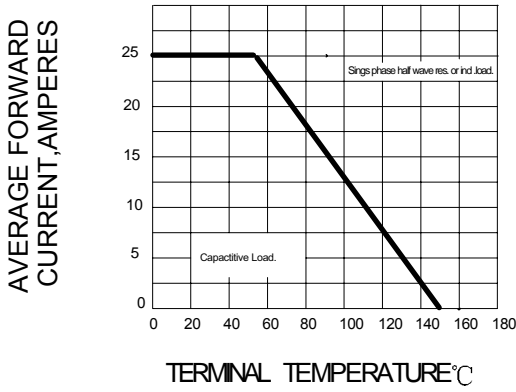


FIG.2 – PEAK FORWARD SURGE CURRENT

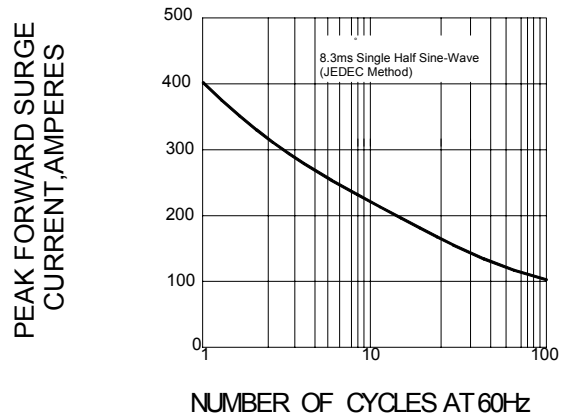


FIG.3 – TYPICAL FORWARD CHARACTERISTICS

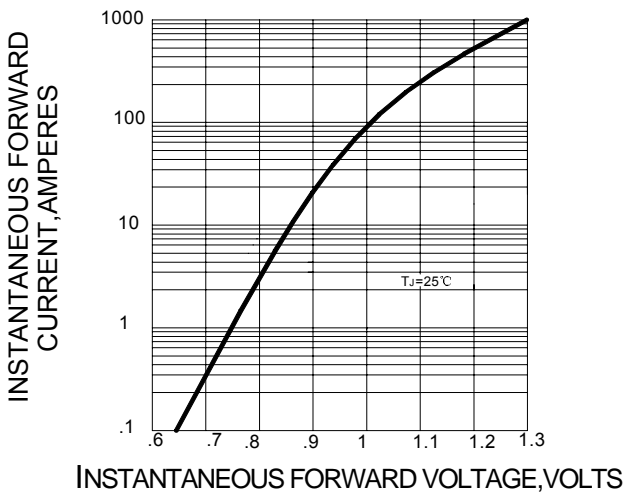


FIG.4 – TYPICAL REVERSE CHARACTERISTICS

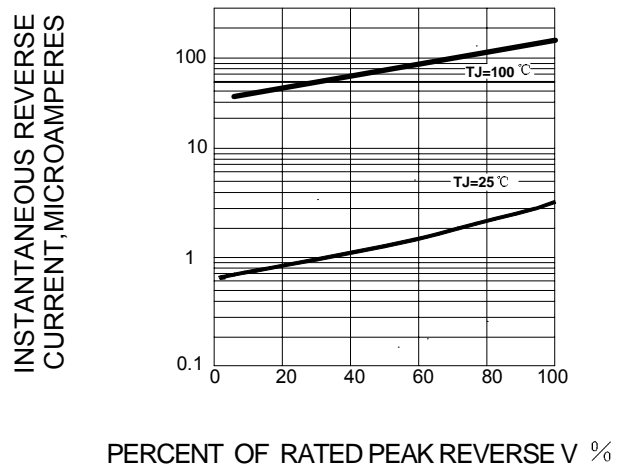


FIG.5 – TYPICAL JUNCTION CAPACITANCE

