


Data Sheet 2504 Rev.—

Features

- Diffused Junction
- Low Leakage
- Low Cost
- High Surge Current Capability
- Low Cost Construction Utilizing Void-Free Molded Plastic Technique

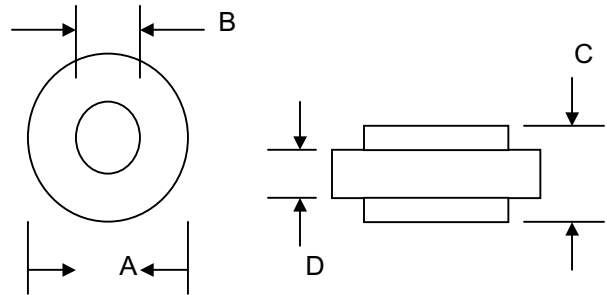

Mechanical Data

- Case: Molded Plastic
- Terminals: Plated Terminals Solderable per MIL-STD-202, Method 208
- Polarity: Color Ring Denotes Cathode End
- Weight: 1.8 grams (approx.)
- Mounting Position: Any
- Marking: Color Band

Dim	AR		ARS	
	Min	Max	Min	Max
A	0.382(9.70)	0.409(10.4)	0.327(8.30)	0.350(8.90)
B	0.217(5.50)	0.224(5.70)	0.217(5.50)	0.224(5.70)
C	0.236(6.00)	0.252(6.40)	0.236(6.00)	0.252(6.40)
D	0.165(4.20)	0.185(4.70)	0.165(4.20)	0.185(4.70)

All Dimensions in inch(mm)

S Suffix Designates ARS Package
No Suffix Designates AR Package

Maximum Ratings and Electrical Characteristics @T_A=25°C unless otherwise specified

Single Phase, half wave, 60Hz, resistive or inductive load.
For capacitive load, derate current by 20%.

Characteristic	Symbol	AR/S 50A	AR/S 50B	AR/S 50D	AR/S 50G	AR/S 50J	AR/S 50K	AR/S 50M	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V _{RRM} V _{RWM} V _R	50	100	200	400	600	800	1000	V
RMS Reverse Voltage	V _{R(RMS)}	35	70	140	280	420	560	700	V
Average Rectified Output Current @T _C = 150°C	I _O	50							A
Non-Repetitive Peak Forward Surge Current 8.3ms Single half sine-wave superimposed on rated load (JEDEC Method) at T _J = 150°C	I _{FSM}	500							A
Forward Voltage @I _F = 50A	V _{FM}	1.2							V
Peak Reverse Current @T _A = 25°C At Rated DC Blocking Voltage @T _A = 100°C	I _{RM}	5.0 250							μA
Reverse Recovery Time (Note 1)	t _{rr}	3.0							μS
Typical Junction Capacitance (Note 2)	C _j	300							pF
Typical Thermal Resistance Junction to Case (Note 3)	R _{θJC}	1.0							K/W
Operating and Storage Temperature Range	T _J , T _{STG}	-50 to +175							°C
Polarity and Voltage Denotation Color Band		Red	Yellow	Silver	Orange	Green	Blue	Violet	

***Glass passivated forms are available upon request**

- Note: 1. Measured with I_F = 0.5A, I_R = 1.0A, I_{RR} = 0.25A
2. Measured at 1.0 MHz and applied reverse voltage of 4.0V D.C.
3. Thermal Resistance: Junction to case, single side cooled.