

AS1702 - AS1705

1.8W Single-Channel Audio Power Amplifiers

1 General Description

The AS1702 - AS1705 are single-channel differential audio power-amplifiers designed to drive 4 and 8Ω loads. The integrated gain circuitry of these amplifiers and their small size make them ideal for 2.7- to 5V-powered portable audio devices.

The differential input design improves noise rejection and provides common-mode rejection. A bridge-tied load (BTL) design minimizes external component count, while providing high-fidelity audio power amplification.

The devices deliver 1.8W continuous average power per channel to a 4Ω load with less than 1% total harmonic distortion (plus noise), while operating from a single 2.7 to 5V supply.

For reduced component designs, the devices are available with different gain levels as shown in Table 1.

Table 1. Standard Products

| Model | Gain |
|--------|--------------------------------------|
| AS1702 | Adjustable (via external components) |
| AS1703 | Av = 0dB |
| AS1704 | Av = 3dB |
| AS1705 | Av = 6dB |

Integrated shutdown circuitry disables the bias generator and amplifiers, and reduces quiescent current consumption to less than 100nA. The shutdown input can be set active-high or active-low. All devices contain click-and-pop suppression circuitry that reduces audible clicks and pops during power-up and shutdown.

The AS1702 - AS1705 are pin compatible with the LM4895 and the MAX9718A/B/C/D. The devices are available in a 10-pin MSOP package and a 10-pin DFN package.


2 Key Features

- 2.7V to 5.5V (Vcc) Single-Supply Operation
- THD+N: 1.8W into 4Ω at 1% (per Channel)
- Differential Input
- Adjustable Gain Option (AS1702)
- Internal Fixed Gain to Reduce External Component Count (AS1703, AS1704, AS1705)
- <100nA Low-Power Shutdown Mode
- Click and Pop Suppression
- Pin-Compatible to National Semiconductor LM4895 (AS1705) and Maxim MAX9718A/B/C/D
- Operating Temperature Range: -40 to +85°C
- Package Types
 - 10-pin MSOP
 - 10-pin DFN

3 Applications

The devices are ideal as audio front-ends for battery powered audio devices such as MP3 and CD players, mobile phones, PDAs, portable DVD players, and any other hand-held battery-powered device.


Figure 1. Simplified Block Diagram

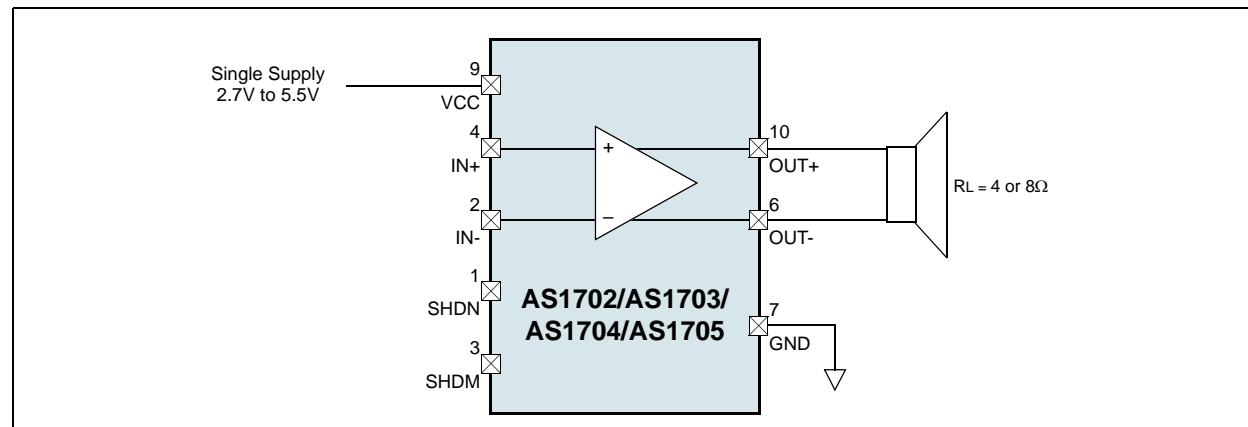

4 Pinout

Pin Assignments

Figure 2. Pin Assignments (Top View)

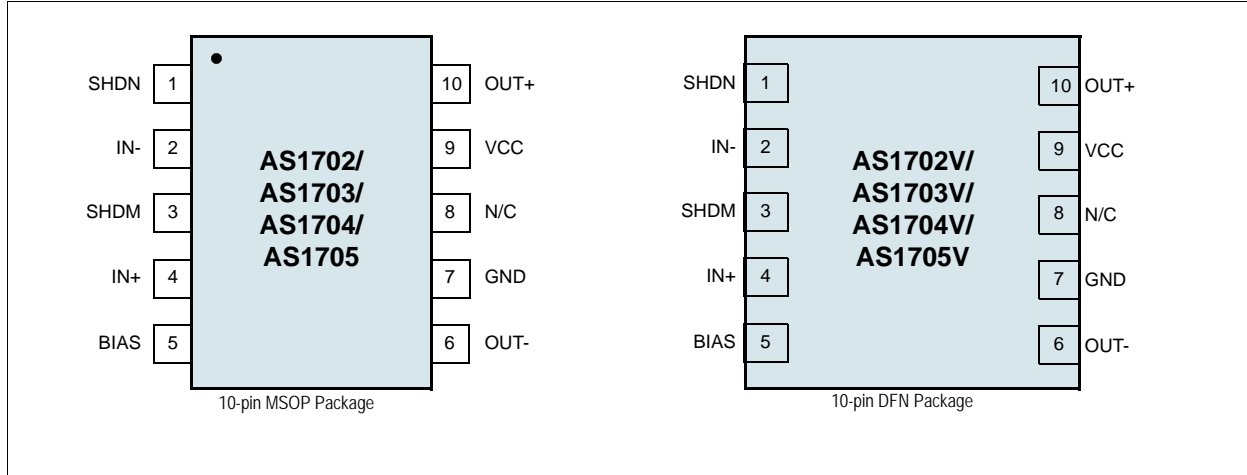

Pin Descriptions

Table 2. Pin Descriptions – MSOP-10 and TDFN-10 Package

| Pin | Name | Description |
|-----|------|--|
| 1 | SHDN | Shutdown Input. The polarity of this pin is dependent on the state of pin SHDM. |
| 2 | IN- | Inverting Input |
| 3 | SHDM | Shutdown-Mode Polarity Input. This pin controls the polarity of pin SHDN. Connect this pin high for an active-high SHDN input. Connect this pin low for an active-low SHDN input (see Table 6 on page 11). |
| 4 | IN+ | Non-Inverting Input |
| 5 | BIAS | DC Bias Bypass |
| 6 | OUT- | Bridge Amplifier Negative Output |
| 7 | GND | Ground |
| 8 | N/C | Not Connected. No internal connection. |
| 9 | VCC | Power Supply |
| 10 | OUT+ | Bridge Amplifier Positive Output |

5 Absolute Maximum Ratings

Stresses beyond those listed in [Table 3](#) may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in [Electrical Characteristics on page 4](#) is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

Table 3. Absolute Maximum Ratings

| Parameter | Min | Max | Units | Comments |
|---|-------------|-------------|-------|--|
| Electrical Parameters | | | | |
| Supply Voltage (VDD to VSS) | -0.3 | +7 | V | |
| Supply Voltage (All Other Pins) | VSS -0.3 | VDD +0.3 | V | |
| Input Current (latch-up immunity) | -50 | 50 | mA | Norm: JEDEC 78 |
| Electrostatic Discharge | | | | |
| Electrostatic Discharge HBM | | 1 | kV | Norm: MIL 883 E method 3015 |
| Temperature Ranges and Storage Conditions | | | | |
| Continuous Power Dissipation (T _{AMB} = +70°C) [†] | | 600 | mW | MSOP-10 |
| Continuous Power Dissipation (T _{AMB} = +25°C) [†] | | 1000 | mW | MSOP-10 |
| Storage Temperature Range | -65 | +150 | °C | |
| Junction Temperature | | +150 | °C | |
| Package Body Temperature | | +260 | °C | The reflow peak soldering temperature (body temperature) specified is in accordance with <i>IPC/JEDEC J-STD-020 "Moisture/Reflow Sensitivity Classification for Non-Hermetic Solid State Surface Mount Devices"</i> . The lead finish for Pb-free leaded packages is matte tin (100% Sn). |
| Humidity non-condensing | 5 | 85 | % | |
| Moisture Sensitive Level | 1 | | | Represents a max. floor life time of unlimited |

[†] Using PCB metal plane and thermally-conductive paste.

6 Electrical Characteristics

All limits are guaranteed. The parameters with min and max values are guaranteed with production tests or SQC (Statistical Quality Control) methods.

5V Operation

Table 4. Electrical Characteristics – 5V Supply, $T_{AMB} = +25^{\circ}\text{C}$ (unless otherwise specified)

| Symbol | Parameter | Conditions | Min | Typ | Max | Unit |
|------------|---|--|---------------------|------------|---------------------|--------------------|
| T_{AMB} | Operating Temperature Range | | -40 | | +85 | $^{\circ}\text{C}$ |
| VCC | Supply Voltage | $T_{AMB} = -40$ to $+85^{\circ}\text{C}$ | 2.7 | | 5.5 | V |
| ICC | Supply Current ¹ | $V_{IN-} = V_{IN+} = V_{BIAS}; T_{AMB} = -40$ to $+85^{\circ}\text{C}$ | | 8 | 10.4 | mA |
| ISHDN | Shutdown Supply | SHDN = SHDM = GND | | 0.05 | 1 | μA |
| V_{IH} | SHDN, SHDM Threshold | | $0.7 \times V_{CC}$ | | $0.3 \times V_{CC}$ | V |
| V_{IL} | | | | | | |
| V_{BIAS} | Common-Mode Bias Voltage ² | | $V_{CC}/2 - 5\%$ | $V_{CC}/2$ | $V_{CC}/2 + 5\%$ | V |
| VOS | Output Offset Voltage | $V_{IN-} = V_{IN+} = V_{BIAS}$ | Av = 0dB (AS1703) | ± 1 | ± 10 | mV |
| | | | Av = 3dB (AS1704) | ± 1 | ± 15 | |
| | | | Av = 6dB (AS1705) | ± 1 | ± 20 | |
| Vic | Common-Mode Input Voltage ³ | Inferred from CMRR Test | Av = 0dB (AS1703) | 0.2 | $V_{CC} - 0.2$ | V |
| | | | Av = 3dB (AS1704) | 0.9 | $V_{CC} - 0.9$ | |
| | | | Av = 6dB (AS1705) | 1.5 | $V_{CC} - 1.5$ | |
| | | External Gain AS1702 | | 1.5 | $V_{CC} - 1.5$ | |
| RIN | Input Impedance | AS1703, AS1704, AS1705 | 10 | 15 | 20 | k Ω |
| CMRR | Common-Mode Rejection Ratio | $f_N = 1\text{kHz}$ | | 64 | | dB |
| PSRR | Power Supply Rejection Ratio | $V_{IN-} = V_{IN+} = V_{BIAS}; V_{RIPPLE} = 200\text{mVp-p}; R_L = 8\Omega; C_{BIAS} = 1\mu\text{F}$ | f = 217Hz | | 79 | dB |
| | | | f = 1kHz | | 73 | |
| POUT | Output Power ⁴ | THD+N = 1%; $f_{in} = 1\text{kHz}$ | $R_L = 8\Omega$ | 0.8 | 1.25 | W |
| | | | $R_L = 4\Omega$ | | 1.8 | |
| THD+N | Total Harmonic Distortion plus Noise ⁵ | $R_L = 4\Omega, f_{in} = 1\text{kHz}, P_{OUT} = 1.28\text{W}, V_{CC} = 5\text{V}, A_v = 6\text{dB}$ | | | 0.06 | % |
| | | $R_L = 8\Omega, f_{in} = 1\text{kHz}, P_{OUT} = 0.9\text{W}, V_{CC} = 5\text{V}, A_v = 6\text{dB}$ | | | 0.03 | |
| | Gain Accuracy | AS1703, AS1704, AS1705 | | ± 1 | ± 2 | % |
| | Thermal Shutdown Threshold | | | +145 | | $^{\circ}\text{C}$ |
| | Thermal Shutdown Hysteresis | | | 9 | | $^{\circ}\text{C}$ |
| tPU | Power-up/Enable from Shutdown Time | | | 125 | | ms |
| tSHDN | Shutdown Time | | | 3.5 | | μs |
| VPOP | Turn-Off Transient ⁶ | | | 50 | | mV |

1. Quiescent power supply current is specified and tested with no load. Quiescent power supply current depends on the offset voltage when a practical load is connected to the amplifier.
2. Common-mode bias voltage is the voltage on BIAS and is nominally $V_{CC}/2$.
3. Guaranteed by design.
4. Guaranteed by design.
5. Measurement bandwidth for THD+N is 22Hz to 22kHz.
6. Peak voltage measured at power-on, power-off, into or out of SHDN. Bandwidth defined by A-weighted filters, inputs at AC GND. VCC rise and fall times $\geq 1\text{ms}$.

3V Operation

Table 5. Electrical Characteristics – 3V Supply, $T_{AMB} = +25^{\circ}\text{C}$ (unless otherwise specified)

| Symbol | Parameter | Conditions | | Min | Typ | Max | Unit |
|------------|--|---|-----------------------------|---------------------|------------|---------------------|--------------------|
| I_{CC} | Supply Current ¹ | $V_{IN-} = V_{IN+} = V_{BIAS}$; $T_{AMB} = -40$ to $+85^{\circ}\text{C}$, per amplifier | | | 7.5 | | mA |
| I_{SHDN} | Shutdown Supply | SHDN = SHDM = GND per amplifier | | | 0.05 | 1 | μA |
| V_{IH} | SHDN, SHDM Threshold | | | $0.7 \times V_{CC}$ | | $0.3 \times V_{CC}$ | V |
| V_{IL} | | | | | | | |
| V_{BIAS} | Common-Mode Bias Voltage ² | | | $V_{CC}/2 - 5\%$ | $V_{CC}/2$ | $V_{CC}/2 + 5\%$ | V |
| V_{OS} | Output Offset Voltage | $V_{IN-} = V_{IN+} = V_{BIAS}$ | $A_v = 0\text{dB}$ (AS1703) | | ± 1 | ± 10 | mV |
| | | | $A_v = 3\text{dB}$ (AS1704) | | ± 1 | ± 15 | |
| | | | $A_v = 6\text{dB}$ (AS1705) | | ± 1 | ± 20 | |
| V_{IC} | Common-Mode Input Voltage ³ | Inferred from CMRR Test | $A_v = 0\text{dB}$ (AS1703) | 0.2 | | $V_{CC} - 0.2$ | mV |
| | | | $A_v = 3\text{dB}$ (AS1704) | 0.6 | | $V_{CC} - 0.6$ | |
| | | | $A_v = 6\text{dB}$ (AS1705) | 1.0 | | $V_{CC} - 1.0$ | |
| | | | External gain AS1702 | | 1.0 | | |
| R_{IN} | Input Impedance | AS1703, AS1704, AS1705 | | 10 | 15 | 20 | $\text{k}\Omega$ |
| CMRR | Common-Mode Rejection Ratio | $f_N = 1\text{kHz}$ | | | 64 | | dB |
| PSRR | Power Supply Rejection Ratio | $V_{IN-} = V_{IN+} = V_{BIAS}$; $V_{RIPPLE} = 200\text{mVp-p}$; $R_L = 8\Omega$; $C_{BIAS} = 1\mu\text{F}$ | $f = 217\text{Hz}$ | | 79 | | dB |
| | | | $f = 1\text{kHz}$ | | 73 | | |
| P_{OUT} | Output Power ⁴ | $R_L = 4\Omega$, THD+N = 1%; $f_{IN} = 1\text{kHz}$ | | | 640 | | mW |
| | | $R_L = 8\Omega$, THD+N = 1%; $f_{IN} = 1\text{kHz}$ | | | 440 | | |
| THD+N | Total Harmonic Distortion plus Noise ⁵ | $R_L = 4\Omega$, $f_{IN} = 1\text{kHz}$, $P_{OUT} = 460\text{mW}$, $A_v = 6\text{dB}$ | | | 0.06 | | % |
| | | $R_L = 8\Omega$, $f_{IN} = 1\text{kHz}$, $P_{OUT} = 330\text{mW}$, $A_v = 6\text{dB}$ | | | 0.04 | | |
| | Gain Accuracy | AS1703, AS1704, AS1705 | | | ± 1 | ± 2 | % |
| | Thermal Shutdown Threshold | | | | +145 | | $^{\circ}\text{C}$ |
| | Thermal Shutdown Hysteresis | | | | 9 | | $^{\circ}\text{C}$ |
| t_{PU} | Power-up/Enable from Shutdown Time | | | | 125 | | ms |
| t_{SHDN} | Shutdown Time | | | | 3.5 | | μs |
| V_{POP} | Turn-Off Transient ⁶ | | | | 50 | | mV |

1. Quiescent power supply current is specified and tested with no load. Quiescent power supply current depends on the offset voltage when a practical load is connected to the amplifier. Guaranteed by design.
2. Common-mode bias voltage is the voltage on BIAS and is nominally $V_{CC}/2$.
3. Guaranteed by design.
4. Guaranteed by design.
5. Measurement bandwidth for THD+N is 22Hz to 22kHz.
6. Peak voltage measured at power-on, power-off, into or out of SHDN. Bandwidth defined by A-weighted filters, inputs at AC GND. V_{CC} rise and fall times $\geq 1\text{ms}$.

7 Typical Operating Characteristics

Figure 3. THD + Noise vs. Frequency;
 $V_{DD} = 3V, R_L = 4\Omega, A_V = 2V_{DD} = 3V, R_L = 8\Omega, A_V = 2$

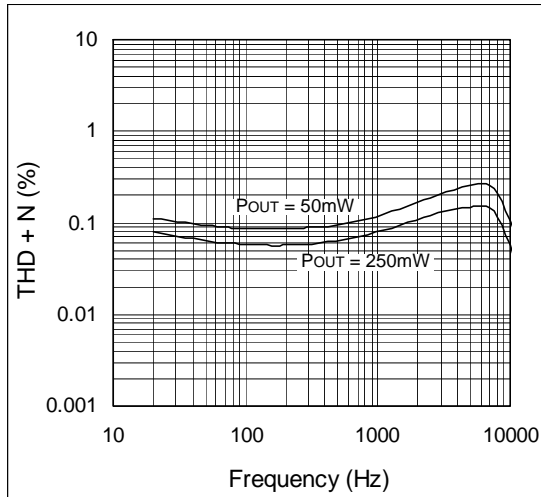


Figure 4. THD + Noise vs. Frequency;

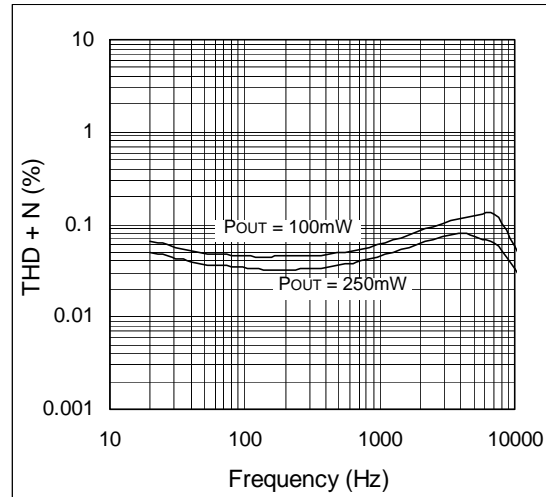


Figure 5. THD + Noise vs. Frequency;
 $V_{DD} = 5V, R_L = 4\Omega, A_V = 2V_{DD} = 5V, R_L = 8\Omega, A_V = 2$

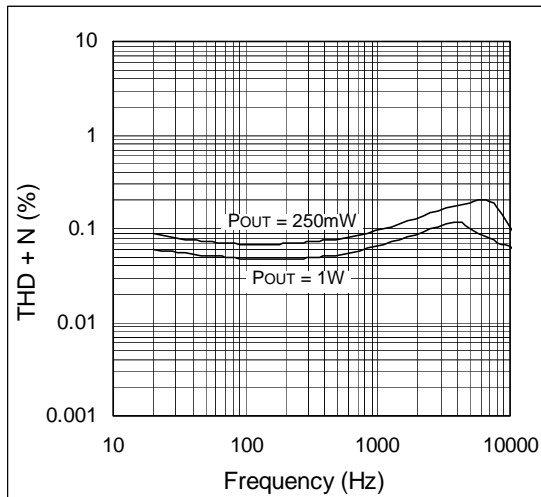


Figure 6. THD + Noise vs. Frequency;

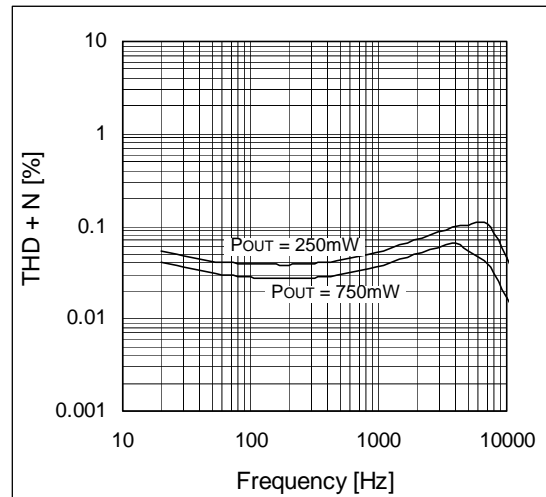


Figure 7. THD + Noise vs. Frequency;
 $V_{DD} = 5V, R_L = 4\Omega, A_V = 4V_{DD} = 5V, R_L = 8\Omega, A_V = 4$

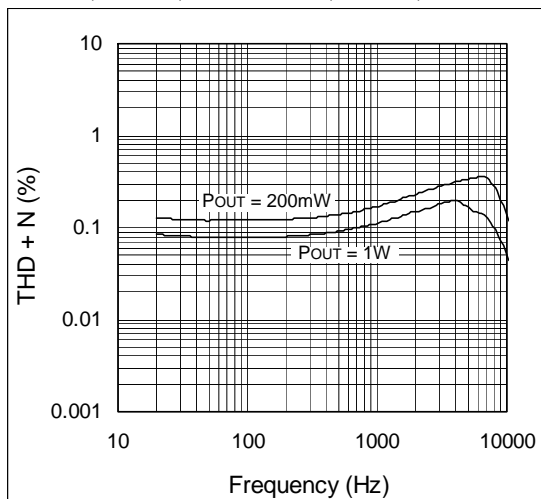


Figure 8. THD + Noise vs. Output Power;

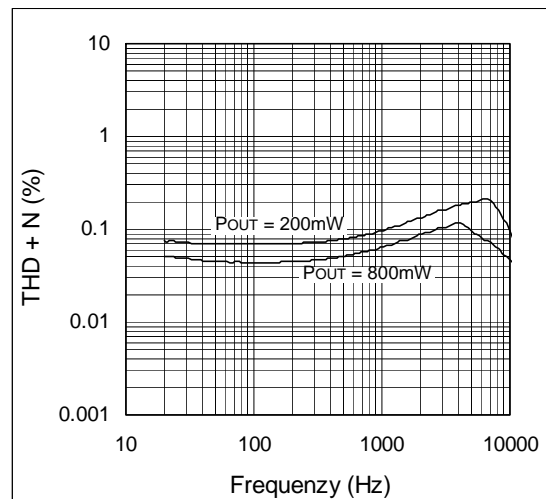


Figure 9. THD + Noise vs. Output Power;
 $V_{DD} = 3V, R_L = 4\Omega, A_v = 2V_{DD} = 3V, R_L = 8\Omega, A_v = 2$

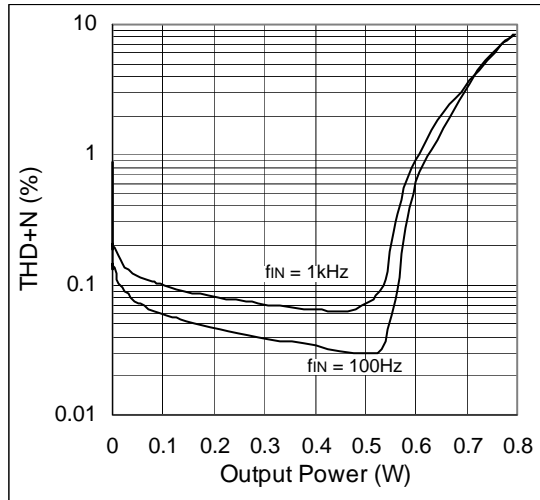


Figure 10. THD + Noise vs. Output Power;

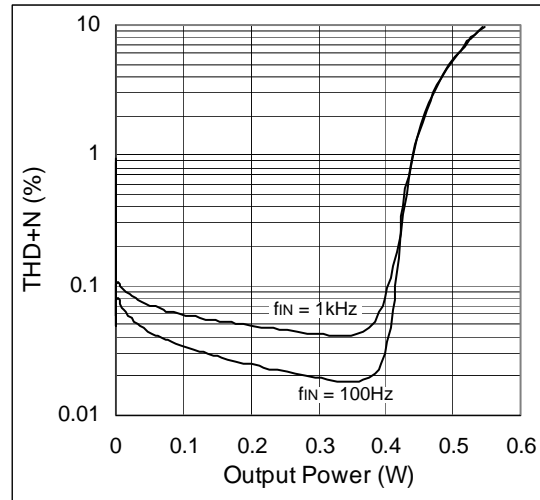


Figure 11. THD + Noise vs. Output Power;
 $V_{DD} = 3V, R_L = 4\Omega, A_v = 4V_{DD} = 3V, R_L = 8\Omega, A_v = 4$

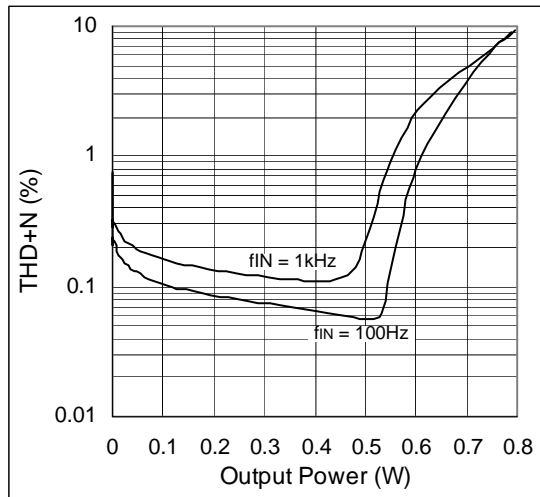


Figure 12. THD + Noise vs. Output Power;

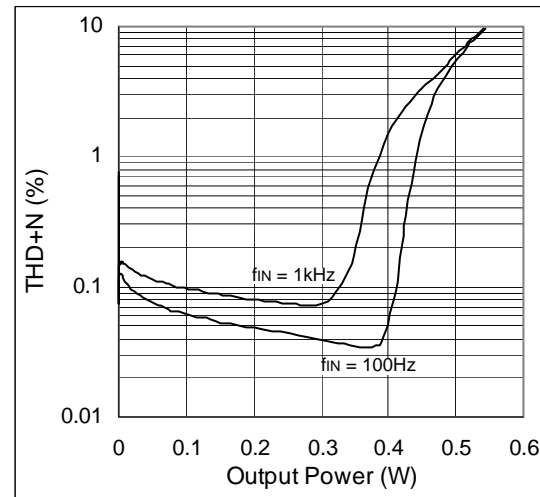


Figure 13. THD + Noise vs. Output Power;
 $V_{DD} = 5V, R_L = 4\Omega, A_v = 2V_{DD} = 5V, R_L = 8\Omega, A_v = 2$

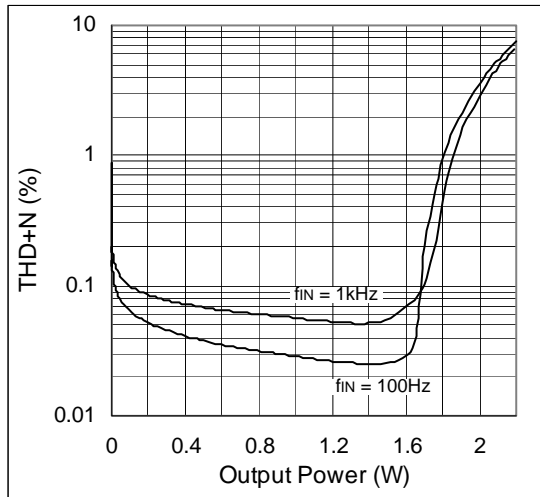


Figure 14. THD + Noise vs. Output Power;

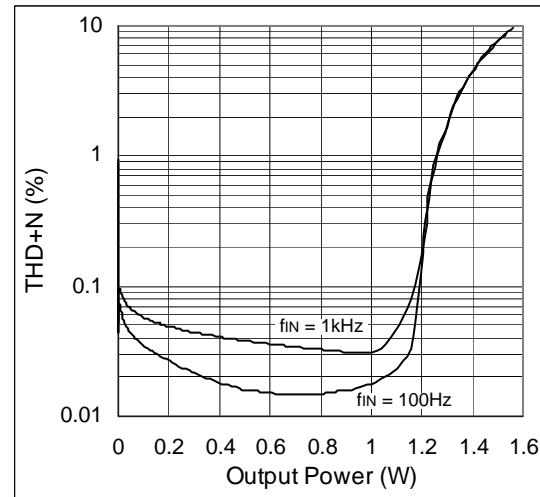


Figure 15. THD + Noise vs. Output Power;
 $V_{DD} = 5V, R_L = 4\Omega, A_v = 4V_{DD} = 5V, R_L = 8\Omega, A_v = 4$

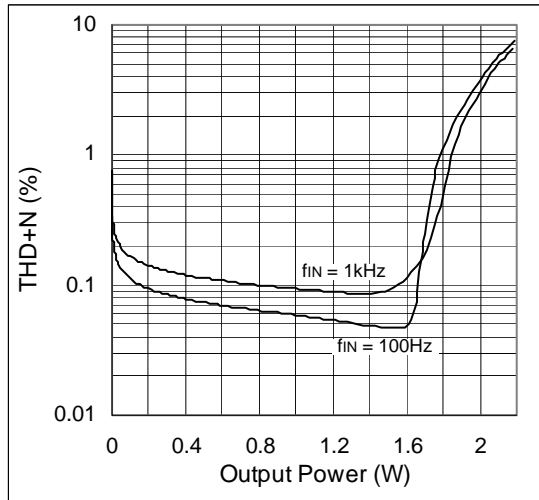


Figure 16. THD + Noise vs. Output Power;

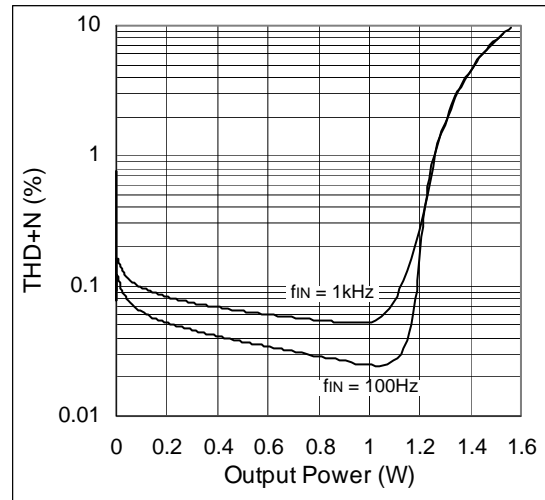


Figure 17. Output Power vs. Load Resistance;
 $V_{DD} = 3V, V_{DD} = 5V$

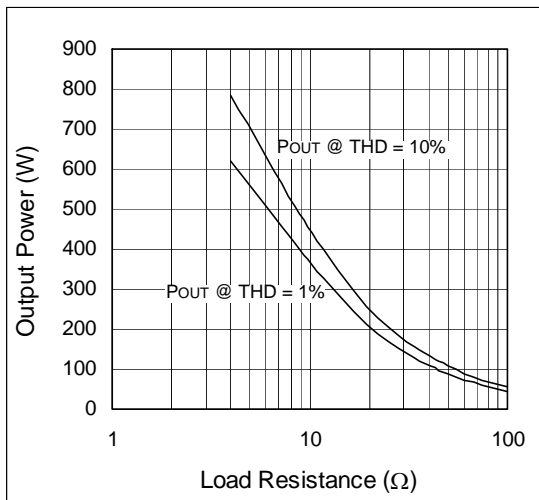


Figure 18. Output Power vs. Load Resistance;

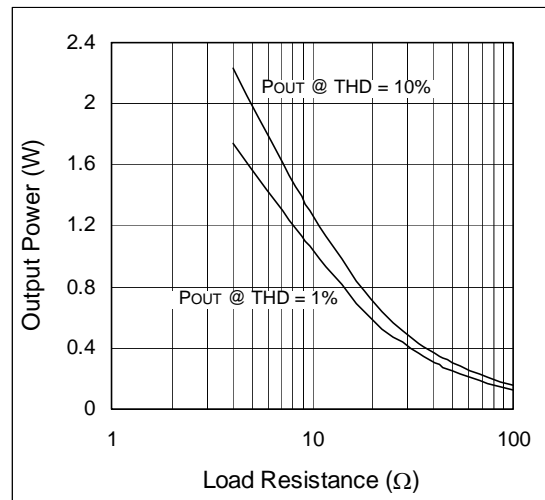


Figure 19. Output Power vs. Supply Voltage;
 $R_L = 4\Omega, R_L = 8\Omega$

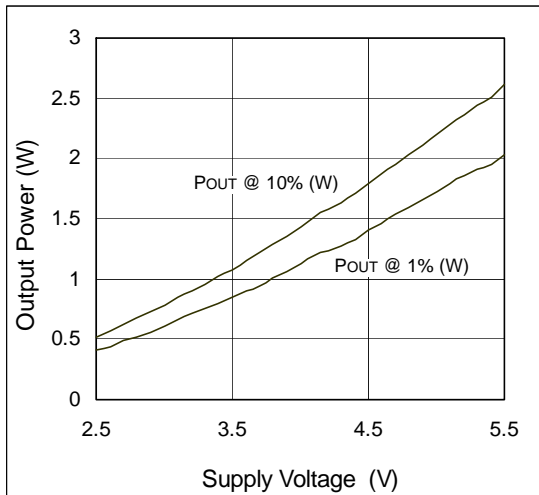


Figure 20. Output Power vs. Supply Voltage;

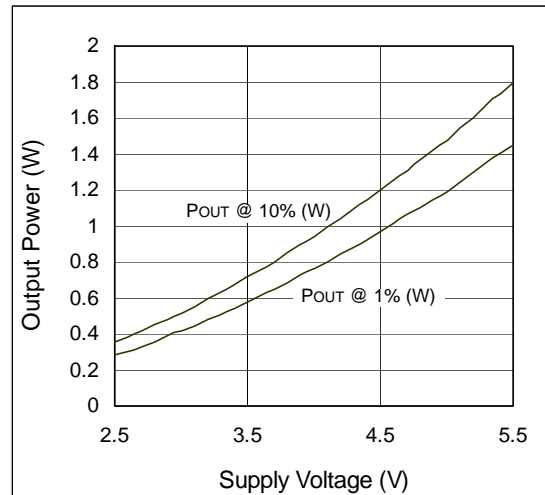


Figure 21. Power Dissipation vs. Output Power; $V_{DD} = 3V, R_L = 4\Omega, A_v = 2, f = 1kHz$

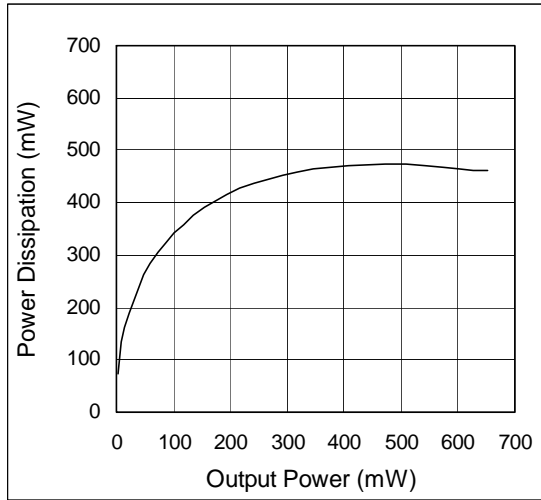


Figure 22. Power Dissipation vs. Output Power; $V_{DD} = 3V, R_L = 8\Omega, A_v = 2, f = 1kHz$

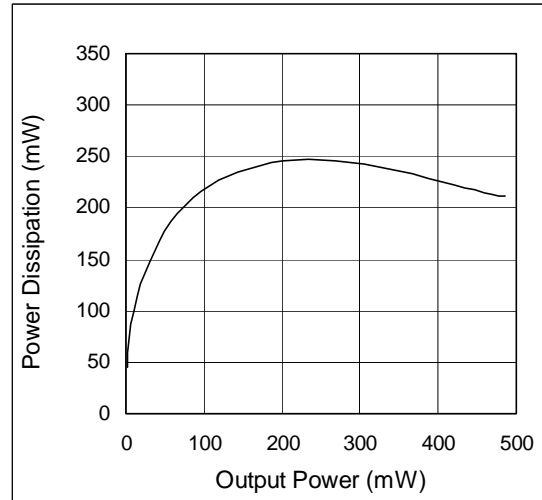


Figure 23. Power Dissipation vs. Output Power; $V_{DD} = 5V, R_L = 4\Omega, A_v = 2, f = 1kHz$

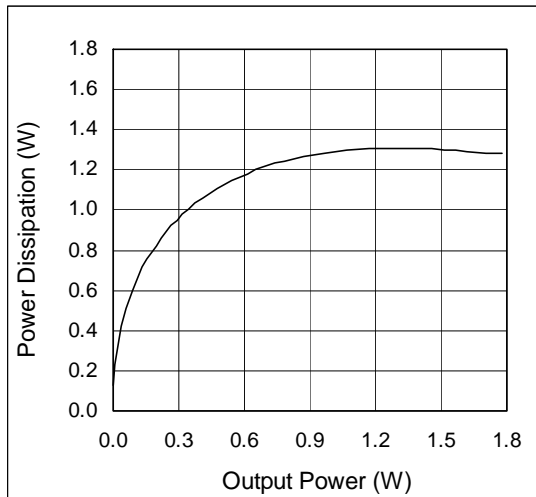


Figure 24. Power Dissipation vs. Output Power; $V_{DD} = 5V, R_L = 8\Omega, A_v = 2, f = 1kHz$

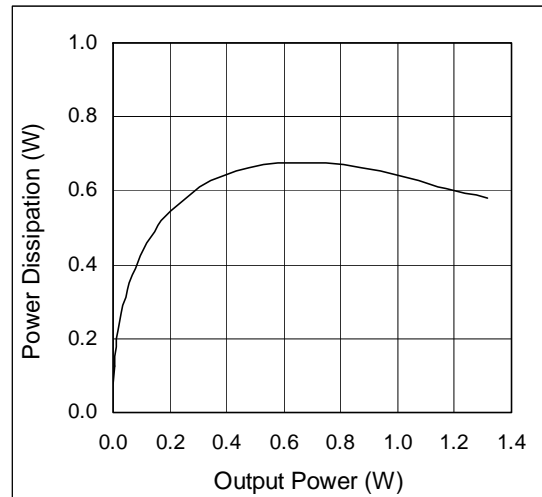


Figure 25. Shutdown Hysteresis Voltage; $V_{DD} = 3V$

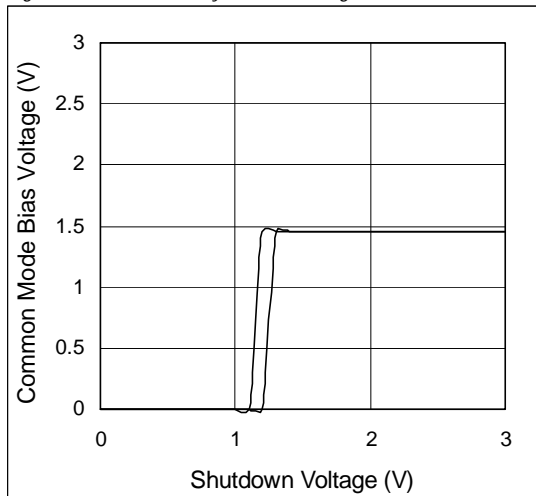


Figure 26. Shutdown Hysteresis Voltage; $V_{DD} = 5V$

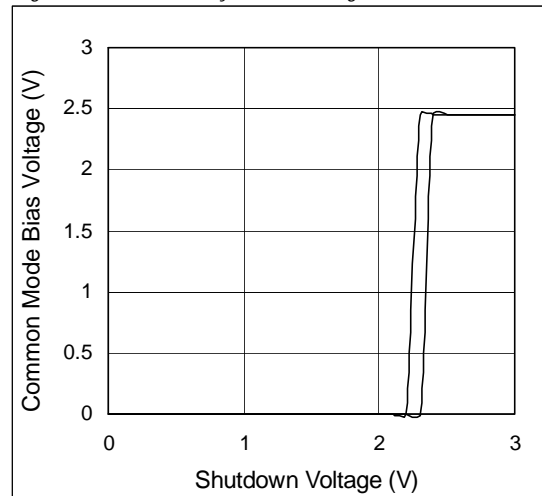


Figure 27. Shutdown Current vs. Temperature

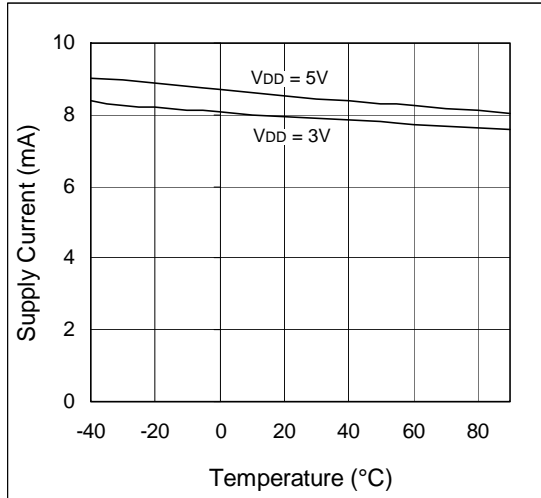


Figure 28. Shutdown Current vs. Temperature


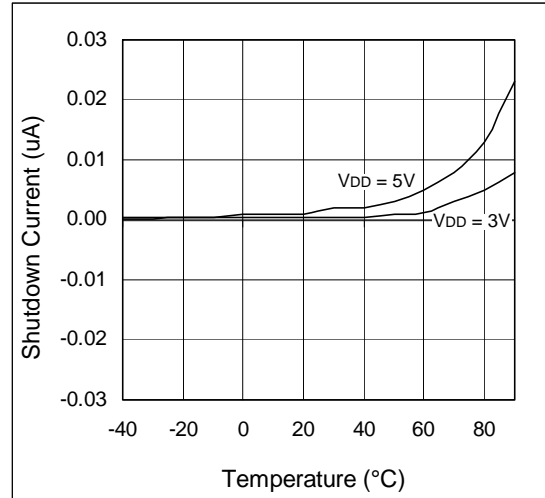


Figure 29. Power Supply Rejection Ratio vs. Frequency

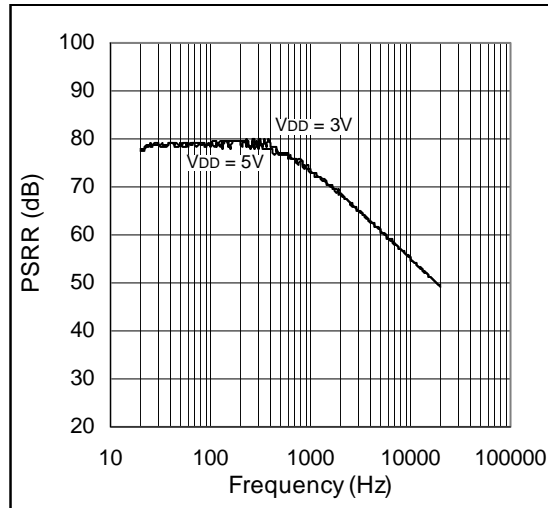

8 Detailed Description

The AS1702 - AS1705 are 1.8W high output-current audio amplifiers (configured as BTL amplifiers), and contain integrated low-power shutdown and click- and pop-suppression circuitry. Two inputs (SHDM and SHDN) allow shutdown mode to be configured as active-high or active-low (see [Shutdown Mode on page 11](#)).

Each device has either adjustable or fixed gains (0dB, 3dB, 6dB) (see [Ordering Information on page 19](#)).

Bias

The devices operate from a single 2.7 to 5.5V supply and contain an internally generated, common-mode bias voltage of:

$$\frac{V_{CC}}{2} \quad (EQ\ 1)$$

referenced to ground. Bias provides click-and-pop suppression and sets the DC bias level for the audio outputs. Select the value of the bias bypass capacitor as described in [Section BIAS Capacitor on page 15](#).

Note: Do not connect external loads to BIAS as this can adversely affect overall device performance.

Shutdown Mode

All devices implement a 100nA, low-power shutdown circuit which reduces quiescent current consumption. As shutdown mode commences, the bias circuitry is automatically disabled, the device outputs go high impedance, and bias is driven to GND.

The SHDM input controls the polarity of SHDN:

- Drive SHDM high for an active-low SHDN input.

- Drive SHDM low for an active-high SHDN input.

Table 6. Shutdown Mode Selection Configurations

| SHDM | SHDN | Mode |
|------|------|--------------------------|
| 0 | 0 | Shutdown Mode Enabled |
| 0 | 1 | Normal Operation Enabled |
| 1 | 0 | Normal Operation Enabled |
| 1 | 1 | Shutdown Mode Enabled |

Click-and-Pop Suppression

During power-up, the device common-mode bias voltage (V_{BIAS} (see [page 4](#))) ramps to the DC bias point. When entering shutdown, the device outputs are driven high impedance to 100k Ω between both outputs minimizing the energy present in the audio band, thus preventing clicks and pops.

9 Application Information

Figure 30. AS1702 Typical Application Diagram


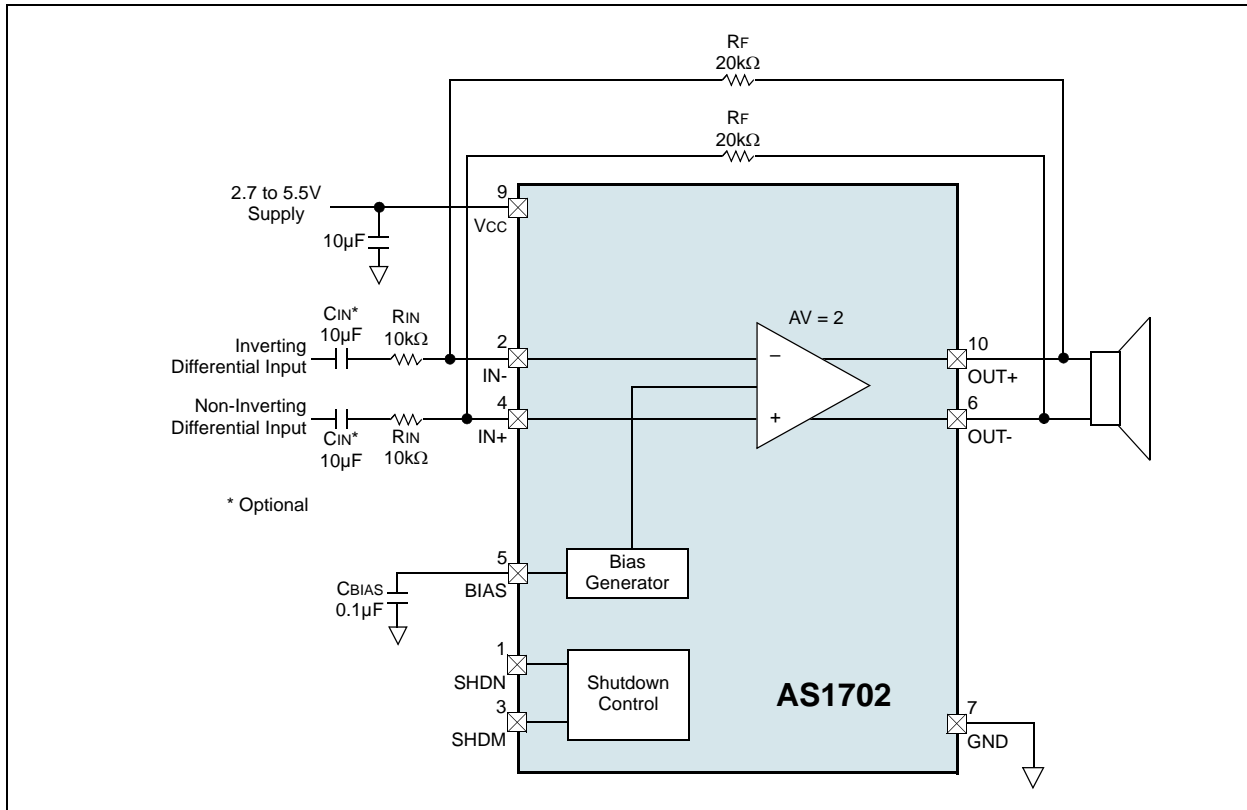



Figure 31. AS1703, AS1704, AS1705 Typical Application Diagram

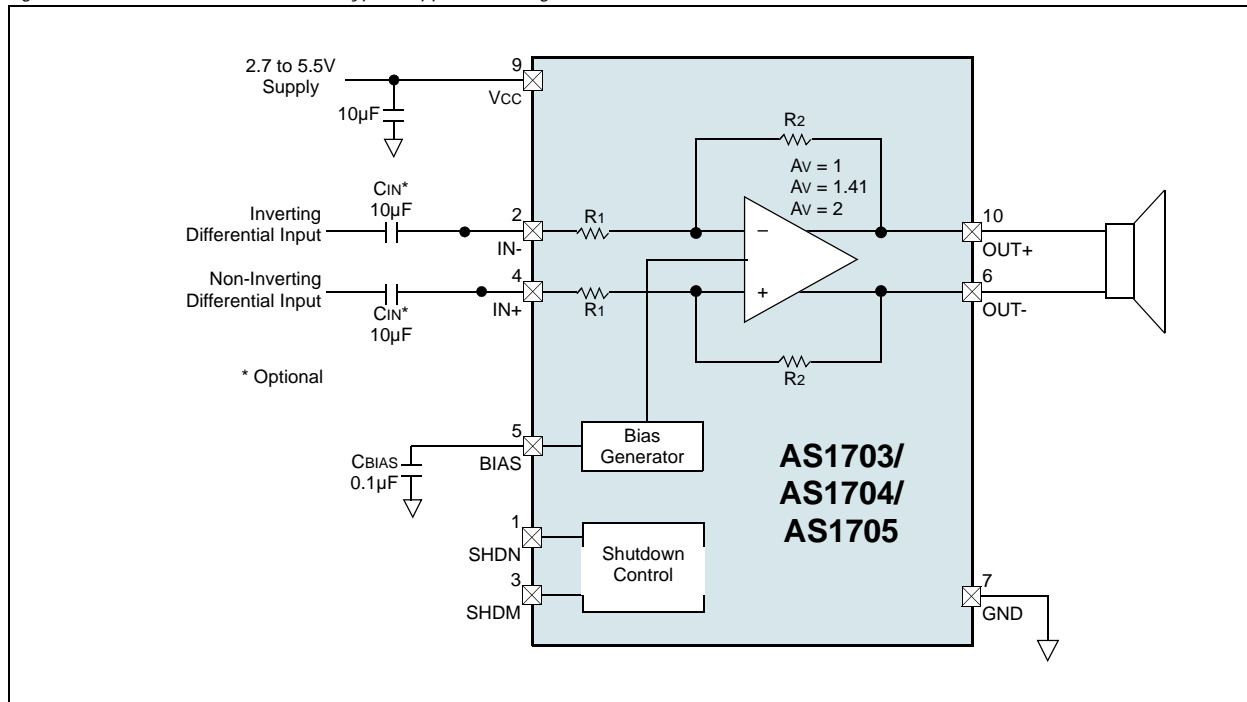

BTL Amplifier

All devices are designed to drive loads differentially in a bridge-tied load (BTL) configuration.

Figure 32. Bridge Tied Load Configuration

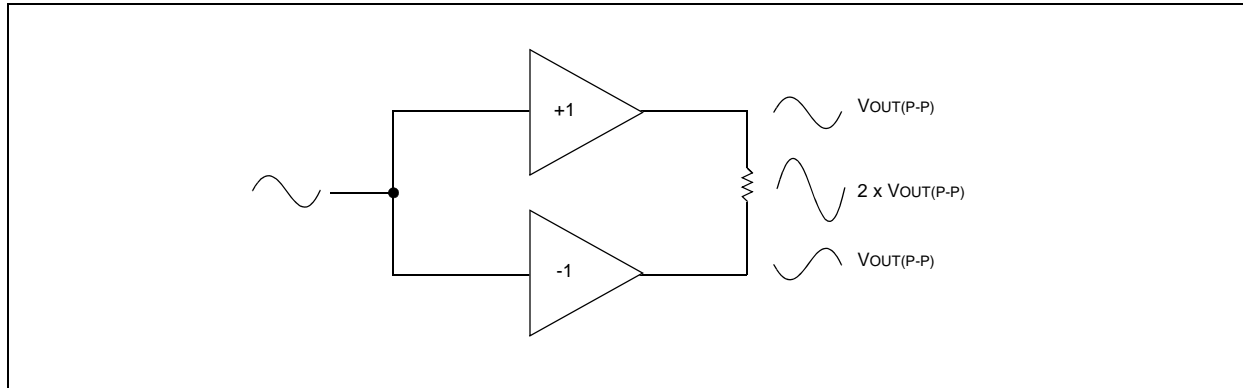

The BTL configuration doubles the output voltage (illustrated in Figure 32) compared to a single-ended amplifier under similar conditions. Thus, the differential gain of the device (AVD) is twice the closed-loop gain of the input amplifier. The effective gain is given by:

$$AVD = 2 \times \frac{R_F}{R_{IN}} \quad (\text{EQ 2})$$

Substituting $2 \times V_{OUT(P-P)}$ for $V_{OUT(P-P)}$ into (EQ 3) and (EQ 4) yields four times the output power due to doubling of the output voltage:

$$V_{RMS} = \frac{V_{OUT(P-P)}}{2\sqrt{2}} \quad (\text{EQ 3})$$

$$P_{OUT} = \frac{V_{RMS}^2}{R_L} \quad (\text{EQ 4})$$

Since the BTL outputs are biased at mid-supply, there is no net DC voltage across the load. This eliminates the need for the large, expensive, performance degrading DC-blocking capacitors required by single-ended amplifiers.

Power Dissipation and Heat Sinking

Normally, the devices dissipate a significant amount of power. The maximum power dissipation is given in Table 3 as Continuous Power Dissipation, or it can be calculated by:

$$P_{DISSPKF(MAX)} = \frac{T_{J(MAX)} - T_A}{\Theta_{JA}} \quad (\text{EQ 5})$$

where $T_{J(MAX)}$ is +150°C, T_{AMB} (see Table 3) is the ambient temperature, and Θ_{JA} is the reciprocal of the derating factor in °C/W as specified in Table 3. For example, Θ_{JA} of the TQFN package is +59.2°C/W.

The increased power delivered by a BTL configuration results in an increase in internal power dissipation versus a single-ended configuration. The maximum internal power dissipation for a given V_{CC} and load is given by:

$$P_{DISSPKF(MAX)} = \frac{2V_{CC}^2}{\pi^2 R_L} \quad (\text{EQ 6})$$

If the internal power dissipation exceeds the maximum allowed for a given package, power dissipation should be reduced by increasing the ground plane heat-sinking capabilities and increasing the size of the device traces (see Layout and Grounding Considerations on page 15). Additionally, reducing V_{CC} , increasing load impedance, and decreasing ambient temperature can reduce device power dissipation.

The integrated thermal-overload protection circuitry limits the total device power dissipation. Note that if the junction temperature is $\geq +145^{\circ}\text{C}$, the integrated thermal-overload protection circuitry will disable the amplifier output stage. If the junction temperature is reduced by 9° , the amplifiers will be re-enabled.

Note: A pulsing output under continuous thermal overload results as the device heats and cools.

Fixed Differential Gain (AS1703, AS1704, and AS1705)

The AS1703, AS1704, and AS1705 contain different internally-fixed gains (see [Ordering Information on page 19](#)). A fixed gain facilitates simplified designs, decreased footprint size, and elimination of external gain-setting resistors.

The fixed gain values are achieved using resistors R1 and R2 (see [Figure 31 on page 12](#)).

Adjustable Differential Gain (AS1702)

Gain-Setting Resistors


The AS1702 uses external feedback resistors, R_F and R_{IN} ([Figure 33](#)), to set the gain of the device as:

$$A_V = \frac{R_F}{R_{IN}} \quad (EQ 7)$$

where A_V is the desired voltage gain. For example, $R_{IN} = 10\text{k}\Omega$, $R_F = 20\text{k}\Omega$ yields a gain of 2V/V , or 6dB .

Note: R_F can be either fixed or variable, allowing the gain to be controlled by software (using a AS150x digital potentiometer. For more information on the AS1500 family of digital potentiometers, refer to the latest version of the AS150x data sheet, available from the austriamicrosystems website <http://www.austriamicrosystems.com>.)

Figure 33. Setting the AS1702 Gain

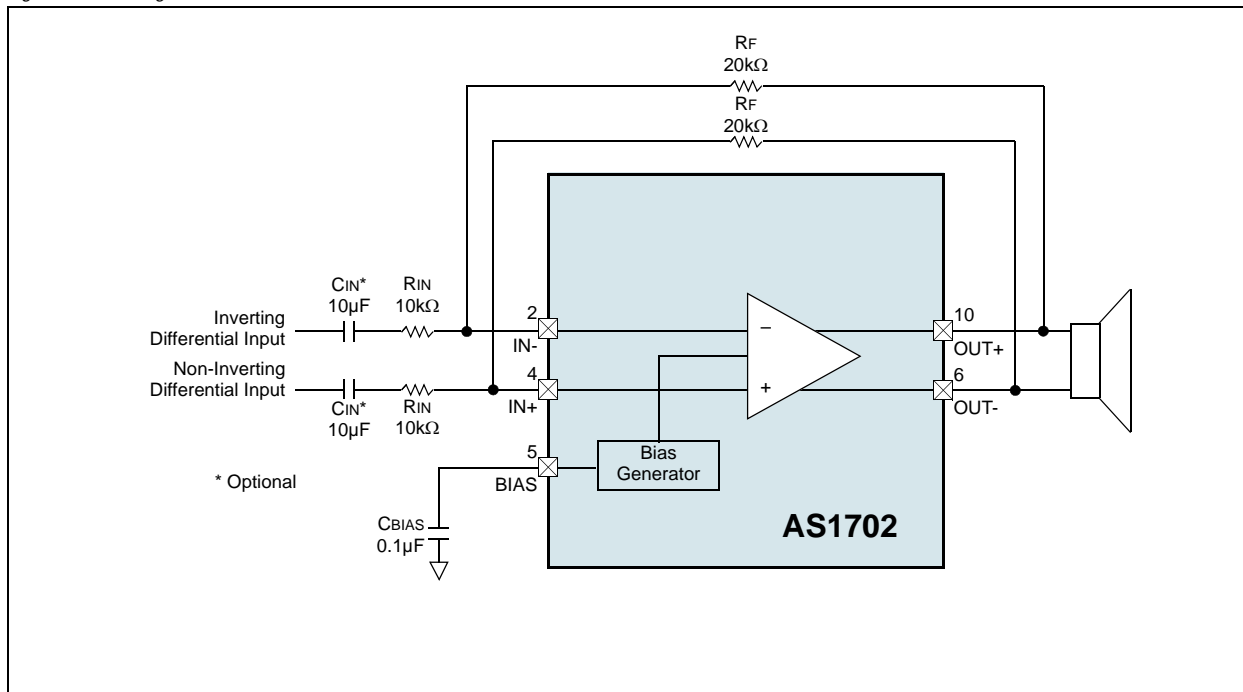

Input Filter

The BTL inputs can be biased at voltages other than mid-supply. However, the integrated common-mode feedback circuit adjusts for input bias, ensuring the outputs are still biased at mid-supply. Input capacitors are not required if the common-mode input voltage (V_{IC}) is within the range specified in [Table 4](#) and [Table 5](#).

Input capacitor C_{IN} (if used), in conjunction with R_{IN} , forms a high-pass filter that removes the DC bias from an incoming signal. The AC coupling capacitor allows the amplifier to bias the signal to an optimum DC level. Assuming zero-source impedance, the -3dB point of the high-pass filter is given by:

$$f_{-3dB} = \frac{1}{2\pi R_{IN} C_{IN}} \quad (EQ 8)$$

Setting f_{-3dB} too high affects the low-frequency response of the amplifier. Capacitors with dielectrics that have low-voltage coefficients such as tantalum or aluminum electrolytic should be used, since capacitors with high-voltage coefficients, such as ceramics, can increase distortion at low frequencies.

BIAS Capacitor

BIAS is the output of the internally generated $V_{CC}/2$ bias voltage. The BIAS bypass capacitor, C_{BIAS} , improves PSRR and THD+N by reducing power supply noise and other noise sources at the common-mode bias node, and also generates the click- and pop-less DC bias waveform for the amplifiers. Bypass BIAS with a $0.1\mu F$ capacitor to GND. Larger values of C_{BIAS} (up to $1\mu F$) improve PSRR, but increase t_{ON}/t_{OFF} times. For example, a $1\mu F$ C_{BIAS} capacitor increases t_{ON}/t_{OFF} by 10 and improves PSRR by 20dB (at 1kHz).

Note: Do not connect external loads to BIAS.

Supply Bypassing

Proper power supply bypassing – connect a $10\mu F$ ceramic capacitor (C_{BIAS}) from VCC to GND – will ensure low-noise, low-distortion performance of the device. Additional bulk capacitance can be added as required.

Note: Place C_{BIAS} as close to the device as possible.

Layout and Grounding Considerations

Well designed PC board layout is essential for optimizing device performance. Use large traces for the power supply inputs and amplifier outputs to minimize losses due to parasitic trace resistance and route heat away from the device.

Good grounding improves audio performance and prevents digital switching noise from coupling onto the audio signal.

10 Package Drawings and Markings

Figure 34. 10-pin DFN Marking

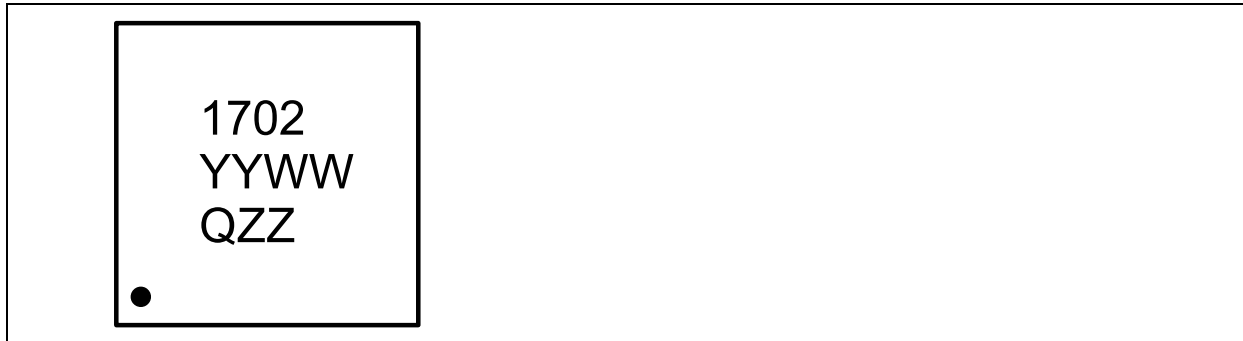


Table 7. Packaging Code YYWWQZZ

| YY | WW | Q | ZZ |
|-------------------------------------|--------------------|------------------|---------------------------------|
| last two digits of the current year | manufacturing week | plant identifier | free choice / traceability code |

Figure 35. 10-pin MSOP Marking


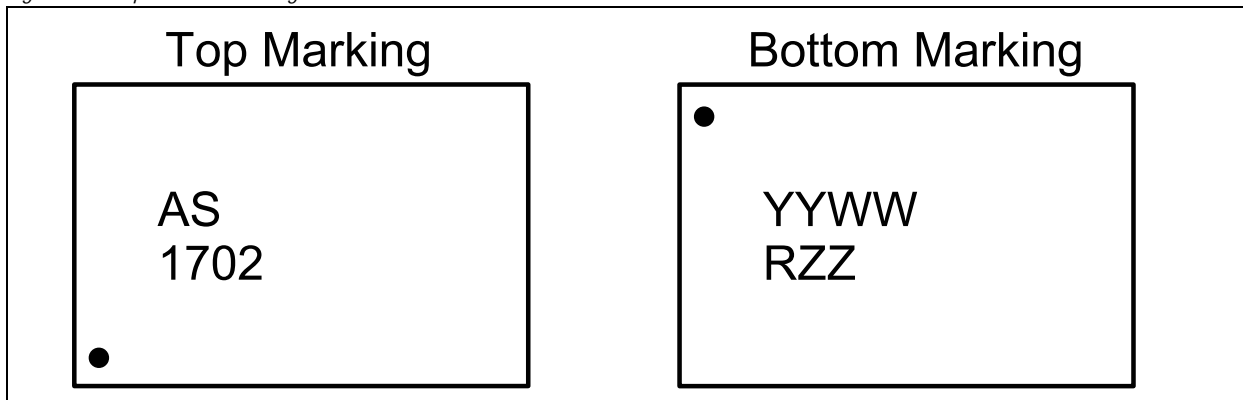


Table 8. Packaging Code YYWWRZZ

| YY | WW | R | ZZ |
|-------------------------------------|--------------------|------------------|---------------------------------|
| last two digits of the current year | manufacturing week | plant identifier | free choice / traceability code |

Figure 36. 10-pin DFN Package

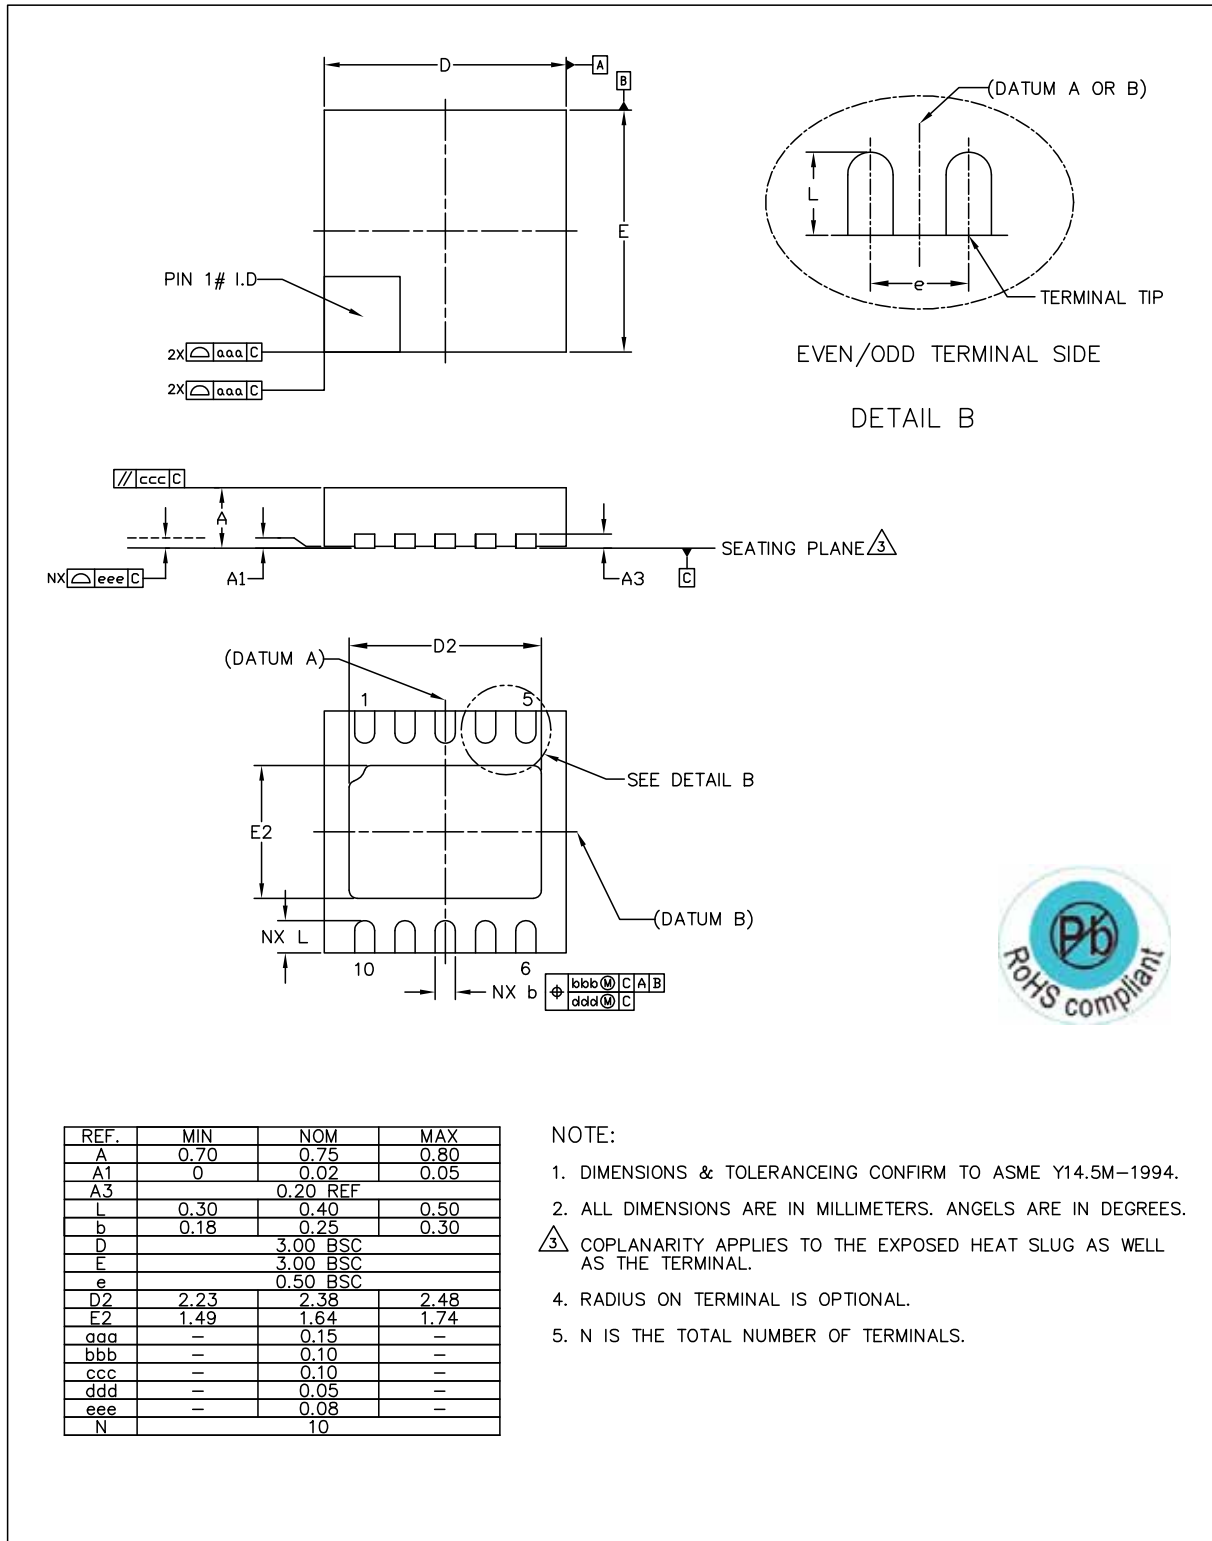


| REF. | MIN | NOM | MAX |
|------|------|----------|------|
| A | 0.70 | 0.75 | 0.80 |
| A1 | 0 | 0.02 | 0.05 |
| A3 | | 0.20 REF | |
| L | 0.30 | 0.40 | 0.50 |
| b | 0.18 | 0.25 | 0.30 |
| D | | 3.00 BSC | |
| E | | 3.00 BSC | |
| e | | 0.50 BSC | |
| D2 | 2.23 | 2.38 | 2.48 |
| E2 | 1.49 | 1.64 | 1.74 |
| aaa | - | 0.15 | - |
| bbb | - | 0.10 | - |
| ccc | - | 0.10 | - |
| ddd | - | 0.05 | - |
| eee | - | 0.08 | - |
| N | | 10 | |

NOTE:

1. DIMENSIONS & TOLERANCEING CONFIRM TO ASME Y14.5M-1994.
2. ALL DIMENSIONS ARE IN MILLIMETERS. ANGELS ARE IN DEGREES.
3. COPLANARITY APPLIES TO THE EXPOSED HEAT SLUG AS WELL AS THE TERMINAL.
4. RADIUS ON TERMINAL IS OPTIONAL.
5. N IS THE TOTAL NUMBER OF TERMINALS.

| | | | | |
|--|--------------------|-----------------|---|------|
| | | | ASSEMBLY ENGINEERING | |
| TITLE MLPD 3x3x0.75mm, 10 LEAD, 2.38x1.64mm ePAD | | | REFERENCE DOCUMENT JEDEC MO - 229 LATEST REVISION | |
| DRAWN RH8 | DATE 2010.02.02 | REV. N/C | DRAWING NO. QDF | UNIT |
| CHECKED GBO | DATE 2010.02.02 | SHEET 1 OF 1 | DIMENSION AND TOLERANCE SCALE NOT IN SCALE | |
| APPROVED MKR | DATE 2010.02.02 | | | |

Figure 37. 10-pin MSOP Package

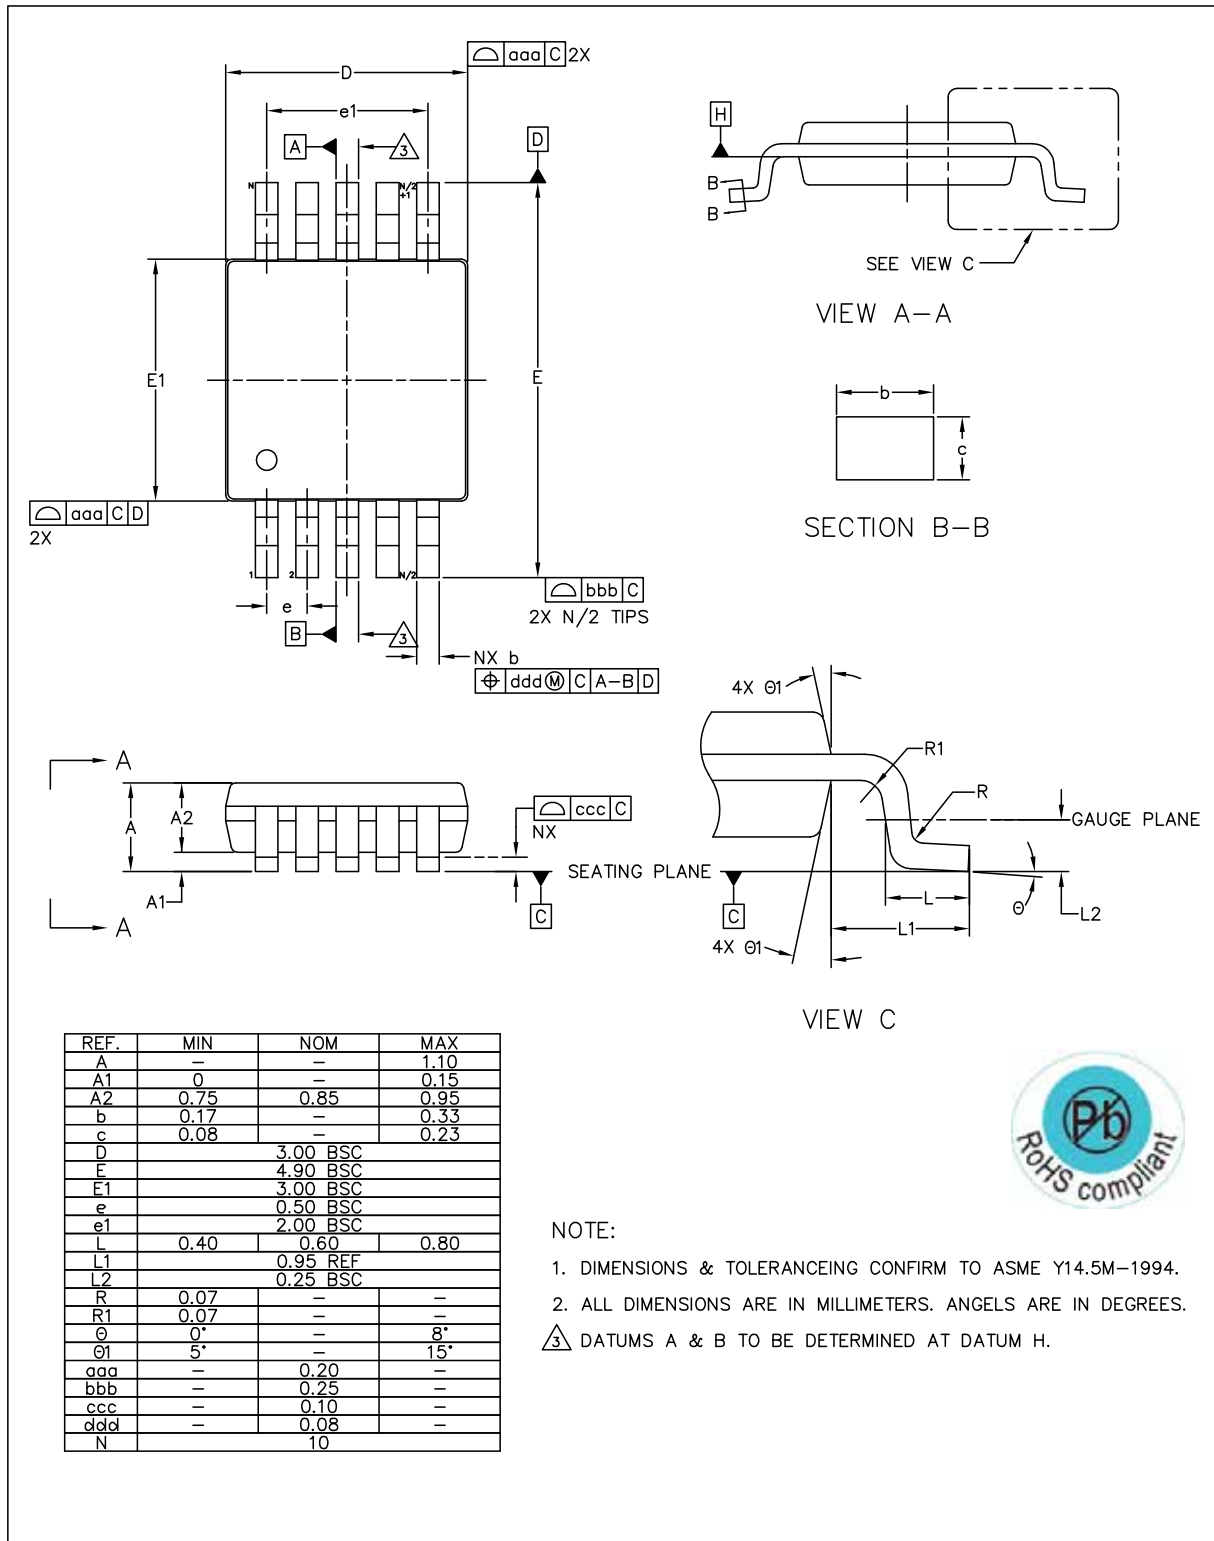

NOTE:

1. DIMENSIONS & TOLERANCEING CONFIRM TO ASME Y14.5M-1994.
 2. ALL DIMENSIONS ARE IN MILLIMETERS. ANGELS ARE IN DEGREES.
- △ DATUMS A & B TO BE DETERMINED AT DATUM H.

| | | | | |
|--------------------|--|--|---|--|
| | | | ASSEMBLY ENGINEERING | |
| DRAWN RH8 | | | TITLE MSOP 10 LEAD | |
| CHECKED GBO | | | REFERENCE DOCUMENT JEDEC MO - 187 LATEST REVISION | |
| APPROVED MKR | | | DRAWING NO. JBX | |
| DATE 2011.02.04 | | | UNIT | |
| DATE 2011.02.04 | | | DIMENSION AND TOLERANCE | |
| SHEET 1 OF 1 | | | SCALE NOT IN SCALE | |

11 Ordering Information

The devices are available as the standard products shown in [Table 9](#).

Table 9. Ordering Information

| Ordering Code | Marking | Description | Gain | Delivery Form | Package |
|---------------|---------|--|------------|---------------|-------------|
| AS1702-T | AS1702 | 1.8W Single-Channel Audio Power Amplifiers | Adjustable | Tape and Reel | 10-pin MSOP |
| AS1703-T | AS1703 | 1.8W Single-Channel Audio Power Amplifiers | Av =0dB | Tape and Reel | |
| AS1704-T | AS1704 | 1.8W Single-Channel Audio Power Amplifiers | Av =3dB | Tape and Reel | |
| AS1705-T | AS1704 | 1.8W Single-Channel Audio Power Amplifiers | Av =6dB | Tape and Reel | |
| AS1702V-T | 1702 | 1.8W Single-Channel Audio Power Amplifiers | Adjustable | Tape and Reel | 10-pin DFN |
| AS1703V-T | 1703 | 1.8W Single-Channel Audio Power Amplifiers | Av =0dB | Tape and Reel | |
| AS1704V-T | 1704 | 1.8W Single-Channel Audio Power Amplifiers | Av =3dB | Tape and Reel | |
| AS1705V-T | 1705 | 1.8W Single-Channel Audio Power Amplifiers | Av =6dB | Tape and Reel | |

Note: All products are RoHS compliant.

Buy our products or get free samples online at ICdirect: <http://www.austriamicrosystems.com/ICdirect>

Technical Support is found at <http://www.austriamicrosystems.com/Technical-Support>

For further information and requests, please contact us <mailto:sales@austriamicrosystems.com>
or find your local distributor at <http://www.austriamicrosystems.com/distributor>

Copyrights

Copyright © 1997-2011, austriamicrosystems AG, Tobelbaderstrasse 30, 8141 Unterpremstaetten, Austria-Europe. Trademarks Registered ®. All rights reserved. The material herein may not be reproduced, adapted, merged, translated, stored, or used without the prior written consent of the copyright owner.

All products and companies mentioned are trademarks or registered trademarks of their respective companies.

Disclaimer

Devices sold by austriamicrosystems AG are covered by the warranty and patent indemnification provisions appearing in its Term of Sale. austriamicrosystems AG makes no warranty, express, statutory, implied, or by description regarding the information set forth herein or regarding the freedom of the described devices from patent infringement. austriamicrosystems AG reserves the right to change specifications and prices at any time and without notice. Therefore, prior to designing this product into a system, it is necessary to check with austriamicrosystems AG for current information. This product is intended for use in normal commercial applications. Applications requiring extended temperature range, unusual environmental requirements, or high reliability applications, such as military, medical life-support or life-sustaining equipment are specifically not recommended without additional processing by austriamicrosystems AG for each application. For shipments of less than 100 parts the manufacturing flow might show deviations from the standard production flow, such as test flow or test location.

The information furnished here by austriamicrosystems AG is believed to be correct and accurate. However, austriamicrosystems AG shall not be liable to recipient or any third party for any damages, including but not limited to personal injury, property damage, loss of profits, loss of use, interruption of business or indirect, special, incidental or consequential damages, of any kind, in connection with or arising out of the furnishing, performance or use of the technical data herein. No obligation or liability to recipient or any third party shall arise or flow out of austriamicrosystems AG rendering of technical or other services.



Contact Information

Headquarters

austriamicrosystems AG
Tobelbaderstrasse 30
A-8141 Unterpremstaetten, Austria

Tel: +43 (0) 3136 500 0
Fax: +43 (0) 3136 525 01

For Sales Offices, Distributors and Representatives, please visit:

<http://www.austriamicrosystems.com/contact>