

# **INNOLUX DISPLAY CORPORATION**

## **LCD MODULE SPECIFICATION**

Customer: \_\_\_\_\_

Model Name: AT080TN05

SPEC NO.: A080-05-TT-52

Date: 2006/06/13



Version: 02

☒ Preliminary Specification

☐ Final Specification

For Customer's Acceptance

| Approved by | Comment |
|-------------|---------|
|             |         |

| Approved by                                                                                     | Reviewed by                                                                                     | Prepared by                                                                                     |
|-------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|
| <br>06/13/06 | <br>06/14/06 | <br>6/14/06 |

## Record of Revision

| Version | Revise Date | Page    | Content                                                                                                                                      |
|---------|-------------|---------|----------------------------------------------------------------------------------------------------------------------------------------------|
| 1       | 2006/05/10  |         | Initial Release.                                                                                                                             |
| 2       | 2006/6/13   | 20<br>8 | Modify the Mechanical Drawing<br>Modify Power Voltage $V_{GH}$ Typ. from "15.0 V" to "16.0v",<br>and $V_{GL}$ Typ. from "-10.0V" to "-7.0V". |

## Contents

|        |                                    |    |
|--------|------------------------------------|----|
| 1.     | General Specifications.....        | 1  |
| 2.     | Pin Assignment.....                | 2  |
| 2.1.   | TFT LCD Panel Driving Section..... | 2  |
| 2.2.   | Backlight Unit Section.....        | 6  |
| 3.     | Operation Specifications.....      | 7  |
| 3.1.   | Absolute Maximum Rating.....       | 7  |
| 3.1.1. | Typical Operation Conditions.....  | 8  |
| 3.1.2. | Current Consumption .....          | 9  |
| 3.1.3. | Backlight Driving Conditions.....  | 9  |
| 3.2.   | Power Sequence .....               | 10 |
| 3.3.   | Timing Characteristics .....       | 11 |
| 3.3.1. | Timing Conditions.....             | 11 |
| 3.3.2. | Timing Diagram .....               | 12 |
| 4.     | Optical Specifications .....       | 15 |
| 5.     | Reliability Test Items.....        | 19 |
| 6.     | General Precautions.....           | 20 |
| 6.1.   | Safety .....                       | 20 |
| 6.2.   | Handling .....                     | 20 |
| 6.3.   | Static Electricity .....           | 20 |
| 6.4.   | Storage .....                      | 20 |
| 6.5.   | Cleaning .....                     | 20 |
| 7.     | Mechanical Drawing.....            | 21 |
| 8.     | Package Drawing .....              | 22 |

# 1. General Specifications

| No. | Item                        | Specification                | Remark |
|-----|-----------------------------|------------------------------|--------|
| 1   | LCD size                    | 8.0 inch(Diagonal)           |        |
| 2   | Driver element              | a-Si TFT active matrix       |        |
| 3   | Resolution                  | 800X3(RGB)X600               |        |
| 4   | Display mode                | Normally White, Transmissive |        |
| 5   | Dot pitch                   | 0.0675(W)X0.2025(H) mm       |        |
| 6   | Active area                 | 162(W)X121.5(H) mm           |        |
| 7   | Module size                 | 183(W)X141(H)X6.3(D) mm      | Note 1 |
| 8   | Surface treatment           | Anti-Glare                   |        |
| 9   | Color arrangement           | RGB-stripe                   |        |
| 10  | Interface                   | Digital                      |        |
| 11  | Backlight Power consumption | TBD                          |        |
| 12  | Panel Power consumption     | TBD                          |        |
| 13  | Weight                      | TBD                          |        |

Note 1: Refer to Mechanical Drawing.

## 2. Pin Assignment

### 2.1. TFT LCD Panel Driving Section

| Pin No. | Symbol           | I/O | Function                               | Remark    |
|---------|------------------|-----|----------------------------------------|-----------|
| 1       | POL              | I   | Polarity selection                     |           |
| 2       | STVD             | I/O | Vertical start pulse input when U/D= H | Note 1    |
| 3       | OEV              | I   | Output enable                          |           |
| 4       | CKV              | I   | Vertical clock                         |           |
| 5       | STVU             | I/O | Vertical start pulse input when U/D= L | Note 1    |
| 6       | GND              | P   | Power ground                           |           |
| 7       | EDGSL            | I   | Select rising edge or falling edge     |           |
| 8       | V <sub>CC</sub>  | P   | Power supply for digital circuit       |           |
| 9       | V9               | I   | Gamma voltage level 9                  |           |
| 10      | V <sub>GL</sub>  | P   | Gate OFF voltage                       |           |
| 11      | V2               | I   | Gamma voltage level 2                  |           |
| 12      | V <sub>GH</sub>  | P   | Gate ON voltage                        |           |
| 13      | V6               | I   | Gamma voltage level 6                  |           |
| 14      | U/D              | I   | Up/down selection                      | Note 1, 2 |
| 15      | V <sub>COM</sub> | I   | Common voltage                         |           |
| 16      | GND              | P   | Power ground                           |           |
| 17      | AV <sub>DD</sub> | P   | Power supply for analog circuit        |           |
| 18      | V14              | I   | Gamma voltage level 14                 |           |
| 19      | V11              | I   | Gamma voltage level 11                 |           |
| 20      | V8               | I   | Gamma voltage level 8                  |           |

|    |                 |     |                                                                      |        |
|----|-----------------|-----|----------------------------------------------------------------------|--------|
| 21 | V5              | I   | Gamma voltage level 5                                                |        |
| 22 | V3              | I   | Gamma voltage level 3                                                |        |
| 23 | GND             | P   | Power ground                                                         |        |
| 24 | R5              | I   | Red data(MSB)                                                        |        |
| 25 | R4              | I   | Red data                                                             |        |
| 26 | R3              | I   | Red data                                                             |        |
| 27 | R2              | I   | Red data                                                             |        |
| 28 | R1              | I   | Red data                                                             |        |
| 29 | R0              | I   | Red data(LSB)                                                        |        |
| 30 | GND             | P   | Power ground                                                         |        |
| 31 | GND             | P   | Power ground                                                         |        |
| 32 | G5              | I   | Green data(MSB)                                                      |        |
| 33 | G4              | I   | Green data                                                           |        |
| 34 | G3              | I   | Green data                                                           |        |
| 35 | G2              | I   | Green data                                                           |        |
| 36 | G1              | I   | Green data                                                           |        |
| 37 | G0              | I   | Green data(LSB)                                                      |        |
| 38 | STHL            | I/O | Horizontal start pulse input when R/L = H                            | Note 1 |
| 39 | INV             | I   | Control signal are inverted or not                                   |        |
| 40 | GND             | I   | Power ground                                                         |        |
| 41 | DCLK            | I   | Sample clock                                                         |        |
| 42 | V <sub>CC</sub> | P   | Power supply for digital circuit                                     |        |
| 43 | STHR            | I/O | Horizontal start pulse input when R/L = L                            | Note 1 |
| 44 | LD              | I   | Latches the polarity of outputs and switches the new data to outputs |        |
| 45 | B5              | I   | Blue data (MSB)                                                      |        |


|    |                  |   |                                 |           |
|----|------------------|---|---------------------------------|-----------|
| 46 | B4               | I | Blue data                       |           |
| 47 | B3               | I | Blue data                       |           |
| 48 | B2               | I | Blue data                       |           |
| 49 | B1               | I | Blue data                       |           |
| 50 | B0               | I | Blue data (LSB)                 |           |
| 51 | R/L              | I | Right/ left selection           | Note 1, 2 |
| 52 | V1               | I | Gamma voltage level 1           |           |
| 53 | V4               | I | Gamma voltage level 4           |           |
| 54 | V7               | I | Gamma voltage level 7           |           |
| 55 | V10              | I | Gamma voltage level 10          |           |
| 56 | V12              | I | Gamma voltage level 12          |           |
| 57 | V13              | I | Gamma voltage level 13          |           |
| 58 | AV <sub>DD</sub> | P | Power supply for analog circuit |           |
| 59 | GND              | P | Power ground                    |           |
| 60 | V <sub>COM</sub> | I | Common voltage                  |           |

I: input, O: output, P: Power

Note 1: Selection of scanning mode

| Setting of scan control input |                 | IN/OUT state for start pulse |      |      |      | Scanning direction        |
|-------------------------------|-----------------|------------------------------|------|------|------|---------------------------|
| U/D                           | R/L             | STVD                         | STVU | STHR | STHL |                           |
| GND                           | V <sub>CC</sub> | O                            | I    | O    | I    | Up to down, left to right |
| V <sub>CC</sub>               | GND             | I                            | O    | I    | O    | Down to up, right to left |
| GND                           | GND             | O                            | I    | I    | O    | Up to down, right to left |
| V <sub>CC</sub>               | V <sub>CC</sub> | I                            | O    | O    | I    | Down to up, left to right |

Note 2: Definition of scanning direction.  
Refer to the figure as below:

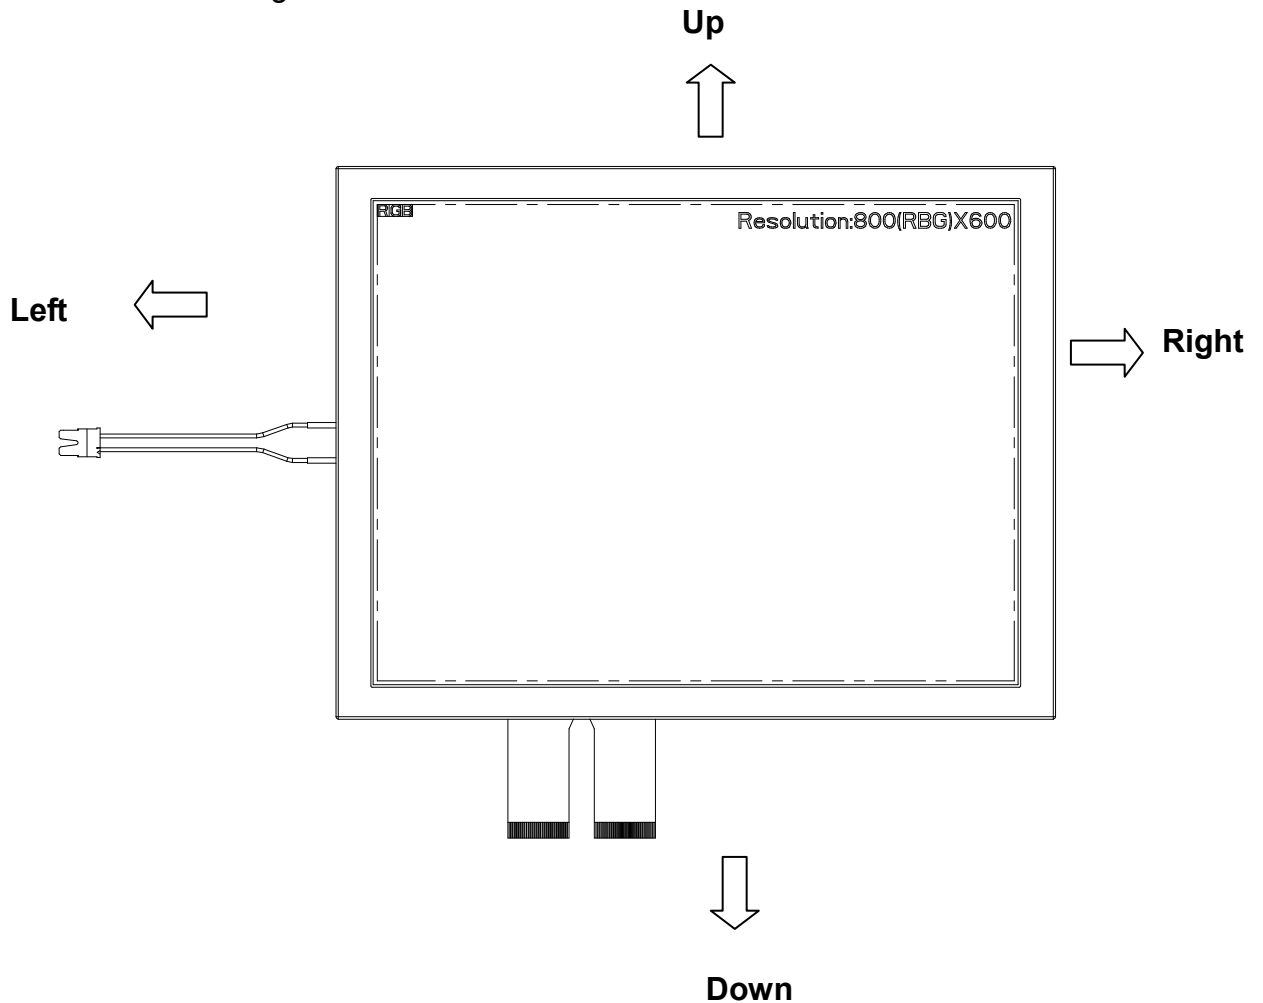

Note 3: When REV="L", normally  
REV="H", these data will be inverted.

## 2.2. Backlight Unit Section

| Pin No. | Symbol | I/O | Function                                      | Remark |
|---------|--------|-----|-----------------------------------------------|--------|
| 1       | HI     | P   | Power supply for backlight unit(High voltage) | Pink   |
| 2       | GND    | P   | Ground for backlight unit                     | White  |

### 3. Operation Specifications

#### 3.1. Absolute Maximum Rating

 (GND=AV<sub>SS</sub>=0V, Note 2)

|                       | Symbol                           | Values               |                       | Unit | Remark |
|-----------------------|----------------------------------|----------------------|-----------------------|------|--------|
|                       |                                  | Min.                 | Max.                  |      |        |
| Power voltage         | V <sub>CC</sub>                  | -0.3                 | 5                     | V    |        |
|                       | AV <sub>DD</sub>                 | -0.5                 | 13.5                  | V    |        |
|                       | V <sub>GH</sub>                  | -0.3                 | (18.0)                | V    |        |
|                       | V <sub>GL</sub>                  | -15                  | 0.3                   | V    |        |
|                       | V <sub>GH</sub> -V <sub>GL</sub> | -                    | 33                    | V    |        |
| Input signal voltage  | V1~V7                            | 0.4 AV <sub>DD</sub> | AV <sub>DD</sub> +0.3 | V    | Note 1 |
|                       | V8~V14                           | -0.3                 | 0.6AV <sub>DD</sub>   | V    | Note 1 |
| Operation Temperature | T <sub>OP</sub>                  | (-30)                | (85)                  | °C   |        |
| Storage Temperature   | T <sub>ST</sub>                  | (-40)                | (95)                  | °C   |        |

Note 1: AV<sub>DD</sub>-0.1 ≥ V1 ≥ V2 ≥ V3 ≥ V4 ≥ V5 ≥ V6 ≥ V7 ≥ V8 ≥ V9 ≥ V10 ≥ V11 ≥ V12 ≥ V13 ≥ V14 ≥ AV<sub>SS</sub>+0.1

Note 2: The absolute maximum rating values of this product are not allowed to be exceeded at any times. Should a module be used with any of the absolute maximum ratings exceeded, the characteristics of the module may not be recovered, or in an extreme case, the module may be permanently destroyed.

### 3.1.1. Typical Operation Conditions

 (GND=AV<sub>SS</sub>=0V, Note 1)

| Item                     | Symbol           | Values               |        |                       | Unit | Remark |
|--------------------------|------------------|----------------------|--------|-----------------------|------|--------|
|                          |                  | Min.                 | Typ.   | Max.                  |      |        |
| Power voltage            | V <sub>CC</sub>  | 3.0                  | 3.3    | 3.6                   | V    |        |
|                          | AV <sub>DD</sub> | -                    | 10.0   | -                     | V    |        |
|                          | V <sub>GH</sub>  | -                    | (16.0) | -                     | V    |        |
|                          | V <sub>GL</sub>  | -                    | (-7.0) | -                     | V    |        |
| Input signal voltage     | V <sub>COM</sub> | -                    | TBD    | -                     | V    |        |
|                          | V1~V7            | 0.4 A <sub>VDD</sub> | -      | A <sub>VDD</sub> -0.1 | V    |        |
|                          | V8~V14           | 0.1                  | -      | 0.6 A <sub>VDD</sub>  | V    |        |
| Input logic high voltage | V <sub>IH</sub>  | 0.7V <sub>CC</sub>   | -      | V <sub>CC</sub>       | V    |        |
| Input logic low voltage  | V <sub>IL</sub>  | 0                    | -      | 0.3V <sub>CC</sub>    | V    |        |

 Note 1: Be sure to apply V<sub>CC</sub> and V<sub>GL</sub> to the LCD first, and then apply V<sub>GH</sub>.

### 3.1.2. Current Consumption

 (GND=AV<sub>SS</sub>=0V)

| Item               | Symbol                       | Values |      |      | Unit | Remark                   |
|--------------------|------------------------------|--------|------|------|------|--------------------------|
|                    |                              | Min.   | Typ. | Max. |      |                          |
| Current for Driver | I <sub>GH</sub>              | -      | 0.2  | 0.5  | mA   | V <sub>GH</sub> =15.0V   |
|                    | I <sub>GL</sub>              | -      | 0.2  | 1.0  | mA   | V <sub>GL</sub> = -10.0V |
|                    | I <sub>CC</sub>              | -      | 4.0  | 10.0 | mA   | V <sub>CC</sub> =3.3V    |
|                    | I <sub>AV<sub>DD</sub></sub> | -      | 25.0 | 50.0 | mA   | AV <sub>DD</sub> =10.0V  |

### 3.1.3. Backlight Driving Conditions

| Item                  | Symbol                | Values |       |        | Unit              | Remark     |
|-----------------------|-----------------------|--------|-------|--------|-------------------|------------|
|                       |                       | Min.   | Typ.  | Max.   |                   |            |
| Lamp voltage          | V <sub>L</sub>        | -      | (600) | -      | V <sub>rms</sub>  | Note 1,6   |
| Lamp current          | I <sub>L</sub>        | -      | 6.0   | -      | mA <sub>rms</sub> | Note 6     |
| Frequency             | F <sub>L</sub>        | (40)   | (50)  | (60)   | kHz               | Note 3     |
| Lamp starting voltage | V <sub>S</sub> (25°C) | -      | -     | (800)  | V <sub>rms</sub>  | Note 1,4,6 |
|                       | V <sub>S</sub> (0°C)  | -      | -     | (1200) | V <sub>rms</sub>  | Note 2,4,6 |
| Lamp life time        | -                     | 20,000 | -     | -      | Hr                | Note 5     |

Note 1: The ambient temperature is 25°C.

Note 2: The ambient temperature is 0°C.

Note 3: The lamp frequency should be selected as different as possible from display horizontal synchronous signal to avoid interference.


Note 4: For starting the backlight unit, the output voltage of DC/AC's transformer should be larger than the maximum lamp starting voltage.

 Note 5: The "lamp life time" is defined as the module brightness decay to 50% of original brightness when the ambient temperature is 25°C and I<sub>L</sub> =6mA.


Note 6: Measure inverter type: DA1205, C=27pF, Input Voltage=12.0V.

## 3.2. Power Sequence

### 3.2.1. Power on:

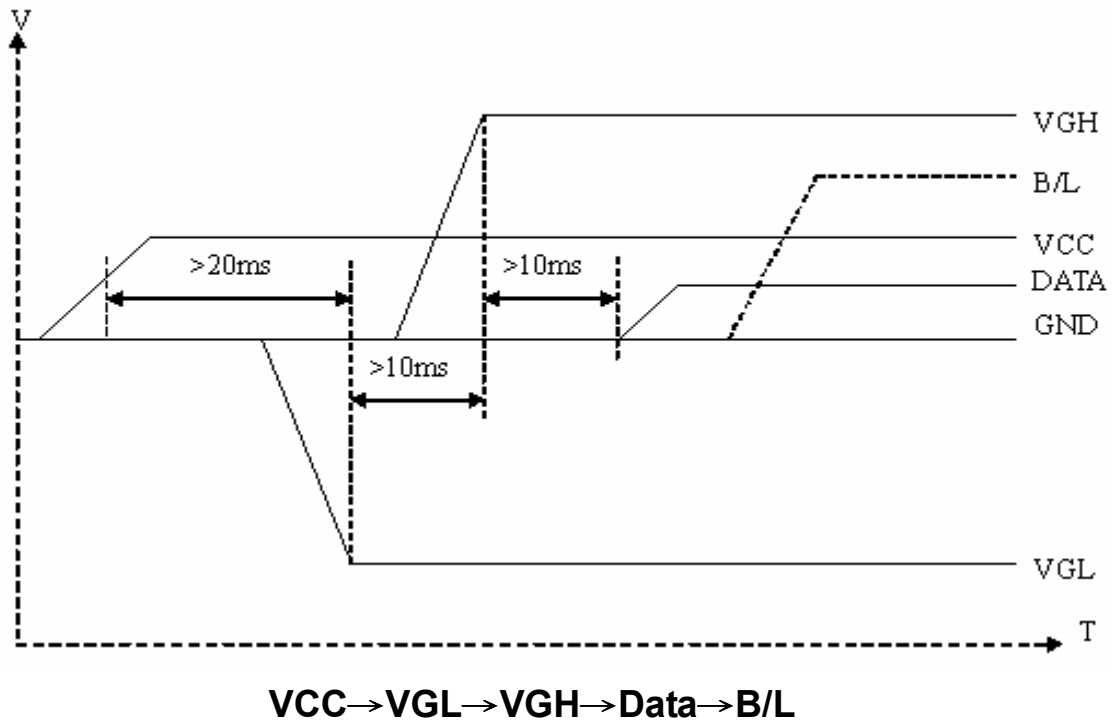

### 3.2.2. Power off:

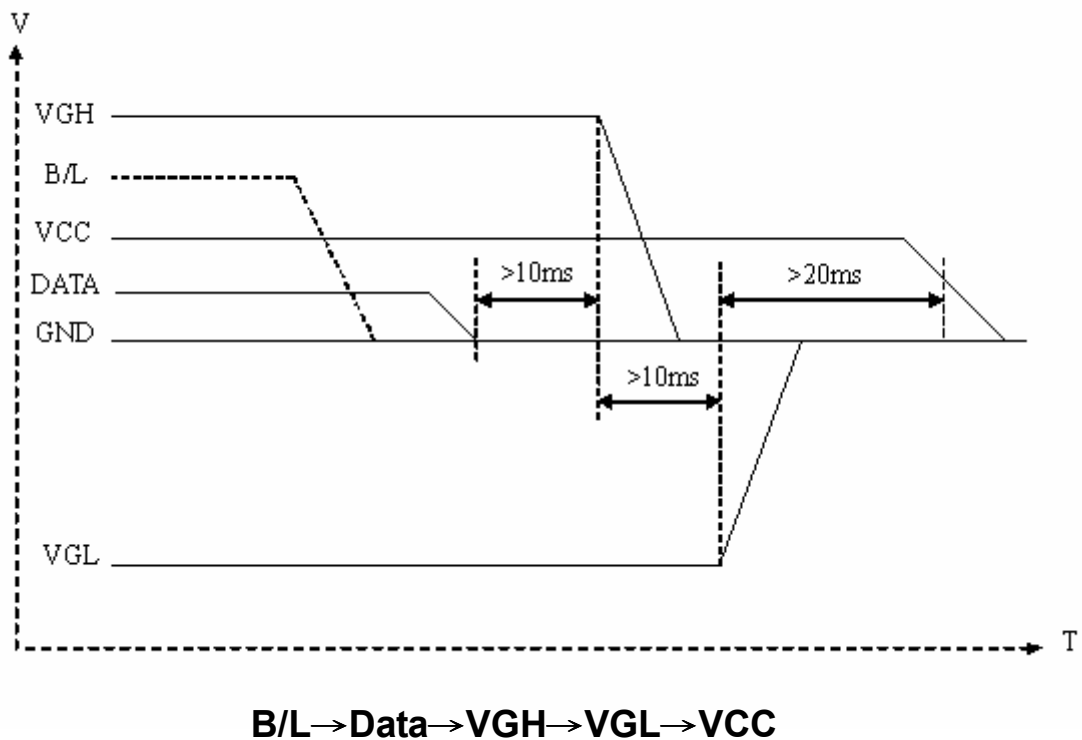


### 3.3. Timing Characteristics

#### 3.3.1. Timing Conditions


| Item                            | Symbol | Values |      |      | Unit | Remark |
|---------------------------------|--------|--------|------|------|------|--------|
|                                 |        | Min.   | Typ. | Max. |      |        |
| DCLK frequency                  | Fclk   | -      | 40   | 45   | MHz  |        |
| DCLK cycle                      | Tcph   | 22     | 25   | -    | ns   |        |
| DCLK pulse width                | Tcw    | 8      | -    | -    | ns   |        |
| Data set-up time                | Tsu    | 4      | -    | -    | ns   |        |
| Data hold time                  | Thd    | 2      | -    | -    | ns   |        |
| Time that the last data to LD   | Tld    | 1      | -    | -    | Tcph |        |
| Pulse width of LD               | Twld   | 2      | -    | -    | Tcph |        |
| Time that LD to DIO1/2          | Tlds   | 5      | -    | -    | Tcph |        |
| POL set-up time                 | Tpsu   | 6      | -    | -    | ns   |        |
| POL hold time                   | Tphd   | 6      | -    | -    | ns   |        |
| OEV pulse width                 | Toev   | 1      | -    | -    | us   |        |
| CKV pulse width                 | Tckv   | 2.5    | -    | -    | us   |        |
| Horizontal display timing range | Tdh    | -      | 800  | -    | Tcph |        |
| Horizontal timing range         | Th     | -      | 1056 | -    | Tcph |        |
| STV setup time                  | Tsuv   | 700    | -    | -    | ns   |        |
| STV hold time                   | Thdv   | 700    | -    | -    | ns   |        |
| Horizontal lines per field      | Tv     | 628    | 635  | 650  | Tdh  |        |
| Vertical display timing range   | Tvd    | -      | 600  | -    | Tdh  |        |



### 3.3.2. Timing Diagram



EDGSL=L or open

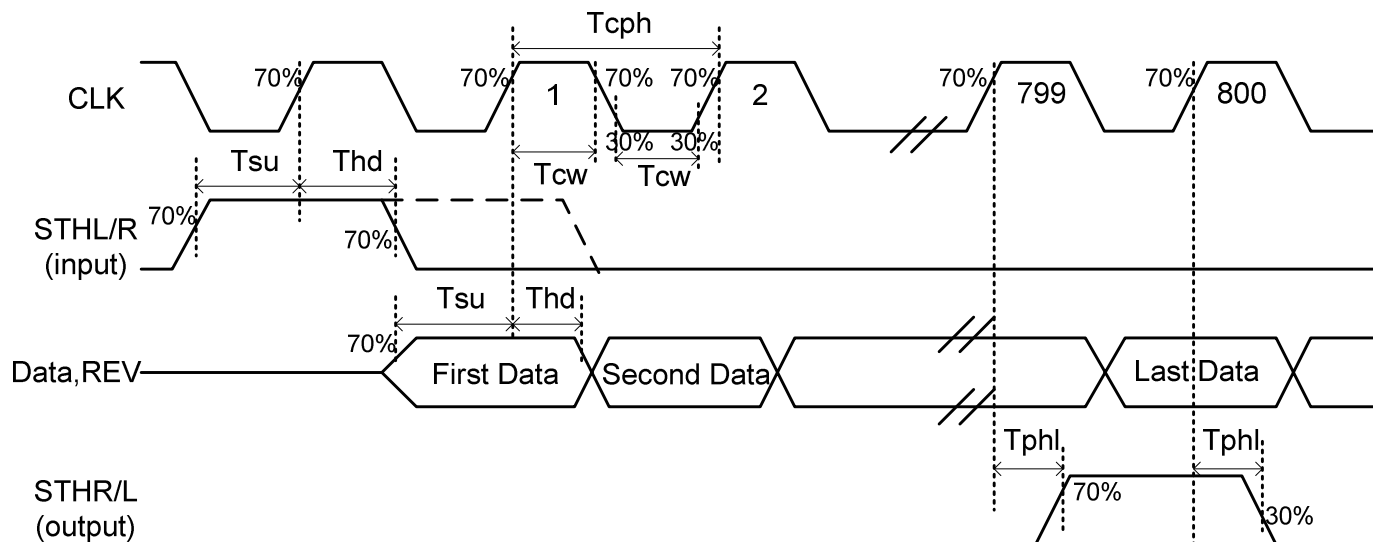

EDGSL=H

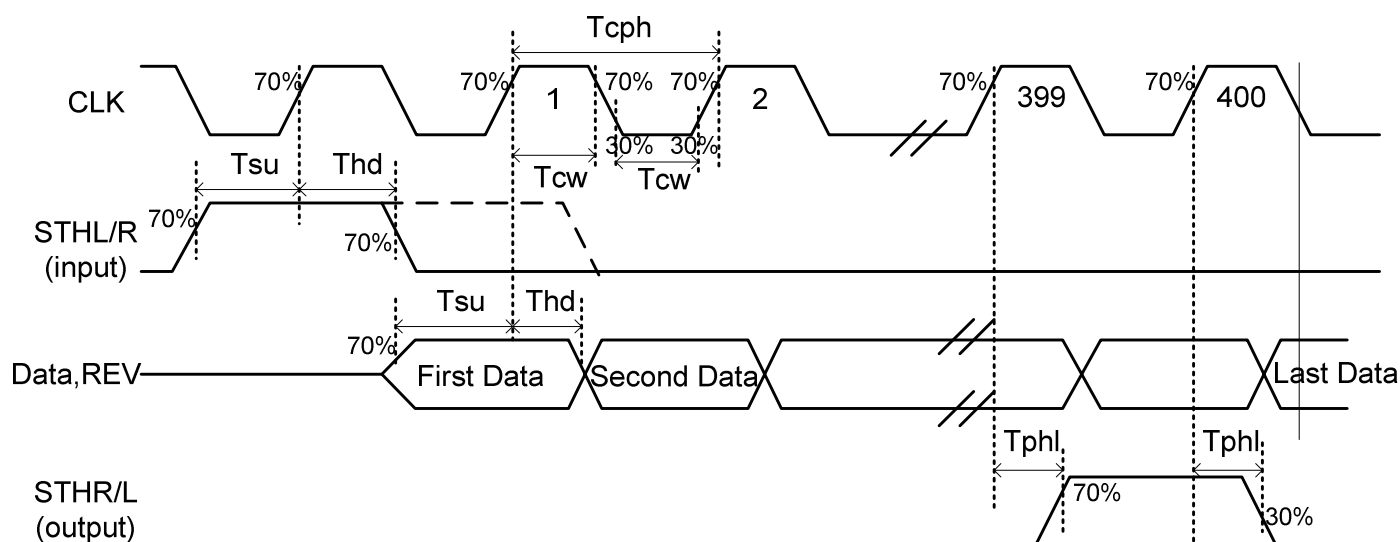

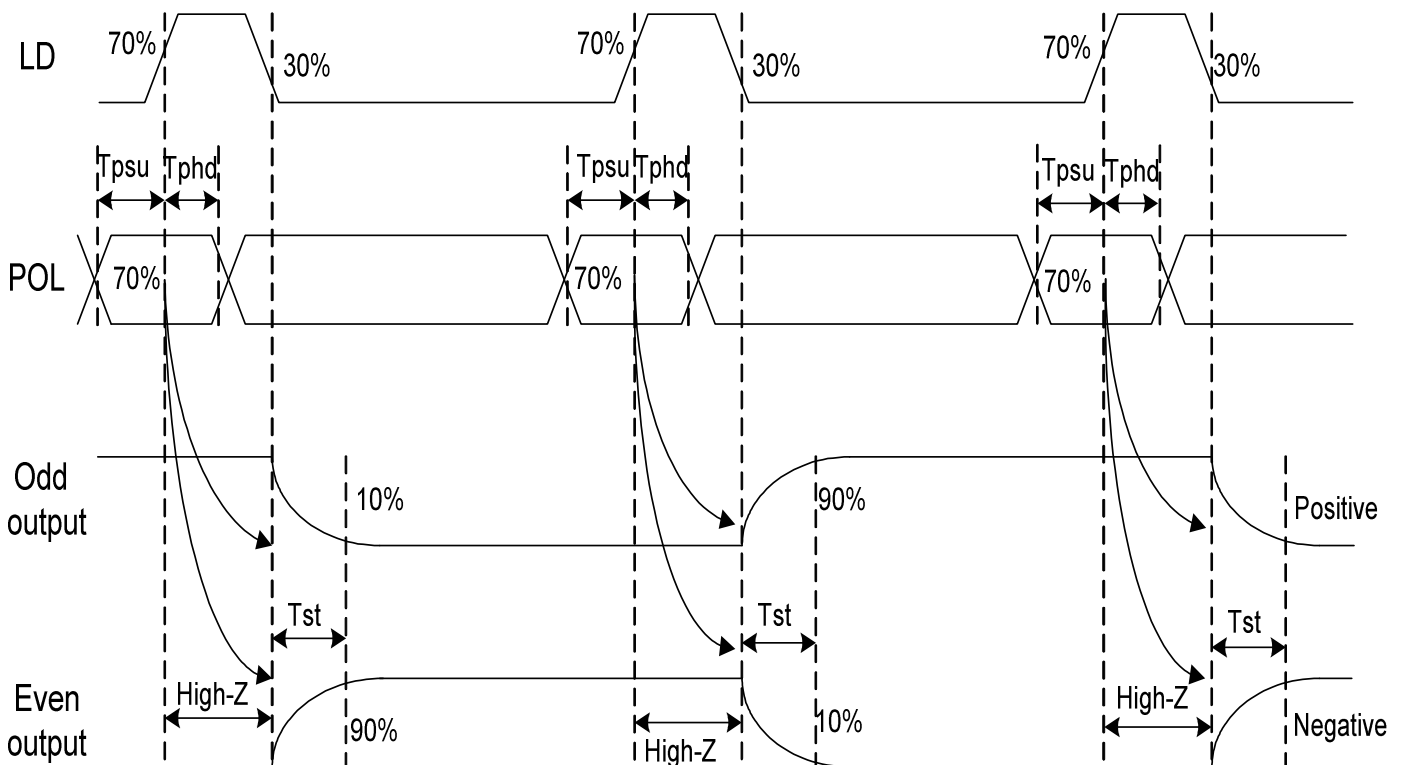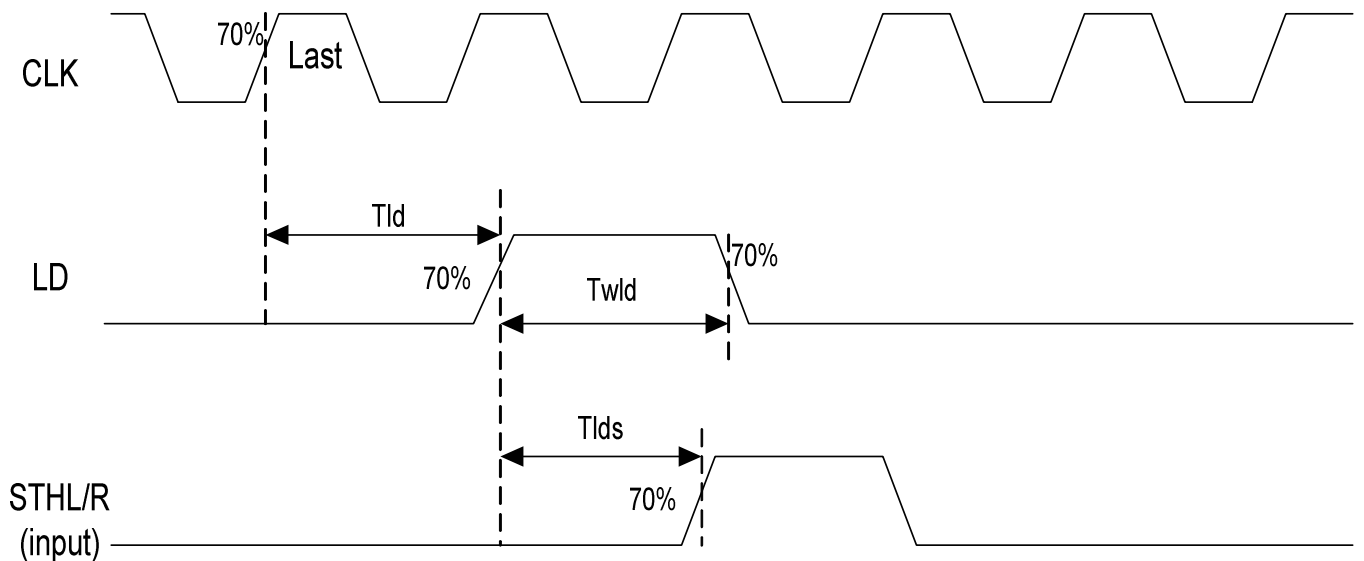

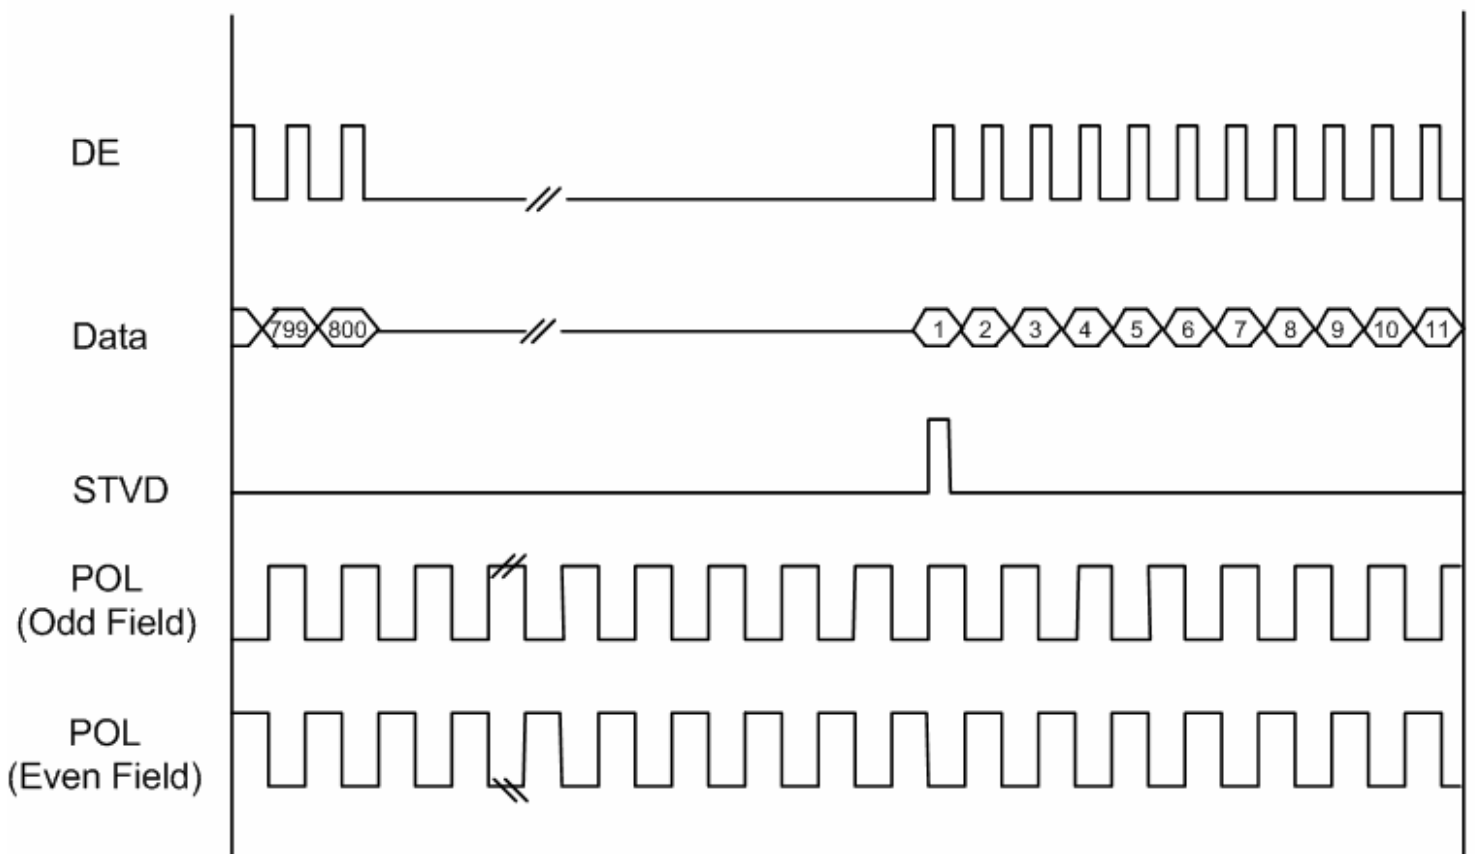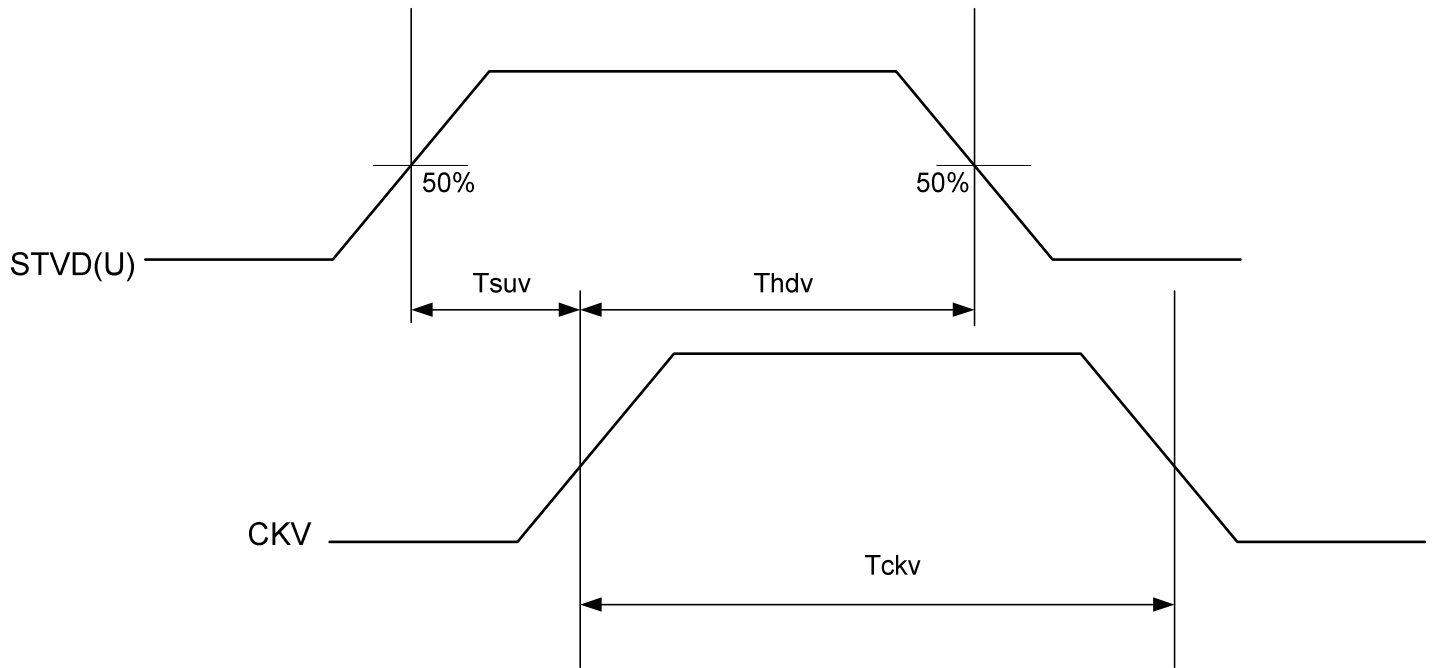

## 4. Optical Specifications

| Item                      | Symbol     | Condition                       | Values |        |        | Unit              | Remark                     |
|---------------------------|------------|---------------------------------|--------|--------|--------|-------------------|----------------------------|
|                           |            |                                 | Min.   | Typ.   | Max.   |                   |                            |
| Viewing angle<br>(CR≥ 10) | $\theta_L$ | $\Phi=180^\circ$ (9 o'clock)    | (70)   | (80)   | -      | degree            | Note 1                     |
|                           | $\theta_R$ | $\Phi=0^\circ$ (3 o'clock)      | (70)   | (80)   | -      |                   |                            |
|                           | $\theta_T$ | $\Phi=90^\circ$ (12 o'clock)    | (70)   | (80)   | -      |                   |                            |
|                           | $\theta_B$ | $\Phi=270^\circ$ (6 o'clock)    | (70)   | (80)   | -      |                   |                            |
| Response time             | $T_{ON}$   | Normal<br>$\theta=\Phi=0^\circ$ | -      | (10)   | TBD    | msec              | Note 3                     |
|                           | $T_{OFF}$  |                                 | -      | (15)   | TBD    | msec              | Note 3                     |
| Contrast ratio            | CR         |                                 | (400)  | (500)  | -      | -                 | Note 4                     |
| Color chromaticity        | $W_X$      |                                 | (0.26) | (0.31) | (0.36) | -                 | Note 2<br>Note 5<br>Note 6 |
|                           | $W_Y$      |                                 | (0.28) | (0.33) | (0.38) | -                 |                            |
| Luminance                 | L          |                                 | 300    | (350)  | -      | cd/m <sup>2</sup> | Note 6                     |
| Luminance uniformity      | $Y_U$      |                                 | 70     | 75     | -      | %                 | Note 7                     |

**Test Conditions:**

1.  $V_{CC}=3.3V$ ,  $I_L=6mA$  (Backlight current), the ambient temperature is  $25^\circ C$ .
2. The test systems refer to Note 2.

Note 1: Definition of viewing angle range

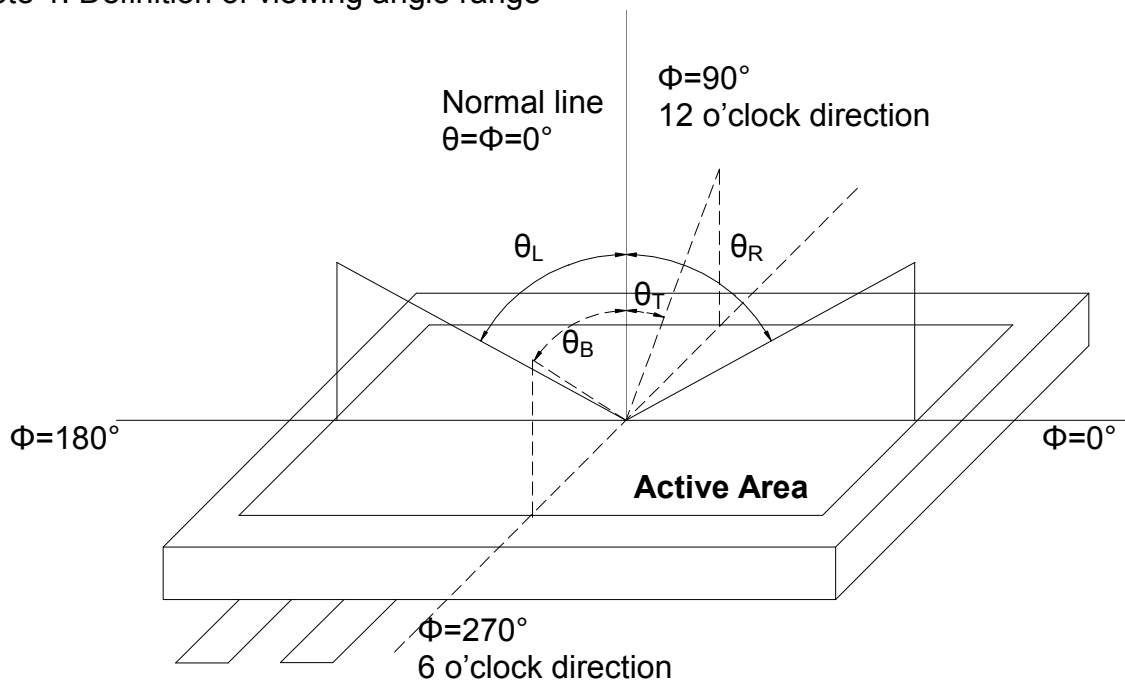


Fig. 4-1 Definition of viewing angle

Note 2: Definition of optical measurement system.

The optical characteristics should be measured in dark room. After 30 minutes operation, the optical properties are measured at the center point of the LCD screen. (Response time is measured by Photo detector TOPCON BM-7, other items are measured by BM-5A/Field of view:  $1^\circ$  /Height: 500mm.)

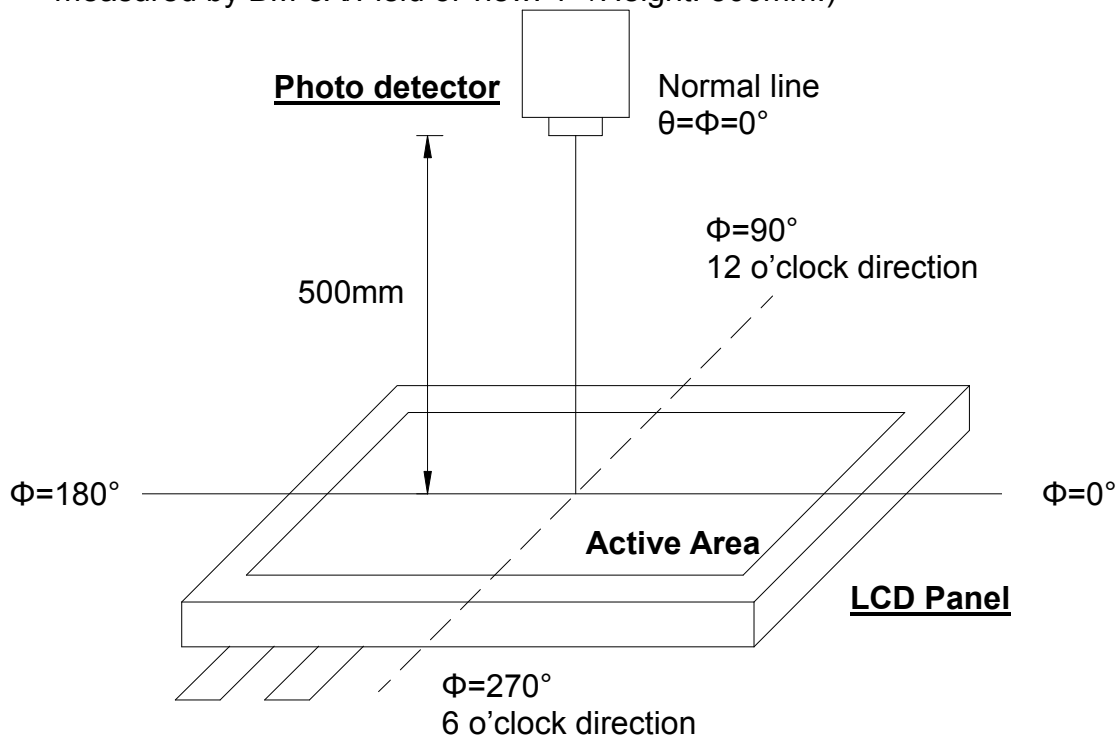


Fig. 4-2 Optical measurement system setup

The copyright belongs to InnoLux. Any unauthorized use is prohibited.

<http://www.BDTIC.com/INNOLUX>

**Note 3: Definition of Response time**

The response time is defined as the LCD optical switching time interval between "White" state and "Black" state. Rise time ( $T_{ON}$ ) is the time between photo detector output intensity changed from 90% to 10%. And fall time ( $T_{OFF}$ ) is the time between photo detector output intensity changed from 10% to 90%.

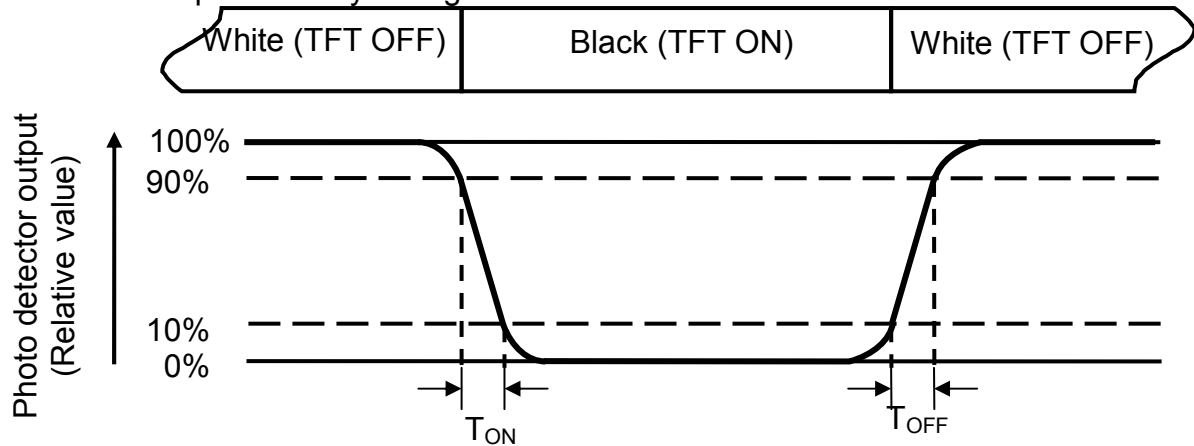


Fig. 4-3 Definition of response time

**Note 4: Definition of contrast ratio**

$$\text{Contrast ratio (CR)} = \frac{\text{Luminance measured when LCD on the "White" state}}{\text{Luminance measured when LCD on the "Black" state}}$$

**Note 5: Definition of color chromaticity (CIE1931)**

Color coordinates measured at center point of LCD.


Note 6: All input terminals LCD panel must be ground while measuring the center area of the panel.

**Note 7: Definition of Luminance Uniformity**

Active area is divided into 9 measuring areas (Refer to Fig. 4-4 ).Every measuring point is placed at the center of each measuring area.

$$\text{Luminance Uniformity (Yu)} = \frac{B_{min}}{B_{max}}$$

L-----Active area length      W----- Active area width

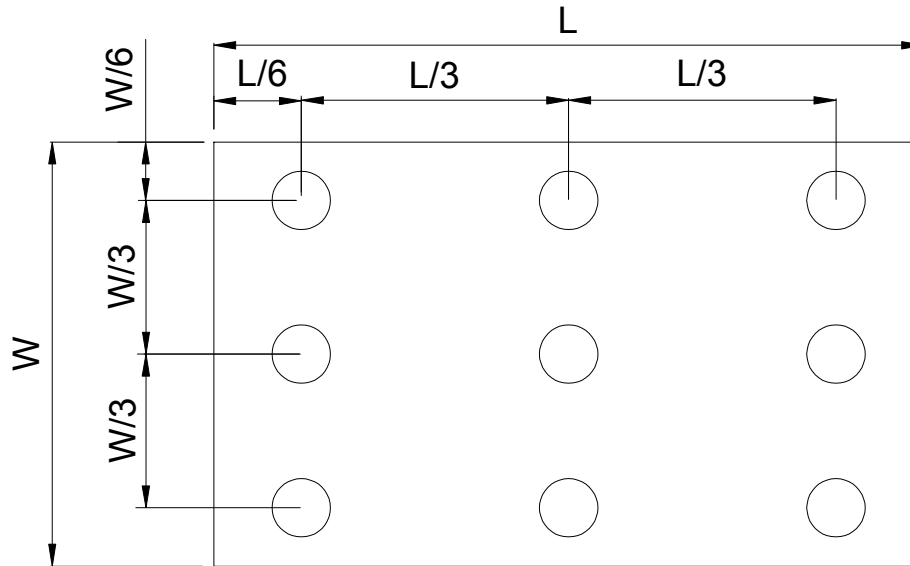

**Fig. 4-4 Definition of measuring points**

**B<sub>max</sub>**: The measured maximum luminance of all measurement position.

**B<sub>min</sub>**: The measured minimum luminance of all measurement position.

## 5. Reliability Test Items

(Note3)

| Item                                     | Test Conditions                                                                                                                             | Remark |
|------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------|--------|
| High Temperature Storage                 | Ta = (95°C) 240 hrs                                                                                                                         | Note 1 |
| Low Temperature Storage                  | Ta = (-40°C) 240hrs                                                                                                                         | Note 1 |
| High Temperature Operation               | Ts = (85°C) 240hrs                                                                                                                          | Note 2 |
| Low Temperature Operation                | Ta = (-30°C) 240hrs                                                                                                                         | Note 1 |
| Operate at High Temperature and Humidity | +60°C, 90%RH 240 hrs                                                                                                                        |        |
| Thermal Shock                            | -40°C/30 min ~ +95°C/30 min for a total 100 cycles, Start with cold temperature and end with high temperature                               |        |
| Vibration Test                           | Frequency range:10~55Hz<br>Stroke:1.5mm<br>Sweep:10Hz~55Hz~10Hz<br>2 hours for each direction of X. Y. Z.<br>(6 hours for total)            |        |
| Mechanical Shock                         | 100G 6ms,±X, ±Y, ±Z 3 times for each direction                                                                                              |        |
| Package Vibration Test                   | Random Vibration :<br>0.015G*G/Hz from 5-200HZ, -6dB/Octave from 200-500HZ<br>2 hours for each direction of X. Y. Z.<br>(6 hours for total) |        |
| Package Drop Test                        | Height:60 cm<br>1 corner, 3 edges, 6 surfaces                                                                                               |        |
| Electro Static Discharge                 | ± 2KV, Human Body Mode, 100pF/1500Ω                                                                                                         |        |

Note 1: Ta is the ambient temperature of samples.

Note 2: Ts is the temperature of panel's surface.

Note 3: In the standard condition, there shall be no practical problem that may affect the display function. After the reliability test, only guarantees operation, but don't guarantee all of the cosmetic specification.

## 6. General Precautions

### 6.1. Safety

Liquid crystal is poisonous. Do not put it in your mouth. If liquid crystal touches your skin or clothes, wash it off immediately by using soap and water.

### 6.2. Handling

1. The LCD panel is plate glass. Do not subject the panel to mechanical shock or to excessive force on its surface.
2. The polarizer attached to the display is easily damaged. Please handle it carefully to avoid scratch or other damages.
3. To avoid contamination on the display surface, do not touch the module surface with bare hands.
4. Keep a space so that the LCD panels do not touch other components.
5. Put cover board such as acrylic board on the surface of LCD panel to protect panel from damages.
6. Transparent electrodes may be disconnected if you use the LCD panel under environmental conditions where the condensation of dew occurs.
7. Do not leave module in direct sunlight to avoid malfunction of the ICs.

### 6.3. Static Electricity

1. Be sure to ground module before turning on power or operating module.
2. Do not apply voltage which exceeds the absolute maximum rating value.

### 6.4. Storage

1. Store the module in a dark room where must keep at  $25\pm 10^{\circ}\text{C}$  and 65%RH or less.
2. Do not store the module in surroundings containing organic solvent or corrosive gas.
3. Store the module in an anti-electrostatic container or bag.

### 6.5. Cleaning

1. Do not wipe the polarizer with dry cloth. It might cause scratch.
2. Only use a soft cloth with IPA to wipe the polarizer, other chemicals might permanent damage to the polarizer.

7. Mechanical Drawing

