

AT7316

700mA High Voltage Adjustable Current Regulator
With Enable Control



Immense Advance Tech.

FEATURES

- Wide Supply Voltage Range: 5V~50V.
- Output Voltage Surge Ratings Up To 75V
- 0.5V Output Drop-out Voltage at 0.7A
- 3us Fast Response Output Stage Enable Control
- Output Current Controlled by External Resistor
- Internal Thermal Protection
- PWM Dimming via OE Pin

APPLICATION


- DC/DC LED Driver Applications
- RGB Full Color Power LED Driver
- Back Lighting of Flat Panel Displays
- LED Table Lamp

DESCRIPTION

The AT7316 is a high voltage, low dropout current regulator. The output current can be programmed by an external resistor which sets the full scale LED string current up to 700mA and the output sink current could be disabled via OE pin.


Additional feature includes thermal protection function to ensure the system reliability. Therefore, a large amount of current can be handled safely in one package. The device is available in TO-252-5L package.

ORDER INFORMATION

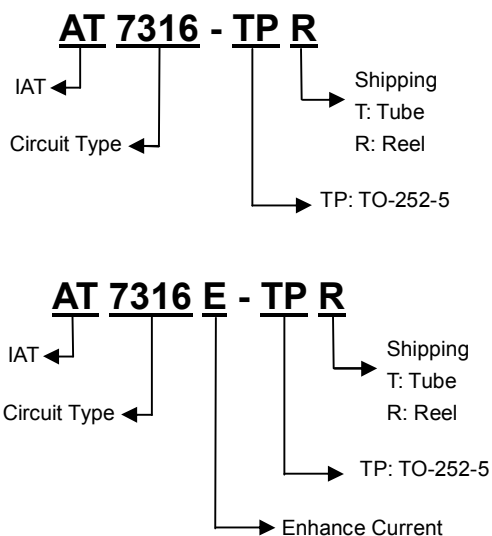

PIN CONFIGURATIONS

TO-252-5L



(TOP VIEW)

AT7316

700mA High Voltage Adjustable Current Regulator
With Enable Control



Immense Advance Tech.

PIN DESCRIPTIONS

Symbol	Description
OUT	Output pin. Sink current it decided by the current on R _{SET} connected to I _{SET} pin. $I_{OUT} = 1.2 \times \frac{500}{R_{CS}}$
OE	Output Stage Enable Control pin. High enables the OUT pin. It can be left floating for normally on.
I _{SET}	Output Current Setting pin. Connect a resistor from I _{SET} to GND to set the LED bias current. $I_{SET} = 0.002 \times I_{OUT} = \frac{1.2}{R_{CS}}$
VDD	Power Supply pin.
GND	Ground pin.

TYPICAL APPLICATION CIRCUITS

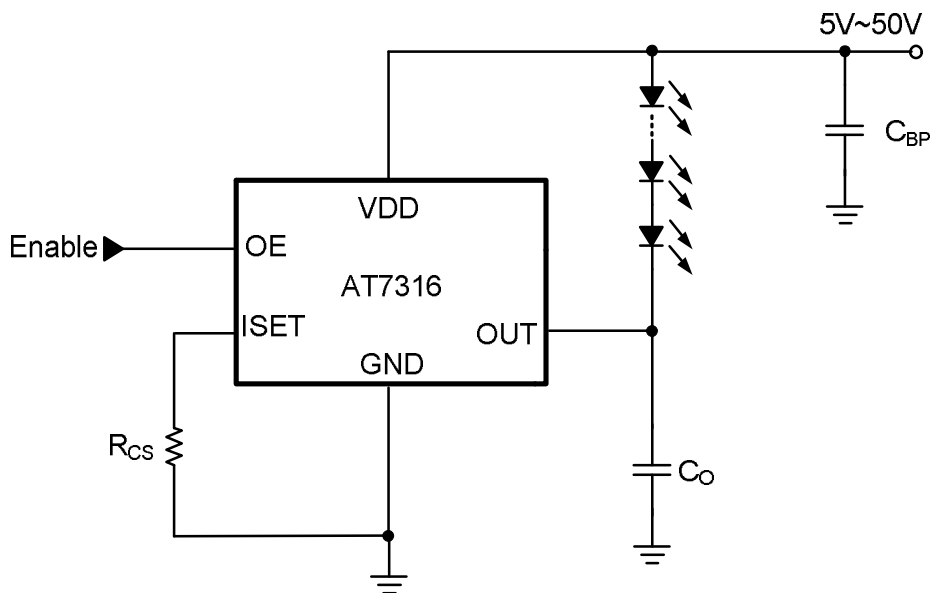


Figure 1

AT7316

700mA High Voltage Adjustable Current Regulator
With Enable Control



Immense Advance Tech.

ABSOLUTE MAXIMUM RATINGS (Note 1)

Parameter	Symbol	Range	Unit
Input Voltage	V_{DD}	55	V
Output Sustaining Voltage	V_{OUT}	75	V
Output Sink Current	I_{OUT}	700	mA
Output Enable Voltage	V_{OE}	13.2	V
Maximum Operating Junction Temperature	T_J	150	°C
Lead Temperature (Soldering 10 sec)	T_{LEAD}	260	°C
Storage Temperature rang	T_{STG}	-65 to +150	°C
Thermal Resistance Junction to Ambient (Note 2)	θ_{JA}	80	°C/W

RECOMMENDED OPERATING CONDITIONS (Note 3)

Parameter	Symbol	Operation Conditions	Unit
Supply Voltage	V_{DD}	5 ~ 50	V
Output Enable Voltage	V_{OE}	0 ~ 12	V
Output Sink Current	AT7316	200 ~ 355	mA
	AT7316E	350 ~ 600	
Operating free-air temperature range	T_A	-40 to +85	°C

Note 1: Stresses listed as the above "Absolute Maximum Ratings" may cause permanent damage to the device. These are for stress ratings. Functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may remain possibility to affect device reliability.

Note 2: 2 square inch of FR-4, double sided, 1 oz. minimum copper weight.

Note 3: The device is not guaranteed to function outside its operating conditions

AT7316

700mA High Voltage Adjustable Current Regulator
With Enable Control



Immense Advance Tech.

ELECTRICAL CHARACTERISTICS

$V_{DD}=24V$, $T_A=25^{\circ}C$, No Load, unless otherwise specified.

Parameter	Symbol	Condition	Min	Typ	Max	Unit
Output Current	I_{OUT}	$V_{OUT}=0.5V$, $R_{SET}=3K\Omega$		200		mA
		$V_{OUT}=0.5V$, $R_{SET}=1.71K\Omega$		350		
		$V_{OUT}=0.5V$, $R_{SET}=1K\Omega$		600		
Output Current Deviation	ΔI_{OUT}	AT7316 $V_{OUT}=0.5V$, $I_{OUT}=200\sim 350mA$			± 5	%
		AT7316E $V_{OUT}=0.5V$, $I_{OUT}=350\sim 600mA$			± 5	
SET Current Range	I_{SET}		200		1400	μA
Minimum Output Current	$I_{OUT(min)}$	$I_{SET}=200\mu A$		100		mA
Maximum Output Current	$I_{OUT(max)}$	$I_{SET}=1400\mu A$		700		mA
Output Dropout Voltage	V_{DROP}	$I_{SET}=1000\mu A$ (Note 1)		0.35		V
Load Regulation	Reg_Load	$V_{OUT}=0.5V$ to 3V			3	mA/V
Line Regulation	Reg_Line	$V_{OUT}=0.5V$, $I_{OUT}=350mA$, $V_{DD}=5V$ to 50V		0.08	0.15	%/V
Thermal Shutdown Junction Temperature	T_{HI}	Hysteresis= $20^{\circ}C$		160		$^{\circ}C$
“Low” Input Voltage	V_{OEL}		0		0.8	V
“High” Input Voltage	V_{OEH}	Should lower than V_{DD}	2		Min { $V_{DD}, 12$ }	V
“Low” Input Current	I_{OEL}	$V_{OE}=0V$	-20		+20	μA
“High” Input Current	I_{OEH}	$V_{OE}=5V$	-5.0		+5.0	μA
Output Enable Delay Time	T_{DLH}	OE from Low to High, $V_{OUT}=0.5V$, $I_{OUT}=350mA$, 50%		3		μS
Output Disable Delay Time	T_{DHL}	OE from High to Low, $V_{OUT}=0.5V$, $I_{OUT}=350mA$, 50%		3		μS
Supply Current Consumption	I_{SS}				5	mA

Note 1: Output dropout voltage: $90\% \times I_{OUT}$ @ $V_{OUT}=500mV$

AT7316


700mA High Voltage Adjustable Current Regulator
With Enable Control



Immense Advance Tech.

PACKAGE OUTLINE DIMENSIONS

TO-252-5L PACKAGE OUTLINE DIMENSIONS

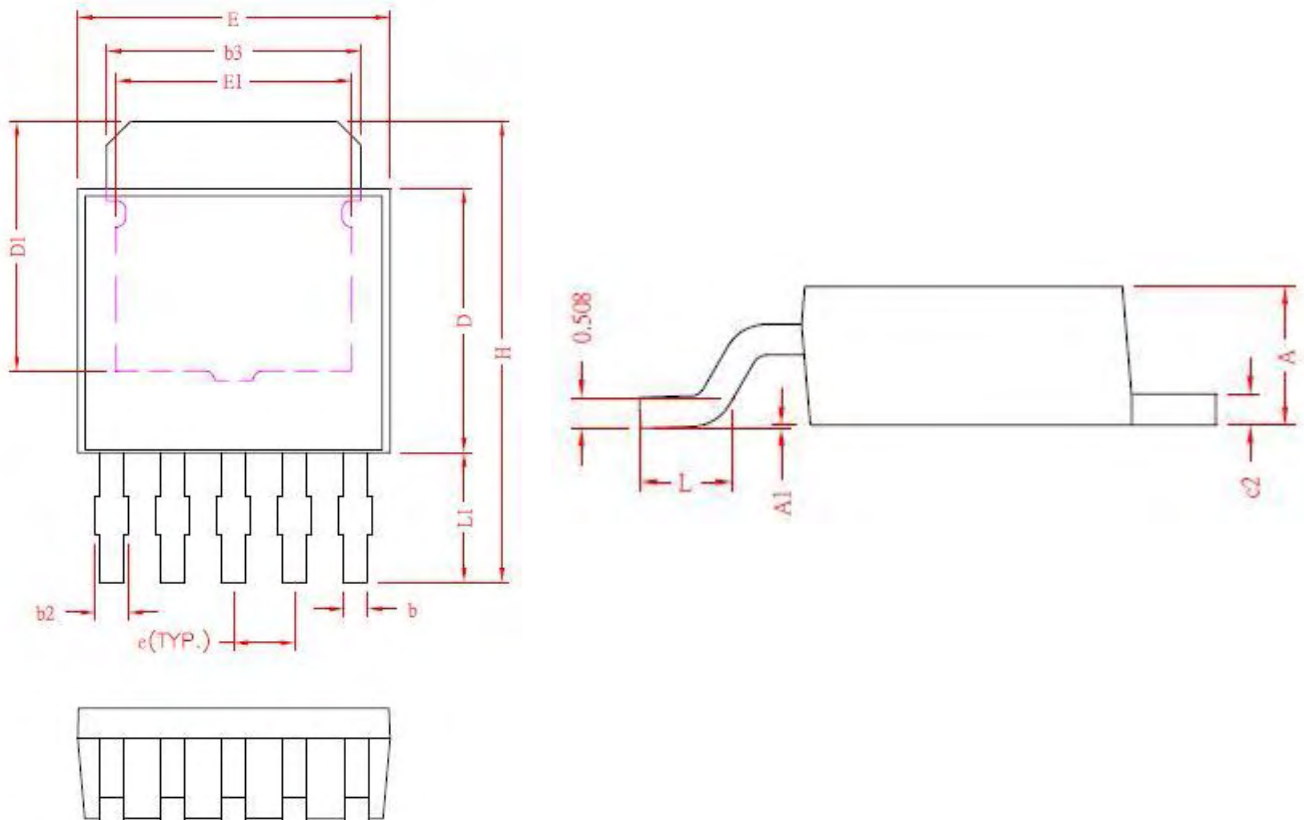

REF.	Millimeter		REF.	Millimeter	
	Min.	Max.		Min.	Max.
A	2.20	2.40	D1	4.57	---
A1	0	0.15	E	6.35	6.73
b	0.45	0.60	E1	3.81	---
b2	0.50	0.80	e	1.27 REF.	
b3	5.21	5.46	H	9.40	10.20
e2	0.46	0.58	L	1.40	1.77
D	5.40	5.59	L1	2.40	3.00

Note:

Information provided by IAT is believed to be accurate and reliable. However, we cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in an IAT product; nor for any infringement of patents or other rights of third parties that may result from its use. We reserve the right to change the circuitry and specifications without notice.

Life Support Policy: IAT does not authorize any IAT product for use in life support devices and/or systems. Life support devices or systems are devices or systems which, (I) are intended for surgical implant into the body or (II) support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user. Typical numbers are at 25°C and represent the most likely norm.