

www.datasheet4u.com

# Specification

**AX32X1**

SSC		
Drawn	Approval	Approval

Rev. 02

www.DataSheet4U.com 008

# Contents

www.datasheet4u.com

1. Part number of AX32X1
2. Outline dimensions
3. Characteristics of Acriche
4. Color spectrum,  $T_a=25^{\circ}\text{C}$
5. Current – Voltage characteristics,  $T_a=25^{\circ}\text{C}$
6. Voltage – Relative flux characteristics,  $T_a=25^{\circ}\text{C}$
7. Relative Flux – Junction temperature characteristics
8. Typical dome type radiation pattern,  $T_a=25^{\circ}\text{C}$
9. Acriche Binning structure graphical representation
10. Operating instructions of AX32X1
11. Recommended solder pad
12. Solder profile
13. PCB type Reel Packaging
14. Packaging Structure
15. Precaution for use
16. Handling of silicone resin for LEDs

# AX32X1

www.datasheet4u.com

## Description

Acriche series is designed for AC source operation and high flux output applications. Acriche is a semi-permanent and environmental friendly semiconductor lighting that can be used in AC without additional device.

Acriche's thermal management perform exceeds other power LED solutions. It incorporates state of the art SMD design and Thermal emission material. Acriche is ideal light sources for general illumination Applications.



## AX32X1

## Features

- Connect directly in AC power
- Power Saving
- Long Life Time
- Simple BOM
- Miniaturization
- Low thermal resistance
- SMT solderability
- Lead Free product
- RoHS compliant

## Applications

- Architectural lighting
- Task lighting
- Decorative / Pathway lighting
- Household appliances

\* The appearance and specifications of the product can be changed for improvement without notice.

Rev. 02

www.DataSheet4U.com 008

www.ZLED.com

: SSC-QP-7-07-25 (Rev.00)

## Part number of AX32X1

### 1. Part Number form : A X<sub>1</sub> X<sub>2</sub> X<sub>3</sub> X<sub>4</sub> X<sub>5</sub>

X <sub>1</sub>	Color
W	Pure White
N	Warm White

X <sub>2</sub>	Acriche Series
1	-
2	-
3	A3

X <sub>3</sub>	LENS Type
2	Dome Type

X <sub>4</sub>	Operating Voltage [V]
0	100
1	110
2	220
3	230


X <sub>5</sub>	PCB Type
0	-
1	4W PCB

### 2. Part Number of AX32X0


Part number	Operating voltage	Operating current
AW3200 / AN3200	100V/110V [RMS]	40mA [RMS]
AW3220 / AN3220	220V/230V [RMS]	20mA [RMS]

## Outline dimensions

### 1. AX3201/AX3211

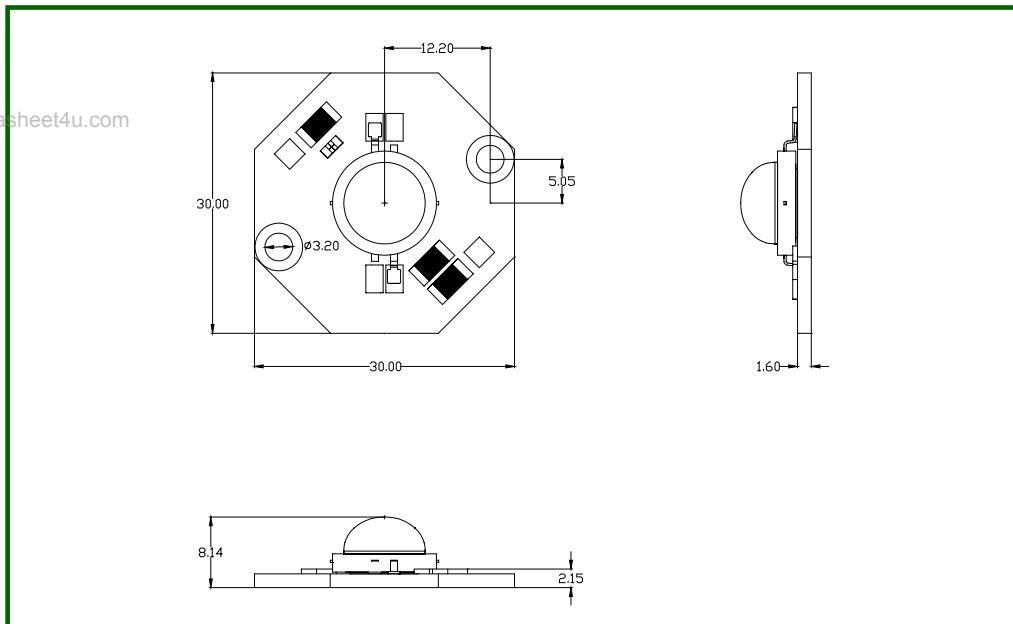

### 2. AX3221/AX3231

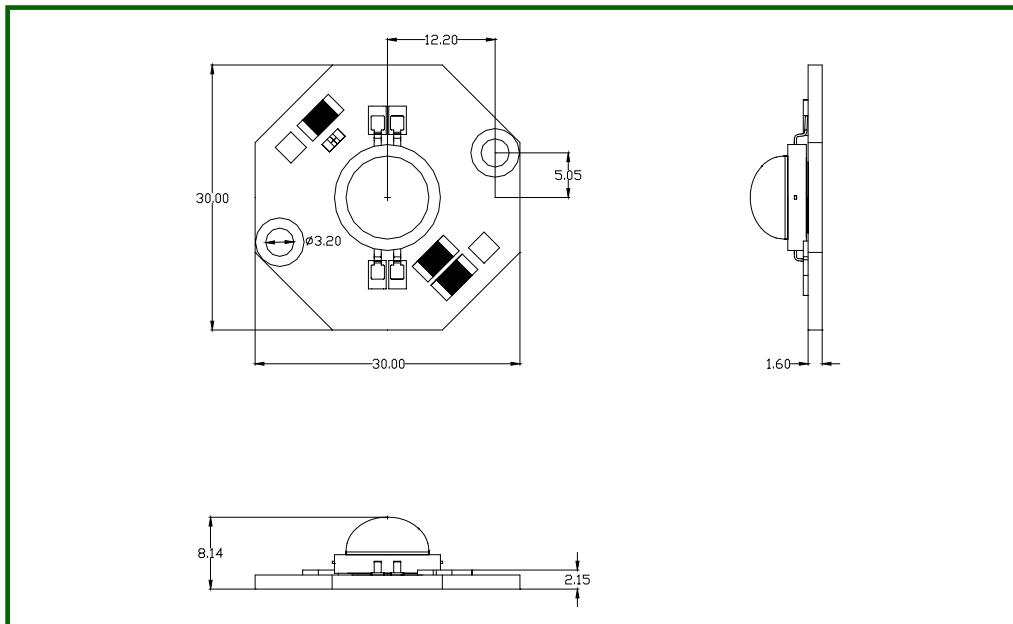

Notes :

- [1] All dimensions are in millimeters.
- [2] Scale : none
- [3] This drawing without tolerances are for reference only
- [4] Slug of package isn't connected to anode or cathode
- [5] NC pin isn't connected to electrode

Rev. 02

www.DataSheet4U.com 008

## Characteristics of Ariche

### 1. AW3201/AW3211

1-1 Electro-Optical characteristics at 100V/110V Ta=25°C

Parameter	Symbol	Value			Unit
		Min	Typ	Max	
Luminous Flux [1]	$\Phi_V$ [2]	-	195	-	lm
Illuminance [3]	$\Phi_I$	-	220	-	lx
Correlated Color Temperature [4]	CCT	-	6300	-	K
CRI	R <sub>a</sub>	-	70	-	-
Operating Current	I <sub>opt</sub>	-	40	-	mA [RMS]
Power Dissipation	P <sub>D</sub>	4			W
Operating Frequency	Freq	50 / 60			Hz
View Angle	2 1/2	110			deg.

1-2 Absolute Maximum Ratings

Parameter	Symbol	Value	Unit
Operating Voltage	V <sub>opt</sub> [5]	115/127	V [RMS]
Power Dissipation	P <sub>D</sub>	7.5	W
Junction Temperature	T <sub>j</sub>	125	°C
Operating Temperature	T <sub>opr</sub>	-30 ~ +85	°C
Storage Temperature	T <sub>stg</sub>	-40 ~ +120	°C
ESD Sensitivity	-	±2,000V HBM	-

\*Notes :

[1] Ariche series maintains a tolerance of ±10% on flux and power measurements.

[2]  $\Phi_V$  is the total luminous flux output as measured with an integrated sphere.

[3] Illuminance is measured at 50cm distance

[4] Correlated Color Temperature is derived from the CIE 1931 Chromaticity diagram.  
CCT ±5% tester tolerance

[5] 'Operating Voltage' doesn't indicate the maximum voltage which customers use, but it means tolerable voltage according to the voltage variation rate by one's country.  
It is recommended that the temperature of lead frame should be below 70 .

## Characteristics of Ariche

### 2. AN3201/AN3211 (CRI 70)

2-1 Electro-Optical characteristics at 100V/110V Ta=25°C

Parameter	Symbol	Value			Unit
		Min	Typ	Max	
Luminous Flux [1]	$\Phi_V$ [2]	-	150	-	lm
Illuminance [3]	$\Phi_I$	-	170	-	lx
Correlated Color Temperature [4]	CCT	-	3000	-	K
CRI	R <sub>a</sub>	-	70	-	-
Operating Current	I <sub>opt</sub>	-	40	-	mA [RMS]
Power Dissipation	P <sub>D</sub>	4			W
Operating Frequency	Freq	50 / 60			Hz
View Angle	2 1/2	110			deg.

### 2-2 Absolute Maximum Ratings

Parameter	Symbol	Value	Unit
Operating Voltage	V <sub>opt</sub> [5]	115/127	V [RMS]
Power Dissipation	P <sub>D</sub>	7.5	W
Junction Temperature	T <sub>j</sub>	125	°C
Operating Temperature	T <sub>opr</sub>	-30 ~ +85	°C
Storage Temperature	T <sub>stg</sub>	-40 ~ +120	°C
ESD Sensitivity	-	±2,000V HBM	-

\*Notes :

[1] Ariche series maintains a tolerance of ±10% on flux and power measurements.

[2]  $\Phi_V$  is the total luminous flux output as measured with an integrated sphere.

[3] Illuminance is measured at 50cm distance

[4] Correlated Color Temperature is derived from the CIE 1931 Chromaticity diagram.  
CCT ±5% tester tolerance

[5] 'Operating Voltage' doesn't indicate the maximum voltage which customers use, but it means tolerable voltage according to the voltage variation rate by one's country.  
It is recommended that the temperature of lead frame should be below 70 .

## Characteristics of Ariche

### 3. AW3221/AW3231

3-1 Electro-Optical characteristics at 100V/110V Ta=25°C

Parameter	Symbol	Value			Unit
		Min	Typ	Max	
Luminous Flux [1]	$\Phi_V$ [2]	-	195	-	lm
Illuminance [3]	$\Phi_I$	-	220	-	lx
Correlated Color Temperature [4]	CCT	-	6300	-	K
CRI	R <sub>a</sub>	-	70	-	-
Operating Current	I <sub>opt</sub>	-	20	-	mA [RMS]
Power Dissipation	P <sub>D</sub>	4			W
Operating Frequency	Freq	50 / 60			Hz
View Angle	2 1/2	110			deg.

3-2 Absolute Maximum Ratings

Parameter	Symbol	Value	Unit
Operating Voltage	V <sub>opt</sub> [5]	253/265	V [RMS]
Power Dissipation	P <sub>D</sub>	7.5	W
Junction Temperature	T <sub>j</sub>	125	°C
Operating Temperature	T <sub>opr</sub>	-30 ~ +85	°C
Storage Temperature	T <sub>stg</sub>	-40 ~ +120	°C
ESD Sensitivity	-	±2,000V HBM	-

\*Notes :

[1] Ariche series maintains a tolerance of ±10% on flux and power measurements.

[2]  $\Phi_V$  is the total luminous flux output as measured with an integrated sphere.

[3] Illuminance is measured at 50cm distance

[4] Correlated Color Temperature is derived from the CIE 1931 Chromaticity diagram.  
CCT ±5% tester tolerance

[5] 'Operating Voltage' doesn't indicate the maximum voltage which customers use, but it means tolerable voltage according to the voltage variation rate by one's country.  
It is recommended that the temperature of lead frame should be below 70 .

## Characteristics of Ariche

### 4. AN3221/AN3231 (CRI 70)

4-1 Electro-Optical characteristics at 100V/110V Ta=25°C

Parameter	Symbol	Value			Unit
		Min	Typ	Max	
Luminous Flux [1]	$\Phi_V$ [2]	-	150	-	lm
Illuminance [3]	$\Phi_I$	-	170	-	lx
Correlated Color Temperature [4]	CCT	-	3000	-	K
CRI	R <sub>a</sub>	-	70	-	-
Operating Current	I <sub>opt</sub>	-	20	-	mA [RMS]
Power Dissipation	P <sub>D</sub>	4			W
Operating Frequency	Freq	50 / 60			Hz
View Angle	2 1/2	110			deg.

### 4-2 Absolute Maximum Ratings

Parameter	Symbol	Value	Unit
Operating Voltage	V <sub>opt</sub> [5]	253/265	V [RMS]
Power Dissipation	P <sub>D</sub>	7.5	W
Junction Temperature	T <sub>j</sub>	125	°C
Operating Temperature	T <sub>opr</sub>	-30 ~ +85	°C
Storage Temperature	T <sub>stg</sub>	-40 ~ +120	°C
ESD Sensitivity	-	±2,000V HBM	-

\*Notes :

[1] Ariche series maintains a tolerance of ±10% on flux and power measurements.

[2]  $\Phi_V$  is the total luminous flux output as measured with an integrated sphere.


[3] Illuminance is measured at 50cm distance

[4] Correlated Color Temperature is derived from the CIE 1931 Chromaticity diagram.  
CCT ±5% tester tolerance


[5] 'Operating Voltage' doesn't indicate the maximum voltage which customers use, but it means tolerable voltage according to the voltage variation rate by one's country.  
It is recommended that the temperature of lead frame should be below 70 .

## Color spectrum, Ta=25°C

### 1. Pure white

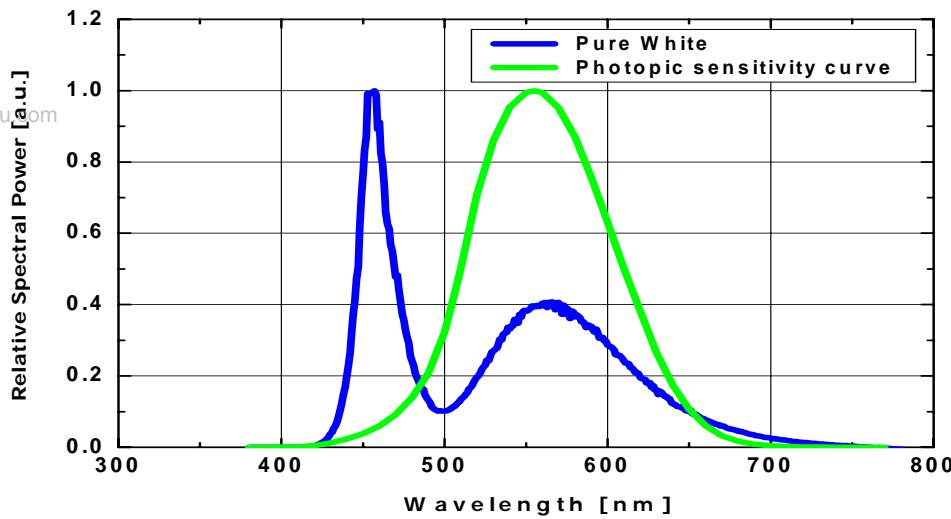


### 2. Warm white

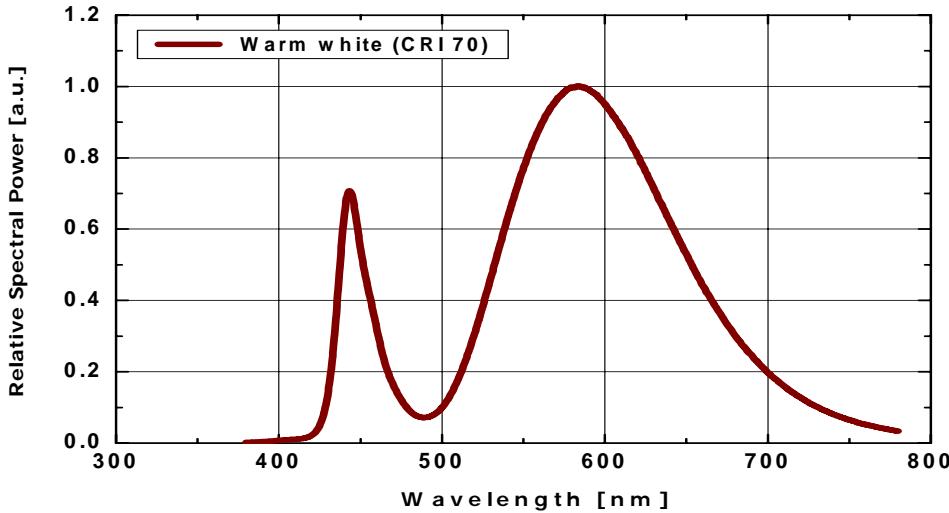


## Current – Voltage characteristics, Ta=25°C

### 1. AX3201

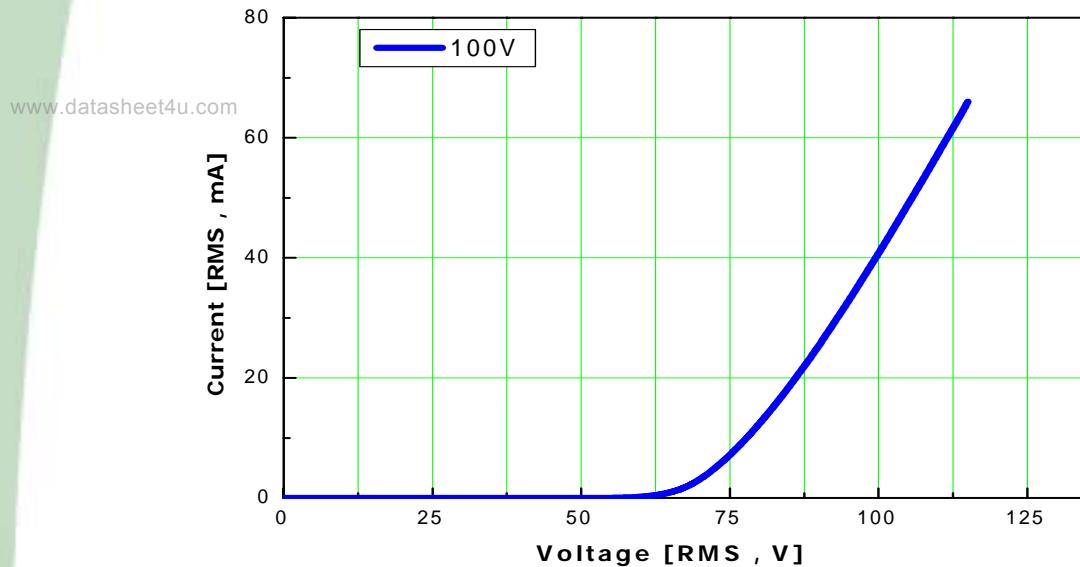


### 2. AX3211

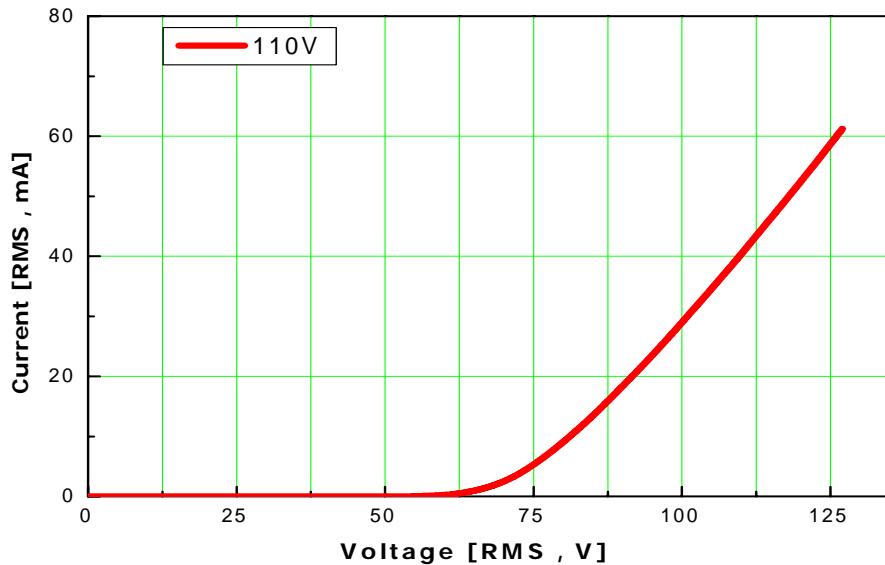


## Current – Voltage characteristics, Ta=25°C

### 3. AX3221

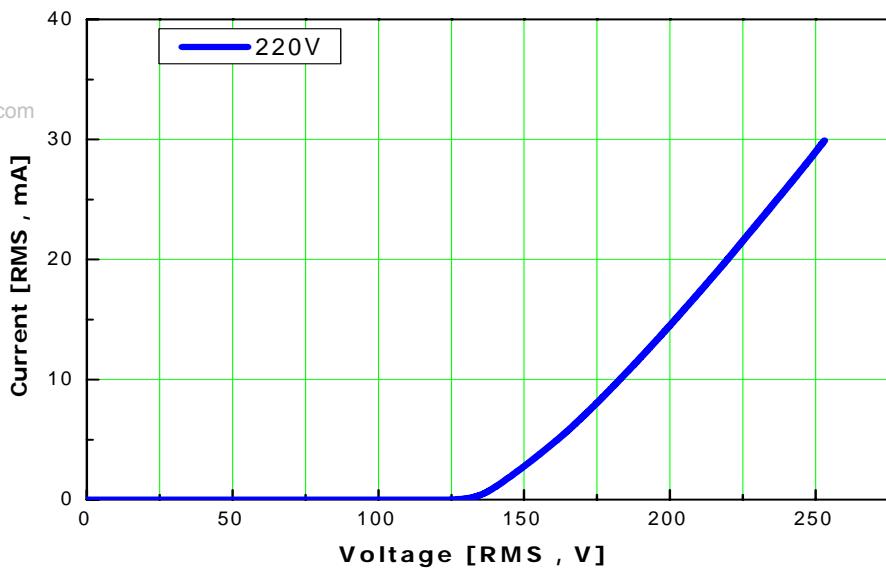


www.datasheet4u.com

### 4. AX3231

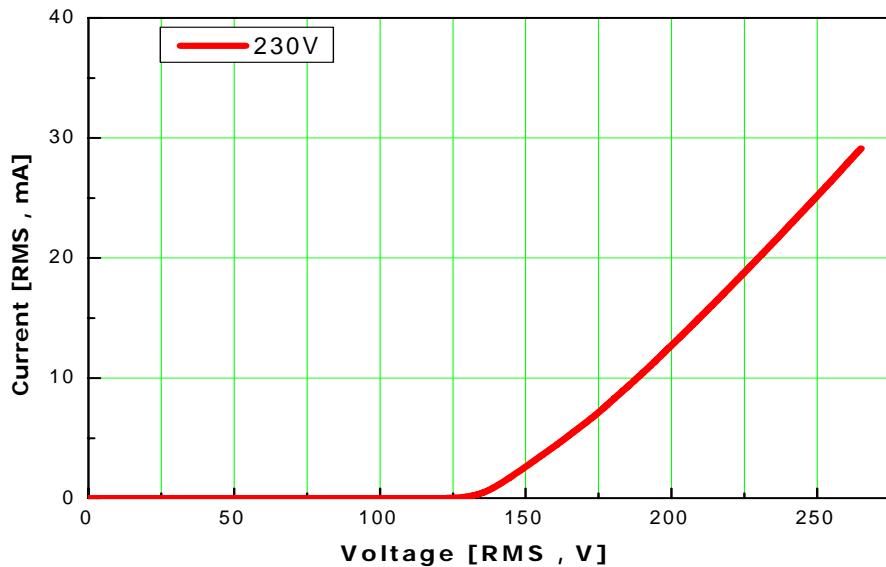


## Voltage – Relative flux characteristics, Ta=25°C

### 1. AX3201

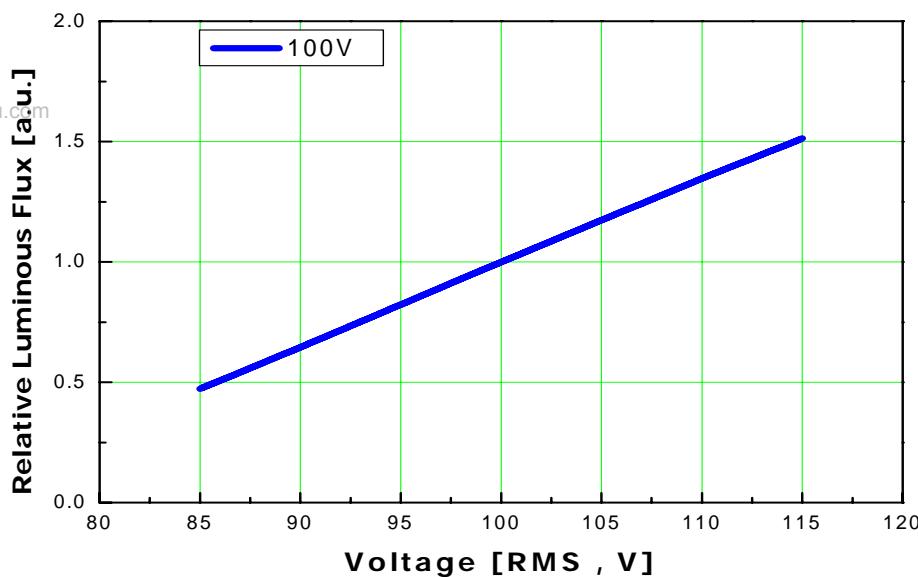


### 2. AX3211

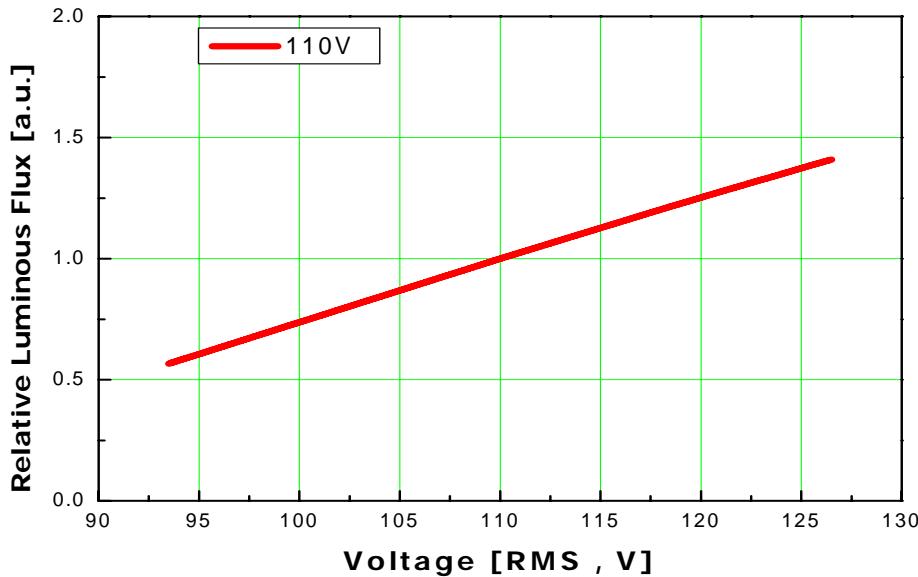


## Voltage – Relative flux characteristics, Ta=25°C

### 3. AX3221

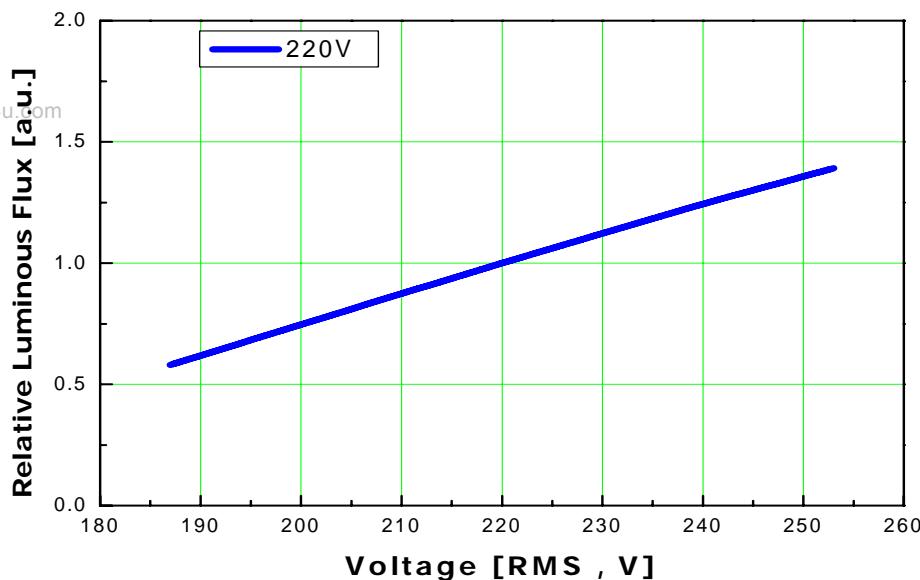


### 4. AX3231

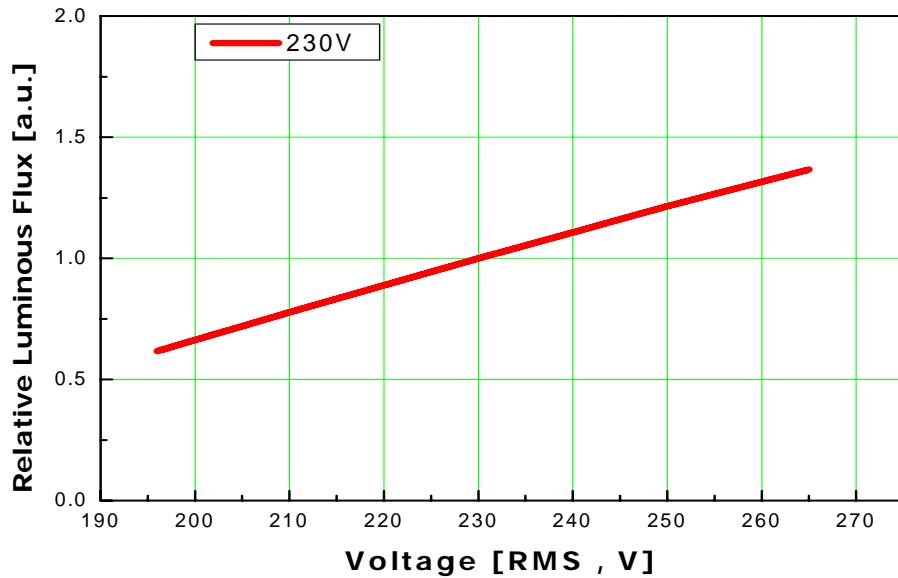


## Relative Flux – Junction temperature characteristics

### 1. AX32X1

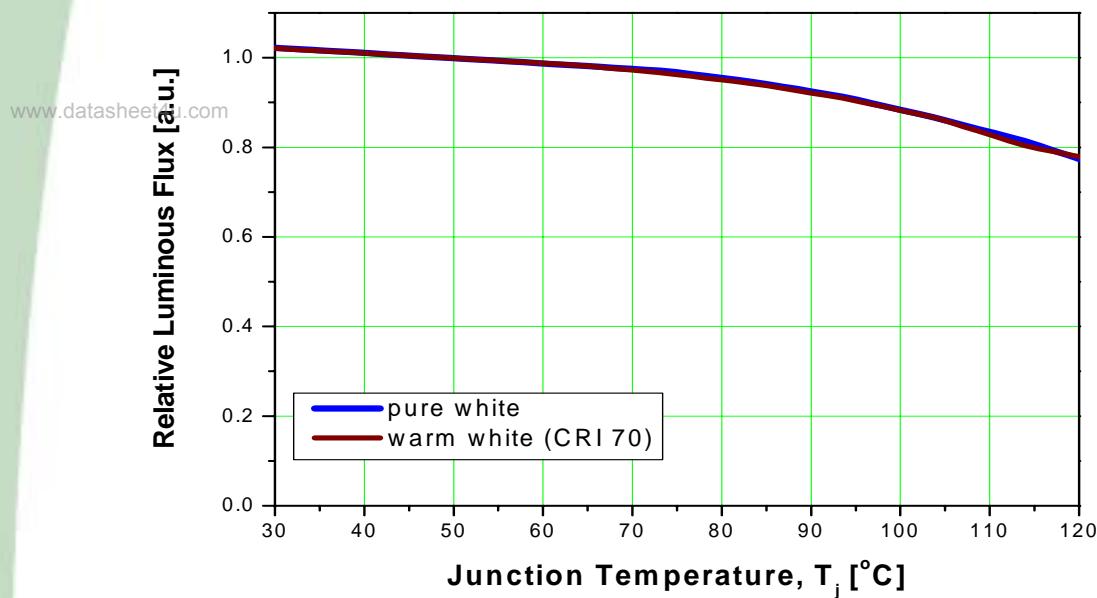


## Typical dome type radiation pattern, $T_a=25^{\circ}\text{C}$

### 1. AX32X1

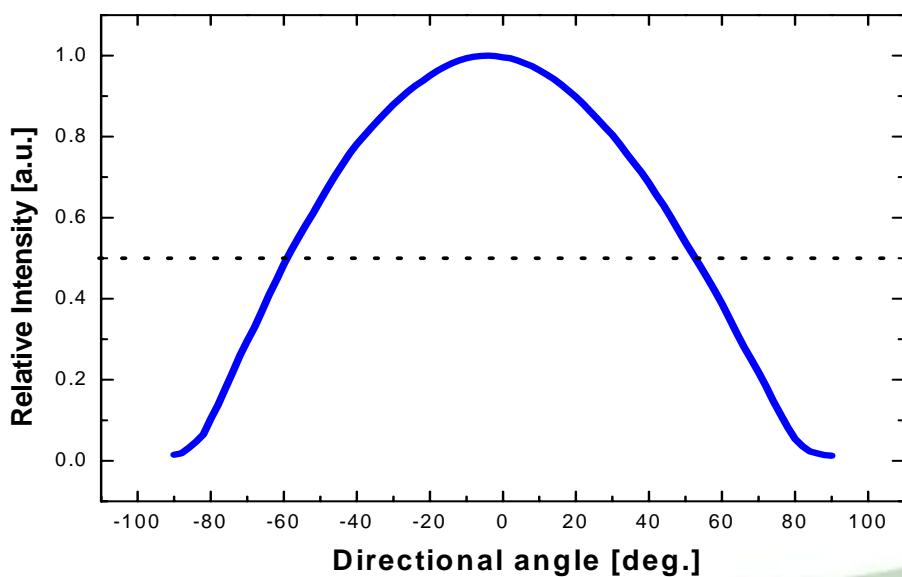

## Acriche Binning structure graphical representation

### 1. AX32X1

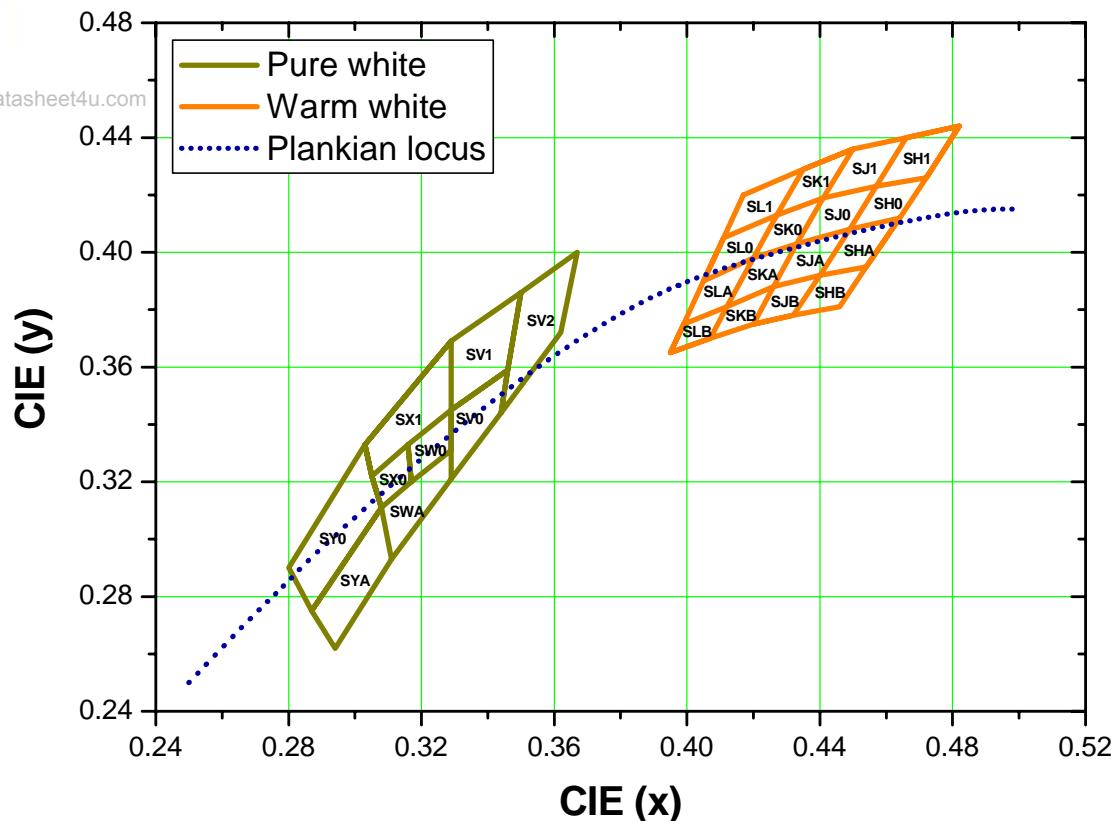

\*Notes : For more detail Acriche binning, see the Acriche Binning and Labeling document.

www.datasheet4u.com

## Operating instructions of AX32X1



### 1. Operating temperature



**Surface Temperature ( $T_s$ )**

Parameter	Value	Unit
$R_{js}$	6 ~ 7	/W
$T_j \text{ max}$	125	
$T_s \text{ max}$	100	

### 2. Thermal modeling

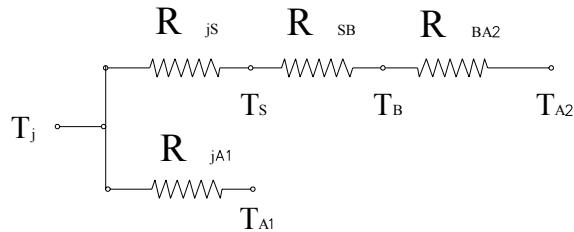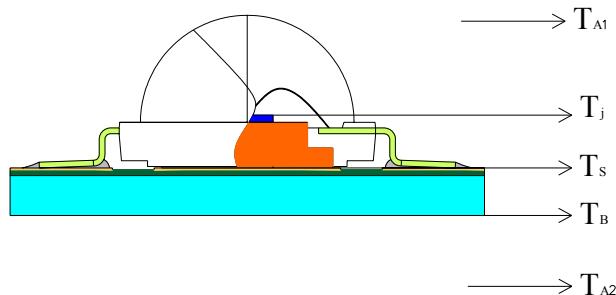


Notes :

- [1] Acriche must be used with proper heat management.
- [2] It is recommended that the temperature of board should be below 70 .
- [3] For more information, refer to Z Power led Thermal Management Guide.  
([www.essc.co.kr/\\_HOMEPAGE/home\\_kor/product/spec/thermal.pdf](http://www.essc.co.kr/_HOMEPAGE/home_kor/product/spec/thermal.pdf))

## Operating instructions of AX32XO

### 3. Heat sink

www.datasheet4u.com

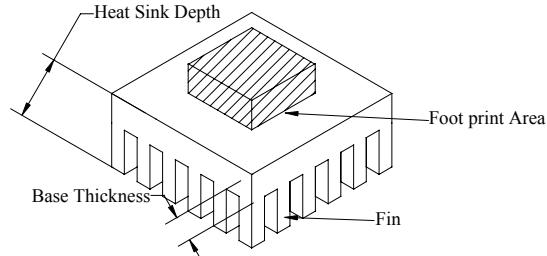


Specification & Size	T <sub>B</sub> (°C)	R <sub>BA</sub> (°C /W)
Size : 44 x 44 mm S : 7mm      T <sub>B</sub> : 4mm, D <sub>H</sub> : 22.mm      F <sub>H</sub> : 18mm      N : 7ea Footprint: 745mm <sup>2</sup> Power Dissipation:4W	73.8	10



Specification & Size	T <sub>B</sub> (°C)	R <sub>BA</sub> (°C /W)
Size : 50 x 50 mm S :              T <sub>B</sub> :      mm, D <sub>H</sub> : 25 mm      F <sub>H</sub> :      mm      N : Footprint: 745mm <sup>2</sup> Power Dissipation:4W	56.2	5

## PCB type Reel Packaging

www.datasheet4u.com

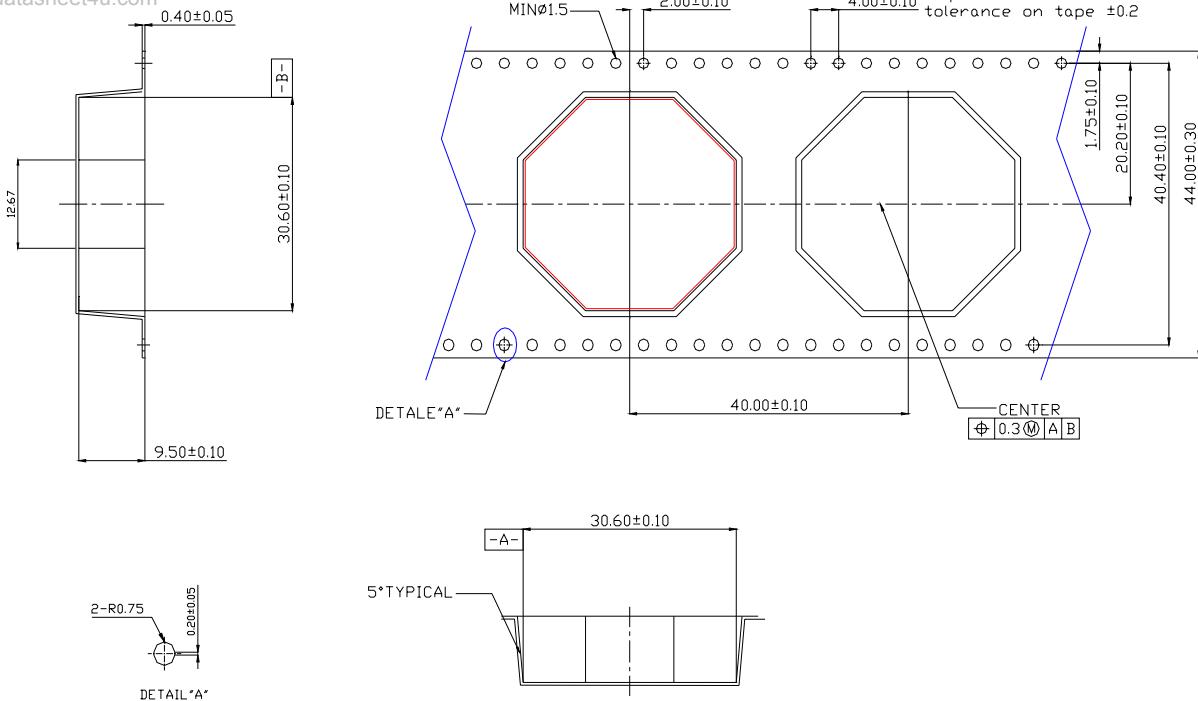

Note :


1. The number of loaded products in the reel is 100ea
2. All dimensions are in millimeters
3. Scale none

\*The appearance and specifications of the product may be changed for improvement without notice.


## Packaging Structure

### Aluminum Vinyl Bag

[www.datasheet4u.com](http://www.datasheet4u.com)

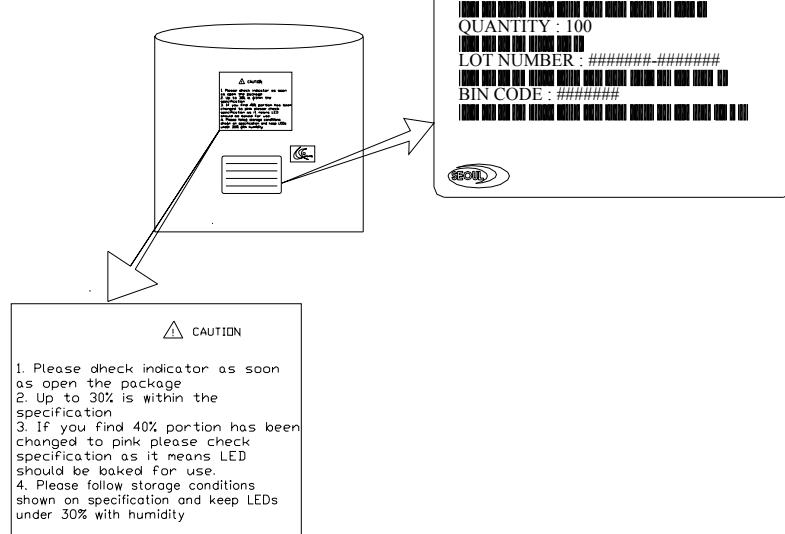

### Outer Box

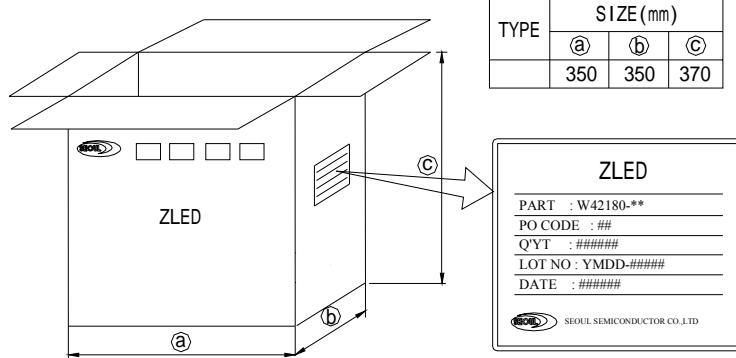

#### Note :

1. 5 reels are loaded in box
2. Scale none
3. For more information about binning and labeling, refer to the Application Note - 1

## Precaution for use

- [1] Ariche series run on high voltage such as 110 V or 220 V.
- [2] Please don't touch the PCB surface, which has built-in terminals and chips, with your hands or metals, while Ariche series is running.
- [3] Please don't add or change wires, while Ariche series is running.

[www.datasheet4u.com](http://www.datasheet4u.com)

## Handling of silicone resin for LEDs

- [1] Ariche series is encapsulated by silicone resin for the highest flux efficiency.
- [2] Notes for handling of Silicone resin Ariche series.
- [3] Avoid touching silicone resin parts especially by sharp tools such as Pincette (Tweezers).
- [4] Avoid leaving fingerprints on silicone resin parts.
- [5] Dust sensitivity silicone resin need containers having cover for storage.
- [6] When populating boards in SMT production, there are basically no restrictions regarding the form of the pick and place nozzle, except that mechanical pressure on the surface of the resin must be prevent.
- [7] Please do not force over 3000 gf impact or pressure diagonally on the silicon lens. It will cause fatal damage of this product.
- [8] Please do not recommend to cover the silicone resin of the Ariche series with other resin (epoxy, urethane, etc).