


## FEATURES

- InGaP HBT Technology
- -47 dBc ACPR @ + 10 MHz, +24.5 dBm
- 30 dB Gain
- High Efficiency
- Low Transistor Junction Temperature
- Internally matched for a 50  $\Omega$  System
- Low Profile Miniature Surface Mount Package;  
Halogen Free and RoHS Compliant
- Multi-Carrier Capability

## APPLICATIONS


- LTE, WCDMA and HSDPA Air Interfaces
- Picocell, Femtocell, Home Nodes
- Customer Premises Equipment (CPE)
- Data Cards and Terminals

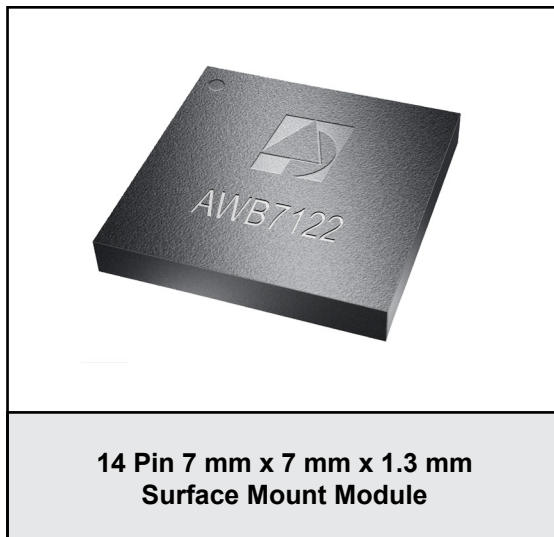

## PRODUCT DESCRIPTION

The AWB7122 is a highly linear, fully matched, power amplifier module designed for picocell, femtocell, and customer premises equipment (CPE) applications. Its high power efficiency and low adjacent channel power levels meet the extremely demanding needs of small cell infrastructure architectures. Designed for LTE, WCDMA, HSDPA air interfaces operating in the 1805 MHz to 1880 MHz band, the AWB7122 delivers up to +24.5 dBm of LTE (E-TM1.1) power with

an ACPR of -47 dBc. It operates from a convenient +4.2 V supply and provides 30 dB of gain. The device is manufactured using an advanced InGaP HBT MMIC technology offering state-of-the-art reliability, temperature stability, and ruggedness. The self-contained 7 mm x 7 mm x 1.3 mm surface mount package incorporates RF matching networks optimized for output power, efficiency, and linearity in a 50  $\Omega$  system.

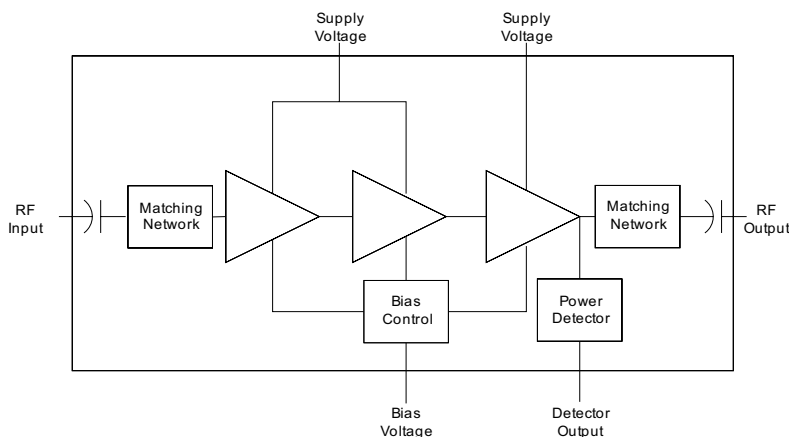

**Figure 1: Block Diagram**

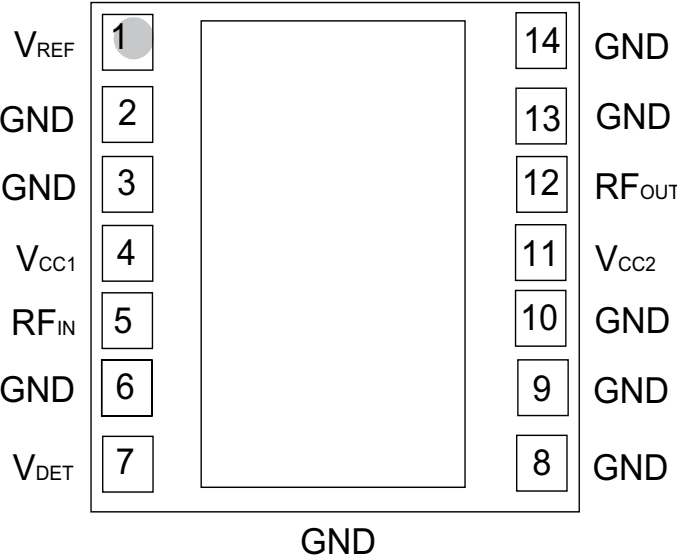


Figure 2: Pinout (X-ray Top View)

Table 1: Pin Description

| PIN | NAME       | DESCRIPTION       |
|-----|------------|-------------------|
| 1   | $V_{REF}$  | Reference Voltage |
| 2   | GND        | Ground            |
| 3   | GND        | Ground            |
| 4   | $V_{CC1}$  | Supply Voltage    |
| 5   | $RF_{IN}$  | RF Input          |
| 6   | GND        | Ground            |
| 7   | $V_{DET}$  | Detector Voltage  |
| 8   | GND        | Ground            |
| 9   | GND        | Ground            |
| 10  | GND        | Ground            |
| 11  | $V_{CC2}$  | Supply Voltage    |
| 12  | $RF_{OUT}$ | RF Output         |
| 13  | GND        | Ground            |
| 14  | GND        | Ground            |

## ELECTRICAL CHARACTERISTICS

Table 2: Absolute Minimum and Maximum Ratings

| PARAMETER                           | MIN      | MAX  | UNIT           |
|-------------------------------------|----------|------|----------------|
| Supply Voltage ( $V_{CC}$ )         | 0        | +5   | V              |
| Reference Voltage ( $V_{REF}$ )     | 0        | +3.5 | V              |
| RF Output Power ( $P_{OUT}$ )       | -        | +28  | dBm, modulated |
| RF Input Power ( $P_{IN}$ )         | -        | +10  | dBm, CW        |
| ESD Rating                          |          |      |                |
| Human Body Model <sup>(1)</sup>     | Class 1C | -    |                |
| Charged Device Model <sup>(2)</sup> | Class IV | -    |                |
| MSL Rating <sup>(3)</sup>           | 4        | -    |                |
| Junction Temperature ( $T_J$ )      | -        | +150 | °C             |
| Storage Temperature ( $T_{STG}$ )   | -40      | +150 | °C             |

Functional operation is not implied under these conditions. Exceeding any one or a combination of the Absolute Maximum Rating Conditions may cause permanent damage to the device. Exposure to absolute ratings for extended periods of time may adversely affect reliability.

Notes:

(1) JEDEC JS-001-2010.

(2) JEDEC JESD22-C101D.

(3) 260 °C peak reflow.

Table 3: Operating Ranges

| PARAMETER                                    | MIN        | TYP        | MAX           | UNIT | COMMENTS                  |
|----------------------------------------------|------------|------------|---------------|------|---------------------------|
| Operating Frequency (f)                      | 1805       | -          | 1880          | MHz  |                           |
| Supply Voltage ( $V_{CC}$ )                  | +3.2       | +4.2       | +4.5          | V    |                           |
| Reference Voltage ( $V_{REF}$ )              | +2.80<br>0 | +2.85<br>- | +2.90<br>+0.5 | V    | PA "on"<br>PA "shut down" |
| RF Output Power ( $P_{OUT}$ ) <sup>(1)</sup> | -          | +24.5      | -             | dBm  |                           |
| Case Temperature ( $T_C$ ) <sup>(2)</sup>    | -40        | -          | +85           | °C   |                           |

The device may be operated safely over these conditions; however, parametric performance is guaranteed only over the conditions defined in the electrical specifications.

Notes:

(1) Typ RF Output Power is used during production test.

(2) Case Temperature references the board temperature at the ground paddle on the backside of the package.

**Table 4: Electrical Specifications**  
**(T<sub>C</sub> = +25 °C, V<sub>CC</sub> = +4.2 V, V<sub>REF</sub> = +2.85 V, 50 Ω system)**

| PARAMETER                                                     | MIN         | TYP               | MAX               | UNIT | COMMENTS                                                                                                                                             |
|---------------------------------------------------------------|-------------|-------------------|-------------------|------|------------------------------------------------------------------------------------------------------------------------------------------------------|
| Gain <sup>(2)</sup>                                           | 30          | 32                | 36                | dB   |                                                                                                                                                      |
| ACPR <sup>(1), (2), (3)</sup><br>@ 10 MHz<br>@ 20 MHz         | -<br>-      | -47<br>-57        | -45<br>-55        | dBc  |                                                                                                                                                      |
| Power-Added Efficiency <sup>(1), (2), (3)</sup>               | 14.5        | 16                | -                 | %    |                                                                                                                                                      |
| Thermal Resistance                                            | -           | 23.8              | -                 | °C/W | Junction to case                                                                                                                                     |
| Supply Current <sup>(1), (2), (3)</sup>                       | -           | 390               | 463               | mA   | Total through V <sub>CC</sub> pins                                                                                                                   |
| Quiescent Current (I <sub>q</sub> )                           | -           | 135               | 175               | mA   |                                                                                                                                                      |
| Reference Current                                             | -           | 6.5               | 10                | mA   | through V <sub>REF</sub> pin                                                                                                                         |
| Leakage Current                                               | -           | 1.5               | 5                 | μA   | V <sub>CC</sub> = +4.5 V, V <sub>REF</sub> = 0 V                                                                                                     |
| Harmonics<br>2fo<br>3fo<br>4fo                                | -<br>-<br>- | -56<br>-65<br>-65 | -48<br>-57<br>-57 | dBc  |                                                                                                                                                      |
| Input Return Loss                                             | 10          | 14                | -                 | dB   |                                                                                                                                                      |
| P1dB                                                          | -           | 32                | -                 | dBm  |                                                                                                                                                      |
| Spurious Output Level<br>(all spurious outputs)               | -           | -                 | -60               | dBc  | P <sub>OUT</sub> ≤ +24.5 dBm<br>In-band load VSWR < 5:1<br>Out-of-band load VSWR < 10:1<br>Applies over all voltage and temperature operating ranges |
| Load mismatch stress with no permanent degradation or failure | 8:1         | -                 | -                 | VSWR | V <sub>CC</sub> = +4.2 V, P <sub>IN</sub> = 0 dBm<br>Applies over full operating temperature range                                                   |

Notes:

(1) ACPR and Efficiency measured at 1842.5 MHz.

(2) P<sub>OUT</sub> = +24.5 dBm.


(3) LTE E-TM1.1 (10 MHz)

## APPLICATION INFORMATION


To ensure proper performance, refer to all related Application Notes on the ANADIGICS web site:  
<http://www.anadigics.com>

**Shutdown Mode**

The power amplifier may be placed in a shutdown mode by applying logic low levels (see Operating Ranges table) to the  $V_{REF}$  voltage.

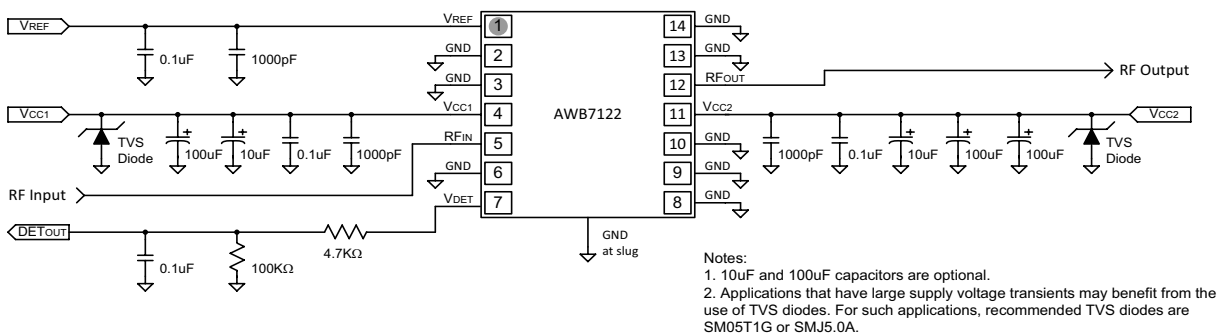

**Figure 3: Application Circuit Schematic**

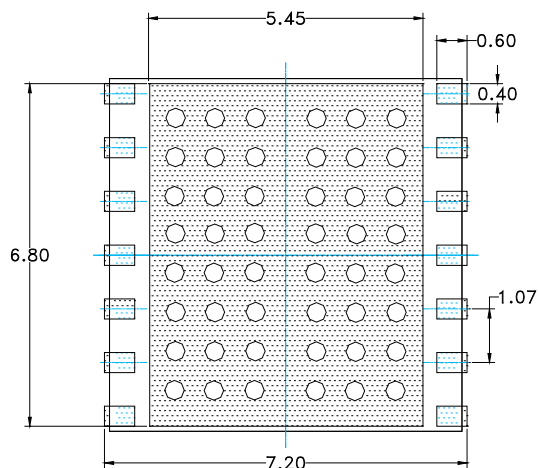


PCB METAL  
TOP (X-RAY) VIEW


ONLY PACKAGE I/O's AND  
GROUND REQUIREMENTS  
SHOWN.

#### NOTES:

- (1) UNLESS SPECIFIED DIMENSIONS ARE SYMMETRICAL ABOUT CENTER LINES SHOWN.
- (2) DIMENSIONS IN MILLIMETERS.
- (3) VIAS SHOWN IN PCB METAL VIEW ARE FOR REFERENCE ONLY. NUMBER & SIZE OF THERMAL VIAS REQUIRED DEPENDENT ON HEAT DISSIPATION REQUIREMENT AND THE PCB PROCESS CAPABILITY.

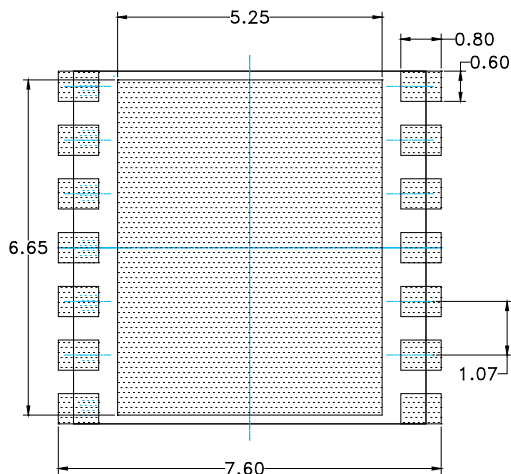


PCB SOLDER MASK  
TOP (X-RAY) VIEW

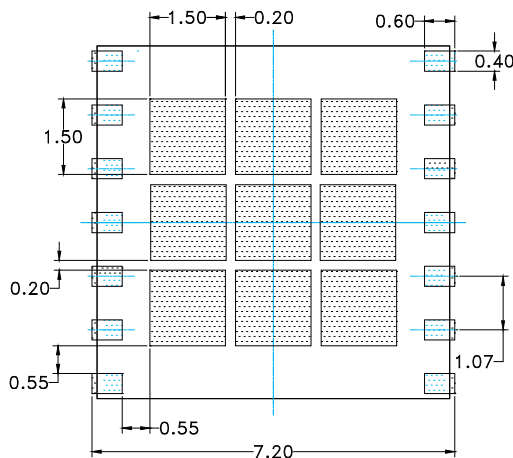

STENCIL APERTURE  
TOP (X-RAY) VIEW

**Figure 4: PCB Footprint**

## PACKAGE OUTLINE

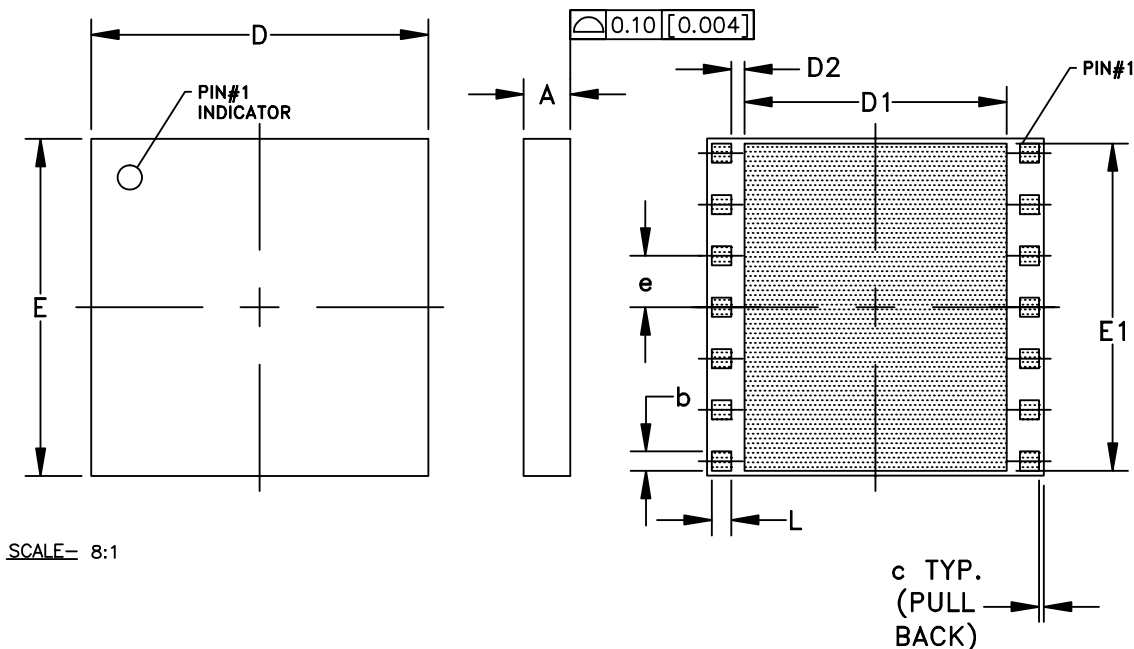

|    | MILLIMETERS |       |       | INCHES |        |        | NOTE |
|----|-------------|-------|-------|--------|--------|--------|------|
|    | MIN.        | NOM.  | MAX.  | MIN.   | NOM.   | MAX.   |      |
| A  | 1.22        | 1.32  | 1.42  | 0.048  | 0.052  | 0.056  | —    |
| b  | 0.375       | 0.400 | 0.425 | 0.0148 | 0.0157 | 0.0167 | 14X  |
| c  | —           | 0.10  | —     | —      | 0.004  | —      | —    |
| D  | 6.90        | 7.00  | 7.10  | 0.272  | 0.276  | 0.280  | —    |
| D1 | —           | 5.45  | —     | —      | 0.215  | —      | —    |
| D2 | —           | 0.275 | —     | —      | 0.0108 | —      | —    |
| E  | 6.90        | 7.00  | 7.10  | 0.272  | 0.276  | 0.280  | —    |
| E1 | —           | 6.80  | —     | —      | 0.268  | —      | —    |
| e  | —           | 1.067 | —     | —      | 0.0420 | —      | 6X   |
| L  | 0.375       | 0.400 | 0.425 | 0.0148 | 0.0157 | 0.0167 | 14X  |

## NOTES:

1. CONTROLLING DIMENSIONS: MILLIMETERS
2. UNLESS SPECIFIED TOLERANCE=±0.076[0.003].
3. PADS (INCLUDING CENTER) SHOWN UNIFORM SIZE FOR REFERENCE ONLY. ACTUAL PAD SIZE AND LOCATION WILL VARY WITHIN MIN. AND MAX. DIMENSIONS ACCORDING TO SPECIFIC LAMINATE DESIGN.

Figure 5: Package Outline - 14 Pin 7 mm x 7 mm x 1.3 mm Surface Mount Module

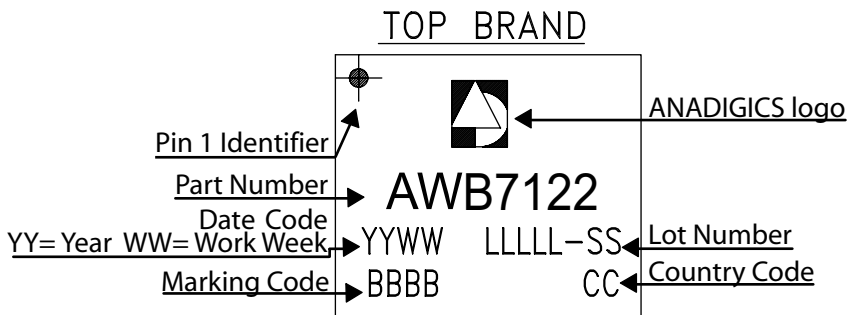


Figure 6: Branding Specification

## COMPONENT PACKAGING

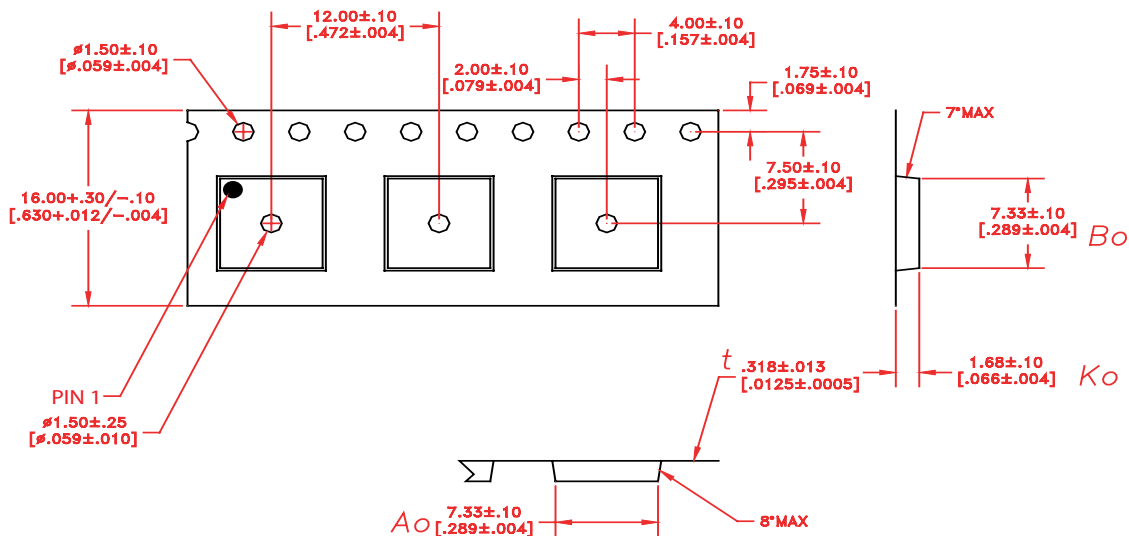


Figure 7: Tape &amp; Reel Packaging

Table 5: Tape &amp; Reel Dimensions

| PACKAGE TYPE         | TAPE WIDTH | POCKET PITCH | REEL CAPACITY | MAX REEL DIA |
|----------------------|------------|--------------|---------------|--------------|
| 7 mm x 7 mm x 1.3 mm | 16 mm      | 12 mm        | 2500          | 13"          |



**ORDERING INFORMATION**

| ORDER NUMBER | TEMPERATURE RANGE | PACKAGE DESCRIPTION                                                   | COMPONENT PACKAGING                 |
|--------------|-------------------|-----------------------------------------------------------------------|-------------------------------------|
| AWB7122P7    | -40 °C to +85 °C  | RoHS-compliant 14 Pin<br>7 mm x 7 mm x 1.3 mm<br>Surface Mount Module | Loose in Bag                        |
| AWB7122P8    | -40 °C to +85 °C  | RoHS-compliant 14 Pin<br>7 mm x 7 mm x 1.3 mm<br>Surface Mount Module | Tape and Reel, 2500 pieces per Reel |
| AWB7122P9    | -40 °C to +85 °C  | RoHS-compliant 14 Pin<br>7 mm x 7 mm x 1.3 mm<br>Surface Mount Module | Partial Reel                        |

**ANADIGICS**

141 Mount Bethel Road  
Warren, New Jersey 07059, U.S.A.  
Tel: +1 (908) 668-5000  
Fax: +1 (908) 668-5132

URL: <http://www.anadigics.com>

**IMPORTANT NOTICE**

ANADIGICS, Inc. reserves the right to make changes to its products or to discontinue any product at any time without notice. The product specifications contained in Advanced Product Information sheets and Preliminary Data Sheets are subject to change prior to a product's formal introduction. Information in Data Sheets have been carefully checked and are assumed to be reliable; however, ANADIGICS assumes no responsibilities for inaccuracies. ANADIGICS strongly urges customers to verify that the information they are using is current before placing orders.

**WARNING**

ANADIGICS products are not intended for use in life support appliances, devices or systems. Use of an ANADIGICS product in any such application without written consent is prohibited.