

# AWL005G - AWL10G AVALANCHE GLASS PASSIVATED BRIDGE RECTIFIERS


**PRV : 50 - 1000 Volts**  
**Io : 1.0 Ampere**

## FEATURES :

- \* Glass passivated chip
- \* High case dielectric strength
- \* High surge current capability
- \* High reliability
- \* Low reverse current
- \* Low forward voltage drop
- \* Ideal for printed circuit board

## MECHANICAL DATA :

- \* Case : Reliable low cost construction utilizing molded plastic technique
- \* Epoxy : UL94V-O rate flame retardant
- \* Terminals : Plated leads solderable per MIL-STD-202, Method 208 guaranteed
- \* Polarity : Polarity symbols marked on case
- \* Mounting position : Any
- \* Weight : 1.29 grams

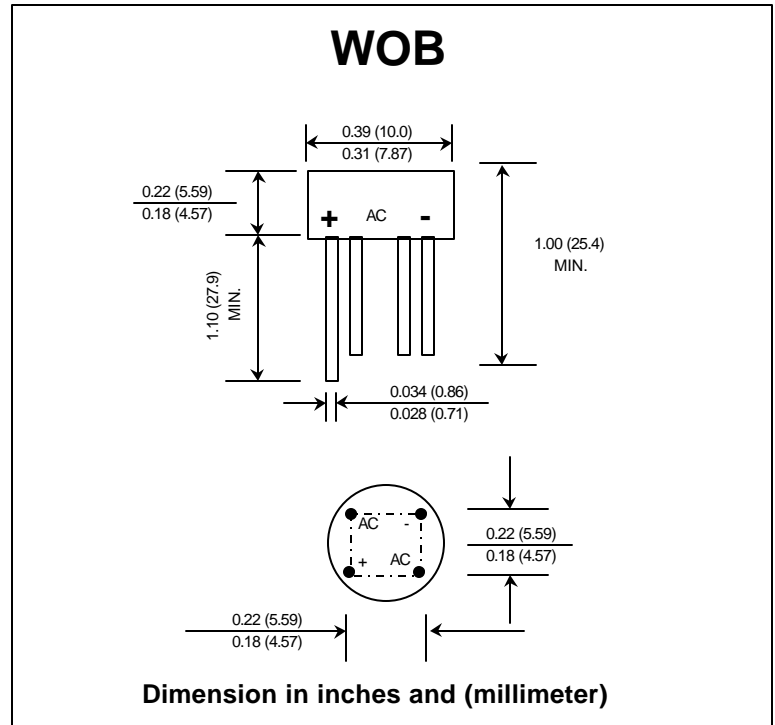

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25 °C ambient temperature unless otherwise specified.  
 Single phase, half wave, 60 Hz, resistive or inductive load.  
 For capacitive load, derate current by 20%.

| RATING  | SYMBOL          | AWL 005G      | AWL 01G | AWL 02G | AWL 04G | AWL 06G | AWL 08G | AWL 10G | UNIT         |
|---|-----------------|---------------|---------|---------|---------|---------|---------|---------|--------------|
| Maximum Recurrent Peak Reverse Voltage  | $V_{RRM}$       | 50            | 100     | 200     | 400     | 600     | 800     | 1000    | Volts        |
| Maximum RMS Voltage   | $V_{RMS}$       | 35            | 70      | 140     | 280     | 420     | 560     | 700     | Volts        |
| Maximum DC Blocking Voltage   | $V_{DC}$        | 50            | 100     | 200     | 400     | 600     | 800     | 1000    | Volts        |
| Minimum Avalanche Breakdown Voltage at 100 $\mu$ A  | $V_{BO(min.)}$  | 100           | 150     | 250     | 450     | 700     | 900     | 1100    | Volts        |
| Maximum Avalanche Breakdown Voltage at 100 $\mu$ A  | $V_{BO(max.)}$  | 550           | 600     | 700     | 900     | 1150    | 1350    | 1550    | Volts        |
| Maximum Average Forward Current<br>0.375" (9.5 mm) lead length $T_c = 50^\circ C$             | $I_{F(AV)}$     | 1.0           |         |         |         |         |         |         | Amps.        |
| Peak Forward Surge Current Single half sine wave<br>Superimposed on rated load (JEDEC Method) | $I_{FSM}$       | 30            |         |         |         |         |         |         | Amps.        |
| Rating for fusing ( $t < 8.3$ ms.)  | $I^2 t$         | 10            |         |         |         |         |         |         | $A^2 S$      |
| Maximum Forward Voltage per Diode at $I_F = 1.0$ Amp.   | $V_F$           | 1.2           |         |         |         |         |         |         | Volts        |
| Maximum DC Reverse Current $T_a = 25^\circ C$   | $I_R$           | 10            |         |         |         |         |         |         | $\mu A$      |
| at Rated DC Blocking Voltage $T_a = 100^\circ C$  | $I_{R(H)}$      | 1.0           |         |         |         |         |         |         | mA           |
| Typical Junction Capacitance per Diode (Note 1)   | $C_J$           | 24            |         |         |         |         |         |         | pf           |
| Typical Thermal Resistance (Note 2)   | $R_{\theta JA}$ | 36            |         |         |         |         |         |         | $^\circ C/W$ |
| Operating Junction Temperature Range  | $T_J$           | - 50 to + 150 |         |         |         |         |         |         | $^\circ C$   |
| Storage Temperature Range   | $T_{STG}$       | - 50 to + 150 |         |         |         |         |         |         | $^\circ C$   |


### Notes :

- 1) Measured at 1.0 MHz and applied reverse voltage of 4.0 Volts.
- 2) Thermal resistance from Junction to Ambient at 0.375" (9.5 mm) lead length P.C. Board mounting.


**UPDATE : APRIL 23,1998**

## RATING AND CHARACTERISTIC CURVES ( AWL005G - AWL10G )


**FIG.1 - DERATING CURVE FOR OUTPUT RECTIFIED CURRENT**

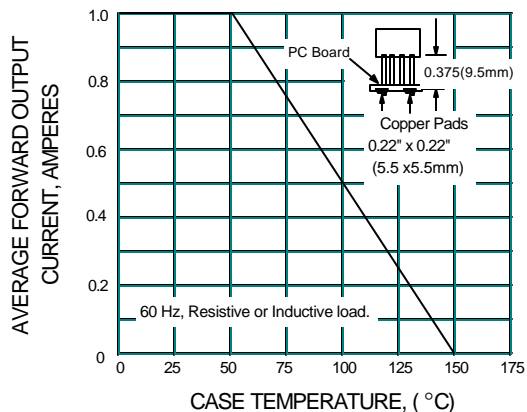

**FIG.2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT**

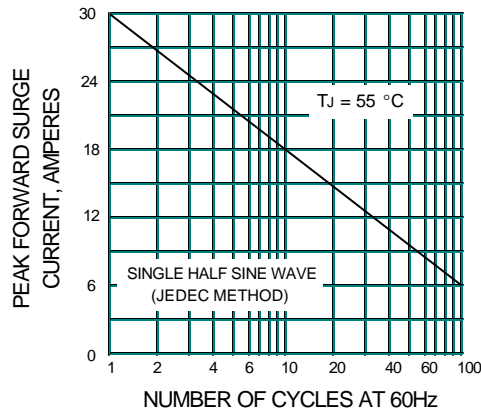

**FIG.3 - TYPICAL FORWARD CHARACTERISTICS**

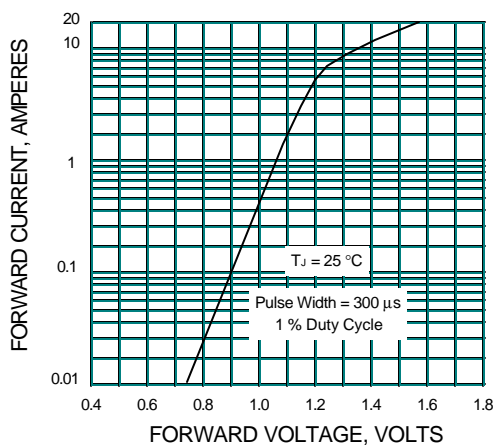

**FIG.4 - TYPICAL REVERSE CHARACTERISTICS**

