



AWS5516

GaAs IC

SPDT Reflective Switch DC-2.0 GHz

PRELIMINARY DATA SHEET - Rev 1.2

FEATURES

- High Linearity (IP3 48 dBm @ 0.9 GHz)
- Low Insertion Loss (0.4 dB @ 0.9 GHz)
- 2.7 V to 6V Operation
- Low DC Power Consumption
- Ultra Miniature SOT-26 Package
- High Isolation

APPLICATIONS

- Transmit/receive switch
- Diversity switching
- Antenna selection

PRODUCT DESCRIPTION

The AWS5516 is a Single Pole Double Throw (SPDT) GaAs MMIC switch assembled in a SOT-26 plastic package. The AWS5516 is designed for applications that require low insertion loss, high isolation, high linearity, and small size. The switch can be controlled with positive, negative, or a combination of both voltages.

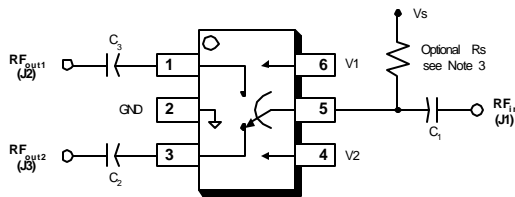


Figure 1: Pin Layout

Table 1: Pin Description

Pin	Function	Description
1	RF _{OUT1} (J2)	RF port can be used as an input or as an output.
2	GND	Ground connection. Keep as short as possible.
3	RF _{OUT2} (J3)	RF port can be used as an input or an output.
4	V2	Control Voltage 2, Low 0V, High 3V to 5V
5	RF _N (J1)/Vs	RF common port and bias voltage for positive control (3V to 5V).
6	V1	Control Voltage 1, Low 0V, High 3V to 5V

Notes:

1. DC blocking capacitors C_{1,2,3} and optional resistor R_s must be supplied externally.
2. C_{1,2,3} = 100 pF for operation >500MHz.
3. The use of resistor R_s to the positive voltage supply is optional. It is only required if it is necessary to independently control the RF ports, such as selecting both ports to be OFF at the same time.

AWS5516

ELECTRICAL CHARACTERISTICS

Table 2: Absolute Minimum and Maximum Ratings

PARAMETER	MIN	MAX	UNIT
RF Input Power > 900 MHz, V Control	-	6	W
Control Voltage	-0.2	+8	V
Operating Temperature	-40°	+85	°C
Storage Temperature	-65	+150	°C
Θ_{JC}	-	25°	C/W

Stresses in excess of the absolute ratings may cause permanent damage. Functional operation is not implied under these conditions. Exposure to absolute ratings for extended periods of time may adversely affect reliability.

Table 3: Operating Ranges at 25° C

PARAMETER	CONDITION	FREQUENCY	MIN	TYP	MAX	UNIT
Switching Characteristics ²	Rise, Fall (10/90% or 90/10% RF) On, Off (50% CTL to 90/10% RF) Video Feedthru			100		nS
				100		nS
				100		mV
Intermodulation Intercept Point (IP3)	2-tone power levels 13dBm to 27dBm (selected to optimize dynamic range of test) $V_{CTL} = 2.7V$ $V_{CTL} = 5.0V$	1.0 GHz	+45	+48		dBm
		1.8 GHz	+42	+46		dBm
		1.0 GHz	+55	+61		dBm
		1.8 GHz	+52	+56		dBm
Input power for 1dB Compression	$V_{CTL} = 2.7V$ $V_{CTL} = 5.0V$	1.0 GHz		+28		dBm
		1.8 GHz		+27		dBm
		1.0 GHz		+37		dBm
		1.8GHz		+37		dBm
Harmonic Level	Input power = +30 dBm, $V_{CTL} = 5.0V$	1 & 1.8 GHz		-75		dBc
Control Voltage (V_{CTL}) ³	Nominal operation voltage		2.7		6	V
Leakage Current	$V_{CTL} = 2.7V$ $V_{CTL} = 5.0V$				50	μA
					75	μA

The device may be operated safely over these conditions; however, parametric performance is guaranteed only over the conditions defined in the electrical specifications.

Notes:

- All measurements made in a 50 ohm system, unless other specified.
- Video feedthru measured with 1 ns rise time pulse and 500 MHz bandwidth.
- V_{CTL} is the absolute value of the differential voltage from V1 to V2. Changing polarity selects the switch path as defined in the truth table below. Use of the optional resistor R_s on the common port limits V_{HIGH} to $V_s \pm 0.2V$

AWS5516

Table 4: Electrical Specifications at 25 °C (VCTL = 2.7V)

PARAMETER ¹	FREQUENCY ²	MIN	TYP	MAX	UNIT
Insertion Loss ³	DC - 1.0 GHz		0.35	0.45	dB
	DC - 2.0 GHz		0.45	0.55	
Isolation	DC - 1.0 GHz	25	32		dB
	DC - 2.0 GHz	22	24		
VSWR ³	0.5 - 2.0 GHz			1.4:1	dB

Notes:

1. All measurements made in a 50 W system, unless other specified.
2. DC= 300 kHz
3. In low insertion loss path.

Table 5: Truth Table

V_1	V_2	$J_1 - J_2$	$J_1 - J_3$
V_{Low}	V_{High}	Isolation	Low Loss
V_{High}	V_{Low}	Low Loss	Isolation

$$V_{CTL} = V_{High} - V_{Low} = 2.7V \text{ to } 8V \text{ (} V_{High} = V_s \pm 0.2V \text{ when Rs used on common port.)}$$

AWS5516

PERFORMANCE DATA

Figure 2: Insertion Loss vs Frequency

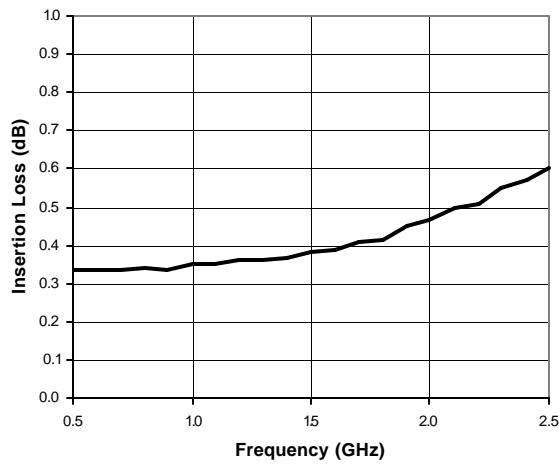


Figure 3: Isolation vs Frequency

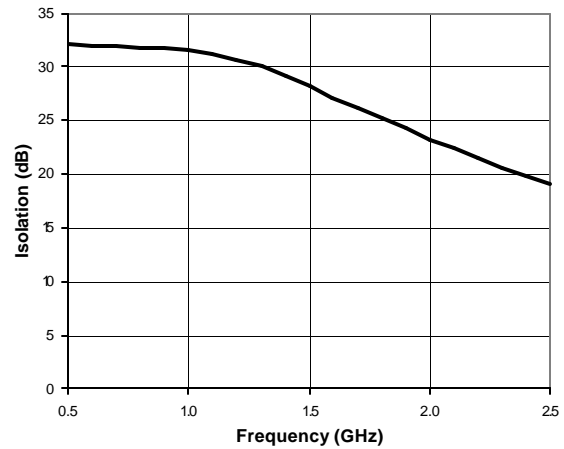


Figure 4: VSWR vs Frequency




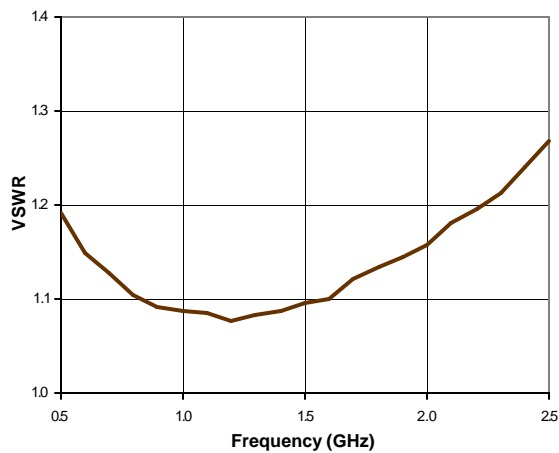


Figure 5: TOI vs Control Voltage

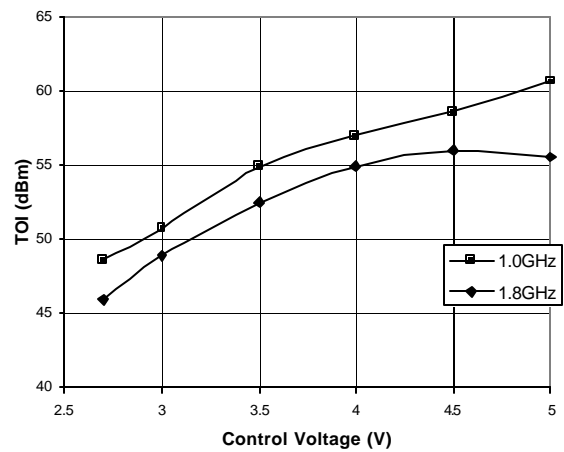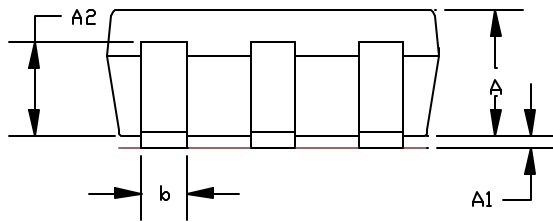

AWS5516

PACKAGE OUTLINE

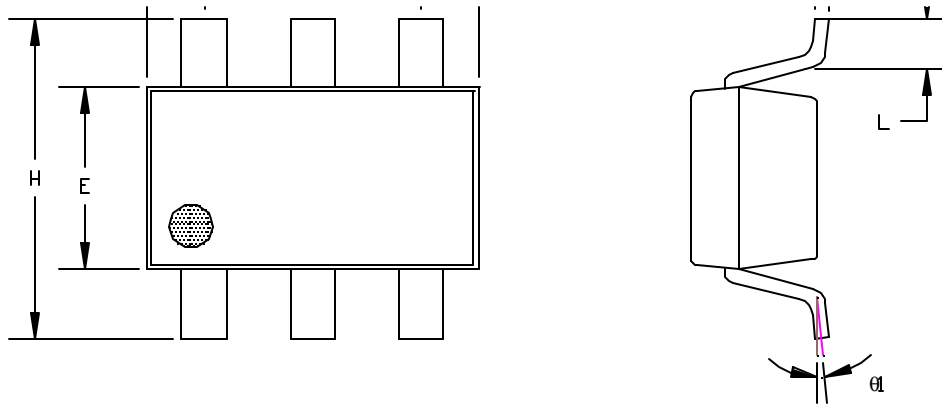

SYMBOLS	DIMENSIONS IN MILLIMETERS		DIMENSIONS IN INCHES	
	MIN	MAX	MIN	MAX
A	1.00	1.30	0.039	0.051
A1	0.00	0.10	0.00	0.004
A2	0.70	0.90	0.027	0.035
b	0.35	0.50	0.014	0.020
C	0.10	0.25	0.004	0.010
D	2.70	3.10	0.106	0.122
E	1.40	1.80	0.055	0.071
e	1.90(TYP)		0.075(TYP)	
H	2.60	3.00	0.102	0.118
L	0.37	---	0.015	---
θ1	1°	9°	1°	9°

- NOTE
1. PACKAGE BODY SIZES EXCLUDE MOLD FLASH AND GATE BURRS
 2. DIMENSION L IS MEASURED IN GAGE PLANE
 3. COPLANARITY : 0.1000 mm
 4. TOLERANCE ±0.1000 mm(4 mil) UNLESS OTHERWISE SPECIFIED

Figure 6: S14 Package Outline Diagram

AWS5516

NOTES

AWS5516

NOTES

AWS5516**ORDERING INFORMATION**

ORDER NUMBER	PACKAGE DESCRIPTION	COMPONENT PACKAGING
AWS5516S14	S14	6 Pin Plastic Package



ANADIGICS, Inc.
35 Technology Drive
Warren, New Jersey 07059
Tel: (908) 668-5000
Fax: (908) 668-5132
<http://www.anadigics.com>
Mktg@anadigics.com

IMPORTANT NOTICE

ANADIGICS, Inc. reserves the right to make changes to its products or to discontinue any product at any time without notice. The product specifications contained in Advanced Product Information sheets and Preliminary Data Sheets are subject to change prior to a product's formal introduction. Information in Data Sheets have been carefully checked and are assumed to be reliable; however, ANADIGICS assumes no responsibilities for inaccuracies. ANADIGICS strongly urges customers to verify that the information they are using is current before placing orders.

WARNING

ANADIGICS products are not intended for use in life support appliances, devices, or systems. Use of an ANADIGICS product in any such application without written consent is prohibited.

