

## Features


- Nominal Zener Voltages: 5.6V, 6.8V, 10V, 18V
- Ultra-Small Surface Mount Package
- Ideal For Transient Suppression
- Lead Free/RoHS Compliant (Note 4)**
- "Green" Device (Note 5 and 6)**

## ESD Sensitivity Rating

- AEC-Q101, HBM - 8kV, MM - 400V (AZ23C5V6W - AZ23C18W)
- IEC 61000-4-2, Air - Exceeds 25kV, Contact - 8kV (AZ23C5V6W, AZ23C6V8W)
- IEC 61000-4-2, Air - Exceeds 15kV, Contact - 8kV (AZ23C10W, AZ23C18W)



Top View



Device Schematic

## Mechanical Data

- Case: SOT-323
- Case Material: Molded Plastic, "Green" Molding Compound, Note 6. UL Flammability Classification Rating 94V-0
- Moisture Sensitivity: Level 1 per J-STD-020D
- Terminals: Solderable per MIL-STD-202, Method 208
- Terminal Connections: See Diagram
- Lead Free Plating (Matte Tin Finish annealed over Alloy 42 leadframe).
- Marking Information: See Table Below & Page 2
- Ordering Information: See Page 2
- Weight: 0.006 grams (approximate)

## Maximum Ratings @ $T_A = 25^\circ\text{C}$ unless otherwise specified

Single phase, half wave, 60Hz, resistive or inductive load.  
For capacitance load, derate current by 20%.

| Characteristic                        | Symbol | Value | Unit |
|---------------------------------------|--------|-------|------|
| Forward Voltage @ $I_F = 10\text{mA}$ | $V_F$  | 0.9   | V    |

## Thermal Characteristics

| Characteristic                                       | Symbol          | Value       | Unit               |
|--|-----------------|-------------|--------------------|
| Power Dissipation (Note 1)                           | $P_D$           | 200         | mW                 |
| Thermal Resistance, Junction to Ambient Air (Note 1) | $R_{\theta JA}$ | 625         | $^\circ\text{C/W}$ |
| Operating and Storage Temperature Range              | $T_J, T_{STG}$  | -65 to +150 | $^\circ\text{C}$   |

## Electrical Characteristics @ $T_A = 25^\circ\text{C}$ unless otherwise specified

| Type Number | Marking Code | Zener Voltage Range (Note 2) |         |         | Maximum Zener Impedance (Note 3) |     |                   |     | Maximum Reverse Current (Note 2) |      | Temperature Coefficient of Zener Voltage @ $I_{ZT} = 5\text{mA}$ |      |
|-------------|--------------|------------------------------|---------|---------|----------------------------------|-----|-------------------|-----|----------------------------------|------|--|------|
|             |              | $V_Z @ I_{ZT}$               |         |         | $Z_{ZT} @ I_{ZT}$                |     | $Z_{ZK} @ I_{ZK}$ |     | $I_R @ V_R$                      |      | $T_C (mV/^\circ\text{C})$  |      |
|             |              | Nom (V)                      | Min (V) | Max (V) | $\Omega$                         | mA  | $\Omega$          | mA  | $\mu\text{A}$                    | V    | Min  | Max  |
| AZ23C5V6W   | KD9          | 5.6                          | 5.32    | 5.88    | 40                               | 5.0 | 400               | 1.0 | 1.0                              | 2.0  | -2.0   | 2.5  |
| AZ23C6V8W   | KDB          | 6.8                          | 6.47    | 7.14    | 15                               | 5.0 | 80                | 1.0 | 2.0                              | 4.0  | 1.2  | 4.5  |
| AZ23C10W    | KDF          | 10                           | 9.4     | 10.6    | 15                               | 5.0 | 70                | 1.0 | 0.2                              | 7.0  | 4.5  | 8.0  |
| AZ23C18W    | KDL          | 18                           | 16.8    | 19.1    | 50                               | 5.0 | 170               | 1.0 | 0.1                              | 12.6 | 12.4   | 16.0 |

- Notes:
- Mounted on FR4 PC Board with recommended pad layout at <http://www.diodes.com/datasheets/ap02001.pdf>.
  - Short duration pulse test used to minimize self-heating.
  - $f = 1\text{KHz}$ .
  - No purposefully added lead.
  - Diodes Inc.'s "Green" Policy can be found on our website at [http://www.diodes.com/products/lead\\_free/index.php](http://www.diodes.com/products/lead_free/index.php).
  - Product manufactured with date code 0627 (week 27, 2006) and newer are built with Green Molding Compound. Product manufactured prior to date code 0627 are built with Non-Green Molding Compound and may contain Halogens or Sb2O3 Fire Retardants.

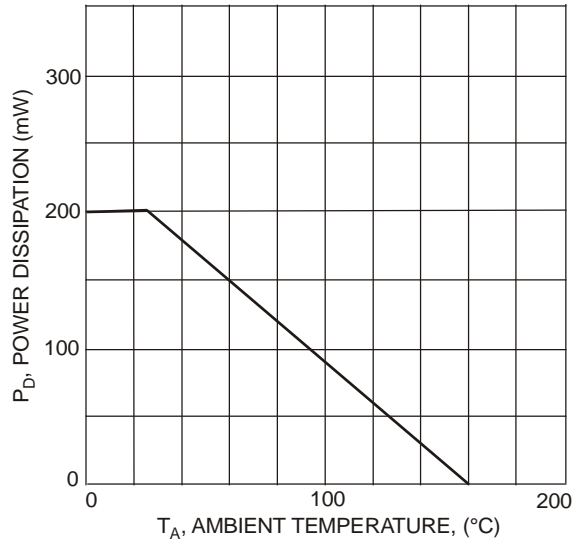


Fig. 1 Power Derating Curve

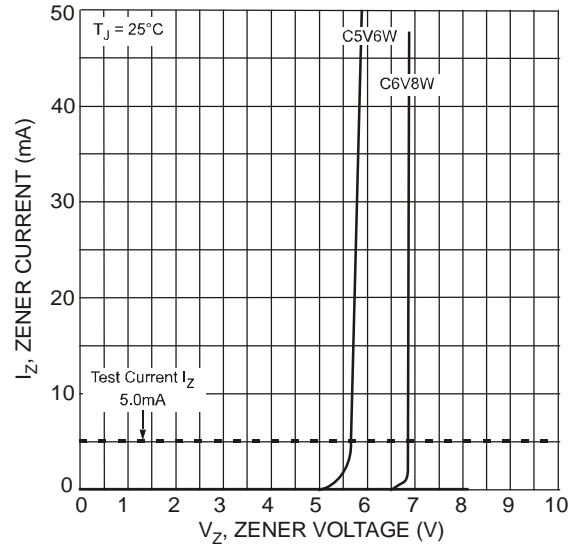


Fig. 2 Typical Zener Breakdown Characteristics

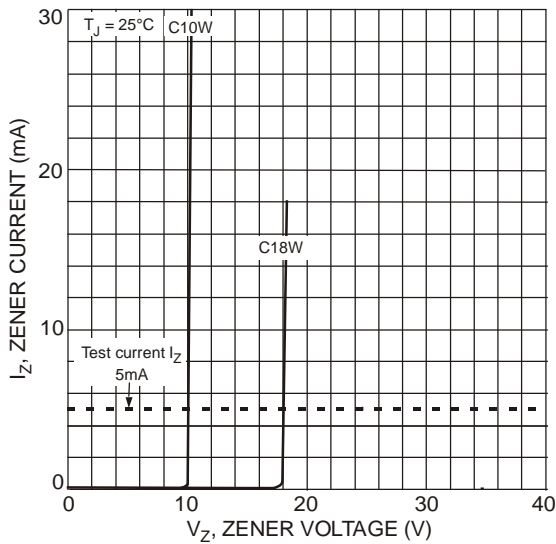


Fig. 3 Typical Zener Breakdown Characteristics

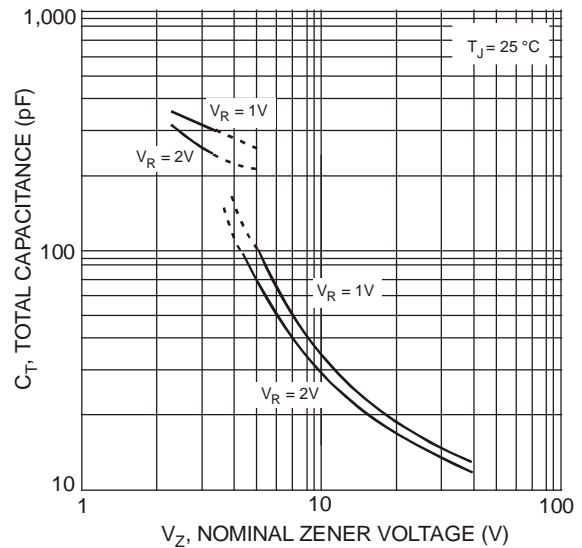


Fig. 4 Typical Total Capacitance vs. Nominal Zener Voltage


### Ordering Information (Notes 6 & 7)

| Part Number        | Case    | Packaging        |
|--------------------|---------|------------------|
| (Type Number)-7-F* | SOT-323 | 3000/Tape & Reel |

\* Add "-7-F" to the appropriate type number in Electrical Characteristics Table from Page 1 example: 6.8V Zener = AZ23C6V8W-7-F.

Notes: 7. For packaging details, go to our website at <http://www.diodes.com/datasheets/ap02007.pdf>.

### Marking Information



xxx = Product Type Marking Code  
See Electrical Characteristics Table  
YM = Date Code Marking  
Y = Year (ex: N = 2002)  
M = Month (ex: 9 = September)


Date Code Key

| Year | 1998 | 1999 | 2000 | 2001 | 2002 | 2003 | 2004 | 2005 | 2006 | 2007 | 2008 | 2009 | 2010 | 2111 | 2012 |
|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| Code | J    | K    | L    | M    | N    | P    | R    | S    | T    | U    | V    | W    | X    | Y    | Z    |


| Month | Jan | Feb | Mar | Apr | May | Jun | Jul | Aug | Sep | Oct | Nov | Dec |
|-------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| Code  | 1   | 2   | 3   | 4   | 5   | 6   | 7   | 8   | 9   | O   | N   | D   |

### Package Outline Dimensions

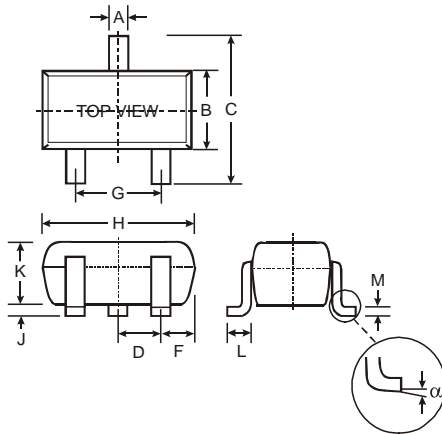

| SOT-323              |              |      |
|----------------------|--------------|------|
| Dim                  | Min          | Max  |
| A                    | 0.25         | 0.40 |
| B                    | 1.15         | 1.35 |
| C                    | 2.00         | 2.20 |
| D                    | 0.65 Nominal |      |
| F                    | 0.30         | 0.40 |
| G                    | 1.20         | 1.40 |
| H                    | 1.80         | 2.20 |
| J                    | 0.0          | 0.10 |
| K                    | 0.90         | 1.00 |
| L                    | 0.25         | 0.40 |
| M                    | 0.10         | 0.18 |
| $\alpha$             | 0°           | 8°   |
| All Dimensions in mm |              |      |

### Suggested Pad Layout

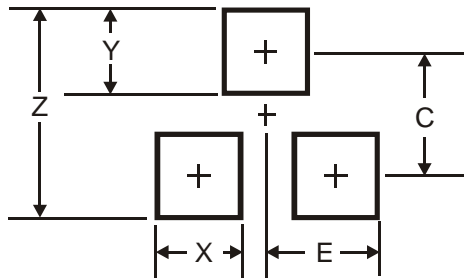

| Dimensions | Value (in mm) |
|------------|---------------|
| Z          | 2.8           |
| X          | 0.7           |
| Y          | 0.9           |
| C          | 1.9           |
| E          | 1.0           |

#### IMPORTANT NOTICE

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. Diodes Incorporated does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on our website, harmless against all damages.

#### LIFE SUPPORT

Diodes Incorporated products are not authorized for use as critical components in life support devices or systems without the expressed written approval of the President of Diodes Incorporated.