

FULL WAVE RECTIFIER

AZ31

Directly-heated power rectifier for
A.C. mains-operated equipment.



FILAMENT

V_f	4.0	V.
I_f	1.1	A.

OPERATING CONDITIONS


V_a max.	2x500	V_{rms}
I_a max.	60	mA
V_a max.	2x400	V_{rms}
I_a max.	75	mA
V_a max.	2x300	V_{rms}
I_a max.	100	mA
Maximum Capacitance of Reservoir Condenser	60	μF

ARRANGEMENT OF ELECTRODES AND BASE CONNECTIONS

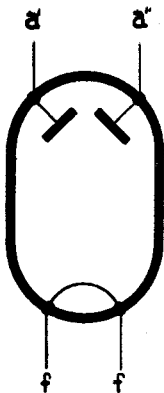

OCTAL BASE

DIMENSIONS

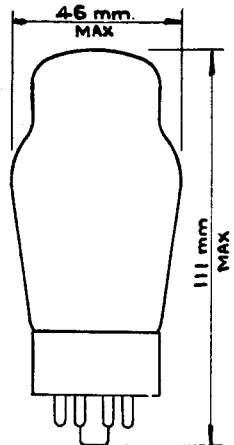

AZ31

FULL WAVE RECTIFIER

Directly-heated power rectifier for
A.C. mains-operated equipment.

