



Features

- Transient Protection for High-Speed Data Lines-to-GND and Lines-to-Lines.
- Provide transient protection for the protected lines to
 - IEC 61000-4-2 (ESD) $\pm 30\text{kV}$ (air/contact)
 - IEC 61000-4-4 (EFT) 80A (5/50ns)
 - IEC 61000-4-5 (Lightning) 45A (8/20 μs)
- **Cable Discharge Event (CDE)**
- DFN3020P10E (3.0x2.0mm) package.
- Specific pin out for easy board layout.
- Fast turn-on and low clamping voltage.
- Low capacitance for high speed interfaces.
- Low operating voltage: 3.3V.
- Low leakage current
- Solid-state silicon-avalanche and active circuit triggering technology.
- **Green Part**

Applications

- WAN/LAN Device
- 10/100/1000 Ethernet
- LVDS Interfaces
- Switching Systems
- Computers
- Instruments


Description

AZ3233-08F is a design which includes surge rated diode arrays to protect high speed data interfaces in an electronic system. The AZ3233-08F has been specifically designed to protect sensitive components which are connected to data and transmission lines from over-voltage damage and latch-up caused by Electrostatic Discharging (ESD), Electrical Fast Transients (EFT), Lightning, and Cable Discharge Event (CDE).

AZ3233-08F is a unique design which includes surge rated, low capacitance steering diodes and a unique design of clamping cell which is an equivalent TVS diode in a single package. During transient conditions, the steering diodes direct the transient to either the power line or to the ground line. The internal unique design of clamping cell prevents over-voltage on the power line, protecting any downstream components.

AZ3233-08F may be used to meet the ESD immunity requirements of IEC 61000-4-2, Level 4 ($\pm 15\text{kV}$ air, $\pm 8\text{kV}$ contact discharge).

Circuit Diagram

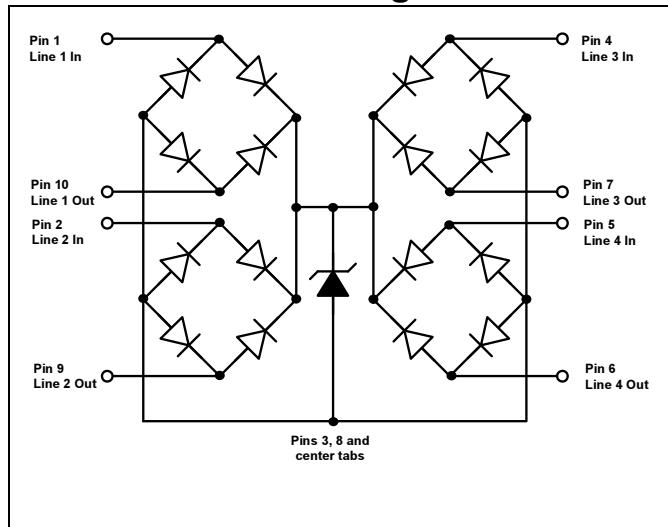

Pin Configuration

Line 1 In	(1)	(10)	Line 1 Out
Line 2 In	(2)	(9)	Line 2 Out
GND	(3)	(8)	GND
Line 3 In	(4)	(7)	Line 3 Out
Line 4 In	(5)	(6)	Line 4 Out

DFN3020P10E (3.0x2.0mm) (Top View)



SPECIFICATIONS







ABSOLUTE MAXIMUM RATINGS				
PARAMETER	SYMBOL	RATING	UNITS	
Peak Pulse Current ($t_p = 8/20\mu s$) (Note 1)	I_{PP}	45	A	
ESD per IEC 61000-4-2 (Air/Contact)	V_{ESD}	± 30	kV	
Lead Soldering Temperature	T_{SOL}	260 (10 sec.)	°C	
Operating Temperature	T_{OP}	-55 to +85	°C	
Storage Temperature	T_{STO}	-55 to +150	°C	

ELECTRICAL CHARACTERISTICS						
PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Reverse Stand-Off Voltage	V_{RWM}	Any I/O Pin to GND, $T=25\text{ °C}$.			3.3	V
Channel Leakage Current	I_{Leak}	$V_{RWM} = 3.3\text{V}$, $T=25\text{ °C}$, Any I/O Pin to GND			1	μA
Reverse Breakdown Voltage	V_{BV}	$I_{BV} = 1\text{mA}$, $T=25\text{ °C}$, Any I/O Pin to GND	3.9			V
Surge Clamping Voltage	$V_{CL-Surge}$	$I_{PP}=5\text{A}$, $t_p=8/20\mu\text{s}$, $T=25\text{ °C}$. Any I/O Pin to GND		5.0	6.0	V
		$I_{PP}=15\text{A}$, $t_p=8/20\mu\text{s}$, $T=25\text{ °C}$. Any I/O Pin to GND		6.5	8.0	V
		$I_{PP}=25\text{A}$, $t_p=8/20\mu\text{s}$, $T=25\text{ °C}$. Any I/O Pin to GND		8.5	10.5	V
		$I_{PP}=45\text{A}$, $t_p=8/20\mu\text{s}$, $T=25\text{ °C}$. Line-to-Line, two I/O pins connected together on each line (Note 1)		10.5	13.0	V
Channel Input Capacitance	C_{IN}	$V_R = 0\text{V}$, $f = 1\text{MHz}$, $T=25\text{ °C}$. Any I/O Pin to GND		3.5	5	pF
		$V_R = 0\text{V}$, $f = 1\text{MHz}$, $T=25\text{ °C}$. Between I/O Pins		1.6		pF

Note 1: Ratings with 2 pins connected together per the recommended configuration (i.e. pin-1 connected to pin-10, pin-2 connected to pin-9, pin-4 connected to pin-7, and pin-5 connected to pin-6).



Typical Characteristics

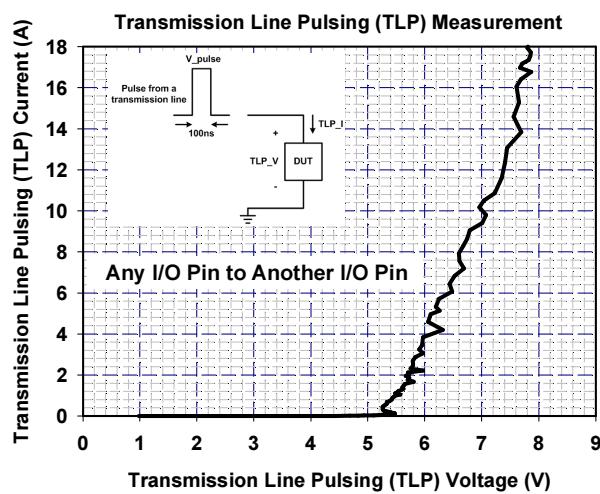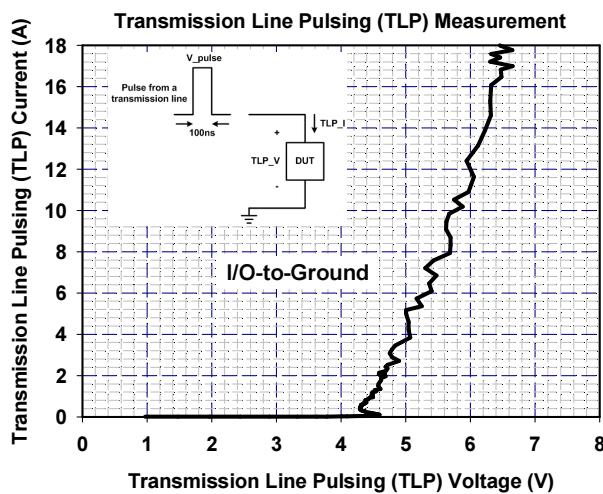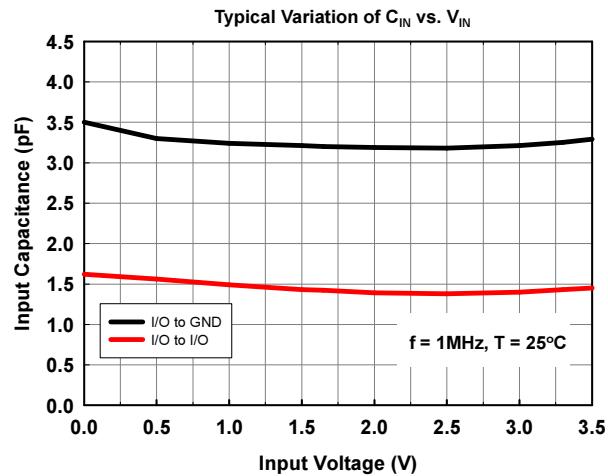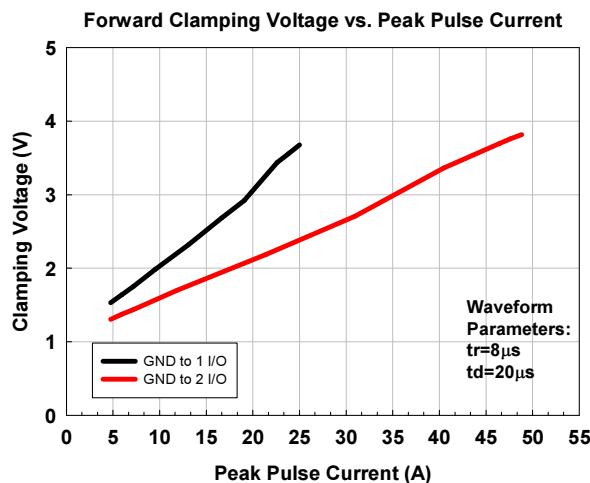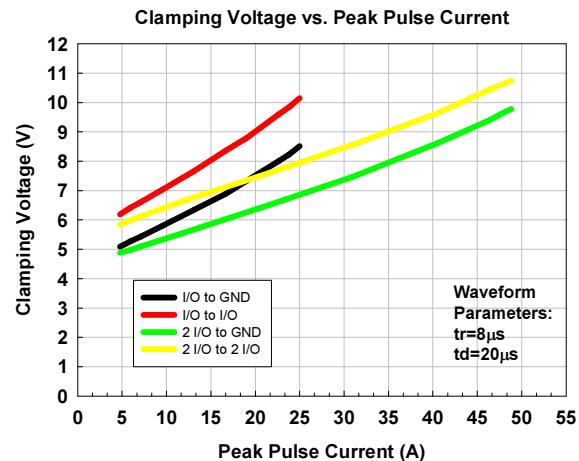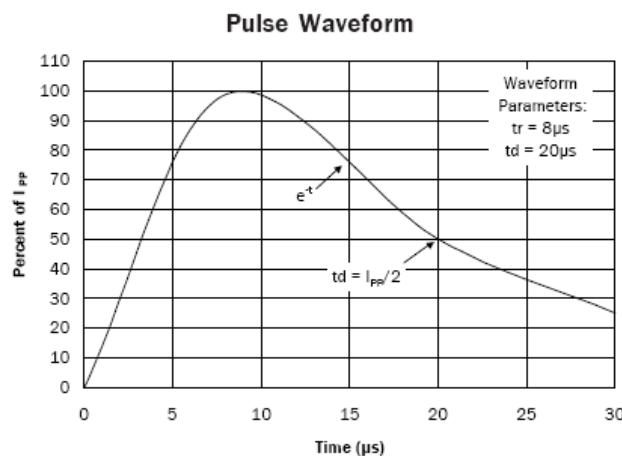

Applications Information

The AZ3233-08F is designed to protect four high-speed data lines operating at 3.3 volts to against system ESD/EFT/Lightning pulses by clamping them to an acceptable reference.

The AZ3233-08F designed with a flow through pin configuration is shown in Fig. 1. Fig. 2 shows a typical PCB layout example with AZ3233-08F for ESD/EFT/Lightning protection. In the Gigabit Ethernet application, pins 1, 2, 4, and 5 should be connected to pins 10, 9, 7, and 6 respectively. The traces should be unbroken and run under the device as shown. To get minimum parasitic inductance, the path length should keep as short as possible. Pins 3, 8 and the three center GND tabs are electrically connected, which should be left floating (i.e. not connected to ground) in the Ethernet application. Fig. 3 shows a typical Gigabit Ethernet protection circuit with AZ3233-08F.

In order to obtain enough suppression of ESD induced transient, good circuit board is critical. Thus, the following guidelines are recommended:

- Minimize the path length between the protected lines and the AZ3233-08F.
- Place the AZ3233-08F near the input terminals or connectors to restrict transient coupling.
- The ESD current return path to ground should be kept as short as possible.

- Use ground planes whenever possible.
- NEVER route critical signals near board edges and near the lines which the ESD transience easily injects to.

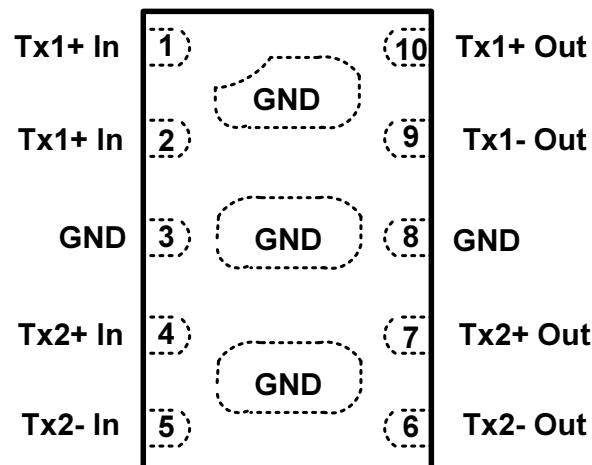


Fig. 1 Pin configuration of AZ3233-08F.

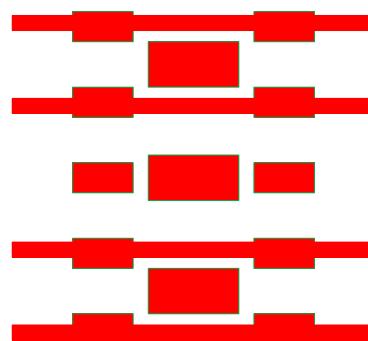


Fig. 2 Layout example of AZ3233-08F.



Gigabit Ethernet LAN Port at MB

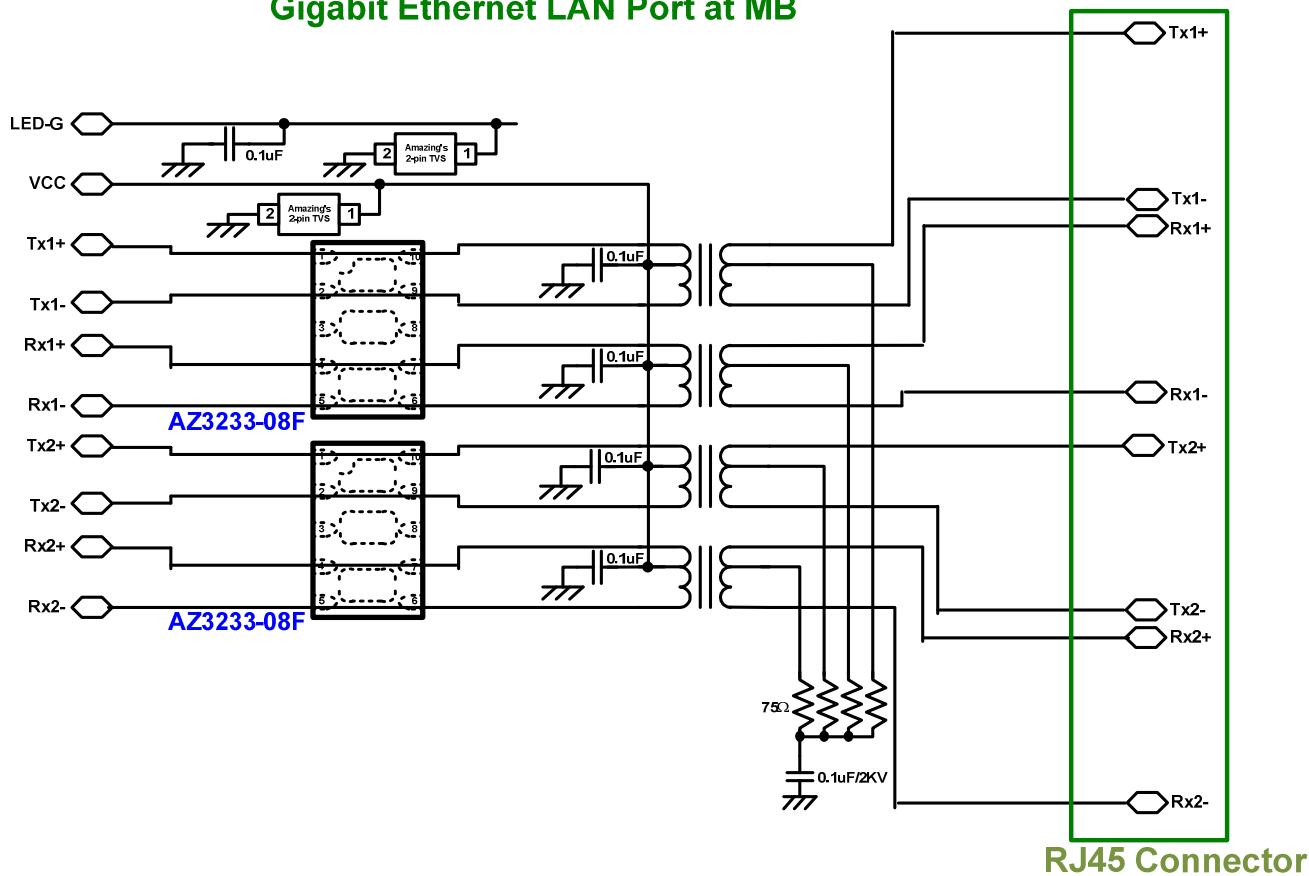




Fig. 3
Gigabit Ethernet surge protection circuit with AZ3233-08F.




Mechanical Details

DFN3020P10E (3.0x2.0mm)

PACKAGE DIAGRAMS

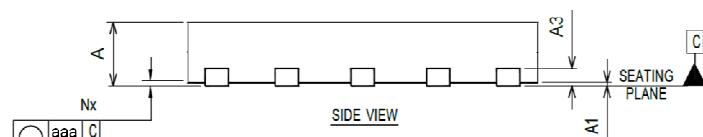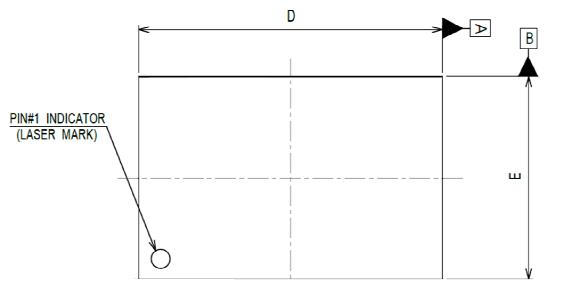


TOP VIEW

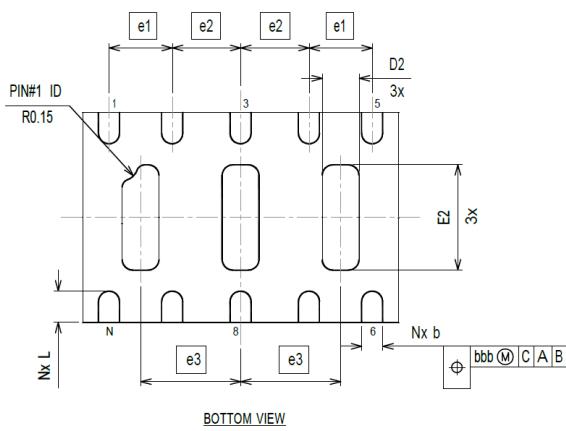

BOTTOM VIEW

Symbol	Millimeters		
	min	nom	max
A	0.51	0.55	0.60
A1	0.00	0.02	0.05
A3 0.153REF			
b	0.15	0.20	0.25
D	2.90	3.00	3.10
E	1.90	2.00	2.10
e1	0.60BSC		
e2	0.65BSC		
e3	0.95BSC		
D2	0.25	0.35	0.45
E2	0.95	1.00	1.05
L	0.25	0.30	0.35
aaa	0.08		
bbb	0.10		

Land Layout

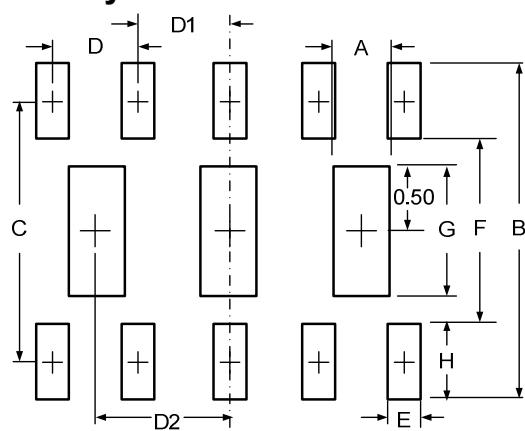

DIMENSIONS	
DIM	MILLIMETERS
A	0.40
B	2.56
C	1.98
D	0.60
D1	0.65
D2	0.95
E	0.25
F	1.40
G	1.00
H	0.58



MARKING CODE



323F = Device Code

W = Date Code

XX = Control Code

G = Green Part Indication

Part Number	Marking Code
AZ3233-08F.R7G (Green Part)	323F WXXG

Note : Green means Pb-free, RoHS, and Halogen free compliant.

Ordering Information

PN#	Material	Type	Reel size	MOQ	MOQ/internal box	MOQ/carton
AZ3233-08F.R7G	Green	T/R	7 inch	3,000/reel	4 reels=12,000/box	6 boxes=72,000/carton

Revision History

Revision	Modification Description
Revision 2016/11/21	Preliminary Release
Revision 2017/05/11	Formal Release