



High vacuum FULL-WAVE RECTIFYING VALVE  
 TUBE REDRESSEUR BIPLAQUE à vide poussé  
 Hochvakuum VOLLWEGGLEICHRICHTERRÖHRE

Heating: direct by A.C.  
 Chauffage: direct par C.A.  
 Heizung: direkt durch Wechselstrom

$V_f = 4,0 \text{ V}$   
 $I_f = 2,3 \text{ A}$



Dimensions in mm  
 Dimensions en mm  
 Abmessungen in mm



Base, culot, Fuss: P

Operating characteristics and limiting values  
 Caractéristiques d'utilisation et limites  
 Betriebs- und Grenzdaten

$V_{tr}$	=	2x300	2x400	max. 2x500	$V_{eff}$
$I_o$	= max.	200	max. 150	max. 120	mA
$C_{filt}$	= max.	60	max. 60	max. 60	$\mu\text{F}$
$R_t$	= min.	2x60	min. 2x80	min. 2x100	$\Omega$

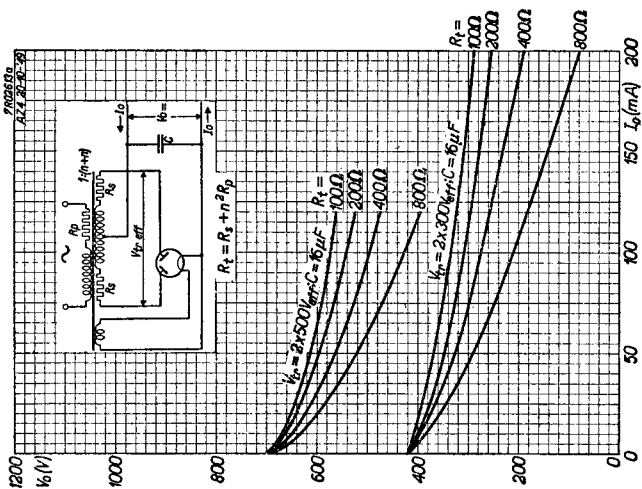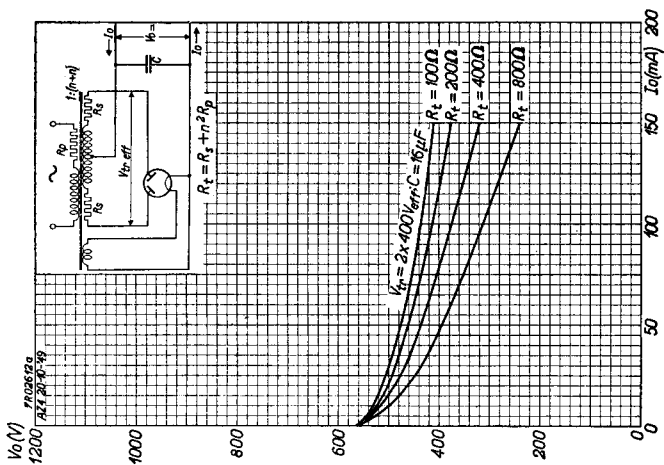

**PHILIPS**



*Electronic  
Tube*

**HANDBOOK**

	<b>AZ4</b>	
<b>page</b>	<b>sheet</b>	<b>date</b>
1	1	1953.06.06
2	A	1953.06.06
3	FP	1999.06.26