



Features

- ESD Protect for 1 Line with Unidirectional.
- Provide ESD protection for a line to
IEC 61000-4-2 (ESD) $\pm 24\text{kV}$ (air), $\pm 18\text{kV}$ (contact)
IEC 61000-4-4 (EFT) 60A (5/50ns)
- Suitable for, **12V and below**, operating voltage applications
- Ultra Small package saves board space
- Protect one I/O line or one power line
- Fast turn-on and Low clamping voltage
- Solid-state silicon-avalanche and active circuit triggering technology
- **Green part**

Applications

- Cellular Handsets and Accessories
- Small Panel Modules
- PDA's
- Portable Devices
- Digital Cameras
- Touch Panels
- Notebooks and Handhelds
- MP3 Players
- Peripherals

Description


AZ4012-01F is a design which includes a unidirectional surge rated clamping cell to protect one power line, or one control line, or one low speed data line in an electronic systems. The AZ4012-01F has been specifically designed to protect sensitive components which are connected to power and control lines from over-voltage damage and latch-up caused by Electrostatic Discharging (ESD), Electrical Fast Transients (EFT), and Cable Discharge Event (CDE).

AZ4012-01F is a unique design which includes proprietary clamping cell in a single package.

During transient conditions, the proprietary clamping cell prevents over-voltage on the power line or control/data lines, protecting any downstream components.

AZ4012-01F may be used to meet the ESD immunity requirements of IEC 61000-4-2, Level 4 ($\pm 15\text{kV}$ air, $\pm 8\text{kV}$ contact discharge).

Circuit Diagram / Pin Configuration

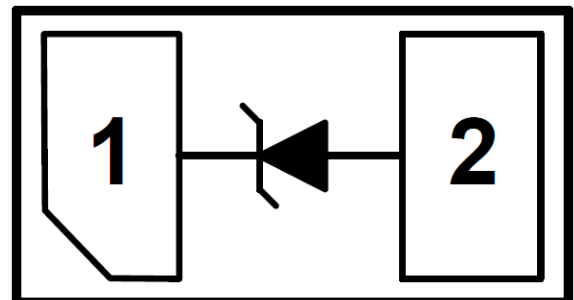

DFN1006P2X (Bottom View)
(1.0mm x 0.6mm x 0.45mm)




SPECIFICATIONS

ABSOLUTE MAXIMUM RATINGS			
PARAMETER	SYMBOL	RATING	UNITS
Operating Supply Voltage (pin-1 to pin-2)	V_{DC}	13	V
pin-1 to pin-2 ESD per IEC 61000-4-2 (Air)	V_{ESD-1}	± 24	kV
pin-1 to pin-2 ESD per IEC 61000-4-2 (Contact)	V_{ESD-2}	± 18	kV
Lead Soldering Temperature	T_{SOL}	260 (10 sec.)	$^{\circ}C$
Operating Temperature	T_{OP}	-55 to +125	$^{\circ}C$
Storage Temperature	T_{STO}	-55 to +150	$^{\circ}C$

ELECTRICAL CHARACTERISTICS						
PARAMETER	SYMBOL	CONDITIONS	MINI	TYP	MAX	UNITS
Reverse Stand-Off Voltage	V_{RWM}	pin-1 to pin-2, $T=25^{\circ}C$.			12	V
Reverse Leakage Current	I_{Leak}	$V_{RWM} = 12V$, $T=25^{\circ}C$, pin-1 to pin-2.			0.1	μA
Reverse Breakdown Voltage	V_{BV}	$I_{BV} = 1mA$, $T=25^{\circ}C$, pin-1 to pin-2	13.5		18	V
Forward Voltage	V_F	$I_F = 15mA$, $T=25^{\circ}C$, pin-2 to pin-1	0.6	0.8	1.0	V
ESD Clamping Voltage	V_{clamp}	IEC 61000-4-2 +6kV, $T=25^{\circ}C$, Contact mode, pin-1 to pin-2.		20		V
ESD Dynamic Turn-on Resistance	$R_{dynamic}$	IEC 61000-4-2 0~+6kV, $T=25^{\circ}C$, Contact mode, pin-1 to pin-2.		0.26		Ω
Channel Input Capacitance	C_{IN}	$V_R = 0V$, $f = 1MHz$, $T=25^{\circ}C$, pin-1 to pin-2.		40	50	pF



Typical Characteristics

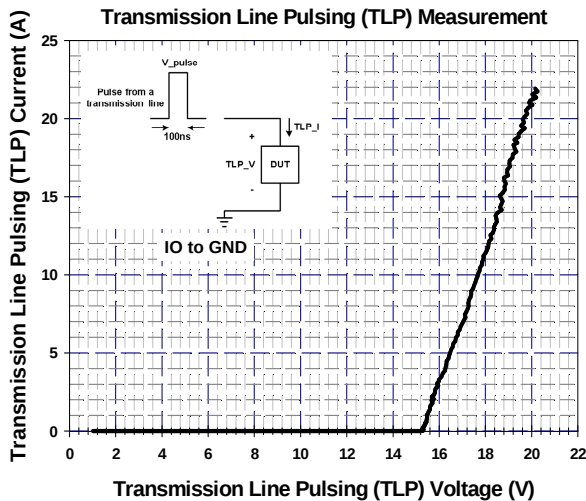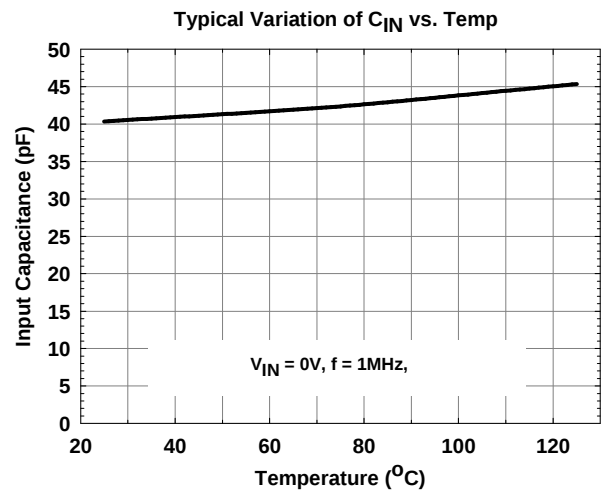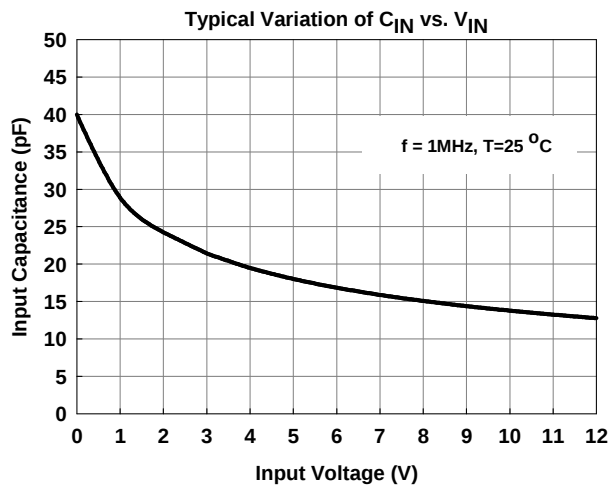

Applications Information

ESD Protection for Battery Contact

The AZ4012-01F can be used to protect the Battery Contact. The ESD protection scheme for typical Li-ion battery pack is shown in Fig. 1. In the Fig. 1, the pin 2 of AZ4012-01F should be connected directly to a ground plane (Pack- terminal) on the board. The pin1 of AZ4012-01F connected to the terminal of Pack+.

All the path lengths connected to the pins of AZ4012-01F should be kept as short as possible to minimize parasitic inductance in the board traces.

In order to obtain enough suppression of ESD induced transient, good circuit board is critical. Thus, the following guidelines are recommended:

- Minimize the path length between the protected lines and the AZ4012-01F.
- Place the AZ4012-01F near the input terminals or connectors to restrict transient coupling.
- The ESD current return path to ground should be kept as short as possible.
- Use ground planes whenever possible.
- NEVER route critical signals near board edges and near the lines which the ESD transient easily injects to PCB internal circuit.

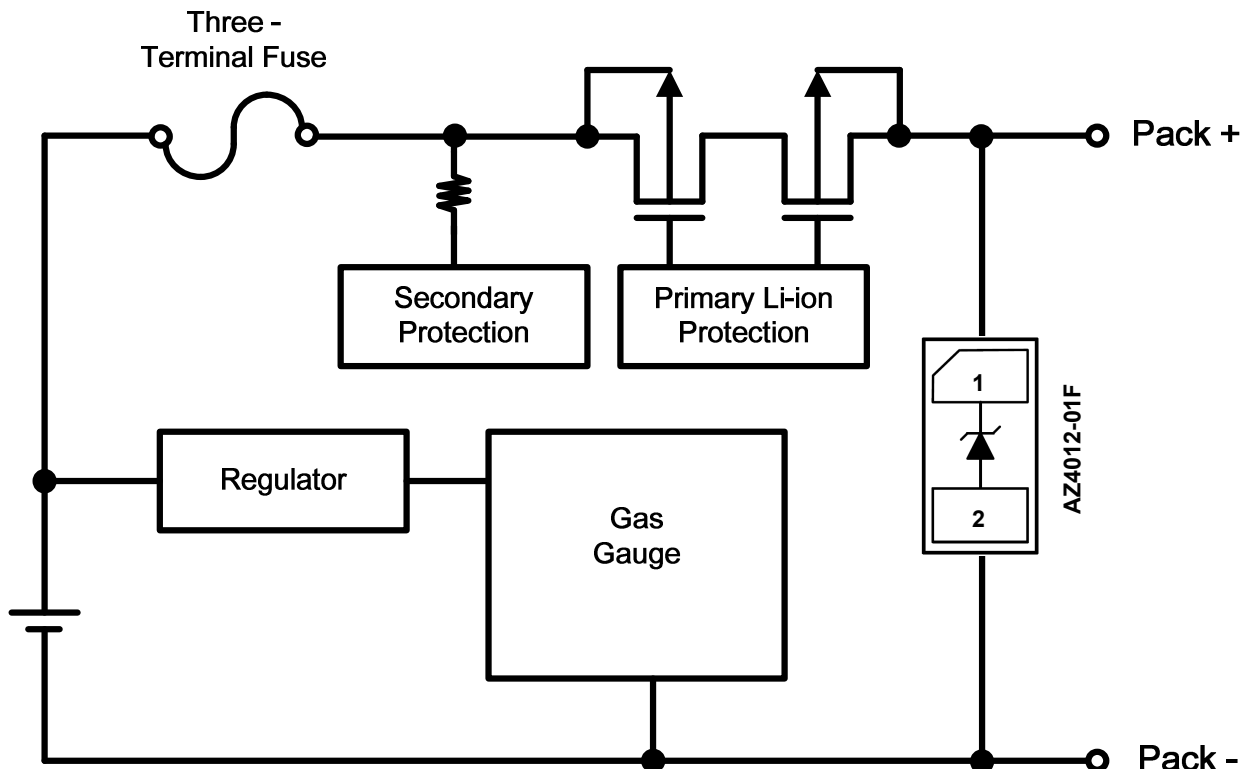


Fig. 1 ESD protection scheme for a typical Li-ion battery pack by using AZ4012-01F.

ESD Protection for Low-Speed Data Line

low speed data lines, and power lines of PCB internal circuits from ESD transient stress.

Fig. 2 shows another simplified example of using AZ4012-01F to protect the control lines,

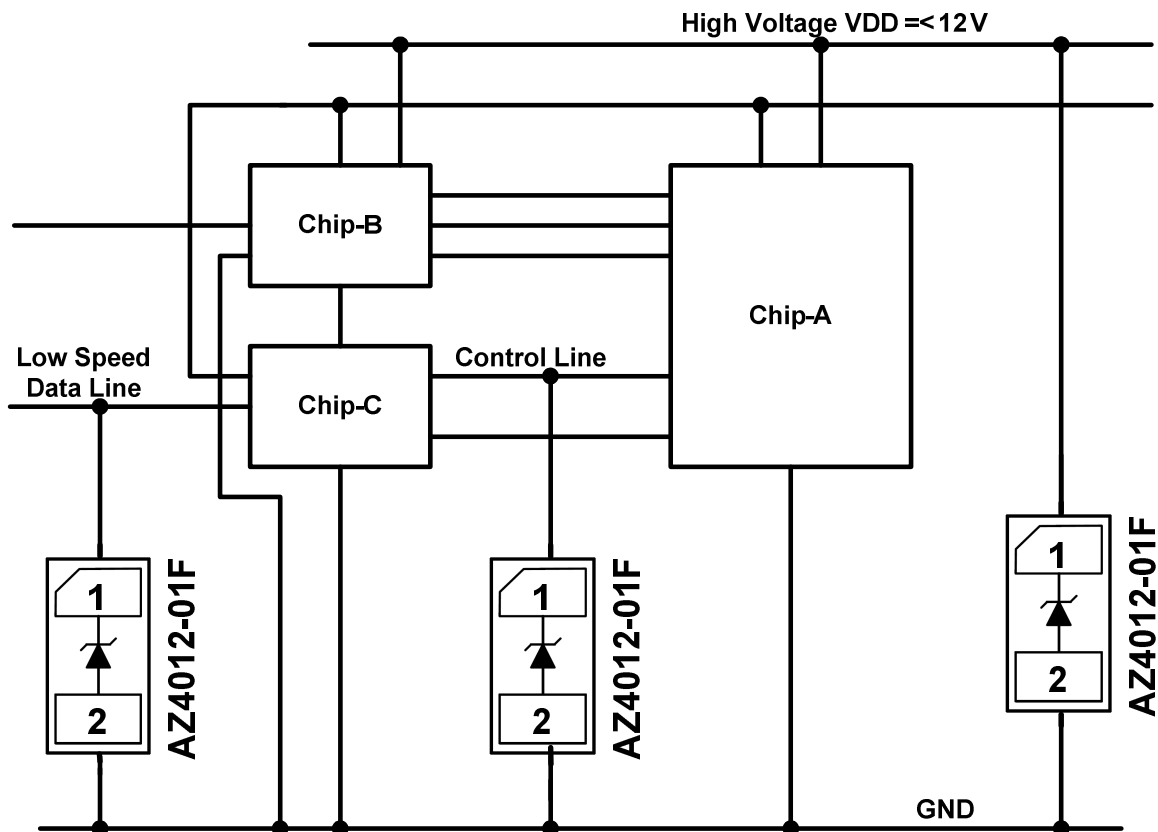





Fig. 2 ESD protection scheme for internal PCB circuits by using AZ4012-01F.



Mechanical Details

DFN1006P2X


PACKAGE DIAGRAMS

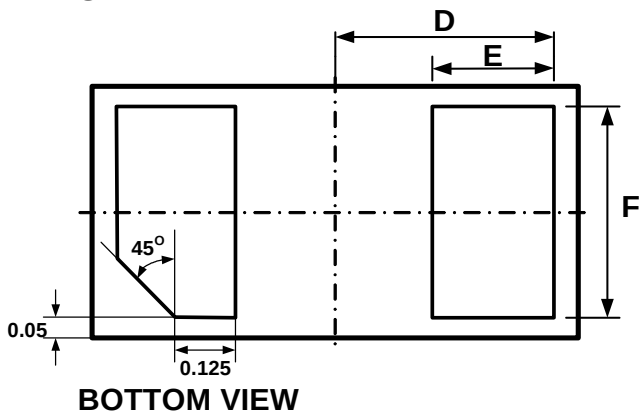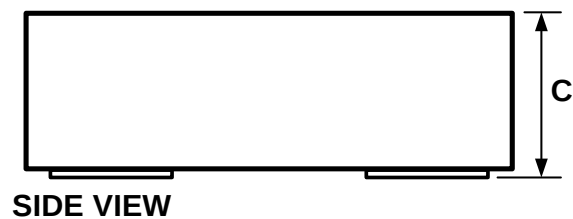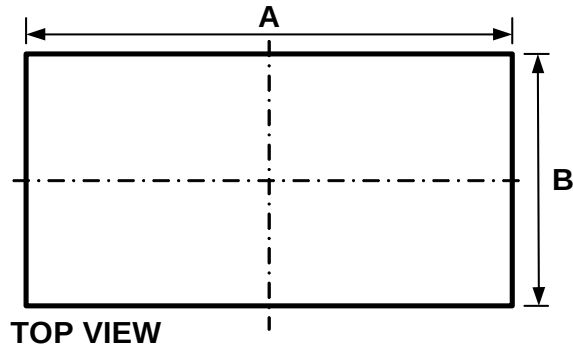

PACKAGE DIMENSIONS

Symbol	Millimeters		Inches	
	min	max	min	max
A	0.95	1.05	0.037	0.041
B	0.55	0.65	0.022	0.026
C	0.41	0.50	0.016	0.020
D	0.45		0.018	
E	0.20	0.30	0.008	0.012
F	0.45	0.55	0.018	0.022


LAND LAYOUT

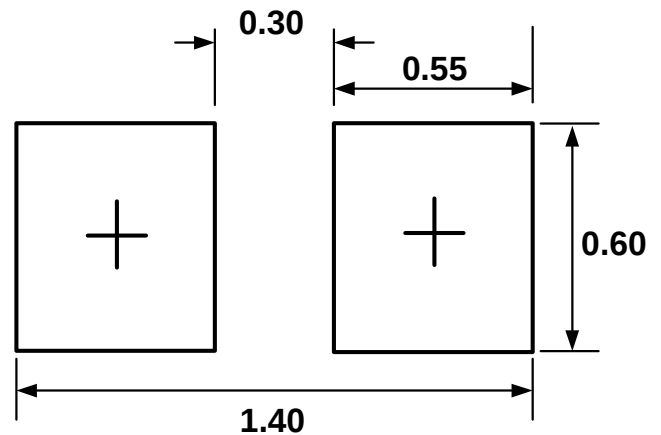

Notes:

This LAND LAYOUT is for reference purposes only. Please consult your manufacturing partners to ensure your company's PCB design guidelines are met.

MARKING CODE

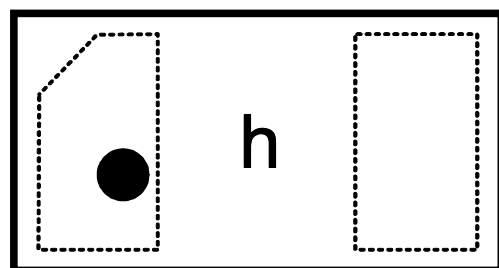

Top View

Part Number	Marking Code
AZ4012-01F (Green Part)	h

Note : Green means Pb-free, RoHS, and Halogen free compliant.

Ordering Information

PN#	Material	Type	Reel size	MOQ	MOQ/internal box	MOQ/carton
AZ4012-01F.R7GR	Green	T/R	7 inch	12,000/reel	4 reel=48,000/box	6 box=288,000/carton

Revision History

Revision	Modification Description
Revision 2012/01/06	Formal release.
Revision 2015/01/29	Update the Ordering Information.