

Long-life grade capacitors

Applications

- Frequency converters
- Switch-mode power supplies in industrial and consumer electronics
- Uninterruptible power supplies

Features

- Long useful life
- Outstanding ripple current capability
- High volumetric efficiency
- Many different case sizes
- Pinning ensures correct insertion


Construction

- Charge-discharge proof, polar
- Aluminum case, fully insulated
- Overload protection by preset break point in case



KAL0409-D

B43511




KAL0273-2

B43521


Terminals

- 4 snap-in terminals (6,3 mm and 4,5 mm length)
- Solder pin mounting on printed circuit boards, pins fit standardized spacings on PCB

...DataSheet


Specifications and characteristics in brief

Rated voltage U_R	350 to 450 VDC	
Surge voltage U_S	$1,1 \cdot U_R$	
Rated capacitance C_R	390 ... 2 200 μF	
Capacitance tolerance	$\pm 20 \% \triangleq \text{M}$	
Leakage current I_L (5 min, 20 °C)	$I_L \leq 0,3 \mu\text{A} \cdot \left(\frac{C_R}{\mu\text{F}} \cdot \frac{U_R}{\text{V}} \right)^{0,7} + 4 \mu\text{A}$	
Self-inductance ESL	Approx. 20 nH	
Useful life 85 °C, U_R ; I_{-R} 40 °C, U_R ; $1,6 \cdot I_{-R}$	<p>> 12 000 h > 200 000 h</p>	<p>Requirements:</p> <p>$\Delta C/C \leq \pm 30 \%$ of initial value $ESR \leq 3$ times initial specified limit $I_L \leq$ initial specified limit</p> <p>Failure percentage: $\leq 1 \%$ Failure rate: ≤ 40 fit ($\leq 40 \cdot 10^{-9}/\text{h}$) (for definition "fit", refer to chapter "Quality", page 62)</p>
Voltage endurance test 85 °C; U_R	3 000 h	<p>Post test requirements:</p> <p>$\Delta C/C \leq \pm 10 \%$ of initial value $ESR \leq 1,3$ times initial specified limit $I_L \leq$ initial specified limit</p>
Vibration resistance	To IEC 60068-2-6, test Fc: displacement amplitude 0,35 mm, frequency range 10 ... 55 Hz, acceleration max. 5 g, duration 3×2 h	
IEC climatic category	To IEC 60068-1: $U_R \leq 400$ VDC: 40/085/56 (– 40 °C/+ 85 °C/56 days damp heat test) $U_R > 400$ VDC: 25/085/56 (– 25 °C/+ 85 °C/56 days damp heat test)	
Detail specification	Similar to CECC 30301-805	
Sectional specification	IEC 60384-4	




B43511 / B43521

Max. Ripple Current – 85 °C

Dimensional drawings


B43511, 4 snap-in terminals

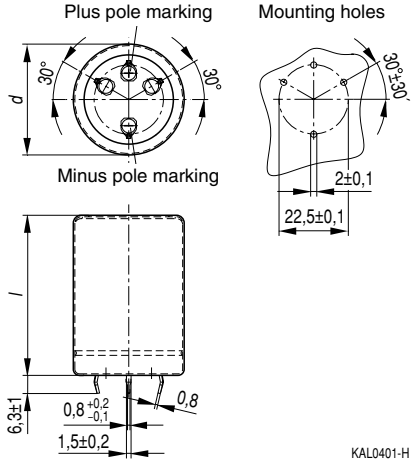

Standard snap-in terminals: length $(6,3 \pm 1)$ mm.
 Also available with a length of $(4,5 - 1)$ mm.
 For ordering example cf. page 191

Dimensions (mm)			Approx. weight (g)	Packing units (pieces)
$d+1$	$l \pm 2$	l_{max}		
35	50	54	63	60
35	60	64	76	36
35	70	74	88	36
35	80	84	101	36
35	100	104	126	36
40	40	44	71	33
40	50	54	89	33
40	60	64	107	33
40	70	74	125	33
40	80	84	143	33
40	100	104	178	33
45	40	—	90	28
45	50	—	113	28
45	60	—	136	28
45	70	—	158	28
45	80	—	181	28
45	100	—	226	28


B43521, solder pins

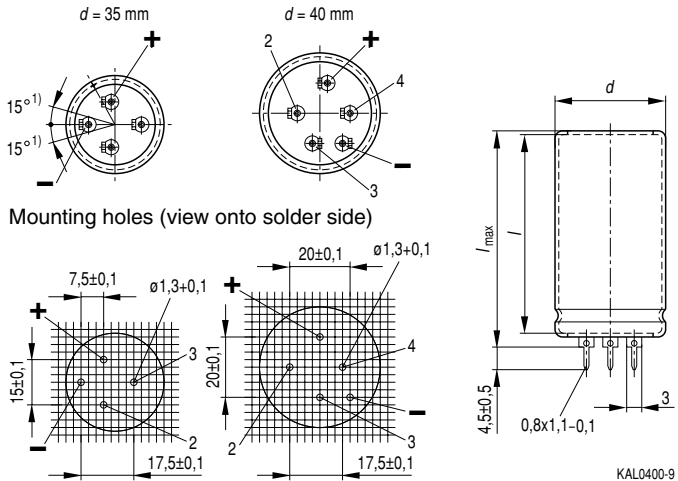

- 1) Permissible range of positions for pole identification marks

Pole markings: Plus: **+**; Minus: **-**

All pin holes must be drilled into the PC-board, since the unconnected pins serve as mountings. These pins must be soldered to isolated pads or pads with the same potential as the negative pole (solder pin and 4 snap-in terminals).



Packing

B43511 / B43521

Max. Ripple Current – 85 °C


Packing of 4 snap-in terminals and solder pins



For ecological reasons the packing is pure cardboard.

Ordering codes

4 snap-in terminals Version	Identification in 3rd block of ordering code
Standard terminals (6,3 ± 1) mm	M000
Short terminals (4,5 – 1) mm	M007



Overview of available types

U_R (VDC)	350	400	420	450
C_R (μ F)	Case dimensions $d \times l$ (mm)			
390				35 × 50 40 × 40
470		35 × 50 40 × 40	35 × 50 40 × 40	35 × 60 40 × 50 45 × 40
560	35 × 50	35 × 60 45 × 40	35 × 60 40 × 50	35 × 70 40 × 60
680	35 × 60 40 × 50	35 × 70 40 × 60 45 × 50	35 × 70 40 × 60 45 × 50	35 × 80 40 × 60 45 × 50
820	35 × 70 40 × 60	35 × 80 40 × 60	35 × 80 40 × 70 45 × 50	40 × 70 45 × 60
1 000	35 × 80 40 × 60 45 × 50	35 × 100 40 × 70 45 × 60	35 × 100 40 × 80 45 × 60	40 × 100 45 × 70
1 500	40 × 80 45 × 70	40 × 100 45 × 80	40 × 100 45 × 80	45 × 100
1 800		45 × 100	45 × 100	
2 200	45 × 100			

The capacitance and voltage ratings listed above are available in different cases upon request.

Other voltage and capacitance ratings are also available upon request.

Capacitors with solder pins are only available in 35 and 40 mm case diameters.



Technical data and ordering codes

U_R	C_R 100 Hz 20 °C μF	Case dimensions $d \times l$ mm	ESR_{max} 100 Hz 20 °C mΩ	Z_{max} 10 kHz 20 °C mΩ	I_{-max} 100 Hz 40 °C A	I_{-R} 100 Hz 85 °C A	Ordering code ¹⁾ * 1 = 4 snap-in 2 = solder pin	
350 VDC	560	35 × 50	230	190	7,0	3,2	B435*1A4567M000	
	680	35 × 60	190	150	8,2	3,7	B435*1A4687M000	
	680	40 × 50	190	150	8,1	3,7	B435*1C4687M000	
	820	35 × 70	160	130	9,6	4,4	B435*1A4827M000	
	820	40 × 60	160	130	9,5	4,3	B435*1C4827M000	
	1 000	35 × 80	130	110	11	5,1	B435*1A4108M000	
	1 000	40 × 60	130	110	10	4,8	B435*1C4108M000	
	1 000	45 × 50	130	110	9,9	4,5	B43511E4108M000	
	1 500	40 × 80	90	70	14	6,5	B435*1A4158M000	
	1 500	45 × 70	90	70	14	6,2	B43511C4158M000	
	2 200	45 × 100	60	50	19	8,6	B43511A4228M000	
	400	470	35 × 50	280	220	6,4	2,9	B435*1A9477M000
		470	40 × 40	280	220	6,2	2,8	B435*1C9477M000
560		35 × 60	230	190	7,5	3,4	B435*1A9567M000	
560		45 × 40	230	190	6,9	3,1	B43511C9567M000	
680		35 × 70	190	150	8,7	4,0	B435*1A9687M000	
680		40 × 60	190	150	8,7	3,9	B435*1C9687M000	
680		45 × 50	190	150	8,1	3,7	B43511E9687M000	
820		35 × 80	160	130	10	4,6	B435*1A9827M000	
820		40 × 60	160	130	9,5	4,3	B435*1C9827M000	
1 000		35 × 100	130	110	12	5,6	B435*1C9108M000	
1 000		40 × 70	130	110	11	5,1	B435*1A9108M000	
1 000		45 × 60	130	110	11	4,8	B43511B9108M000	
1 500		40 × 100	90	70	16	7,2	B435*1A9158M000	
1 500		45 × 80	90	70	14	6,5	B43511C9158M000	
1 800		45 × 100	80	60	17	7,8	B43511A9188M000	

Capacitors with solder pins are only available in 35 and 40 mm case diameters.

Preferred types

1) For capacitors with short 4 snap-in terminals, see page 191.




U_R	C_R 100 Hz 20 °C μF	Case dimensions $d \times l$ mm	ESR_{max} 100 Hz 20 °C m Ω	Z_{max} 10 kHz 20 °C m Ω	$I_{\text{~max}}$ 100 Hz 40 °C A	$I_{\text{~R}}$ 100 Hz 85 °C A	Ordering code ¹⁾ * 1 = 4 snap-in 2 = solder pin
420	470	35 × 50	430	340	6,4	2,9	B435*1A0477M000
	470	40 × 40	430	340	6,2	2,8	B435*1C0477M000
	560	35 × 60	360	290	7,5	3,4	B435*1A0567M000
	560	40 × 50	360	290	7,3	3,3	B435*1C0567M000
	680	35 × 70	300	240	8,7	4,0	B435*1A0687M000
	680	40 × 60	300	240	8,7	3,9	B435*1C0687M000
	680	45 × 50	300	240	8,1	3,7	B43511E0687M000
	820	35 × 80	250	200	10	4,6	B435*1A0827M000
	820	40 × 70	250	200	10	4,6	B435*1C0827M000
	820	45 × 50	250	200	8,9	4,1	B43511E0827M000
	1 000	35 × 100	200	160	12	5,6	B435*1A0108M000
	1 000	40 × 80	200	160	11	5,3	B435*1C0108M000
	1 000	45 × 60	200	160	10	4,8	B43511E0108M000
	1 500	40 × 100	140	110	15	7,2	B435*1A0158M000
	1 500	45 × 80	140	110	14	6,5	B43511C0158M000
	1 800	45 × 100	120	90	17	7,8	B43511A0188M000
450	390	35 × 50	520	410	5,8	2,6	B435*1A5397M000
	390	40 × 40	520	410	5,7	2,6	B435*1C5397M000
	470	35 × 60	430	340	6,8	3,1	B435*1A5477M000
	470	40 × 50	430	340	6,7	3,1	B435*1C5477M000
	470	45 × 40	430	340	6,3	2,9	B43511E5477M000
	560	35 × 70	360	290	7,9	3,6	B435*1A5567M000
	560	40 × 60	360	290	7,9	3,6	B435*1C5567M000
	680	35 × 80	300	240	9,2	4,2	B435*1A5687M000
	680	40 × 60	300	240	8,7	3,9	B435*1C5687M000
	680	45 × 50	300	240	8,1	3,7	B43511E5687M000
	820	40 × 70	250	200	10	4,6	B435*1A5827M000
	820	45 × 60	250	200	9,5	4,3	B43511C5827M000
	1 000	40 × 100	200	160	13	5,8	B435*1A5108M000
	1 000	45 × 70	200	160	11	5,1	B43511C5108M000
	1 500	45 × 100	140	110	16	7,1	B43511A5158M000

Capacitors with solder pins are only available in 35 and 40 mm case diameters.

Preferred types

1) For capacitors with short 4 snap-in terminals, see page 191.




B43511 / B43521


Max. Ripple Current – 85 °C

Useful life


depending on ambient temperature T_A under ripple current operating conditions¹⁾

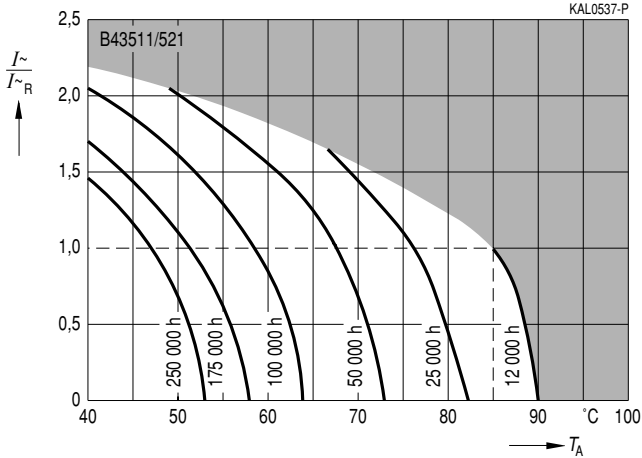


Frequency factor of permissible ripple current I_{\sim} versus frequency f

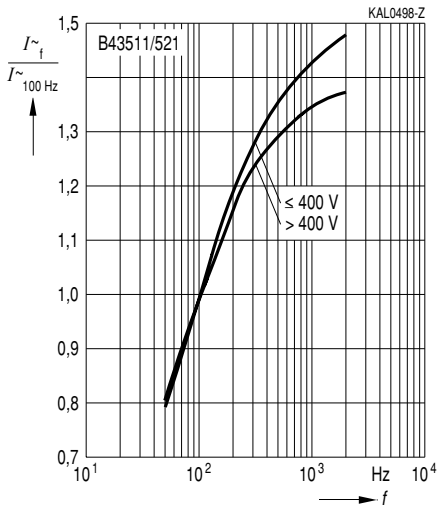

Frequency characteristics of ESR Typical behavior

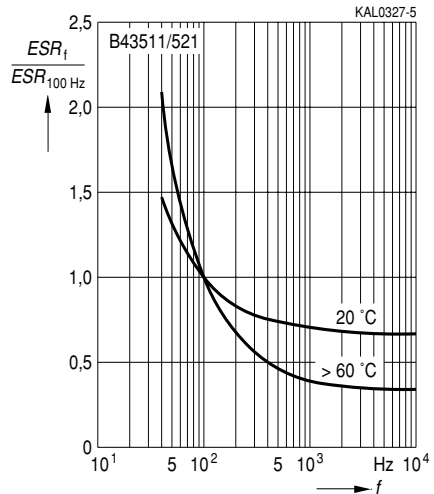


1) Refer to page 40 for an explanation on how to interpret the useful life graphs.



B43511 / B43521

Max. Ripple Current – 85 °C

Impedance Z at $f = 10$ kHz
versus frequency f
Typical behavior at 20 °C

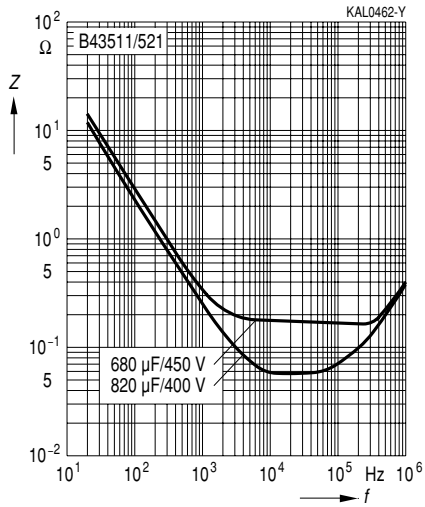

Herausgegeben von EPCOS AG

Unternehmenskommunikation, Postfach 80 17 09, 81617 München, DEUTSCHLAND

☎ ++49 89 636 09, FAX (0 89) 636-2 26 89

© EPCOS AG 2002. Vervielfältigung, Veröffentlichung, Verbreitung und Verwertung dieser Broschüre und ihres Inhalts ohne ausdrückliche Genehmigung der EPCOS AG nicht gestattet.

Bestellungen unterliegen den vom ZVEI empfohlenen Allgemeinen Lieferbedingungen für Erzeugnisse und Leistungen der Elektroindustrie, soweit nichts anderes vereinbart wird.

Diese Broschüre ersetzt die vorige Ausgabe.

Fragen über Technik, Preise und Liefermöglichkeiten richten Sie bitte an den Ihnen nächstgelegenen Vertrieb der EPCOS AG oder an unsere Vertriebsgesellschaften im Ausland. Bauelemente können aufgrund technischer Erfordernisse Gefahrstoffe enthalten. Auskünfte darüber bitten wir unter Angabe des betreffenden Typs ebenfalls über die zuständige Vertriebsgesellschaft einzuholen.

Published by EPCOS AG

Corporate Communications, P.O. Box 80 17 09, 81617 Munich, GERMANY

☎ ++49 89 636 09, FAX (0 89) 636-2 26 89

© EPCOS AG 2002. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.