


B5819WS SCHOTTKY BARRIER DIODE


SOD-323

Features

- For use in low voltage, high frequency inverters
- Free wheeling, and polarity protection applications
- This is a Pb – Free Device
- All SMC parts are traceable to the wafer lot
- Additional testing can be offered upon request

Circuit Diagram



Mechanical Data

- Case: Molded plastic body
- Terminals: Plated leads solderable per MIL-STD-750, Method 2026
- Polarity: Polarity symbols marked on case
- Marking: B5819WS:SLS

Maximum Ratings @T_A=25°C unless otherwise specified

Parameter Marking code	Symbol	B5819WS SLS	Units
Maximum repetitive peak reverse voltage	V _{RRM}	40	V
Maximum DC blocking voltage	V _R		
Maximum RMS voltage	V _{R(RMS)}	28	V
Average rectified output current	I _O	1.0	A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I _{FSM}	9	A
Power Dissipation	P _d	250	mW
Typical thermal resistance	R _{ΘJA}	500	°C/W
Operating junction and storage temperature range	T _J , T _{STG}	-65 to +150	°C

Electrical Characteristics @T_A=25°C unless otherwise specified

Characteristic	Symbol	Min	Max	Units	Test Condition
Reverse Breakdown Voltage *	V _(BR)	40	-	V	I _R =1mA
Forward Voltage *	V _{FM}	-	0.6	V	I _F =1A
		-	0.9	V	I _F =3A
Reverse Leakage Current *	I _{RM}	-	200	μA	V _R =40V
Capacitance between terminals	C _T	-	120	pF	V _R =4V, f=1.0MHz

* Pulse width < 300 μs, duty cycle < 2%

Ratings and Characteristics Curves

FIG. 1- FORWARD CURRENT DERATING CURVE

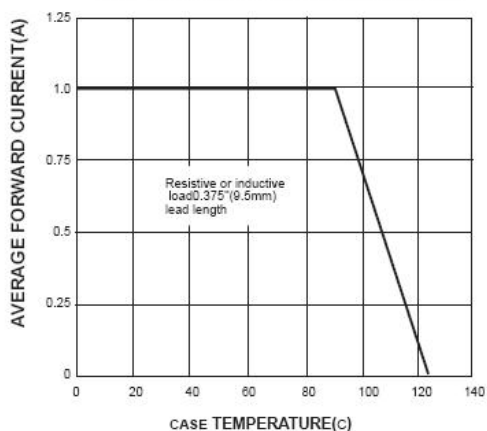


FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

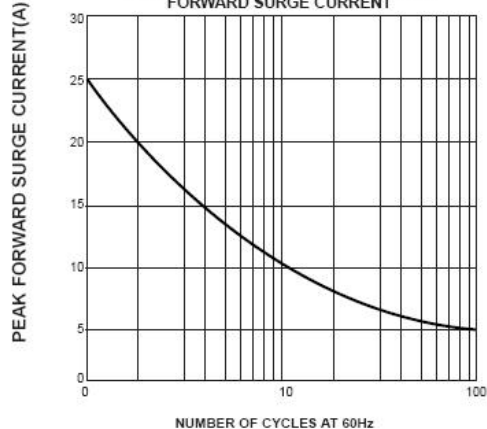


FIG. 3- TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

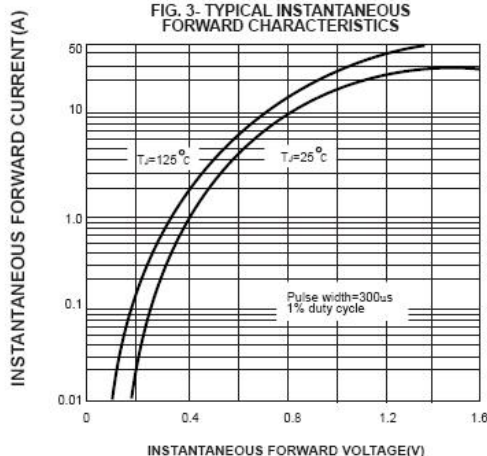


FIG. 4- TYPICAL REVERSE CHARACTERISTICS

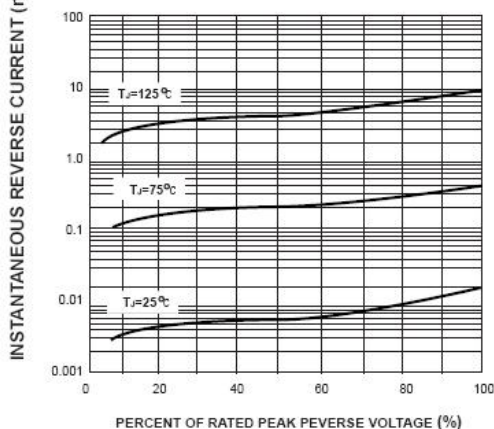


FIG. 5- TYPICAL JUNCTION CAPACITANCE



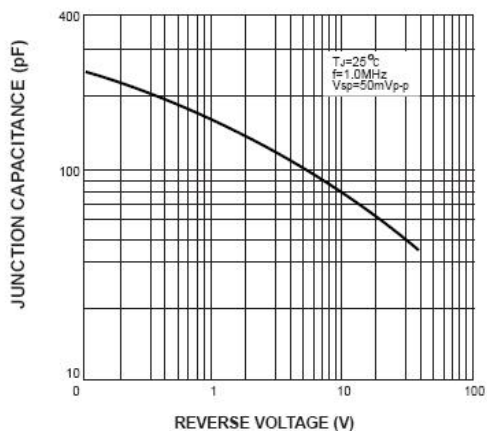


FIG. 6-TYPICAL TRANSIENT THERMAL IMPEDANCE

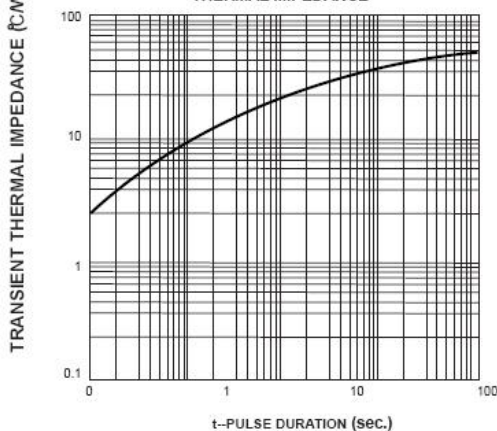

Mechanical Dimensions SOD-323(Inches/Millimeters)

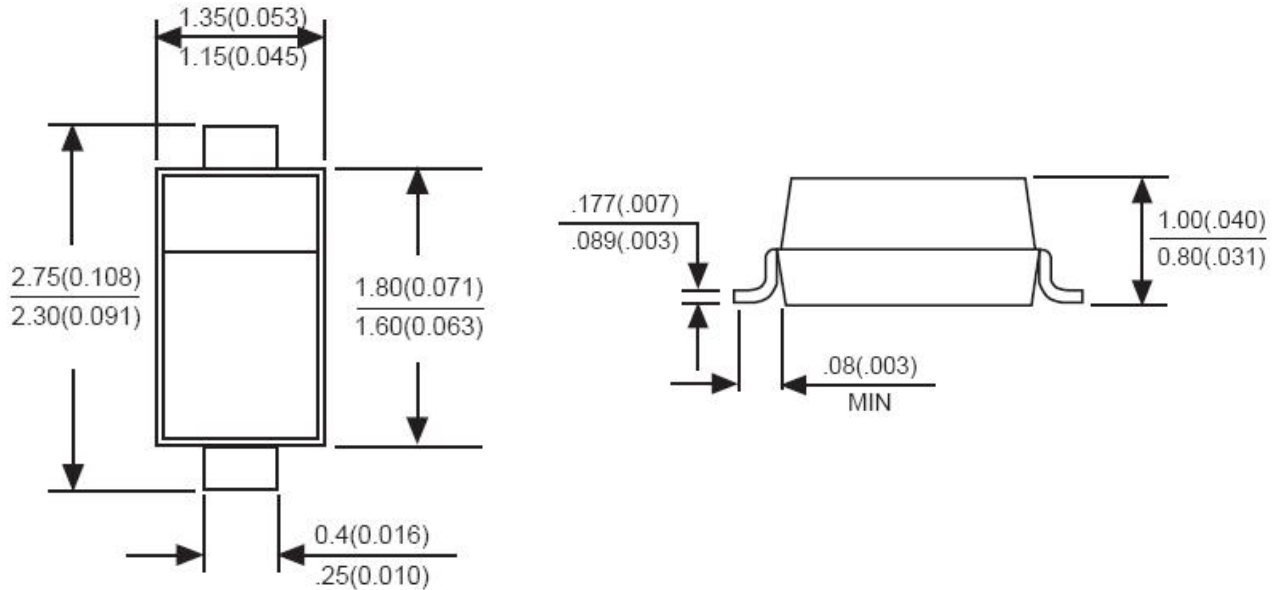

Ordering Information

Device	Package	Shipping
B5819WS	SOD-323 (Pb-Free)	3000pcs / reel


For information on tape and reel specifications, including part orientation and tape sizes, please refer to our tape and reel packaging specification.

Marking Diagram



SLS = Marking Code

Carrier Tape Specification SOD-323

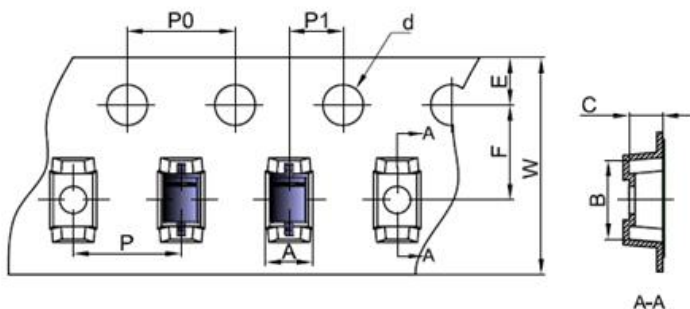

SYMB OL	Millimeters	
	Min.	Max.
B	2.85	2.95
C	1.20	1.30
d	1.40	1.60
E	1.65	1.85
F	3.40	3.60
P	3.90	4.10
P0	3.90	4.10
P1	1.90	2.10
W	7.90	8.30

DISCLAIMER:

- 1- The information given herein, including the specifications and dimensions, is subject to change without prior notice to improve product characteristics. Before ordering, purchasers are advised to contact the SMC Diode Solutions sales department for the latest version of the datasheet(s).
- 2- In cases where extremely high reliability is required (such as use in nuclear power control, aerospace and aviation, traffic equipment, medical equipment, and safety equipment), safety should be ensured by using semiconductor devices that feature assured safety or by means of users' fail-safe precautions or other arrangement.
- 3- In no event shall SMC Diode Solutions be liable for any damages that may result from an accident or any other cause during operation of the user's units according to the datasheet(s). SMC Diode Solution assumes no responsibility for any intellectual property claims or any other problems that may result from applications of information, products or circuits described in the datasheets.
- 4- In no event shall SMC Diode Solutions be liable for any failure in a semiconductor device or any secondary damage resulting from use at a value exceeding the absolute maximum rating.
- 5- No license is granted by the datasheet(s) under any patents or other rights of any third party or SMC Diode Solutions.
- 6- The datasheet(s) may not be reproduced or duplicated, in any form, in whole or part, without the expressed written permission of SMC Diode Solutions.
- 7- The products (technologies) described in the datasheet(s) are not to be provided to any party whose purpose in their application will hinder maintenance of international peace and safety nor are they to be applied to that purpose by their direct purchasers or any third party. When exporting these products (technologies), the necessary procedures are to be taken in accordance with related laws and regulations..