

## isc Three Terminal Positive Voltage Regulator

## BA17812FP

### FEATURES



- Output current in excess of 1.0 A
- Output voltage of 12V
- Internal thermal overload protection
- Output transition Safe-Area compensation
- 100% avalanche tested
- Minimum Lot-to-Lot variations for robust device performance and reliable operation

### ABSOLUTE MAXIMUM RATINGS( $T_a=25^\circ\text{C}$ )

SYMBOL	PARAMETER	RATING	UNIT
$V_i$	DC input voltage	35	V
$I_o$	Output current	internally limited	
$P_{tot}$	Power dissipation	internally limited	
$T_{op}$	Operating junction temperature	0~150	°C
$T_{stg}$	Storage temperature	-55~150	°C

### THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
$R_{th j-c}$	Thermal Resistance, Junction to Case	3	°C/W
$R_{th j-a}$	Thermal Resistance,Junction to Ambient	62.5	°C/W

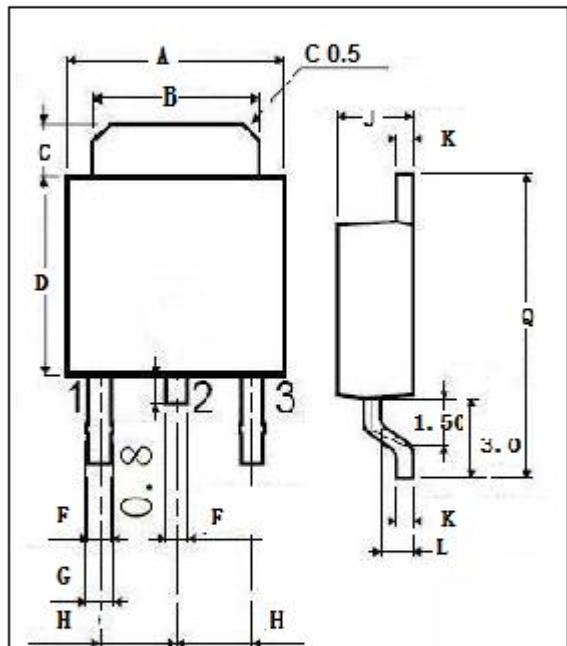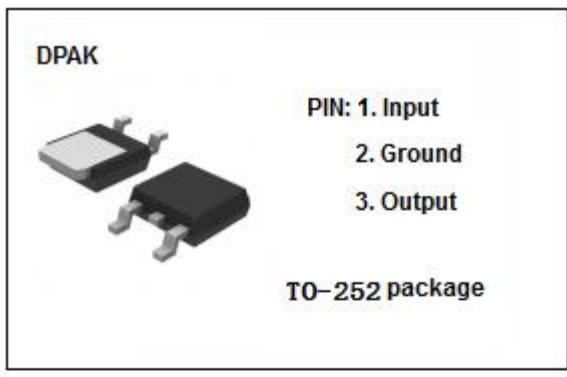

DIM	mm	
	MIN	MAX
A	6.40	6.60
B	5.20	5.40
C	1.15	1.35
D	5.70	6.10
F	0.65	
G	0.75	
H	2.10	2.50
J	2.10	2.40
K	0.40	0.60
L	0.90	1.10
Q	9.90	10.1

**isc Three Terminal Positive Voltage Regulator****BA17812FP****• ELECTRICAL CHARACTERISTICS** $T_j=25^\circ\text{C}$  ( $V_i=19\text{V}$ ,  $I_o=500\text{mA}$ ,  $C_i=0.33\text{\mu F}$ ,  $C_o=0.1\text{\mu F}$  unless otherwise specified)

SYMBOL	PARAMETER	CONDITIONS	MIN	MAX	UNIT
$V_o$	Output Voltage	$V_{in}=19\text{V}$ ; $I_o=500\text{mA}$	11.5	12.5	V
$V_o$	Output Voltage	$I_o=5\text{ mA}$ to $1\text{A}$ ; $V_{in}=15$ to $27\text{V}$ ;	11.4	12.6	V
$\Delta V_v$	Line Regulation	$14.5\text{V} \leq V_{in} \leq 30\text{V}; I_o=500\text{mA}$ $16\text{V} \leq V_{in} \leq 22\text{V}; I_o=500\text{mA}$		240 120	mV
$\Delta V_i$	Load Regulation	$5.0\text{mA} \leq I_o \leq 1\text{ A}$ $250\text{mA} \leq I_o \leq 750\text{mA}$		240 120	mV
$I_b$	Quiescent Current	$V_{in}=19\text{V}$ ; $I_o=0.5\text{A}$		8.0	mA
$\Delta b_1$	Quiescent Current Change	$5.0\text{mA} \leq I_o \leq 1.0\text{A}$		0.5	mA
$\Delta b_2$	Quiescent Current Change	$14.5\text{V} \leq V_{in} \leq 30\text{V}; I_o=500\text{mA}$		0.8	mA