Primary lithium battery system BA 5380

6 V Primary lithium manganese dioxide (Li-MnO₂) battery

The battery consists of 2 LM 33550 cells connected in series.

Key Features

- Á non-replaceable fuse is incorporated on the battery negative
- A normally closed thermal fuse (TCO) is incorporated in the battery. It is non-replaceable and non-resettable
- A blocking diode is incorporated to prevent charging
- A non-replaceable fuse is connected between the two cells for added safety
- A complete discharge device (CDD)
 with LED activation indicator is built
 into the battery. The CDD consists of
 a manually activated switch to connect
 a resistor for discharging the battery
 to 0 V
- Made in the U.S.A.

Typical applications

- AN/PSN-11 GPS
- AN/PSN-10 (V) GPS
- Chemical Agent Monitor




Electrical charachteristics	
Typical OCV	6.0 V
Nominal voltage (at 500 mA)	5.4 V
Cut-off	4.0 V
Typical capacity +21°C / +70°F	13 Ah
(at 250 mA discharge current)	
Operating temperature	-40°C to +71°C / -40°F to +160°F
Storage (Recommended max)	+35°C / +95°F
(Possilbe)	-40°C to +71°C / -40°F to +160°F
Physical characteristics	
Max weight	327 g / 11.5 oz
Weight of Li metal content	7.4 g / 0.26 oz
Max OD	35.51 mm / 1.398 in
Max height	128.5 mm / 5.059 in
Battery case	Plastic
References	
Reference specifications	MIL PRF 32271 or Saft standard specification
Nato Stock Number	6135-01-517-4954




BA 5380


BA 5380 dimensions *All measurements in inches







Electrical schematic



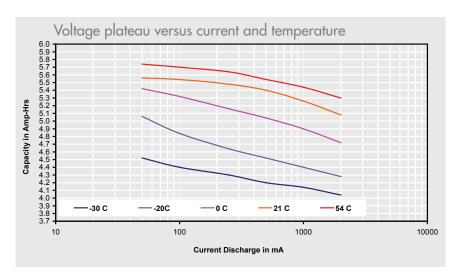

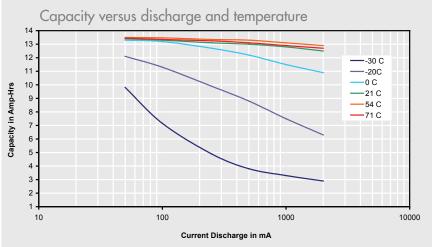

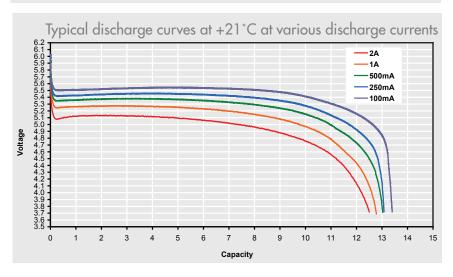



Specialty Battery Group 12, rue Sadi Carnot 93170 Bagnolet France Tel.: +33 (0)1 49 93 19 18 Fax: +33 (0)1 49 93 19 69 www.saftbatteries.com

Saft

Specialty Battery Group 313 Crescent St. Valdese, NC 28690 - USA Tel.: +1 (828) 874 4111

Fax: +1 (828) 874 3981 www.saftbatteries.com Doc N° 32036-2-0912 Edition: September 2012 Information in this document is subject to change without notice and becomes contractual only after written confirmation by Saft. Published by the Communications Department Photo