


Silicon Epitaxial Planar Switching Diode

Features

- Small SMD SOD-323F plastic package
- High switching speed: $t_{rr} \leq 4\text{ns}$
- Repetitive Peak Reverse Voltage: $V_{RRM} \leq 100\text{V}$
- Low leakage current
- Low capacitance
- Halogen and Antimony Free(HAF), RoHS compliant

PINNING

PIN	DESCRIPTION
1	Cathode
2	Anode

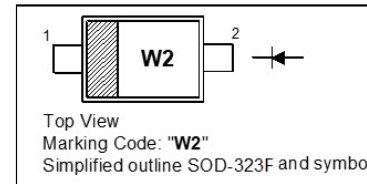

Applications

- High-speed switching
- General-purpose switching

Absolute Maximum Ratings ($T_a = 25^\circ\text{C}$)

Parameter	Symbol	Value	Unit
Reverse Voltage	V_R	75	V
Peak Reverse Voltage	V_{RM}	100	V
Forward Current (Continuous)	I_F	250	mA
Non-repetitive Peak Forward Surge Current	I_{FSM}	0.5 1 2	A
Power Dissipation	P_{tot}	200	mW
Junction Temperature	T_j	150	$^\circ\text{C}$
Storage Temperature Range	T_{stg}	- 65 to + 150	$^\circ\text{C}$

Characteristics at $T_a = 25^\circ\text{C}$

Parameter	Symbol	Max.	Unit
Forward Voltage at $I_F = 1\text{ mA}$ at $I_F = 10\text{ mA}$ at $I_F = 50\text{ mA}$ at $I_F = 150\text{ mA}$	V_F	0.715 0.855 1 1.25	V
Reverse Leakage Current at $V_R = 75\text{ V}$ at $V_R = 25\text{ V}$, $T_j = 150^\circ\text{C}$ at $V_R = 75\text{ V}$, $T_j = 150^\circ\text{C}$	I_R	1 30 50	μA
Diode Capacitance at $V_R = 0\text{ V}$, $f = 1\text{ MHz}$	C_{tot}	1.5	pF
Reverse Recovery Time at $I_F = 10\text{ mA}$, $V_R = 6\text{ V}$, $R_L = 100\ \Omega$, $I_{rr} = 0.1 \times I_R$	t_{rr}	4	ns

Electrical Characteristics Curves

Fig 1. Power Dissipation vs. Temperature

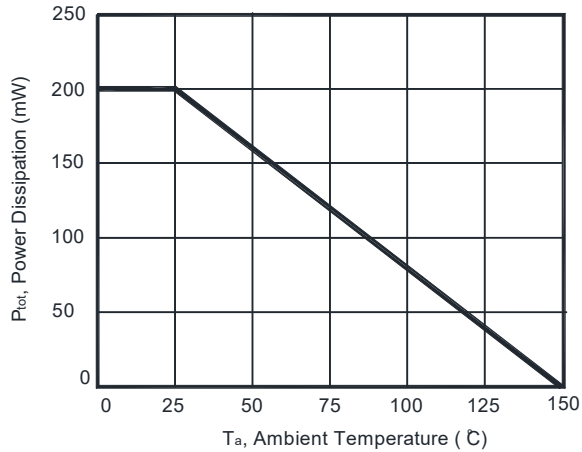


Fig 2. Total Capacitance vs. Reverse Voltage

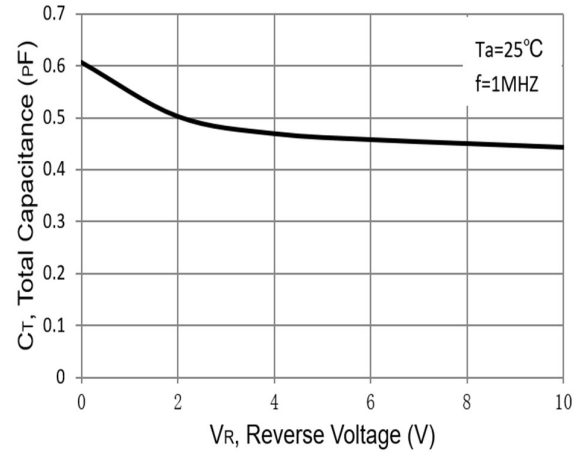


Fig 3. Reverse Current vs. Reverse Voltage


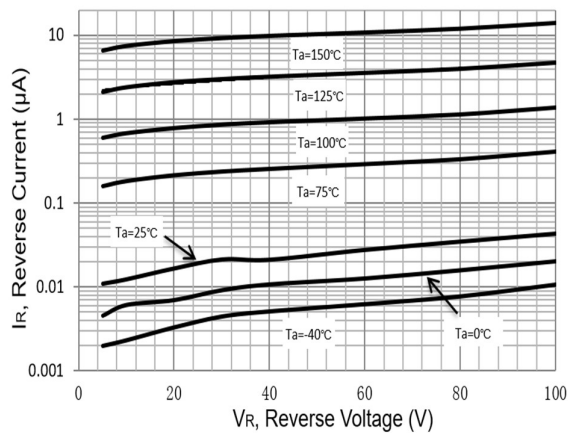



Fig 4. Forward Characteristics

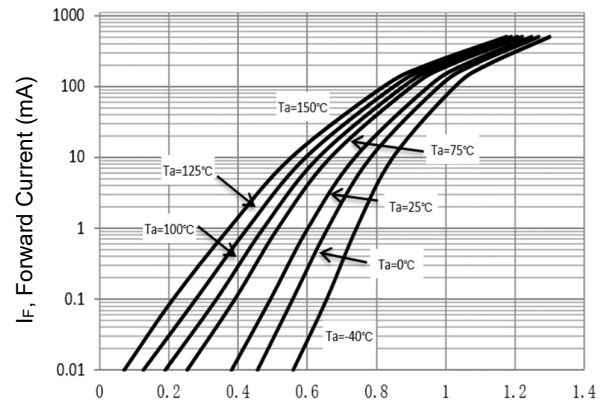

PACKAGE OUTLINE


Plastic surface mounted package; 2 leads

SOD-323F

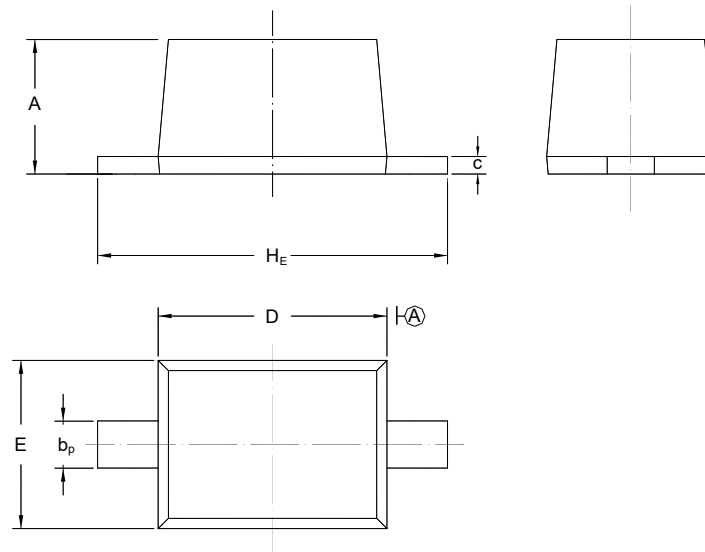

UNIT	A	b _p	C	D	E	H _E
mm	1.10 0.80	0.40 0.25	0.15 0.10	1.80 1.60	1.35 1.15	2.80 2.30

Recommended Soldering Footprint



Packing information

Package	Tape Width (mm)	Pitch		Reel Size		Per Reel Packing Quantity
		mm	inch	mm	inch	
SOD-323F	8	4 ± 0.1	0.157 ± 0.004	178	7	3,000

Marking information

" III " = Cathode line

" W2 " = Part No.

Font type: Arial

