



# BAT46W

## Surface Mount Schottky Barrier Diode



Voltage Range  
100 Volts  
200m Watts Power Dissipation


### Features

- ✧ High breakdown voltage
- ✧ Low turn-on voltage
- ✧ Guard ring construction for transient protection

### Mechanical Data

- ✧ Case: SOD-123, plastic
- ✧ Terminals: Solderable per MIL-STD-202, Method 208
- ✧ Polarity: Cathode band
- ✧ Marking: Date Code and Type Code or Date Code only  
Type Code: L6
- ✧ Weight: 0.01 grams (approx.)

### SOD-123

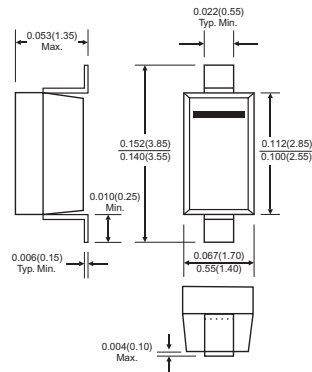

Dimensions in inches and (millimeters)

### Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified.

#### Maximum Ratings

Type Number	Symbol	BAT46W	Units
Peak Repetitive Reverse Voltage	$V_{RRM}$	100	V
Working Peak Reverse Voltage	$V_{RWM}$		
DC Blocking Voltage	$V_R$		
Average Rectified Forward Current	$I_o$	75	mA
Forward Continuous Current (Note 1)	$I_F$	150	mA
Repetitive Peak Forward Current (Note 1) @ $t_p < 1.0s$ , Duty Cycle $< 50\%$	$I_{FRM}$	350	mA
Forward Surge Current (Note 1) @ $t_p=10ms$	$I_{FSM}$	750	mA
Power Dissipation (Note 1)	$P_d$	200	mW
Operating and Storage Temperature Range	$T_J, T_{STG}$	-55 to + 125	°C

#### Electrical Characteristics

Type Number	Symbol	Min	Typ	Max	Units
Reverse Breakdown Voltage $I_R=100\mu A$ pulses	$V_{(BR)}$	100	—	—	V
Reverse Leakage Current (Note 2) $V_R=1.5V$ $V_R=1.5V$ $T_j=60^\circ C$ $V_R=10V$ $V_R=10V$ $T_j=60^\circ C$ $V_R=50V$ $V_R=50V$ $T_j=60^\circ C$ $V_R=75V$ $V_R=75V$ $T_j=60^\circ C$	$I_R$	—	—	0.5 5.0 0.8 7.5 2.0 15 5.0 20	$\mu A$
Forward Voltage (Note 2) $I_F=0.1mA$ $I_F=10mA$ $I_F=250mA$	$V_F$	—	—	0.25 0.45 1.00	V
Junction Capacitance $V_R=0V, f=1.0MHz$ $V_R=1.0V, f=1.0MHz$	$C_j$	—	10 6.0	—	pF
Thermal resistance, Junction to Ambient Air (Note 1)	$R_{\theta JA}$	—	—	500	K/W

Notes: 1. Valid Provided that Leads are Kept at Ambient Temperature.

2. Pulse Test: Pulse width = 300 $\mu s$ , Duty cycle  $\leq 2\%$ .