

BAV16W_1N4148W

FAST SWITCHING DIODES

Features

- Fast switching speed
- Surface mount package ideally suited for automatic insertion
- For general purpose switching applications
- High conductance
- RoHS compliant package

Mechanical Data

- Case: Molded plastic body
- Terminals: Plated leads solderable per MIL-STD-750, Method 2026

- Polarity: Polarity symbols marked on case

- Marking: T6, T4


Packing & Order Information

3,000/Reel




RoHS
COMPLIANT

SOD123

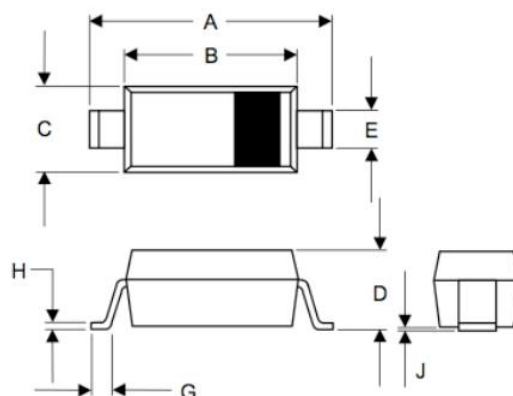

DIMENSIONS					NOTE
DIM	INCHES		MM		
	MIN	MAX	MIN	MAX	
A	.140	.152	3.55	3.85	
B	.100	.112	2.55	2.85	
C	.055	.071	1.40	1.80	
D	-----	.053	-----	1.35	
E	.012	.031	0.30	.78	
G	.006	-----	0.15	-----	
H	-----	.01	-----	.25	
J	-----	.006	-----	.15	

Graphic symbol



MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Maximum ratings and electrical characteristics, Single diode @TA=25°C

Symbol	Parameter	Limits	Unit
VRRM	Peak repetitive peak reverse voltage	75	V
VRWM	Working peak		
VR	DC Blocking voltage		
VR(RMS)	RMS Reverse voltage	53	V
IFM	Forward continuous current	300	mA
IO	Average rectified output current	150	mA
IFSM	Peak forward current @=1.0us @=1.0s	2.0 1.0	A
Pd	Power dissipation	400	mW

BAV16W_1N4148W

FAST SWITCHING DIODES

Maximum ratings and electrical characteristics, Single diode @TA=25°C

Symbol	Parameter	Limits	Unit
R θ JA	Thermal resistance junction to ambient	315	K/W
Tj	Junction temperature	125	°C
TSTG	Storage temperature	-65 to +150	°C
VRM	Non-Repetitive peak reverse voltage	100	V


Electrical ratings @TA=25°C

Symbol	Parameter	Test Conditions	Min	Typ.	Max.	Units
VF1	Forward voltage	IF=1.0mA			0.715	V
VF2		IF=10mA			0.855	V
VF3		IF=50mA			1.0	V
VF4		IF=150mA			1.25	V
IR1	Reverse current	VR=75V			1	uA
IR2		VR=20V			25	nA
CT	Capacitance between terminals	VR=0V,f=1.0MHz			2	pF
Trr	Reverse recovery time	IF=IR=10mA Irr=0.1XIR,RL=100Ω			4	ns

BAV16W_1N4148W

FAST SWITCHING DIODES

■ RATINGS AND CHARACTERISTIC CURVES BAV16W/1N4148W

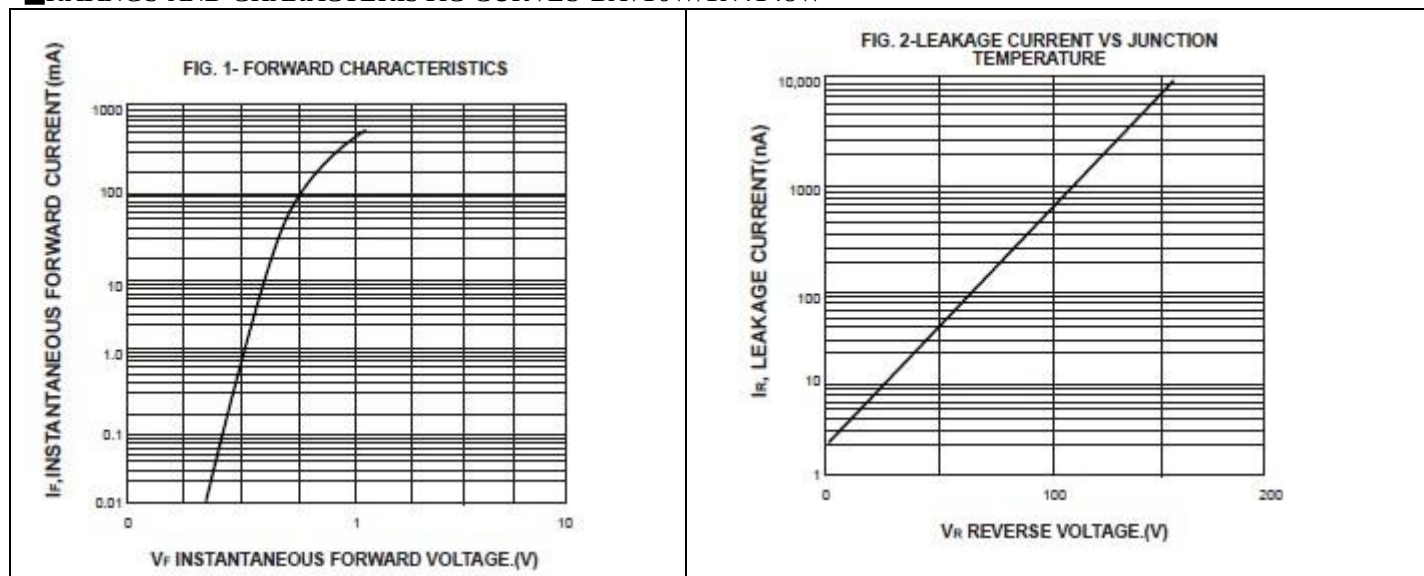

BAV16W_1N4148W

FAST SWITCHING DIODES

Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Bruckewell Technology Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Bruckewell"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product. Bruckewell makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Bruckewell disclaims

- (i) Any and all liability arising out of the application or use of any product.
- (ii) Any and all liability, including without limitation special, consequential or incidental damages.
- (iii) Any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Bruckewell's knowledge of typical requirements that are often placed on Bruckewell products in generic applications.

Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time.

Product specifications do not expand or otherwise modify Bruckewell's terms and conditions of purchase, including but not limited to the warranty expressed therein.