



# BAV199W

DIODE

## DUAL SURFACE MOUNT LOW LEAKAGE DIODE


### DESCRIPTION

The UTC **BAV199W** is a dual surface mount diode providing the designers with extremely low leakage current.

The UTC **BAV199W** is suitable for automatic insertion.

### FEATURES

- \* Extremely Low Leakage Current

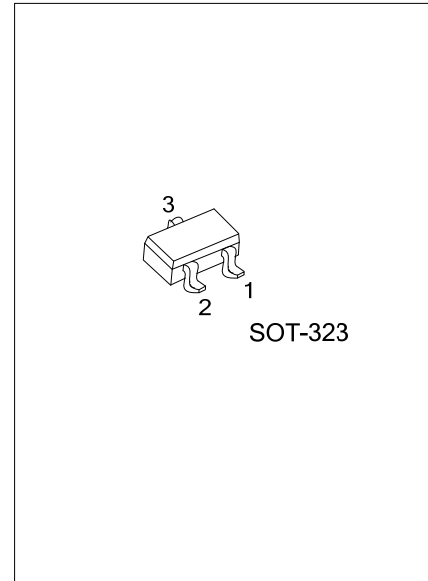


### ORDERING INFORMATION

Ordering Number	Package	Pin Assignment			Packing
		1	2	3	
BAV199WG-AL3-R	SOT-323	K1	A2	A1K2	Tape Reel

Note: Pin Assignment: A: Anode K: Cathode

<p>BAV199WG-AL3-R</p> <p>(1) Packing Type (2) Package Type (3) Green Package</p>	<p>(1) R: Tape Reel (2) AL3 : SOT-323 (3) G: Halogen Free and Lead Free</p>
------------------------------------------------------------------------------------------	-------------------------------------------------------------------------------------

### MARKING



■ ABSOLUTE MAXIMUM RATINGS ( $T_A = 25^\circ\text{C}$ , unless otherwise specified)

PARAMETER	SYMBOL	RATINGS	UNIT
Peak Repetitive Reverse Voltage	$V_{RRM}$	85	V
Working Peak Reverse Voltage	$V_{RWM}$	85	V
DC Blocking Voltage	$V_R$	85	V
RMS Reverse Voltage	$V_{R(RMS)}$	60	V
Forward Continuous Current	Single diode	160	mA
	Double diode	140	
Repetitive Peak Forward Current	$I_{FRM}$	500	mA
Non-Repetitive Peak Forward Surge Current	@ $t = 1.0\mu\text{s}$	4.0	A
	@ $t = 1.0\text{ms}$	1.0	
	@ $t = 1.0\text{s}$	0.5	
Power Dissipation (Note 2)	$P_D$	250	mW
Junction Temperature	$T_J$	-65~+150	$^\circ\text{C}$
Storage Temperature	$T_{STG}$	-65~+150	$^\circ\text{C}$

Notes: 1. Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

2. Part mounted on FR-4 PC board with recommended pad layout.

■ THERMAL DATA

PARAMETER	SYMBOL	RATINGS	UNIT
Junction to Ambient (Note 2)	$\theta_{JA}$	500	$^\circ\text{C/W}$

■ ELECTRICAL CHARACTERISTICS ( $T_A = 25^\circ\text{C}$ , unless otherwise specified.)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Reverse Breakdown Voltage (Note)	$V_{(BR)R}$	$I_R = 100\mu\text{A}$	85			V
Forward Voltage (Note)	$V_F$	$I_F = 1.0\text{mA}$			0.90	V
		$I_F = 10\text{mA}$			1.0	
		$I_F = 50\text{mA}$			1.1	
		$I_F = 150\text{mA}$			1.25	
Leakage Current (Note)	$I_R$	$V_R = 75\text{V}$			5.0	nA
		$V_R = 75\text{V}, T_J = 150^\circ\text{C}$			80	
Total Capacitance	$C_T$	$V_R = 0, f = 1.0\text{MHz}$		2		pF
Reverse Recovery Time	$t_{rr}$	$I_F = I_R = 10\text{mA}, I_{rr} = 0.1 \times I_R, R_L = 100\Omega$			3.0	$\mu\text{s}$

Note: Short duration test pulse to minimize self-heating effect.

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.