



BAV23 / SE / CC / CA

Silicon Epitaxial Planar Diodes

High voltage switching diode

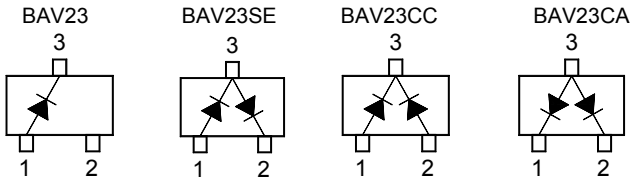


BAV23 Marking Code: **HC**
 BAV23SE Marking Code: **PY**
 BAV23CC Marking Code: **PZ**
 BAV23CA Marking Code: **RA**
 TO-236 Plastic Package

Absolute Maximum Ratings ($T_a = 25^\circ\text{C}$)

Parameter	Symbol	Value	Unit
Maximum Repetitive Reverse Voltage	V_{RRM}	250	V
Reverse Voltage	V_R	200	V
Forward Current	$I_{F(AV)}$	400	mA
Repetitive Peak Forward Current	I_{FRM}	625	mA
Non-repetitive Peak Forward Surge Current	I_{FSM}	1.7 3 9	A
		at $t = 10\text{ ms}$ at $t = 100\ \mu\text{s}$ at $t = 1\ \mu\text{s}$	
Power Dissipation	P_{tot}	350	mW
Thermal Resistance Junction to Ambient Air	$R_{\theta JA}$	357	$^\circ\text{C/W}$
Operating Junction and Storage Temperature Range	T_j, T_{stg}	- 65 to + 150	$^\circ\text{C}$

Characteristics at $T_a = 25^\circ$

Parameter	Symbol	Min.	Max.	Unit
Reverse Breakdown Voltage at $I_R = 100\ \mu\text{A}$	$V_{(BR)R}$	250	-	V
Forward Voltage at $I_F = 100\text{ mA}$ at $I_F = 200\text{ mA}$	V_F	- -	1 1.25	V
Reverse Current at $V_R = 200\text{ V}, T_j = 25^\circ\text{C}$ at $V_R = 200\text{ V}, T_j = 150^\circ\text{C}$	I_R	- -	100 100	nA μA
Total Capacitance at $V_R = 0\text{ V}, f = 1\text{ MHz}$	C_{tot}	-	5	pF
Reverse Recovery Time at $I_F = I_R = 30\text{ mA}, I_{rr} = 0.1 \times I_R, R_L = 100\ \Omega$	t_{rr}	-	50	ns



SEMTECH ELECTRONICS LTD.



ISO/TS 16949:2008
Certificate No. 160713000



ISO 14001:2004
Certificate No. 7116



ISO 9001:2008
Certificate No. 50719410



BS-OHSAS 18001:2007
Certificate No. 7116



IECQ QC 080000
Certificate No. PRC-HSPM-1465-1

Dated : 16/03/2015 Rev:01

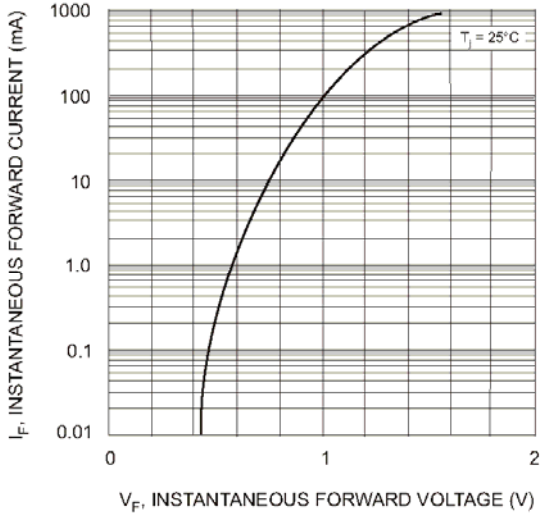


Fig. 1 Forward Characteristics


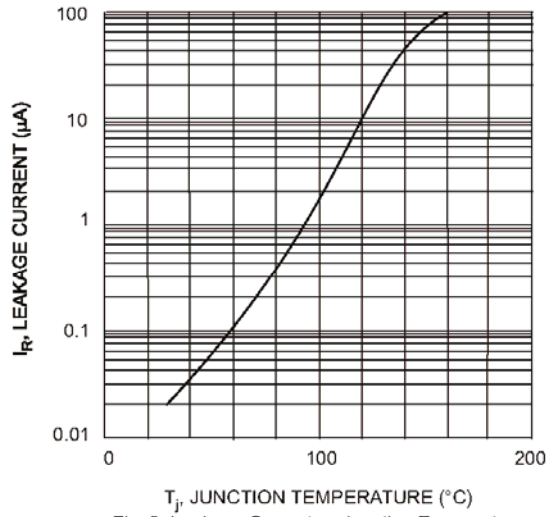


Fig. 2 Leakage Current vs Junction Temperature



SEMTECH ELECTRONICS LTD.



ISO/TS 16949 : 2008
Certificate No. 160713000



ISO14001 : 2004
Certificate No. 7116



ISO 9001 : 2008
Certificate No. 50719410



BS-OHSAS 18001 : 2007
Certificate No. 7116



IECQ QC 080000
Certificate No. PRC-HSPM-1483