

Micro Commercial Components


Micro Commercial Components 20736 Marilla Street Chatsworth CA 91311

Phone: (818) 701-4933 Fax: (818) 701-4939

BAV99WT

Features

- Low Current Leakage
- Low Cost
- Small Outline Surface Mount Package
- Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0



Maximum Ratings


Operating Temperature: -55°C to +150°C
 Storage Temperature: -55°C to +150°C


Electrical Characteristics @ 25°C Unless Otherwise Specified

			mer wise epecimed
Reverse Voltage	V_R	75V	
Average Rectified	Ιο	150mA	
Output Current			
Power Dissipation	P _{TOT}	200mW	
Maximum Instantaneous Forward Voltage	V_{F}	715mV 855mV 1000mV 1250mV	$I_{FM} = 1mA;$ $I_{FM} = 10mA;$ $I_{FM} = 50mA;$ $I_{FM} = 150mA;$
Maximum DC Reverse Current At Rated DC Blocking Voltage	I _R	2.5μΑ	V_R =75Volts T_J = 25°C
Typical Junction Capacitance	CJ	2.0pF	Measured at 1.0MHz, V _R =0V
Reverse Recovery Time	T _{rr}	4nS	$I_F=10mA$ $V_R = 0V$ $R_L=100\Omega$


^{*}Pulse test: Pulse width 300 µsec, Duty cycle 2%

200mW 75Volt Plastic-Encapsulate Diode







DIMENSIONS							
	INCHES		ММ				
DIM	MIN	MAX	MIN	MAX	NOTE		
Α	.071	.087	1.80	2.20			
В	.045	.053	1.15	1.35			
С	.079	.087	2.00	2.20			
D	.026 Nominal		0.65Nominal				
Е	.047	.055	1.20	1.40			
F	.012	.016	.30	.40			
G	.000	.004	.000	.100			
Ι	.035	.039	.90	1.00			
J	.004	.010	.100	.250			
K	.012	.016	.30	.40			



BAV99WT



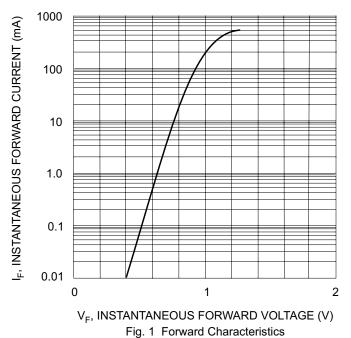



T_j, JUNCTION TEMPERATURE (°C) Fig. 2 Leakage Current vs Junction Temperature



IMPORTANT NOTICE

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes.
Micro Commercial Components Corp. does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold Micro Commercial Components Corp. and all the companies whose products are represented on our website, harmless against all damages.

APPLICATIONS DISCLAIMER

Products offer by *Micro Commercial Components Corp* . are not intended for use in Medical,

Aerospace or Military Applications.