

DATA SHEET

BAS116W/BAW156W/BAV170W/BAV199W

SURFACE MOUNT, LOW LEAKAGE SWITCHING DIODES

VOLTAGE 100 Volts

POWER 200mWatts

SOT-323


Unit: inch (mm)

FEATURES

- Surface mount package ideally suited for automatic insertion.
- Very low leakage current. 2pA typical at VR=75V.
- Low capacitance. 4pF max at VR=0V, f=1MHz
- In compliance with EU RoHS 2002/95/EC directives

MECHANICAL DATA

- Case: SOT-323 plastic
- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx weight: 0.0052 gram
- Marking: BAS116W :PA,BAW156W :P4,BAV170W :P3,BAV199W :PB

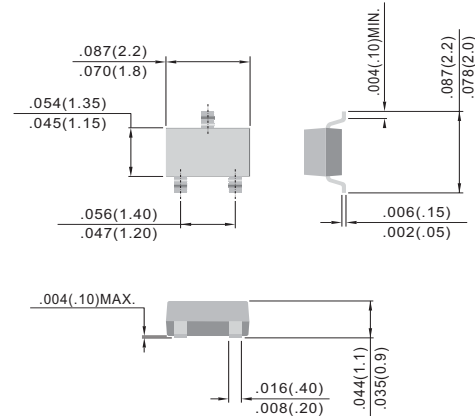

ABSOLUTE RATINGS (each diode)


PARAMETER	Sym bol	Value	Units
Reverse Voltage	V_R	75	V
Peak Reverse Voltage	V_{RM}	100	V
Continuous Forward Current	I_F	0.2	A
Non-repetitive Peak Forward Surge Current at $t \leq 1.0\mu s$	I_{FSM}	4.0	A

THERMAL CHARACTERISTICS

PARAMETER	Sym bol	Value	Units
Power Dissipation (Note 1)	P_{TOT}	200	mW
Thermal Resistance, Junction to Ambient (Note 1)	$R_{\theta JA}$	625	$^{\circ}C/W$
Junction Temperature	T_J	-55 to 150	$^{\circ}C$
Storage Temperature	T_{STG}	-55 to 150	$^{\circ}C$

NOTE:

1. FR-4 Board = 70 x 60 x 1mm.

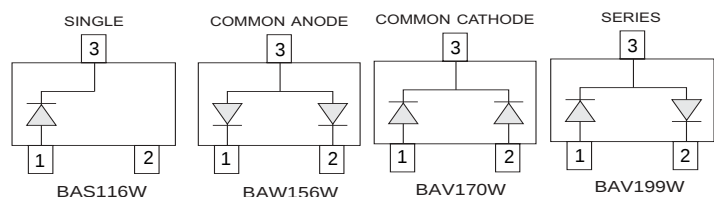

ELECTRICAL CHARACTERISTICS (each diode) (TA=25°C, unless otherwise noted)

PARAMETER	Sym bol	Test Condition	M I N .	TYP .	M A X .	U nits
Reverse Breakdown Voltage	$V_{(BR)}$	$I_R=100 \mu A$	75			V
Reverse Current	I_R	$V_R=75 V, T_J=150 ^\circ C$		0.002 8.0	5 80	nA
Forward Voltage	V_F	$I_F=1m A$ $I_F=10m A$ $I_F=50m A$ $I_F=150m A$			0.9 1.0 1.1 1.25	V
Total Capacitance	C_T	$V_R=0 V, f=1MHz$			2.0	pF
Reverse Recovery Time	T_{RR}	$I_F=I_R=10m A, R_L=100\Omega$			3.0	us

CHARACTERISTIC CURVES (each diode)

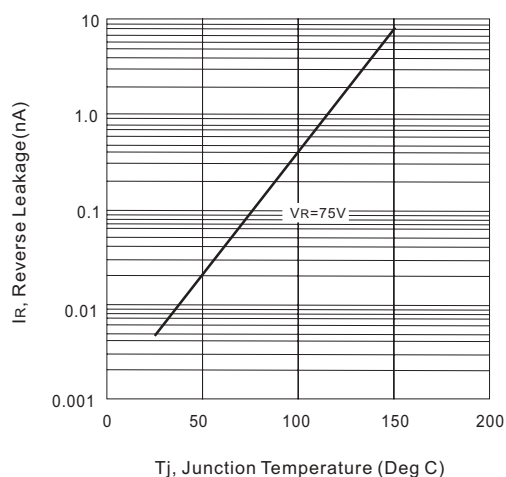


Fig. 1-Reverse Leakage vs. Junction Temperature

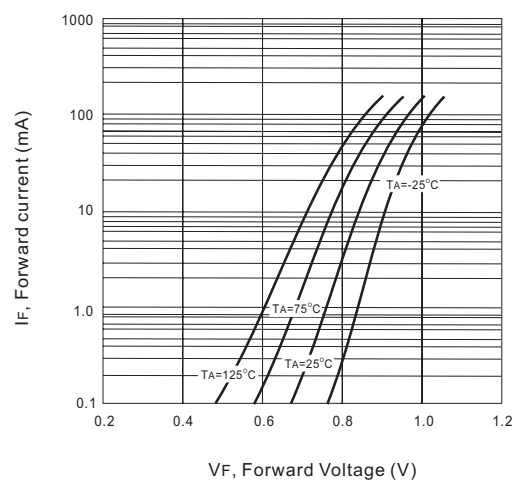


Fig. 2-Forward Current vs. Forward Voltage


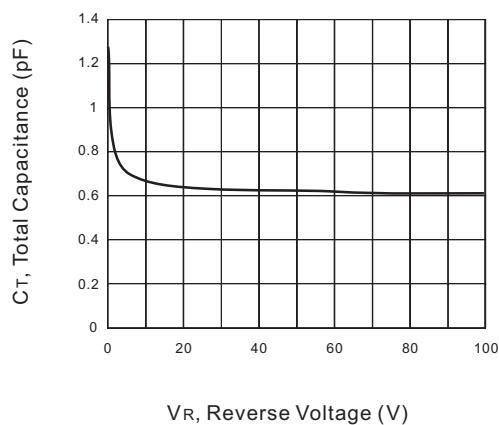


Fig. 3- Total capacitance vs. Reverse Voltage

MOUNTING PAD LAYOUT

SOT-323

Unit: inch (mm)

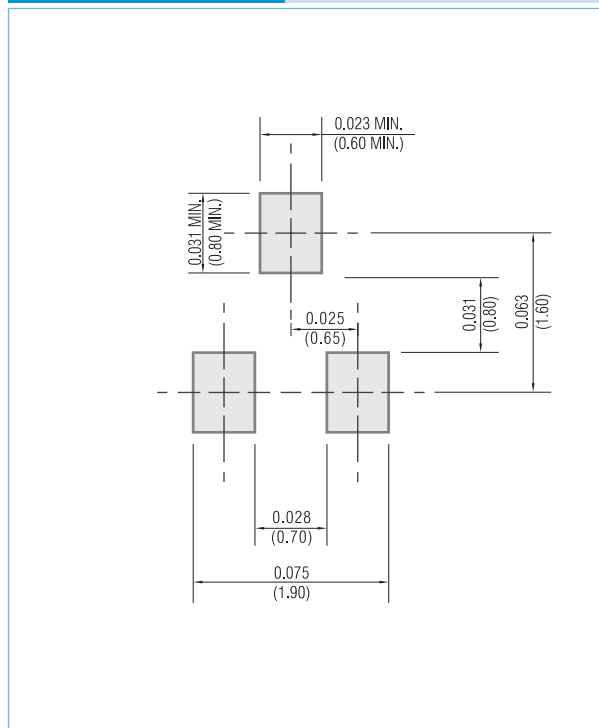

ORDER INFORMATION

- Packing information

T/R - 12K per 13" plastic Reel

T/R - 3K per 7" plastic Reel

LEGAL STATEMENT

Copyright PanJit International, Inc 2009

The information presented in this document is believed to be accurate and reliable. The specifications and information herein are subject to change without notice. Pan Jit makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose. Pan Jit products are not authorized for use in life support devices or systems. Pan Jit does not convey any license under its patent rights or rights of others.