


# BC2004A20c



## Feature

1. COB with metal frame
2. 5x7 dots with cursor
3. Built-in controller Philips PCF 2116
4. + 5V single power supply
5. 1/16 duty cycle
6. I<sup>2</sup>C interface
7. Option: LED,EL backlight

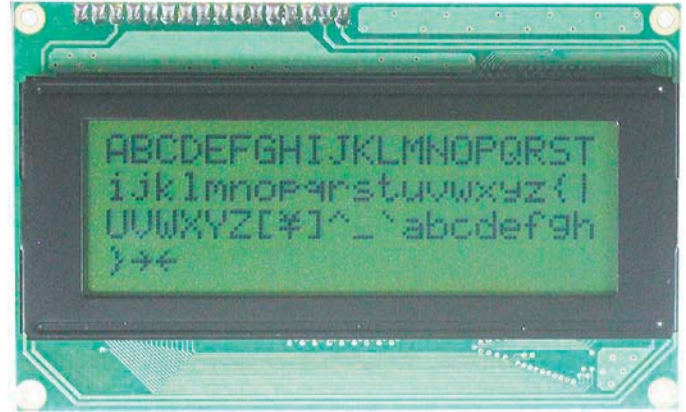

## Mechanical Data

Item	Standard Value	Unit
Module Dimension	116.0 x 37.0	mm
Viewing Area	85.0 x 18.6	mm
Dot Size	0.60 x 0.65	mm
Character Size	2.95 x 4.75	mm

## Pin Assignment RS232

Pin	Symbol	Function
1	5V	Data out from LCM
2	I <sup>2</sup> C Clock	I <sup>2</sup> C interface clock input
3	I <sup>2</sup> C Data	I <sup>2</sup> C interface data input
4	GND	GND for LCM

## Electronic Characteristics

Item	Symbol	Condition	Typical Value	Unit
Input Voltage	Vdd	Vdd = +5V	5.0	V
Supply Current	Idd	Vdd = +5V	20.0	mA
LCD Driving Voltage	Vdd-Vo	25°C	5.0	V
LED Forward Voltage	Vf	25°C	4.3	V
LED Forward Current	If	25°C	210	mA
EL Power Voltage	Vel	Vel=110Vac/400Hz		V

## Dimension

