

MICRO ELECTRONICS

BC107,8,9
BC167,8,9
BC237,8,9
BC317,8,9

THE ABOVE TYPES ARE NPN SILICON PLANAR EPITAXIAL TRANSISTORS FOR USE IN AF SMALL SIGNAL AMPLIFIER STAGES AND DIRECT COUPLED CIRCUITS.

BC107, 8, 9 are complementary to BC177, 8, 9.

BC167, 8, 9 are complementary to BC257, 8, 9.

BC237, 8, 9 are complementary to BC307, 8, 9.

BC317, 8, 9 are complementary to BC320, 1, 2.

CASE

TO-18



CBE

BC107,8,9

TO-92B



ECB

BC167,8,9

TO-92F



CEB

BC237,8,9

TO-92A



EBC

BC317,8,9

ABSOLUTE MAXIMUM RATINGS

TYPE	V _{CEO} (V)	V _{CES} (V)	V _{CE0} (V)	V _{EB0} (V)	I _C (DC) (mA)	P _{tot} (mW) *	T _j , T _{stg}
BC107	50	50	45	6	100	300	-55 to 175°C
BC108	30	30	20	5	100	300	
BC109	30	30	20	5	100	300	
BC167	50	50	45	6	100	300	-55 to 150°C
BC168	30	30	20	5	100	300	
BC169	30	30	20	5	100	300	
BC237	50	50	45	6	100	300	-55 to 150°C
BC238	30	30	20	5	100	300	
BC239	30	30	20	5	100	300	
BC317	50		45	6	150	310	-55 to 150°C
BC318	45		30	5	150	310	
BC319	30		20	5	150	310	

* Total Power Dissipation @ T_A ≤ 25°C



MICRO ELECTRONICS LTD.

38, Hung To Road, Microtron Bldg, Kwun Tong, Kowloon, Hong Kong.

Kwun Tong P.O. Box 69477 Hong Kong. Fax No. 2341 0321 Telex:43510 Micro Hx. Tel: 2343 0181-5

Feb-97

ELECTRICAL CHARACTERISTICS ($T_A=25^{\circ}\text{C}$ unless otherwise noted)

PARAMETER	SYMBOL	MIN	TYP	MAX	UNIT	TEST CONDITIONS
Collector-Base Breakdown Voltage	BVCBO	↑ Note 1 ↓			V	$I_C=10\mu\text{A}$ $I_E=0$
Collector-Emitter Breakdown Voltage	LVCEO *				V	$I_C=2\text{mA}$ $I_B=0$
Emitter-Base Breakdown Voltage	BVEBO				V	$I_E=1\mu\text{A}$ $I_C=0$
Collector Cutoff Current BC107, 108, 109 } only BC167, 168, 169 } BC237, 238, 239 }	ICES			15 4	nA μA	$V_{CE}=V_{CES}$ $V_{BE}=0$ $V_{CE}=V_{CES}$ $V_{BE}=0$ $T_A=125^{\circ}\text{C}$
Collector Cutoff Current BC317, 318, 319 only	ICBO			30 15	nA μA	$V_{CB}=20\text{V}$ $I_E=0$ $V_{CB}=20\text{V}$ $I_E=0$ $T_A=100^{\circ}\text{C}$
Collector-Emitter Saturation Voltage BC107, 108, 109 } only BC167, 168, 169 } BC237, 238, 239 }	$V_{CE}(\text{sat})^*$		0.07	0.25	V	$I_C=10\text{mA}$ $I_B=0.5\text{mA}$
			0.22	0.6	V	$I_C=100\text{mA}$ $I_B=5\text{mA}$
BC317, 318, 319 only	$V_{CE}(\text{sat})^*$		0.07	0.2	V	$I_C=10\text{mA}$ $I_B=0.5\text{mA}$
			0.2	0.5	V	$I_C=100\text{mA}$ $I_B=5\text{mA}$
Base-Emitter Saturation Voltage BC107, 108, 109 } only BC167, 168, 169 } BC237, 238, 239 }	$V_{BE}(\text{sat})^*$		0.7	0.83	V	$I_C=10\text{mA}$ $I_B=0.5\text{mA}$
			0.9	1.05	V	$I_C=100\text{mA}$ $I_B=5\text{mA}$
Base-Emitter Voltage All types	V_{BE}^*	0.55	0.63	0.7	V	$I_C=2\text{mA}$ $V_{CE}=5\text{V}$
BC317, 318, 319 only			0.68	0.77	V	$I_C=10\text{mA}$ $V_{CE}=5\text{V}$
Current Gain-Bandwidth Product BC107, 108, 109 } only BC167, 168, 169 } BC237, 238, 239 }	f_T		150	250	MHz	$I_C=10\text{mA}$ $V_{CE}=5\text{V}$
Collector-Base Capacitance BC107, 108, 109	Cob		3.2	6.0	pF	$V_{CB}=10\text{V}$ $I_E=0$ $f=1\text{MHz}$
BC167, 168, 169			2.7	4.5	pF	
BC237, 238, 239			2.7	4.5	pF	
BC317, 318, 319			2.7	4.0	pF	
Noise Figure BC107, 108	NF		2	10	dB	$I_C=0.2\text{mA}$ $V_{CE}=5\text{V}$ $R_G=2\text{K}\Omega$ $f=1\text{kHz}$ $\Delta f=200\text{Hz}$
BC167, 168			2	10	dB	
BC237, 238			2	10	dB	
BC317, 318			2	6	dB	

* Pulse Test : Pulse Width=0.3ms, Duty Cycle=1%

Note 1 : equal to the value of absolute maximum ratings.

- - - Continued - - -

PARAMETER	SYMBOL	MIN	TYP	MAX	UNIT	TEST CONDITIONS
Noise Figure	NF		1.5	4	dB	I _C =0.2mA V _{CE} =5V R _G =2KΩ f=1kHz Δf=200Hz
			1.2	4		

D.C. CURRENT GAIN (H_{FE}) @ V_{CE}=5V T_A=25°C


at I _C (Pulsed)	H _{FE} GROUP A			H _{FE} GROUP B			H _{FE} GROUP C		
	MIN	TYP	MAX	MIN	TYP	MAX	MIN	TYP	MAX
0.01mA	40	90		40	170		100	290	
2mA	110	170	220	200	300	450	420	520	800
100mA		100			160			270	

h-PARAMETERS @ I_C=2mA V_{CE}=5V f=1kHz T_A=25°C


h - PARAMETER	SYMBOL	H _{FE} GROUP A			H _{FE} GROUP B			H _{FE} GROUP C			UNIT
		MIN	TYP	MAX	MIN	TYP	MAX	MIN	TYP	MAX	
Input Impedance	h _{ie}	1.6	2.7	4.5	3.2	4.5	8.5	6	8.7	15	KΩ
Voltage Feedback Ratio	h _{re}		1.5			2			3		x10 ⁻⁴
Small Signal Current Gain	h _{fe}	125	190	260	240	330	500	450	580	900	
Output Admittance	h _{oe}		18	30		30	60		60	110	μS

TYPICAL CHARACTERISTICS AT T_A=25°C (Pulse Test)

D.C. CURRENT GAIN
vs COLLECTOR CURRENT

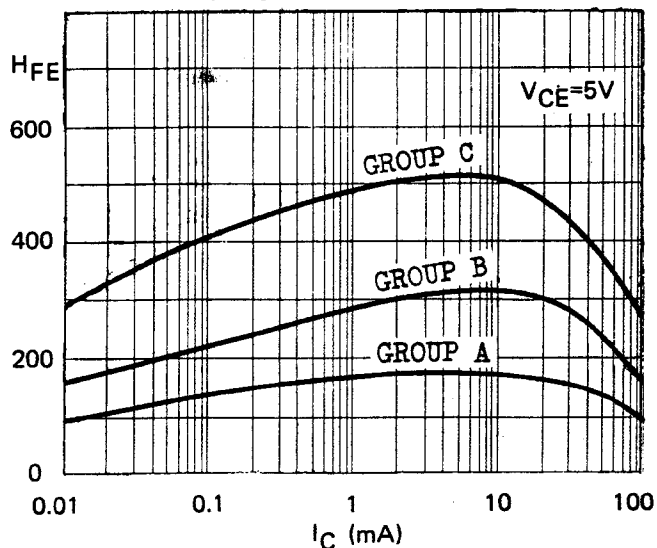


V_{BE} AND V_{CE(sat)}
vs COLLECTOR CURRENT

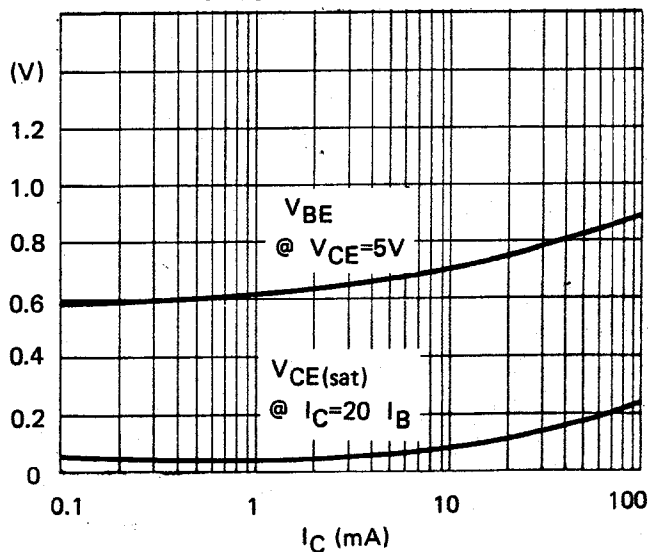


BC107 family
 TYPICAL CHARACTERISTICS ($T_A=25^\circ\text{C}$ UNLESS OTHERWISE SPECIFIED)


COMMON EMITTER
 OUTPUT CHARACTERISTICS

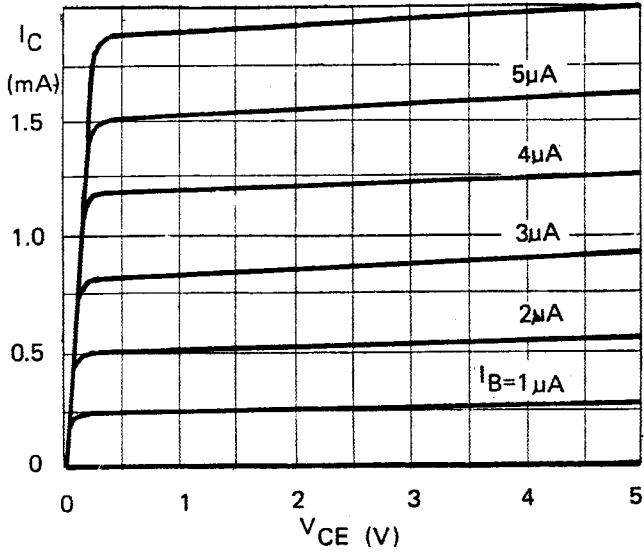


CURRENT GAIN - BANDWIDTH PRODUCT
 vs COLLECTOR CURRENT

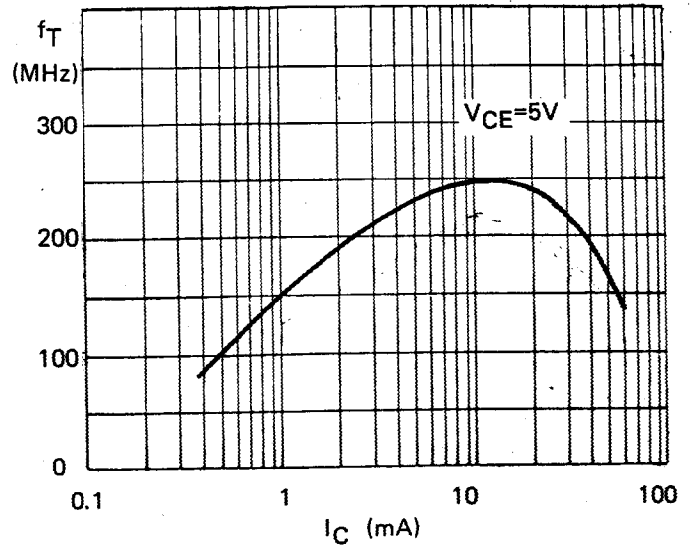


COLLECTOR CUTOFF CURRENT
 vs AMBIENT TEMPERATURE

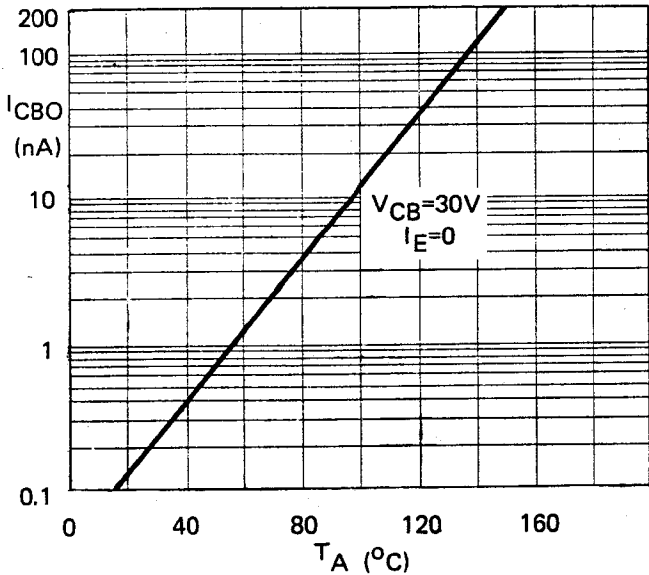

h-PARAMETERS (NORMALIZED)
 vs COLLECTOR CURRENT

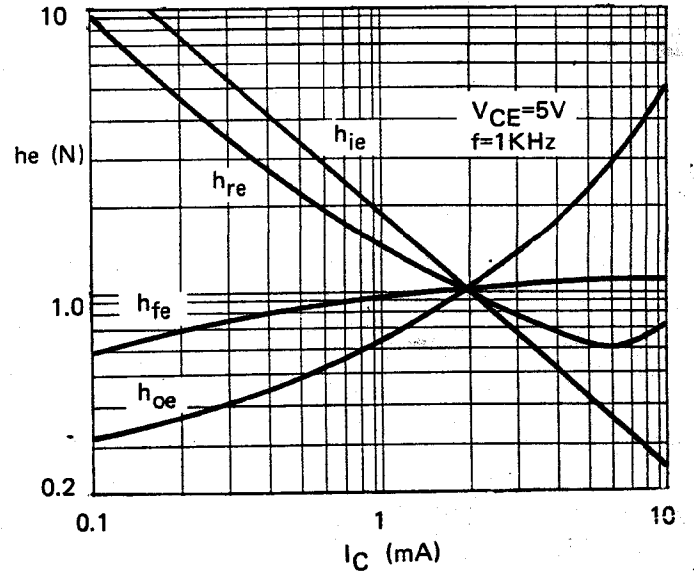

COLLECTOR-BASE CAPACITANCE
 vs COLLECTOR-BASE VOLTAGE

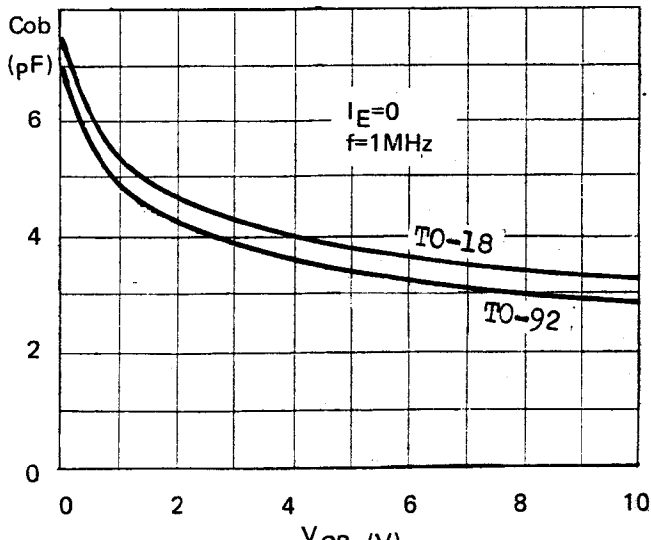

BROAD BAND NOISE FIGURE
 vs COLLECTOR CURRENT

