


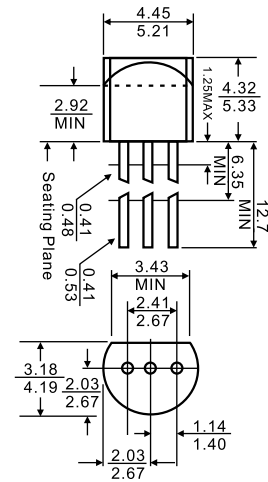

1. COLLECTOR
2. BASE
3. EMITTER

**TO-92**


Dimensions in inches and (millimeters)

**Features**

- ◇ Power dissipation

**MAXIMUM RATINGS ( $T_A=25^{\circ}\text{C}$  unless otherwise noted)**

Symbol	Parameter	Value	Units
$V_{CBO}$	Collector-Base Voltage <b>BC337</b>	50	V
	<b>BC338</b>	30	
$V_{CEO}$	Collector-Emitter Voltage <b>BC337</b>	45	V
	<b>BC338</b>	25	
$V_{EBO}$	Emitter-Base Voltage	5	V
$I_C$	Collector Current -Continuous	800	mA
$P_D$	Total Device Dissipation	625	mW
$T_j$	Junction Temperature	150	$^{\circ}\text{C}$
$T_{stg}$	Storage Temperature	-55-150	$^{\circ}\text{C}$

**ELECTRICAL CHARACTERISTICS ( $T_{amb}=25^{\circ}\text{C}$  unless otherwise specified)**

Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT
<b>Collector-base breakdown voltage</b>	$V_{CBO}$	$I_C=100\mu\text{A}, I_E=0$	50			V
			30			V
<b>Collector-emitter breakdown voltage</b>	$V_{CEO}$	$I_C=10\text{mA}, I_B=0$	45			V
			25			V
<b>Emitter-base breakdown voltage</b>	$V_{EBO}$	$I_E=10\mu\text{A}, I_C=0$	5			V
<b>Collector cut-off current</b>	$I_{CBO}$	$V_{CB}=45\text{V}, I_E=0$ $V_{CB}=25\text{V}, I_E=0$			0.1	$\mu\text{A}$
					0.1	
<b>Collector cut-off current</b>	$I_{CEO}$	$V_{CE}=40\text{V}, I_B=0$ $V_{CE}=20\text{V}, I_B=0$			0.2	$\mu\text{A}$
					0.2	
<b>Emitter cut-off current</b>	$I_{EBO}$	$V_{EB}=4\text{V}, I_C=0$			0.1	$\mu\text{A}$
<b>DC current gain</b>	$h_{FE(1)}$	$V_{CE}=1\text{V}, I_C=100\text{mA}$	100		630	
			100		250	
			160		400	
			250		630	
<b>DC current gain</b>	$h_{FE(2)}$	$V_{CE}=1\text{V}, I_C=300\text{mA}$	60			
<b>Collector-emitter saturation voltage</b>	$V_{CE(sat)}$	$I_C=500\text{mA}, I_B=50\text{mA}$			0.7	V
<b>Base-emitter saturation voltage</b>	$V_{BE(sat)}$	$I_C=500\text{mA}, I_B=50\text{mA}$			1.2	V
<b>Base-emitter voltage</b>	$V_{BE}$	$V_{CE}=1\text{V}, I_C=300\text{mA}$			1.2	V
<b>Transition frequency</b>	$f_T$	$V_{CE}=5\text{V}, I_C=10\text{mA}$ $f=100\text{MHz}$	210			MHz
<b>Collector Output Capacitance</b>	$C_{ob}$	$V_{CB}=10\text{V}, I_E=0$ $f=1\text{MHz}$		15		pF

## Typical Characteristics

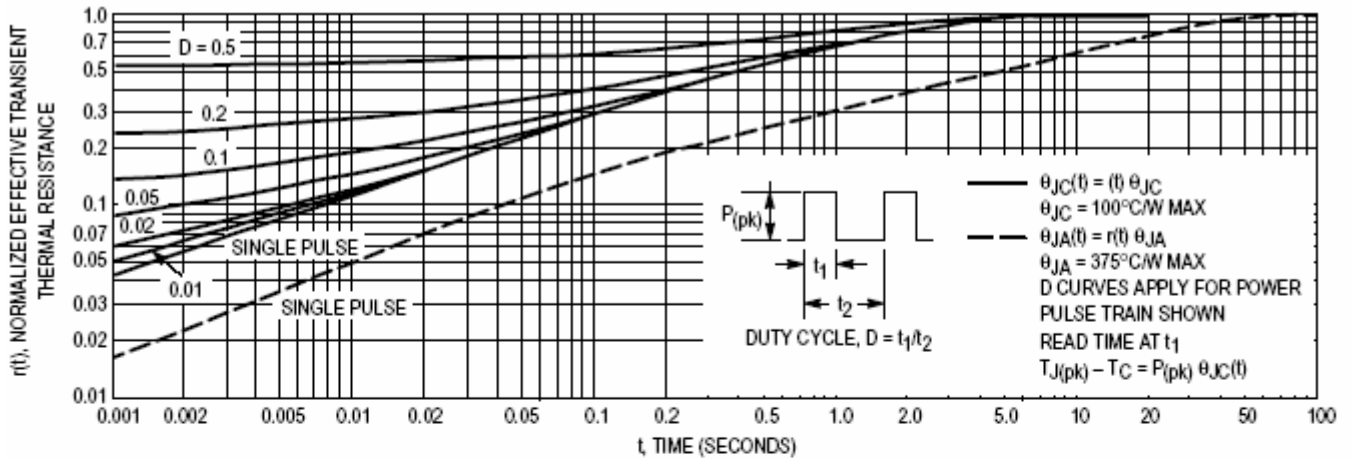


Figure 1. Thermal Response

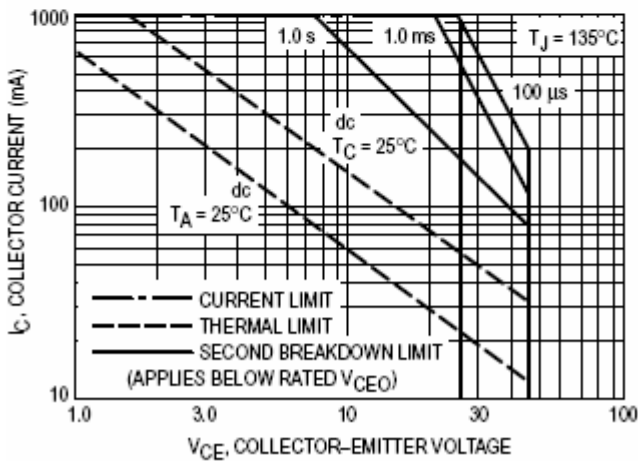


Figure 2. Active Region — Safe Operating Area

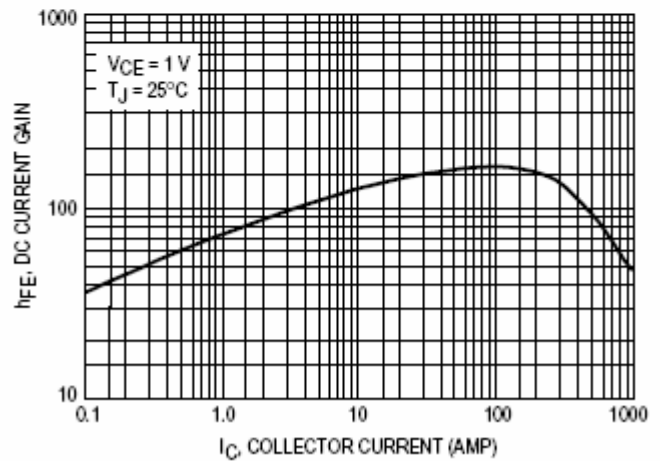


Figure 3. DC Current Gain

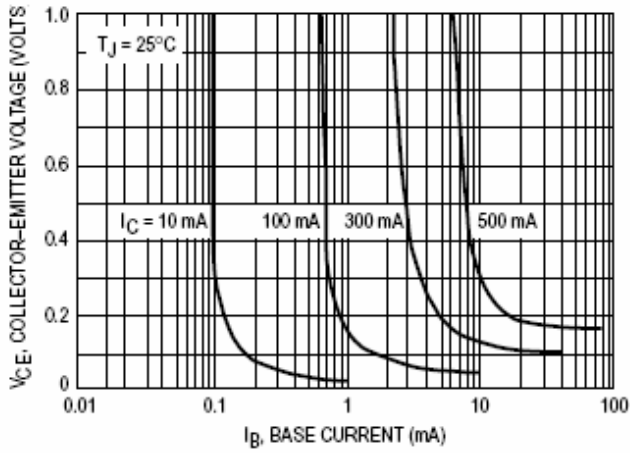


Figure 4. Saturation Region

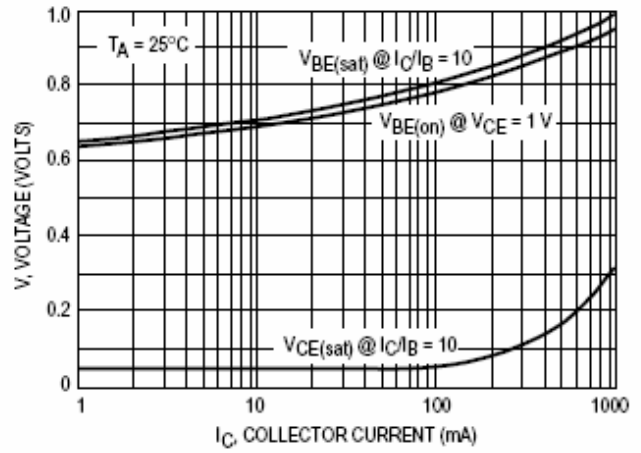


Figure 5. "On" Voltages

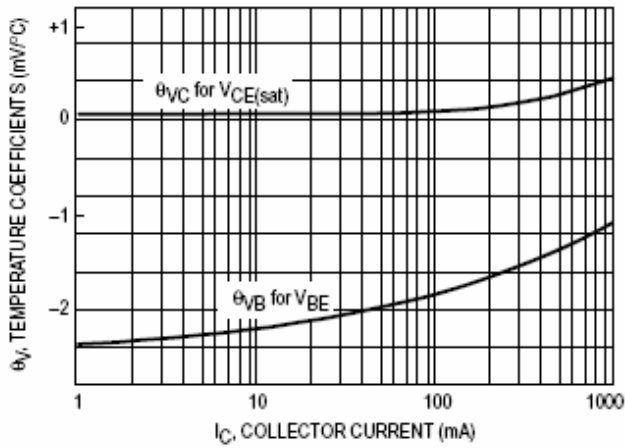


Figure 6. Temperature Coefficients

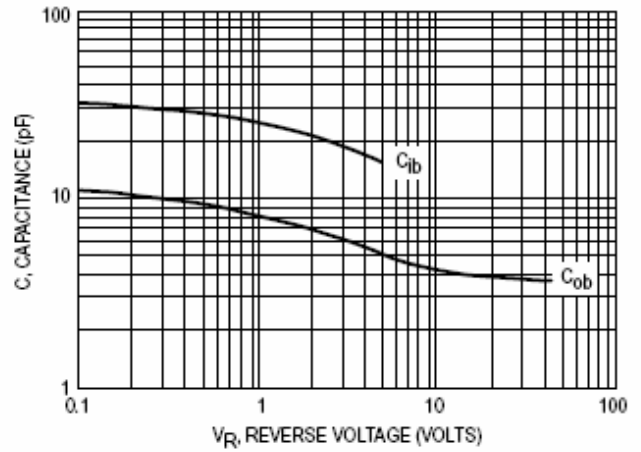


Figure 7. Capacitances