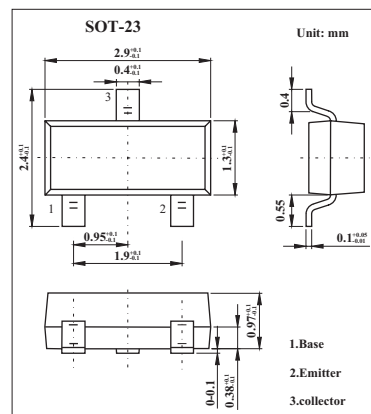



NPN General Purpose Transistor

BC846,BC847,BC848

■ Features

- Low current (max. 100 mA).
- Low voltage (max. 65 V).

■ Absolute Maximum Ratings $T_a = 25^\circ\text{C}$

Parameter	Symbol	BC846	BC847	BC848	Unit
Collector-base voltage	V_{CB0}	80	50	30	V
Collector-emitter voltage	V_{CE0}	65	45	30	V
Emitter-base voltage	V_{EB0}	6	6	5	V
Collector current	I_C	100			mA
Peak collector current	I_{CM}	200			mA
Peak base current	I_{BM}	200			mA
Total power dissipation *	P_{tot}	250			mW
Junction temperature	T_j	150			$^\circ\text{C}$
Storage temperature	T_{stg}	-65 to +150			$^\circ\text{C}$
Operating ambient temperature	R_{amb}	-65 to +150			$^\circ\text{C}$
Thermal resistance from junction to ambient *	$R_{th\ j-a}$	500			K/W

* Transistor mounted on an FR4 printed-circuit board, standard footprint.

BC846,BC847,BC848■ Electrical Characteristics $T_a = 25^\circ\text{C}$

Parameter		Symbol	Testconditions	Min	Typ	Max	Unit
Collector cutoff current		ICBO	$V_{CB} = 30\text{ V}, I_E = 0$			15	nA
		ICBO	$V_{CB} = 30\text{ V}, I_E = 0, T_j = 150^\circ\text{C}$			5	μA
Emitter cutoff current		IEBO	$V_{EB} = 5\text{ V}, I_C = 0$			100	nA
DC current gain	BC846	hFE	$I_C = 2\text{ mA}; V_{CE} = 5\text{ V}$	110		450	
	BC847			110		800	
	BC846A,BC847A			110	180	220	
	BC846B,BC847B,BC848B			200	290	450	
	BC847C			420	520	800	
Collector-emitter saturation voltage		$V_{CE(sat)}$	$I_C = 10\text{ mA}; I_B = 0.5\text{ mA}$		90	250	mV
			$I_C = 100\text{ mA}; I_B = 5\text{ mA}; *$		200	600	mV
Base-emitter saturation voltage		$V_{BE(sat)}$	$I_C = 10\text{ mA}; I_B = 0.5\text{ mA}$		700		mV
			$I_C = 100\text{ mA}; I_B = 5\text{ mA}; *$		900		mV
Base-emitter voltage		V_{BE}	$I_C = 2\text{ mA}; V_{CE} = 5\text{ V}$	580	660	700	mV
			$I_C = 10\text{ mA}; V_{CE} = 5\text{ V}$			770	mV
Collector capacitance		C_C	$V_{CB} = 10\text{ V}; I_E = I_C = 0; f = 1\text{ MHz}$		2.5		pF
Transition frequency		f_T	$V_{CE} = 5\text{ V}; I_C = 10\text{ mA}; f = 100\text{ MHz}$	100			MHz
Noise figure		NF	$I_C = 200\mu\text{A}; V_{CE} = 5\text{ V}; R_s = 2\text{ k}\Omega; f = 1\text{ kHz}; B = 200\text{ Hz}$		2	10	dB

* Pulse test: $t_p \leq 300\mu\text{s}, \delta \leq 0.02$.

■ hFE Classification

TYPE	BC846	BC846A	BC846B
Marking	1D	1A	1B

TYPE	BC847	BC847A	BC847B	BC847C
Marking	1H	1E	1F	1G

TYPE	BC848
Marking	1K