




● Features :

1. 0.36 inch (9.2mm) digit height.
2. Continuous uniform segments.
3. Low power requirement.
4. Excellent characters appearance.
5. Solid state reliability.
6. Multiplex driver : column anode com, and row cathode com.
7. Multi color

● Description :

1. The BCD-9037A is 9.2mm (0.36") digit height five digit seven-segment display, and different pattern appearance..
2. This product use green chips and hi-eff red chips, the green chips are made from GaP on GaP substrate, the hi-eff red chips are made from GaAsP on GaP substrate.
3. This product have a black face and white segments.
4. The content percentage of lead (Pb) and cadmium (Cd) in lead PIN:Pb<0.001%;Cd:0%.



● Package Dimensions :

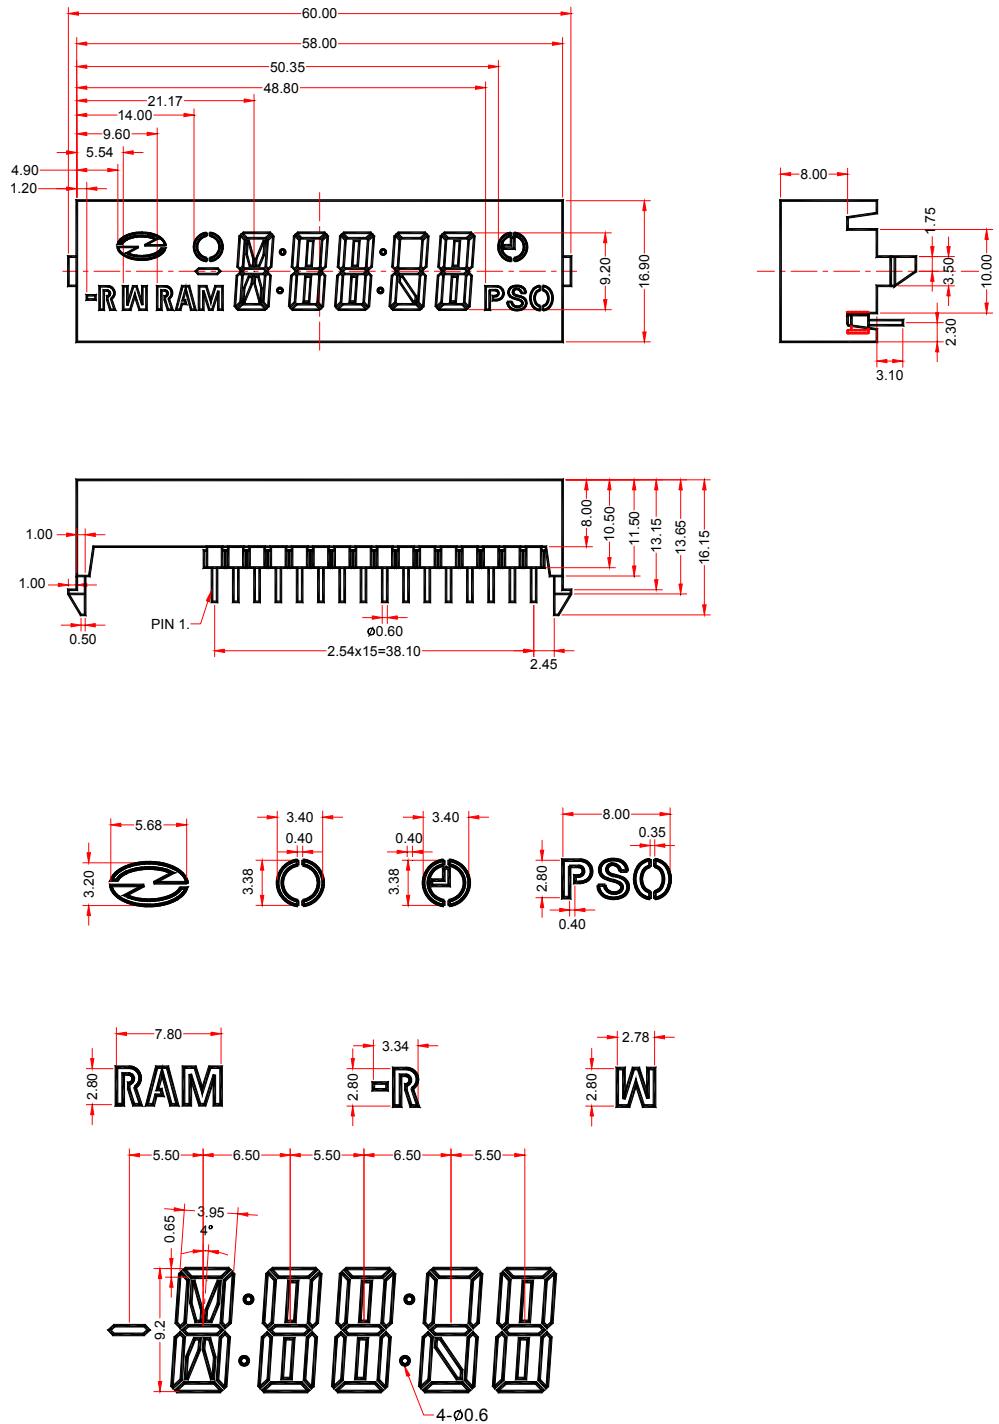

Notes:

1. All dimensions are in millimeters(inches).
2. Tolerance is $\pm 0.25\text{mm} (.01")$ unless otherwise specified.
3. Specifications are subject to change without notice.

● Internal Circuit Diagram :

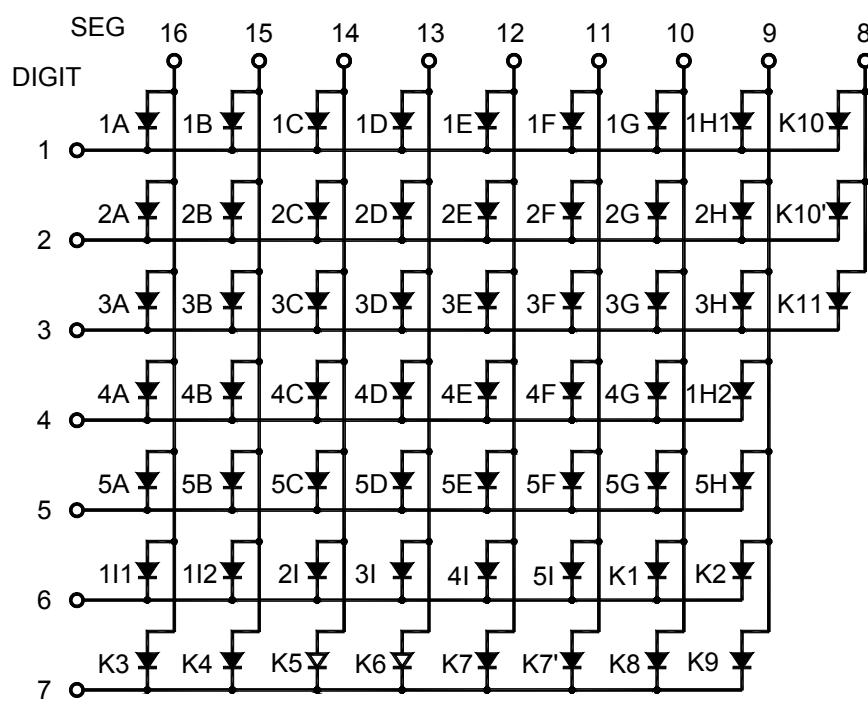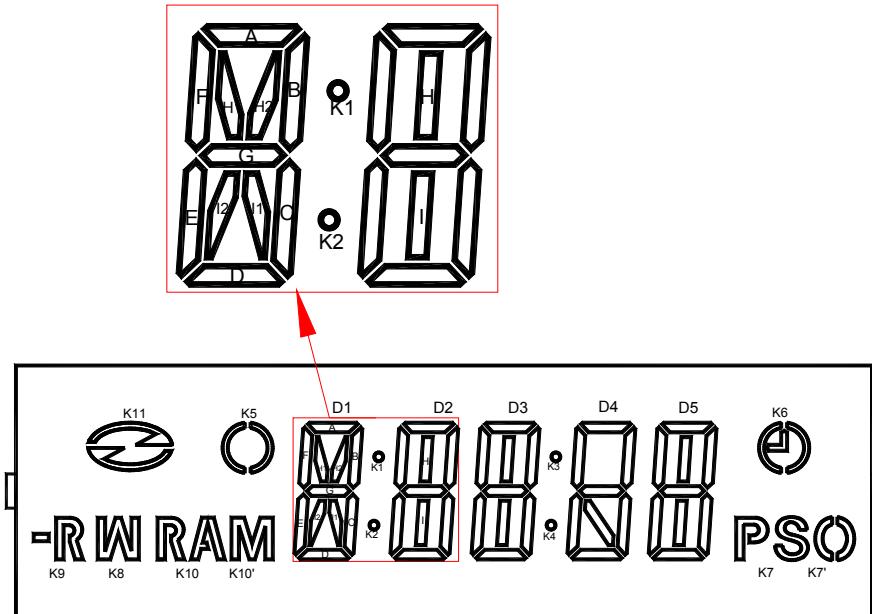

→ Green Chip

→ Hi-Eff Red Chip

● **Absolute Maximum Ratings(Ta=25°C)**

Parameter	Symbol	Green	Hi-Eff Red	Unit
Power Dissipation Per Segment	Pd	80	80	mW
Forward Current Per Segment	I _F	30	30	mA
Peak Forward Current Per Segment (Duty 1/10, 1KHZ)	I _{FP}	150	150	mA
Reverse Voltage Per Segment	V _R	5		V
Operating Temperature	To _{pr}	-40°C~80°C		-
Storage Temperature	T _{stg}	-40°C~85°C		-
Soldering Temperature (1/16" From Body)	T _{sol}	260°C For 5 Seconds		-

● **Electrical And Optical Characteristics(Ta=25°C)**

Green

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Forward Voltage Per Segment	V _f	I _F =10mA	-	2.1	2.5	V
Luminous Intensity Per Segment	I _v	I _F =10mA	-	3.0	-	mcd
Reverse Current Per Segment	I _R	V _R =5V	-	-	100	μA
Peak Wave Length	λ _p	I _F =10mA	-	568	-	nm
Dominant Wave Length	λ _d	I _F =10mA	569	-	574	nm
Spectral Line Half-width	Δλ	I _F =10mA	-	30	-	nm

Hi-Eff red

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Forward Voltage Per Segment	V _f	I _F =10mA	-	1.9	2.5	V
Luminous Intensity Per Segment	I _v	I _F =10mA	-	3.0	-	mcd
Reverse Current Per Segment	I _R	V _R =5V	-	-	100	μA
Peak Wave Length	λ _p	I _F =10mA	-	640	-	nm
Dominant Wave Length	λ _d	I _F =10mA	626	-	636	nm
Spectral Line Half-width	Δλ	I _F =10mA	-	40	-	nm

● Typical Electro-Optical Characteristics Curves

(25°C Ambient Temperature Unless Otherwise Noted)

Fig.1 Relative Radian Intensity VS. Wavelength

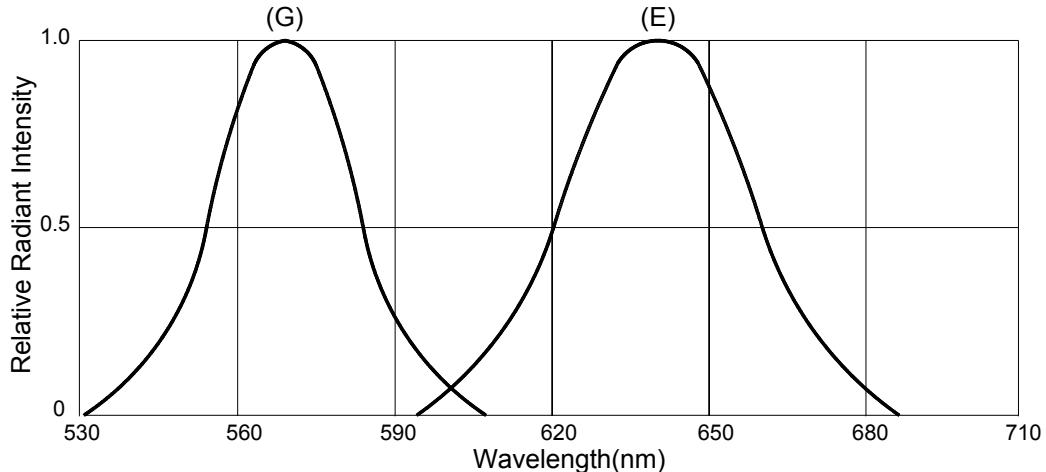


Fig.2 Forward Current VS.
Forward Voltage

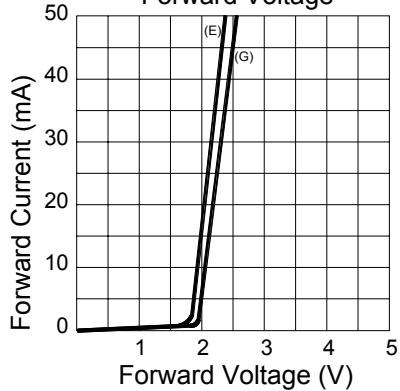


Fig.3 Relative Luminous
Intensity VS.
Ambient Temperature

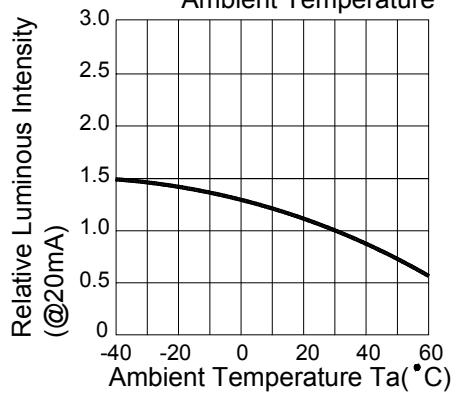


Fig.4 Relative Luminous
Intensity VS.
Forward Current

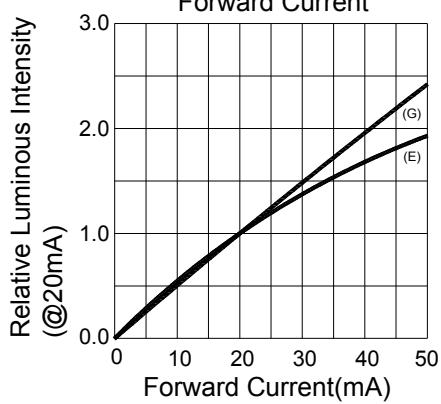


Fig.5 Forward Current
Derating Curve VS.
Ambient Temperature

