



PNP General Purpose Amplifier

BCW30


FEATURES

- Low current.
- Low voltage.



APPLICATIONS

- General purpose switching and amplification .
- NPN complements:BCW32.

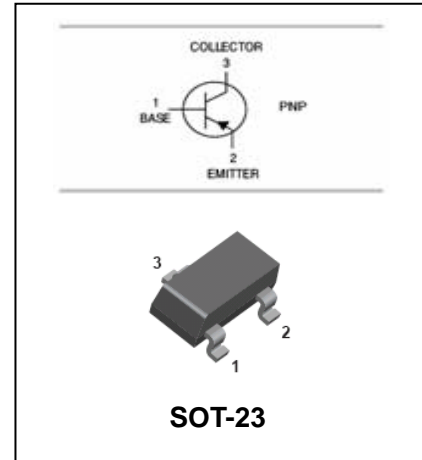

ORDERING INFORMATION

Type No.	Marking	Package Code
BCW30	C2X	SOT-23

MAXIMUM RATING @ Ta=25°C unless otherwise specified

Symbol	Parameter	Value	Unit
V _{CBO}	Collector-Base Voltage	-32	V
V _{CEO}	Collector-Emitter Voltage	-32	V
V _{EBO}	Emitter-Base Voltage	-5	V
I _C	Collector Current -Continuous	-100	mA
P _D	Total Device Dissipation	300	mW
T _j , T _{stg}	Junction and Storage Temperature	-65 to +150	°C

PNP General Purpose Amplifier

BCW30

ELECTRICAL CHARACTERISTICS @ Ta=25°C unless otherwise specified

Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Collector-base breakdown voltage	$V_{(BR)CBO}$	$I_C = -10\mu A, I_E = 0$	-32			V
Collector-emitter breakdown voltage	$V_{(BR)CEO}$	$I_C = -2mA, I_B = 0$	-32			V
Emitter-base breakdown voltage	$V_{(BR)EBO}$	$I_E = -10\mu A, I_C = 0$	-5			V
Collector cut-off current	I_{CBO}	$V_{CB} = -32V, I_E = 0$			-0.1	μA
Emitter cut-off current	I_{EBO}	$V_{EB} = -5V, I_C = 0$			-0.1	μA
DC current gain	h_{FE}	$V_{CE} = -5V, I_C = -10\mu A$ $V_{CE} = -5V, I_C = -2mA$	215	150	500	
Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_C = -10mA, I_B = -0.5mA$ $I_C = -50mA, I_B = -2.5mA$		-0.08 -0.15	-0.3	V
Base-emitter on voltage	$V_{BE(on)}$	$I_C = -2mA, V_{CE} = -5V$	-0.6		-0.7	V
Collector capacitance	C_{ob}	$V_{CB} = -10V, I_E = 0, f = 1MHz$		4.5		pF
Transition frequency	f_T	$I_C = -10mA, V_{CE} = -5V,$ $f = 100MHz$	100			MHz
Noise figure	F	$I_C = -200\mu A, V_{CE} = -5V, R_S = 2k\Omega,$ $f = 1kHz, B = 200Hz$			10	dB

TYPICAL CHARACTERISTICS @ Ta=25°C unless otherwise specified

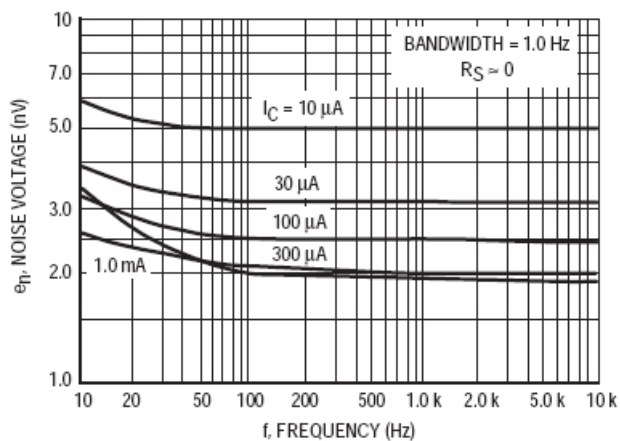


Figure 1. Noise Voltage

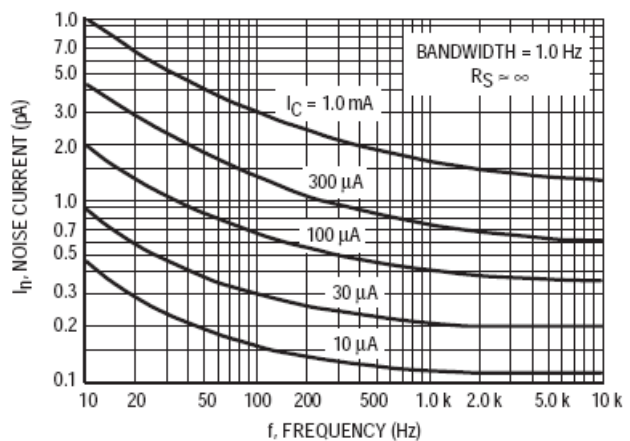


Figure 2. Noise Current



PNP General Purpose Amplifier

BCW30

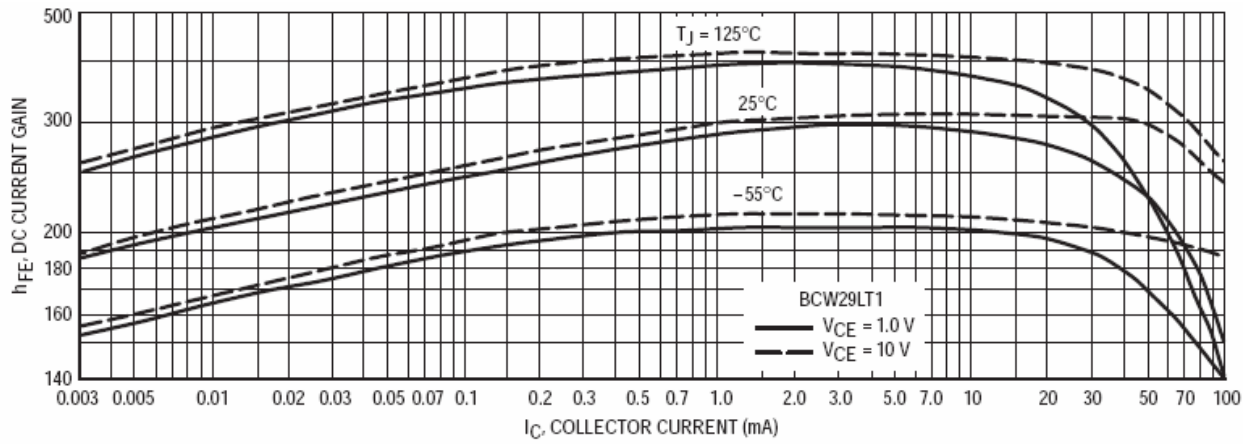


Figure 3. DC Current Gain


PNP General Purpose Amplifier

BCW30


PACKAGE OUTLINE

Plastic surface mounted package

SOT-23

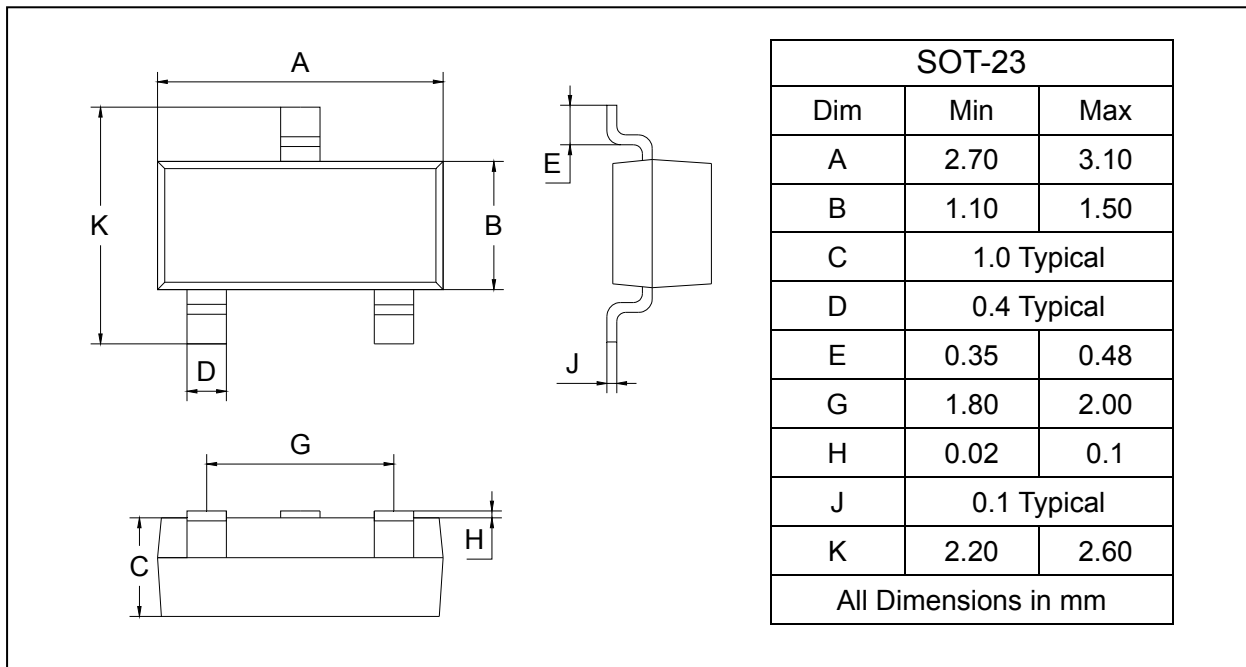

SOLDERING FOOTPRINT

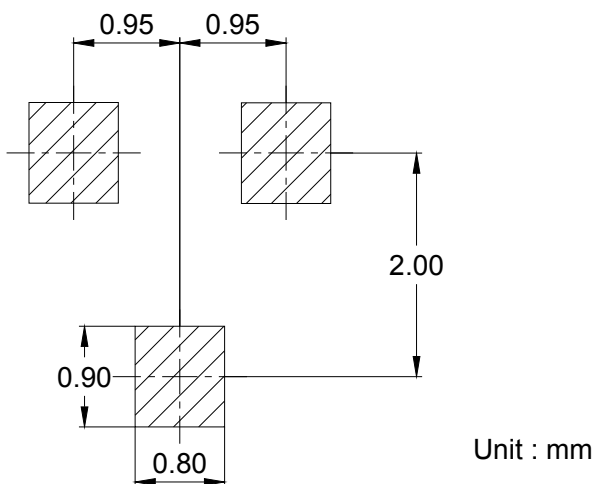

PACKAGE INFORMATION

Device	Package	Shipping
BCW30	SOT-23	3000/Tape&Reel