



Features

- Complimentary to BCW67
- High collector current
- High current gain
- Low collector-emitter saturation voltage

HF



SOT-23

Mechanical Data

- Case: SOT-23
- Molding compound: UL flammability classification rating 94V-0
- Terminals: Tin-plated; solderability per MIL-STD-202, Method 208

Ordering Information

Part Number	Package	Shipping Quantity	Marking Code
BCW65A	SOT-23	3000 pcs / Tape & Reel	EA
BCW65B	SOT-23	3000 pcs / Tape & Reel	EB
BCW65C	SOT-23	3000 pcs / Tape & Reel	EC

Maximum Ratings (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Value	Unit
Collector-Base Breakdown Voltage	V_{CBO}	60	V
Collector-Emitter Breakdown Voltage	V_{CEO}	32	V
Emitter-Base Breakdown Voltage	V_{EBO}	5	V
Continuous Collector Current	I_C	0.8	A
Peak Collector Current	I_{CM}	1	A

Thermal Characteristics

Parameter	Symbol	Value	Unit
Power Dissipation	P_D	330	mW
Thermal Resistance Junction-to-Air ^{*1}	$R_{\theta JA}$	395	$^\circ\text{C/W}$
Thermal Resistance Junction-to-Case ^{*1}	$R_{\theta JC}$	218	$^\circ\text{C/W}$
Thermal Resistance Junction-to-Lead ^{*1}	$R_{\theta JL}$	191	$^\circ\text{C/W}$
Operating junction Temperature	T_J	-55 ~ +150	$^\circ\text{C}$
Storage Temperature Range	T_{STG}	-55 ~ +150	$^\circ\text{C}$

Note 1: The data tested by surface mounted on a 15mm * 15mm * 1mm FR4-epoxy P.C.B

Electrical Characteristics (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

Parameter		Symbol	Test Condition	Min.	Typ.	Max.	Unit
Collector-Base Breakdown Voltage		$V_{(BR)CBO}$	$I_C = 10\mu\text{A}, I_E = 0$	60	-	-	V
Collector-Emitter Breakdown Voltage		$V_{(BR)CEO}$	$I_C = 10\text{mA}, I_B = 0$	32	-	-	V
Emitter-Base Breakdown Voltage		$V_{(BR)EBO}$	$I_E = 10\mu\text{A}, I_C = 0$	5	-	-	V
Collector Cut-off Current		I_{CBO}	$V_{CB} = 32\text{V}, I_E = 0$	-	-	20	nA
Emitter Cut-off Current		I_{EBO}	$V_{EB} = 4\text{V}, I_C = 0$	-	-	20	nA
DC Current Gain	BCW65A	h_{FE}	$V_{CE} = 10\text{V}, I_C = 0.1\text{mA}$	35	-	-	-
	BCW65B			50	-	-	-
	BCW65C			80	-	-	-
	BCW65A		$V_{CE} = 1\text{V}, I_C = 10\text{mA}$	75	-	-	-
	BCW65B			110	-	-	-
	BCW65C			180	-	-	-
	BCW65A		$V_{CE} = 1\text{V}, I_C = 100\text{mA}$	100	-	250	-
	BCW65B			160	-	400	-
	BCW65C			250	-	630	-
Collector-emitter Saturation Voltage		$V_{CE(sat)}$	$I_C = 100\text{mA}, I_B = 10\text{mA}$	-	-	0.3	V
			$I_C = 500\text{mA}, I_B = 50\text{mA}$	-	-	0.7	V
Base-emitter Saturation Voltage		$V_{BE(sat)}$	$I_C = 100\text{mA}, I_B = 10\text{mA}$	-	-	1.25	V
			$I_C = 500\text{mA}, I_B = 50\text{mA}$	-	-	2	V
Transition Frequency		f_T	$I_C = 50\text{mA}, V_{CE} = 5\text{V}$ $f = 20\text{MHz}$	170	-	-	MHz

Ratings and Characteristics Curves (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

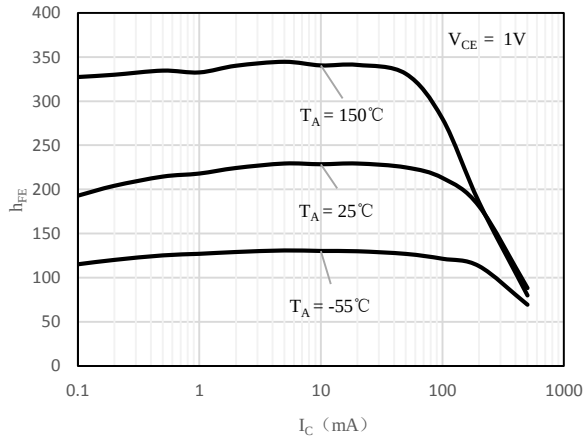


Fig 1 h_{FE} vs. I_C (BCW65A)

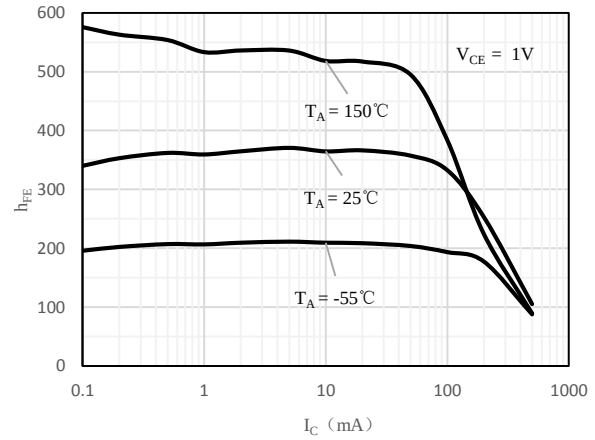


Fig 2 h_{FE} vs. I_C (BCW65B)

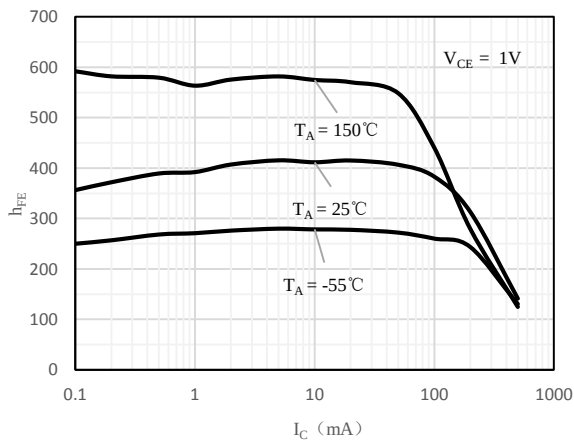


Fig 3 h_{FE} vs. I_C (BCW65C)

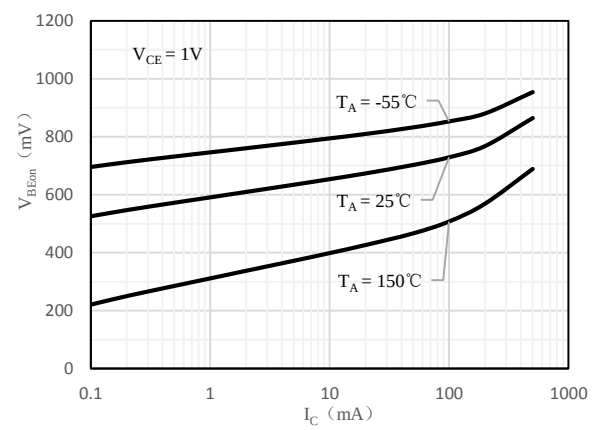


Fig 4 $V_{BE(ON)}$ vs. I_C

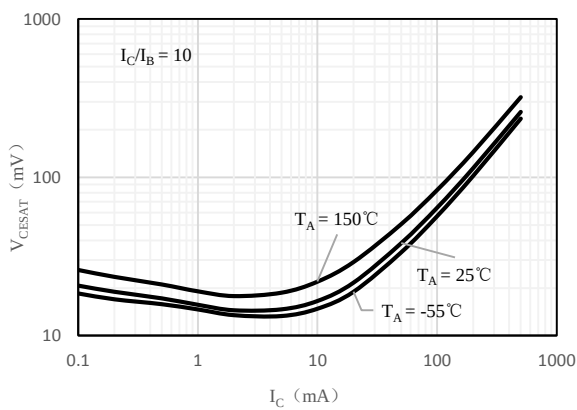


Fig 5 $V_{CE(sat)}$ vs. I_C


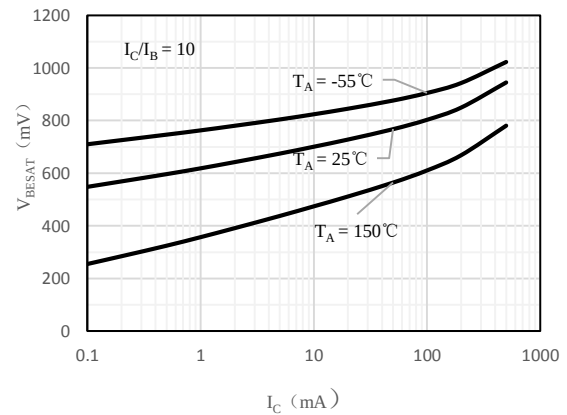


Fig 6 $V_{BE(sat)}$ vs. I_C


Package Outline Dimensions (Unit: mm)

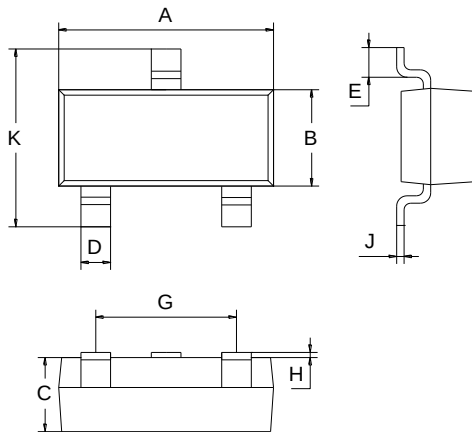

SOT-23		
Dimension	Min.	Max.
A	2.70	3.10
B	1.10	1.50
C	0.9	1.1
D	0.3	0.5
E	0.35	0.48
G	1.80	2.00
H	0.02	0.1
J	0.05	0.15
K	2.20	2.60

Package Outline Dimensions (Unit: mm)

SOT-23

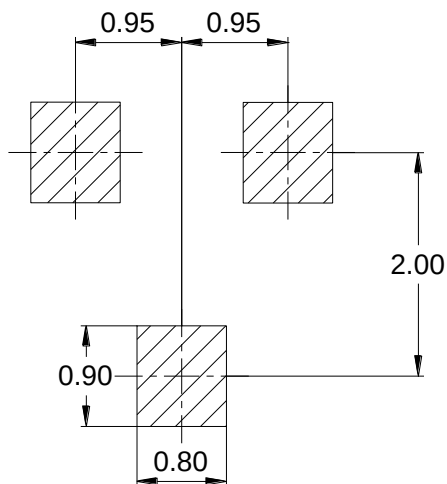

IMPORTANT NOTICE

Changzhou Galaxy Century Microelectronics (GME) reserves the right to make changes without further notice to any product information (copyrighted) herein to make corrections, modifications, improvements, or other changes. GME does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others.