




TRANSISTOR (NPN)

FEATURES

- PNP Complements to BCX51,BCX52,BCX53
- Low Voltage
- High Current
- **Pb-Free package is available**
RoHS product for packing code suffix "G"
Halogen free product for packing code suffix "H"

SOT-89



1. BASE
2. COLLECTOR
3. EMITTER

APPLICATIONS

- Driver Stages of Audio Amplifiers

MARKING: BCX55:BE, BCX55-10:BG, BCX55-16BM
BCX56:BH, BCX56-10:BK, BCX56-16:BL

MAXIMUM RATINGS (T_a=25°C unless otherwise noted)

Symbol	Parameter		Value	Unit
V _{CB0}	Collector-Base Voltage	BCX55	60	V
		BCX56	100	
V _{CEO}	Collector-Emitter Voltage	BCX55	60	V
		BCX56	80	
V _{EBO}	Emitter-Base Voltage		5	V
I _C	Collector Current		1	A
P _C	Collector Power Dissipation		500	mW
R _{θJA}	Thermal Resistance From Junction To Ambient		250	°C/W
T _J	Junction Temperature		150	°C
T _{stg}	Storage Temperature		-55~+150	°C



WILLAS



SOT-89 Plastic-Encapsulate Transistors

BCX55**BCX56**









Parameter	Symbol	Test conditions	Min	Typ	Max	Unit
Collector-base breakdown voltage	$V_{(BR)CBO}$	$I_C=100\mu A, I_E=0$	BCX55	60		V
			BCX56	100		
Collector-emitter breakdown voltage	$V_{(BR)CEO^*}$	$I_C=10mA, I_B=0$	BCX55	60		V
			BCX56	80		
Emitter-base breakdown voltage	$V_{(BR)EBO}$	$I_E=100\mu A, I_C=0$	5			V
Collector cut-off current	I_{CBO}	$V_{CB}=30V, I_E=0$			0.1	μA
Emitter cut-off current	I_{EBO}	$V_{EB}=5V, I_C=0$			0.1	μA
DC current gain	$h_{FE(1)^*}$	$V_{CE}=2V, I_C=5mA$	40			
	$h_{FE(2)^*}$	$V_{CE}=2V, I_C=150mA$	63		250	
	$h_{FE(3)^*}$	$V_{CE}=2V, I_C=0.5A$	25			
Collector-emitter saturation voltage	$V_{CE(sat)^*}$	$I_C=0.5A, I_B=50mA$			0.5	V
Base-emitter voltage	V_{BE^*}	$V_{CE}=2V, I_C=0.5A$			1	V
Transition frequency	f_T	$V_{CE}=5V, I_C=10mA, f=100MHz$		130		MHz

CLASSIFICATION OF $h_{FE(2)}$

RANK	BCX55 BCX56	BCX55-10 BCX56-10	BCX55-16 BCX56-16
RANGE	63 - 250	63 - 160	100 - 250




Typical Characteristics

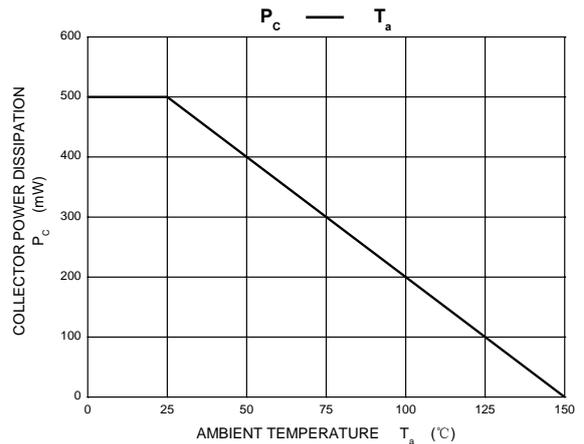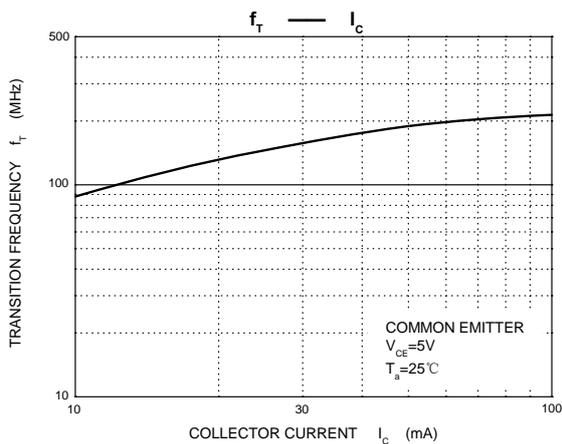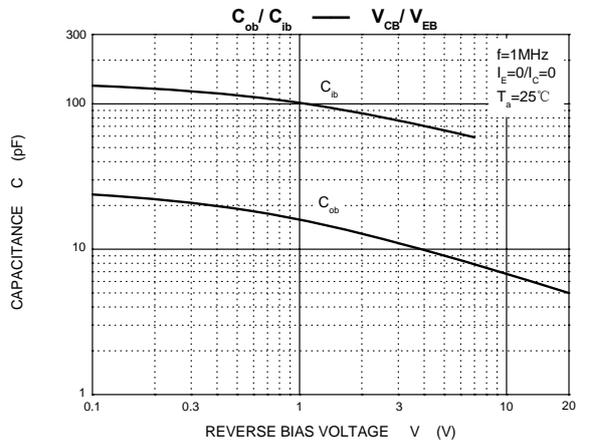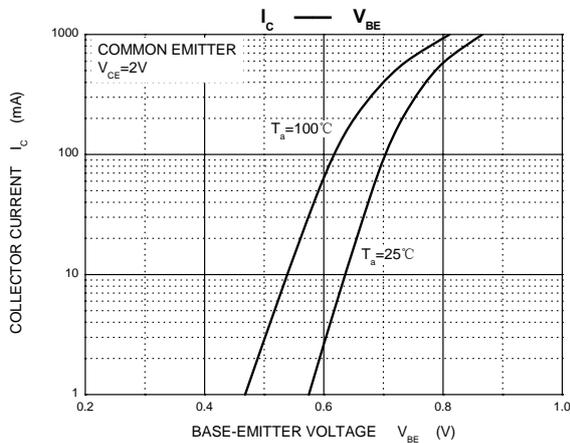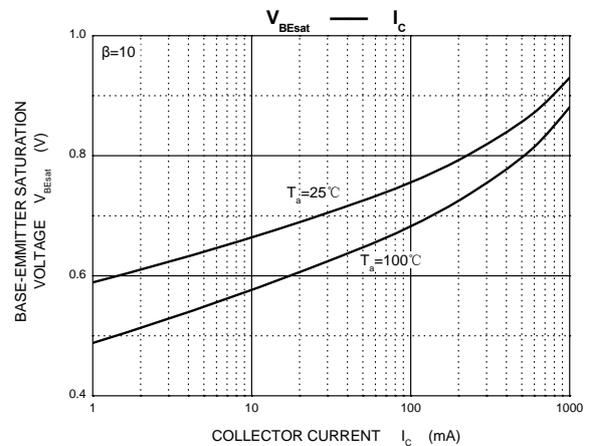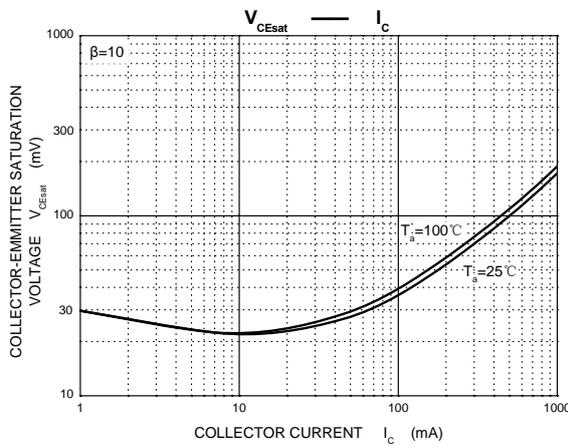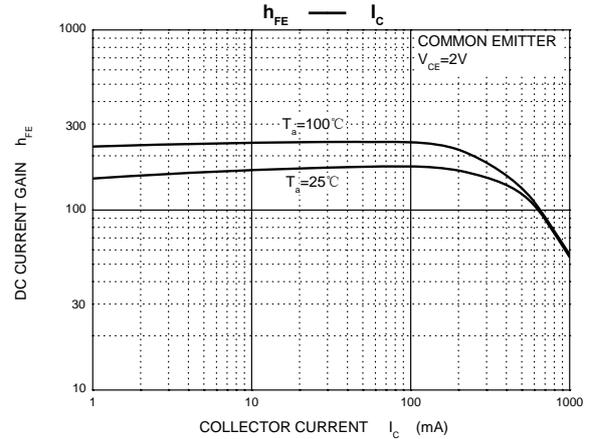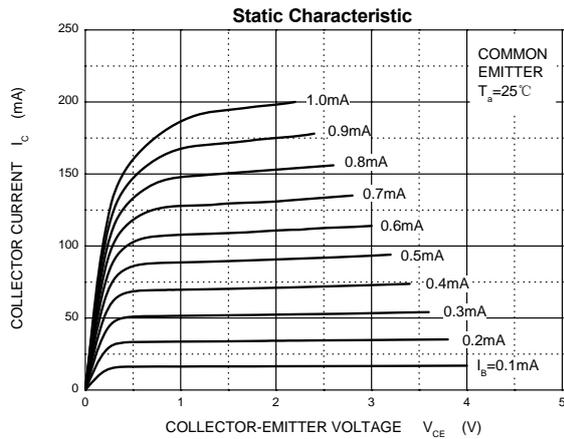



Outline Drawing

SOT-89

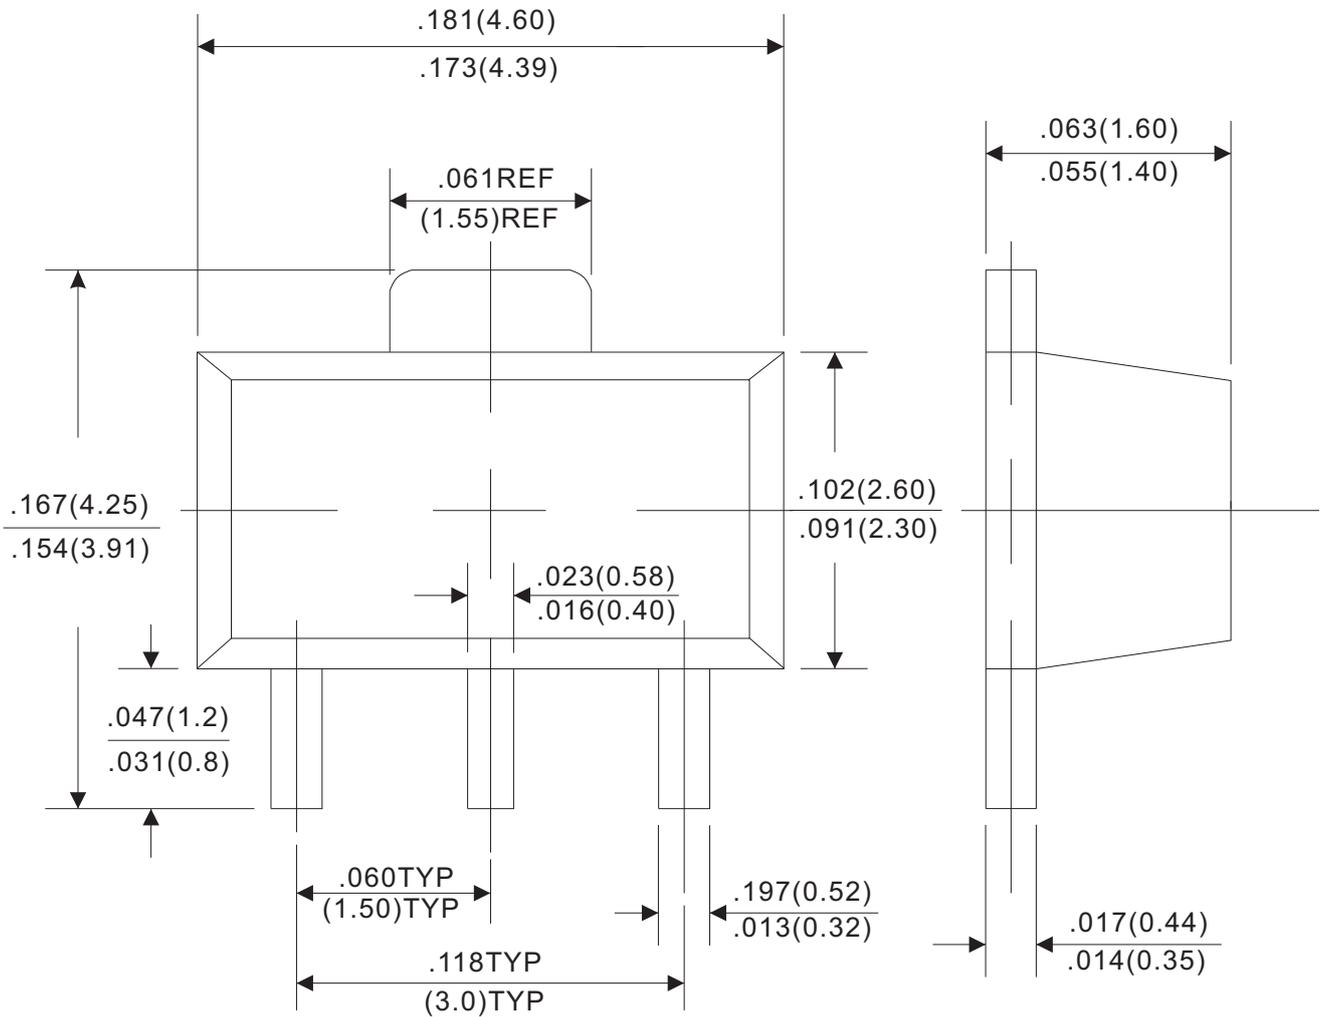

Dimensions in inches and (millimeters)

Rev.C