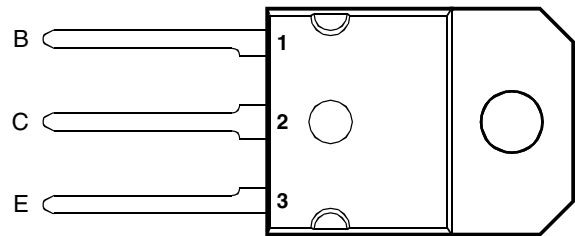


BOURNS®

- Designed for Complementary Use with the BD545 Series
- 85 W at 25°C Case Temperature
- 15 A Continuous Collector Current
- Customer-Specified Selections Available

SOT-93 PACKAGE
(TOP VIEW)

Pin 2 is in electrical contact with the mounting base.

MDTRAAA

absolute maximum ratings at 25°C case temperature (unless otherwise noted)

RATING		SYMBOL	VALUE	UNIT
Collector-base voltage ($I_E = 0$)	BD546	V_{CBO}	-40	V
	BD546A		-60	
	BD546B		-80	
	BD546C		-100	
Collector-emitter voltage ($I_B = 0$) (see Note 1)	BD546	V_{CEO}	-40	V
	BD546A		-60	
	BD546B		-80	
	BD546C		-100	
Emitter-base voltage		V_{EBO}	-5	V
Continuous collector current		I_C	-15	A
Continuous device dissipation at (or below) 25°C case temperature (see Note 2)		P_{tot}	85	W
Continuous device dissipation at (or below) 25°C free air temperature (see Note 3)		P_{tot}	3.5	W
Operating free air temperature range		T_A	-65 to +150	°C
Operating junction temperature range		T_j	-65 to +150	°C
Storage temperature range		T_{stg}	-65 to +150	°C
Lead temperature 3.2 mm from case for 10 seconds		T_L	260	°C

NOTES: 1. These values apply when the base-emitter diode is open circuited.
 2. Derate linearly to 150°C case temperature at the rate of 0.68 W/°C.
 3. Derate linearly to 150°C free air temperature at the rate of 28 mW/°C.

PRODUCT INFORMATION

JUNE 1973 - REVISED SEPTEMBER 2002
 Specifications are subject to change without notice.

BD546, BD546A, BD546B, BD546C

PNP SILICON POWER TRANSISTORS

BOURNS®

electrical characteristics at 25°C case temperature

PARAMETER	TEST CONDITIONS			MIN	TYP	MAX	UNIT
$V_{(BR)CEO}$ Collector-emitter breakdown voltage	$I_C = -30$ mA (see Note 4)	$I_B = 0$	BD546	-40			V
			BD546A	-60			
			BD546B	-80			
			BD546C	-100			
I_{CES} Collector-emitter cut-off current	$V_{CE} = -40$ V $V_{CE} = -60$ V $V_{CE} = -80$ V $V_{CE} = -100$ V	$V_{BE} = 0$ $V_{BE} = 0$ $V_{BE} = 0$ $V_{BE} = 0$	BD546			-0.4	mA
			BD546A			-0.4	
			BD546B			-0.4	
			BD546C			-0.4	
I_{CEO} Collector cut-off current	$V_{CE} = -30$ V $V_{CE} = -60$ V	$I_B = 0$ $I_B = 0$	BD546/546A			-0.7	mA
			BD546B/546C			-0.7	
I_{EBO} Emitter cut-off current	$V_{EB} = -5$ V	$I_C = 0$				-1	mA
h_{FE} Forward current transfer ratio	$V_{CE} = -4$ V $V_{CE} = -4$ V $V_{CE} = -4$ V	$I_C = -1$ A $I_C = -5$ A $I_C = -10$ A		60			
			(see Notes 4 and 5)	25			
				10			
$V_{CE(sat)}$ Collector-emitter saturation voltage	$I_B = -625$ mA $I_B = -2$ A	$I_C = -5$ A $I_C = -10$ A	(see Notes 4 and 5)			-0.8	V
						-1	
V_{BE} Base-emitter voltage	$V_{CE} = -4$ V	$I_C = -10$ A	(see Notes 4 and 5)			-1.8	V
h_{fe} Small signal forward current transfer ratio	$V_{CE} = -10$ V	$I_C = -0.5$ A	$f = 1$ kHz	20			
$ h_{fe} $ Small signal forward current transfer ratio	$V_{CE} = -10$ V	$I_C = -0.5$ A	$f = 1$ MHz	3			

NOTES: 4. These parameters must be measured using pulse techniques, $t_p = 300$ μ s, duty cycle $\leq 2\%$.

5. These parameters must be measured using voltage-sensing contacts, separate from the current carrying contacts.

thermal characteristics

PARAMETER	MIN	TYP	MAX	UNIT
$R_{\theta JC}$ Junction to case thermal resistance			1.47	°C/W
$R_{\theta JA}$ Junction to free air thermal resistance			35.7	°C/W

resistive-load-switching characteristics at 25°C case temperature

PARAMETER	TEST CONDITIONS †			MIN	TYP	MAX	UNIT
t_{on} Turn-on time	$I_C = -6$ A	$I_{B(on)} = -0.6$ A	$I_{B(off)} = 0.6$ A		0.4		μ s
t_{off} Turn-off time				$V_{BE(off)} = 4$ V	$R_L = 5$ Ω	$t_p = 20$ μ s, dc $\leq 2\%$	0.7

† Voltage and current values shown are nominal; exact values vary slightly with transistor parameters.

PRODUCT INFORMATION

JUNE 1973 - REVISED SEPTEMBER 2002

Specifications are subject to change without notice.

BOURNS®

TYPICAL CHARACTERISTICS

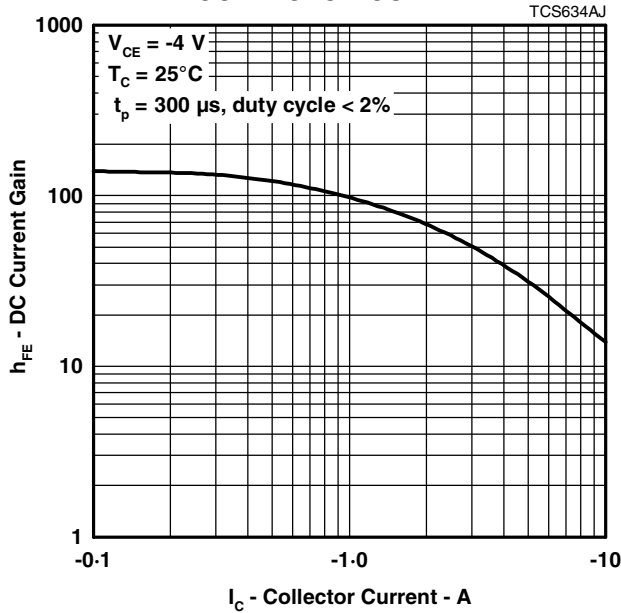
TYPICAL DC CURRENT GAIN
VS
COLLECTOR CURRENT

Figure 1.

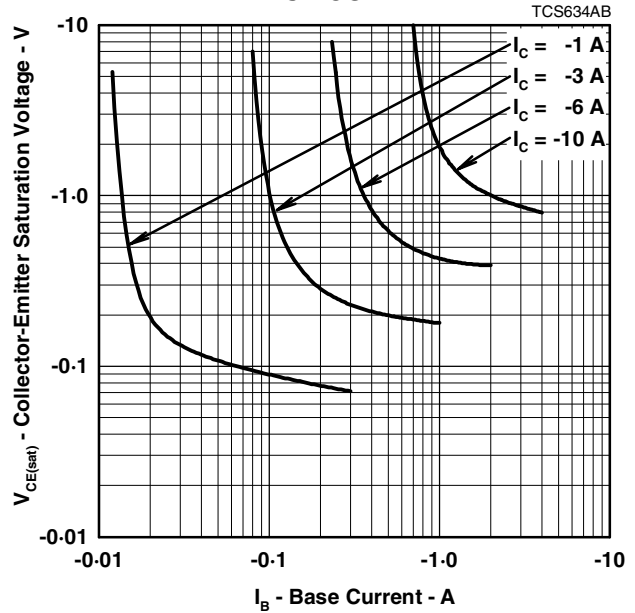
COLLECTOR-EMITTER SATURATION VOLTAGE
VS
BASE CURRENT

Figure 2.

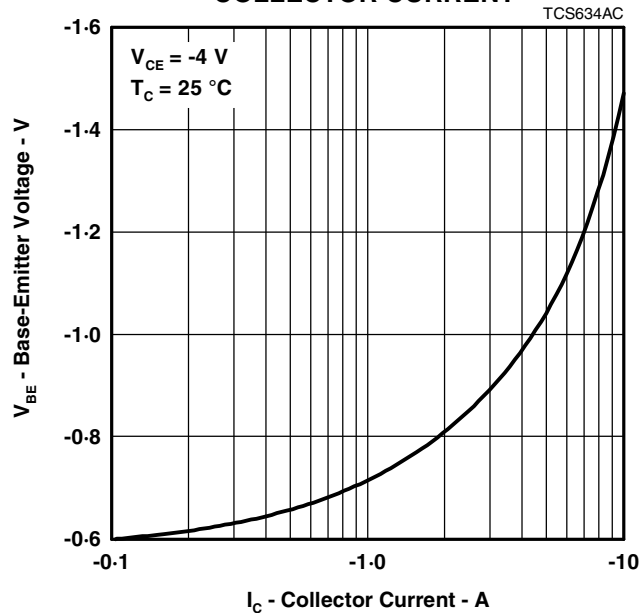
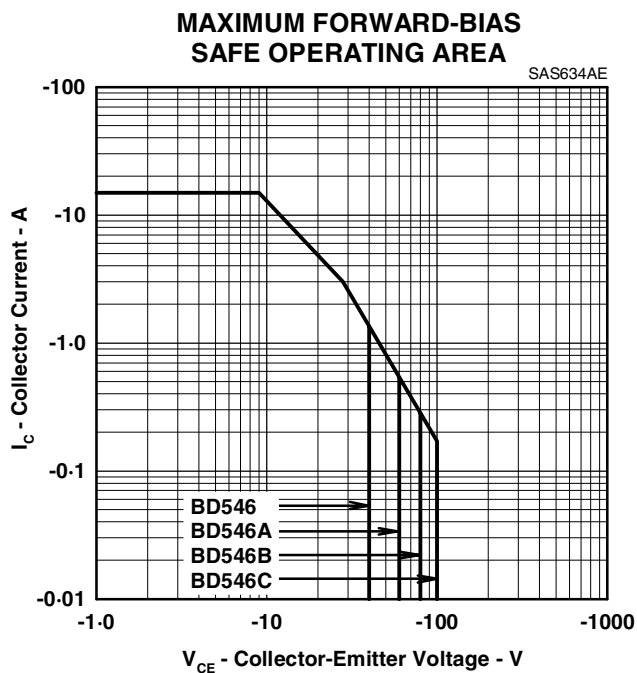
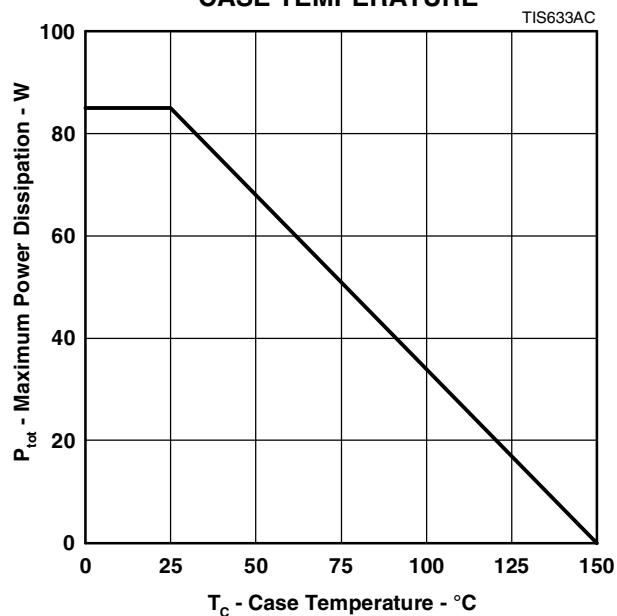
BASE-EMITTER VOLTAGE
VS
COLLECTOR CURRENT

Figure 3.


PRODUCT INFORMATION

JUNE 1973 - REVISED SEPTEMBER 2002
Specifications are subject to change without notice.

MAXIMUM SAFE OPERATING REGIONS

Figure 4.
THERMAL INFORMATION
**MAXIMUM POWER DISSIPATION
vs
CASE TEMPERATURE**

Figure 5.

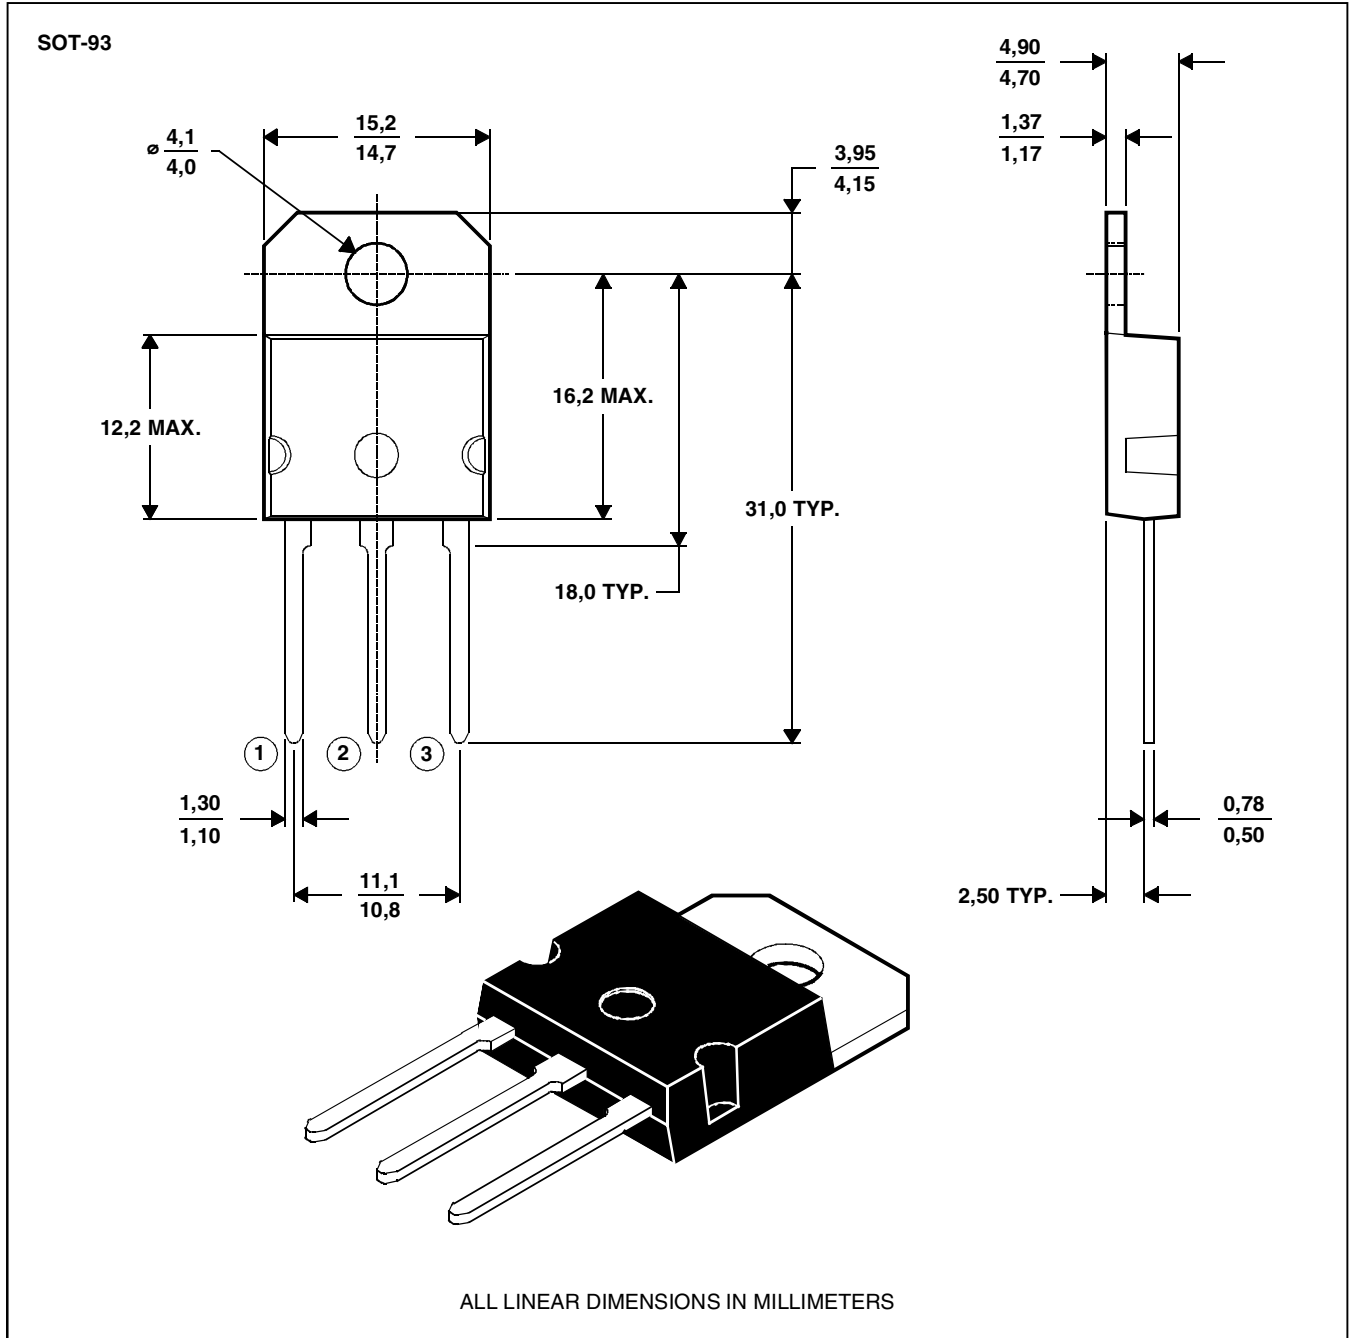BOURNS®**MECHANICAL DATA****SOT-93****3-pin plastic flange-mount package**

This single-in-line package consists of a circuit mounted on a lead frame and encapsulated within a plastic compound. The compound will withstand soldering temperature with no deformation, and circuit performance characteristics will remain stable when operated in high humidity conditions. Leads require no additional cleaning or processing when used in soldered assembly.



NOTE A: The centre pin is in electrical contact with the mounting tab.

MDXXAW

PRODUCT INFORMATION

JUNE 1973 - REVISED SEPTEMBER 2002
Specifications are subject to change without notice.