



---

**BLDC Motor Flash MCU**

**BD66FM5245**

Revision: V1.40    Date: May 11, 2024

[www.holtek.com](http://www.holtek.com)

## Features

### CPU Features

- Operating voltage
  - ♦  $f_{SYS}=32kHz\sim 20MHz$ : 4.5V~5.5V
- Up to 0.2 $\mu s$  instruction cycle with 20MHz system clock at  $V_{DD}=5V$
- Power down and wake-up functions to reduce power consumption
- Oscillator types
  - ♦ Internal High Speed 20MHz RC – HIRC
  - ♦ Internal Low Speed 32kHz RC – LIRC
- Internal oscillators require no external components
- Multi-mode operation: FAST, SLOW, IDLE and SLEEP
- All instructions executed in 1~3 instruction cycles
- Table read instructions
- 115 powerful instructions
- 8-level subroutine nesting
- Bit manipulation instruction

### Peripheral Features

- Flash Program Memory: 4K $\times$ 16
- RAM Data Memory: 512 $\times$ 8
- In Application Programming function – IAP
- Watchdog Timer function
- 24 bidirectional I/O lines
- Five pin-shared external interrupt inputs – H1, H2, H3, NFIN and INT
- Multiple Timer Modules for time measurement, input capture, compare match output, PWM output or single pulse output function
- Single 16-bit Capture Timer Module for motor protection
- Single 10-bit PWM generator provides 3 groups of PWM outputs, supporting edge/center aligned mode
- 14 external channel 12-bit resolution A/D converter
- Over current detection which contains operational amplifier, comparator 0 and 8-bit D/A converter
- Up to four comparators
- BLDC motor control
  - ♦ Hall noise filter for position detection
  - ♦ Motor control circuit
  - ♦ Motor protection circuit
- Single Fully-duplex or Half-duplex Universal Asynchronous Receiver and Transmitter Interface – UART
- Integrated Multiplier/Divider Unit – MDU
- Single Time Base function for generation of fixed time interrupt signal

- Low voltage reset function
- Low voltage detect function
- Package types: 16-pin NSOP, 20/24-pin SSOP


## General Description

The BD66FM5245 is a Flash Memory 8-bit high performance RISC architecture microcontroller, which includes a host of fully integrated special features specifically designed for brushless DC motor applications.

For memory features, the Flash Memory offers users the convenience of multi-programming features. Other memory includes an area of RAM Data Memory. By using the In Application Programming technology, users have a convenient means to directly store their measured data in the Flash Program Memory as well as having the ability to easily update their application programs.

In addition to the advantages of low power consumption and I/O flexibility, the device also includes multiple and extremely flexible Timer Modules, internal oscillators, multi-channel A/D converter, D/A converter, Operational Amplifier, Pulse Width Modulation function, 16-bit Capture Timer Module function, Comparators, Motor Protection Module, Hall sensor position detection function, UART interface function, a 16-bit MDU, Time Base function, Low Voltage Reset, Low Voltage Detection, power-down and wake-up functions. Although especially designed for brushless DC motor applications, the enhanced versatility of this device also makes it applicable for use in a wide range of A/D application possibilities such as sensor signal processing, motor driving, industrial controllers, consumer products, subsystem controllers, etc.

## Block Diagram

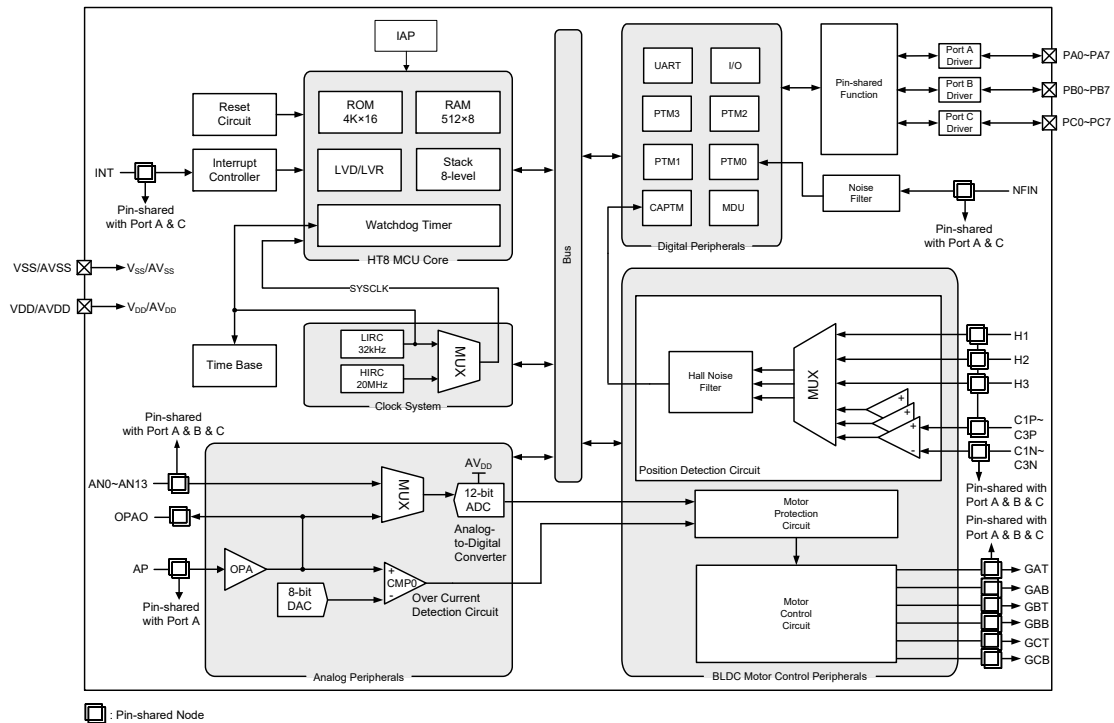

## Pin Assignment

|                       |   |    |                                          |
|-----------------------|---|----|------------------------------------------|
| PC2/H3/GBT/GAB/GAT    | 1 | 16 | PC3/H2/GBB/GAB/GAT                       |
| PC1/GAB/GCT/AN10      | 2 | 15 | PC4/H1/GCT/GCB/GBB                       |
| PC0/NFIN/GAT/GCB/AN11 | 3 | 14 | PA2/PTP1/INT/PTP1/TX/OCDSCK/ICPCK        |
| VSS/AVSS              | 4 | 13 | PA0/PTP0/NFIN/PTP0/RX/TX/AN0/OCSDA/ICPDA |
| VDD/AVDD              | 5 | 12 | PA7/PTCK2/NFIN/PTP0/GCB/AN7              |
| PA1/PTP3B/AP/AN3      | 6 | 11 | PB0/PTCK3/HCO/GCT/AN1                    |
| PA3/H1/C1P/GAT/AN5    | 7 | 10 | PC6/GBB/GCT/PTP0B                        |
| PA4/H2/C2P/GAB/AN4    | 8 | 9  | PA5/H3/C3P/GBT/AN2                       |

**BD66FM5245/BD66VM5245**  
**16 NSOP-A**

|                           |    |    |                                          |
|---------------------------|----|----|------------------------------------------|
| PC1/GAB/GCT/AN10          | 1  | 20 | PC2/H3/GBT/GAB/GAT                       |
| PC0/NFIN/GAT/GCB/AN11     | 2  | 19 | PC3/H2/GBB/GAB/GAT                       |
| VSS/AVSS                  | 3  | 18 | PC4/H1/GCT/GCB/GBB                       |
| VDD/AVDD                  | 4  | 17 | PC5/H2/INT/GCB/GBB/GBT                   |
| PA1/PTP3B/AP/AN3          | 5  | 16 | PA2/PTP1/INT/PTP1/TX/OCDSCK/ICPCK        |
| PB6/PTP3/OPAO/AN12        | 6  | 15 | PA0/PTP0/NFIN/PTP0/RX/TX/AN0/OCSDA/ICPDA |
| PB2/H2/PTP2/C2N/PTP1B/AN9 | 7  | 14 | PA7/PTCK2/NFIN/PTP0/GCB/AN7              |
| PB1/H3/PTP3/C1N/CPN/AN6   | 8  | 13 | PB0/PTCK3/HCO/GCT/AN1                    |
| PA3/H1/C1P/GAT/AN5        | 9  | 12 | PC6/GBB/GCT/PTP0B                        |
| PA4/H2/C2P/GAB/AN4        | 10 | 11 | PA5/H3/C3P/GBT/AN2                       |

**BD66FM5245/BD66VM5245**  
**20 SSOP-A**

|                                          |    |    |                             |
|------------------------------------------|----|----|-----------------------------|
| PB2/H2/PTP2/C2N/PTP1B/AN9                | 1  | 24 | PB3/PTCK0/H1/PTP0B/C3N/AN13 |
| PB1/H3/PTP3/C1N/CPN/AN6                  | 2  | 23 | PB6/PTP3/OPAO/AN12          |
| PA3/H1/C1P/GAT/AN5                       | 3  | 22 | PA1/PTP3B/AP/AN3            |
| PA4/H2/C2P/GAB/AN4                       | 4  | 21 | VSS/AVSS                    |
| PA5/H3/C3P/GBT/AN2                       | 5  | 20 | VDD/AVDD                    |
| PA2/PTP1/INT/PTP1/TX/OCDSCK/ICPCK        | 6  | 19 | PC0/NFIN/GAT/GCB/AN11       |
| PA0/PTP0/NFIN/PTP0/RX/TX/AN0/OCSDA/ICPDA | 7  | 18 | PC1/GAB/GCT/AN10            |
| PB0/PTCK3/HCO/GCT/AN1                    | 8  | 17 | PC2/H3/GBT/GAB/GAT          |
| PA7/PTCK2/NFIN/PTP0/GCB/AN7              | 9  | 16 | PC3/H2/GBB/GAB/GAT          |
| PB5/PTP2/TX/GBT                          | 10 | 15 | PC4/H1/GCT/GCB/GBB          |
| PB7/HAO/PTP1/RX/TX                       | 11 | 14 | PC5/H2/INT/GCB/GBB/GBT      |
| PA6/PTCK1/CTIN/PTP2B/HBO/AN8             | 12 | 13 | PB4/H3/CTIN/RX/TX           |

**BD66FM5245/BD66VM5245**  
**24 SSOP-A**

- Note: 1. If the pin-shared pin functions have multiple outputs, the desired pin-shared function is determined by its corresponding software control bits.
2. The OCSDA and OCDSCK pins are supplied as dedicated OCDS pins and as such only available for the BD66VM5245 device which is the OCDS EV chip for the BD66FM5245 device.
3. For the package type there will be unbounded pins which should be properly configured to avoid unwanted power consumption resulting from floating input conditions. Refer to the “Standby Current Considerations” and “Input/Output Ports” sections.

## Pin Description

The function of each pin is listed in the following table, however the details behind how each pin is configured is contained in other sections of the datasheet. Note that where more than one package type exists the table will reflect the situation for the larger package type.

| Pin Name                                   | Function | OPT                            | I/T | O/T  | Description                                                                                                              |
|--------------------------------------------|----------|--------------------------------|-----|------|--------------------------------------------------------------------------------------------------------------------------|
| PA0/PTP0I/NFIN/PTP0/RX/TX/AN0/OCDSDA/ICPDA | PA0      | PAWU<br>PAPU<br>PAS0           | ST  | CMOS | General purpose I/O. Register enabled pull-high and wake-up                                                              |
|                                            | PTP0I    | PAS0                           | ST  | —    | PTM0 capture input                                                                                                       |
|                                            | NFIN     | PAS0<br>IFS0                   | ST  | —    | Noise filter input                                                                                                       |
|                                            | PTP0     | PAS0                           | —   | CMOS | PTM0 output                                                                                                              |
|                                            | RX/TX    | PAS0<br>IFS1                   | ST  | CMOS | UART serial data input in full-duplex communication or UART serial data input / output in Single Wire Mode communication |
|                                            | AN0      | PAS0                           | AN  | —    | A/D converter external input channel                                                                                     |
|                                            | OCDSDA   | —                              | ST  | CMOS | OCDS data/address pin, for EV chip only                                                                                  |
|                                            | ICPDA    | —                              | ST  | CMOS | ICP data/address pin                                                                                                     |
| PA1/PTP3B/AP/AN3                           | PA1      | PAWU<br>PAPU<br>PAS0           | ST  | CMOS | General purpose I/O. Register enabled pull-high and wake-up                                                              |
|                                            | PTP3B    | PAS0                           | —   | CMOS | PTM3 inverted output                                                                                                     |
|                                            | AP       | PAS0                           | AN  | —    | OPA positive input                                                                                                       |
|                                            | AN3      | PAS0                           | AN  | —    | A/D converter external input channel                                                                                     |
| PA2/PTP1I/INT/PTP1/TX/OCDSCK/ICPCK         | PA2      | PAWU<br>PAPU<br>PAS0           | ST  | CMOS | General purpose I/O. Register enabled pull-high and wake-up                                                              |
|                                            | PTP1I    | PAS0                           | ST  | —    | PTM1 capture input                                                                                                       |
|                                            | INT      | PAS0<br>IFS1<br>INTEG<br>INTC0 | ST  | —    | External interrupt input                                                                                                 |
|                                            | PTP1     | PAS0                           | —   | CMOS | PTM1 output                                                                                                              |
|                                            | TX       | PAS0                           | —   | CMOS | UART serial data output                                                                                                  |
|                                            | OCDSCK   | —                              | ST  | —    | OCDS clock pin, for EV chip only                                                                                         |
|                                            | ICPCK    | —                              | ST  | —    | ICP clock pin                                                                                                            |
| PA3/H1/C1P/GAT/AN5                         | PA3      | PAWU<br>PAPU<br>PAS0           | ST  | CMOS | General purpose I/O. Register enabled pull-high and wake-up                                                              |
|                                            | H1       | PAS0<br>IFS0                   | ST  | —    | Hall sensor input                                                                                                        |
|                                            | C1P      | PAS0                           | AN  | —    | Comparator 1 positive input                                                                                              |
|                                            | GAT      | PAS0                           | —   | CMOS | General purpose I/O. Register enabled pull-high                                                                          |
|                                            | AN5      | PAS0                           | AN  | —    | A/D converter external input channel                                                                                     |
| PA4/H2/C2P/GAB/AN4                         | PA4      | PAWU<br>PAPU<br>PAS1           | ST  | CMOS | General purpose I/O. Register enabled pull-high and wake-up                                                              |
|                                            | H2       | PAS1<br>IFS0                   | ST  | —    | Hall sensor input                                                                                                        |
|                                            | C2P      | PAS1                           | AN  | —    | Comparator 2 positive input                                                                                              |
|                                            | GAB      | PAS1                           | —   | CMOS | Pulse width modulation complementary output                                                                              |
|                                            | AN4      | PAS1                           | AN  | —    | A/D converter external input channel                                                                                     |

| Pin Name                         | Function | OPT                  | I/T | O/T  | Description                                                 |
|----------------------------------|----------|----------------------|-----|------|-------------------------------------------------------------|
| PA5/H3/C3P/GBT/AN2               | PA5      | PAWU<br>PAPU<br>PAS1 | ST  | CMOS | General purpose I/O. Register enabled pull-high and wake-up |
|                                  | H3       | PAS1<br>IFS0         | ST  | —    | Hall sensor input                                           |
|                                  | C3P      | PAS1                 | AN  | —    | Comparator 3 positive input                                 |
|                                  | GBT      | PAS1                 | —   | CMOS | Pulse width modulation complementary output                 |
|                                  | AN2      | PAS1                 | AN  | —    | A/D converter external input channel                        |
| PA6/PTCK1/CTIN/<br>PTP2B/HBO/AN8 | PA6      | PAWU<br>PAPU<br>PAS1 | ST  | CMOS | General purpose I/O. Register enabled pull-high and wake-up |
|                                  | PTCK1    | PAS1                 | ST  | —    | PTM1 clock input or capture input                           |
|                                  | CTIN     | PAS1<br>IFS1         | ST  | —    | CAPTM input                                                 |
|                                  | PTP2B    | PAS1                 | —   | CMOS | PTM2 inverted output                                        |
|                                  | HBO      | PAS1                 | —   | CMOS | Test pin for Hall sensor                                    |
|                                  | AN8      | PAS1                 | AN  | —    | A/D converter external input channel                        |
| PA7/PTCK2/NFIN/<br>PTP0/GCB/AN7  | PA7      | PAWU<br>PAPU<br>PAS1 | ST  | CMOS | General purpose I/O. Register enabled pull-high and wake-up |
|                                  | PTCK2    | PAS1                 | ST  | —    | PTM2 clock input or capture input                           |
|                                  | NFIN     | PAS1<br>IFS0         | ST  | —    | Noise filter input                                          |
|                                  | PTP0     | PAS1                 | —   | CMOS | PTM0 output                                                 |
|                                  | GCB      | PAS1                 | —   | CMOS | Pulse width modulation complementary output                 |
|                                  | AN7      | PAS1                 | AN  | —    | A/D converter external input channel                        |
| PB0/PTCK3/HCO/GCT/AN1            | PB0      | PBPU<br>PBS0         | ST  | CMOS | General purpose I/O. Register enabled pull-high             |
|                                  | PTCK3    | PBS0                 | ST  | —    | PTM3 clock input or capture input                           |
|                                  | HCO      | PBS0                 | —   | CMOS | Test pin for Hall sensor                                    |
|                                  | GCT      | PBS0                 | —   | CMOS | Pulse width modulation complementary output                 |
|                                  | AN1      | PBS0                 | AN  | —    | A/D converter external input channel                        |
| PB1/H3/PTP3I/C1N/<br>CPN/AN6     | PB1      | PBPU<br>PBS0         | ST  | CMOS | General purpose I/O. Register enabled pull-high             |
|                                  | H3       | PBS0<br>IFS0         | ST  | —    | Hall sensor input                                           |
|                                  | PTP3I    | PBS0                 | ST  | —    | PTM3 capture input                                          |
|                                  | C1N      | PBS0                 | AN  | —    | Comparator 1 negative input                                 |
|                                  | CPN      | PBS0                 | AN  | —    | Comparator 1, 2, 3 negative input                           |
|                                  | AN6      | PBS0                 | AN  | —    | A/D converter external input channel                        |
| PB2/H2/PTP2I/C2N/<br>PTP1B/AN9   | PB2      | PBPU<br>PBS0         | ST  | CMOS | General purpose I/O. Register enabled pull-high             |
|                                  | H2       | PBS0<br>IFS0         | ST  | —    | Hall sensor input                                           |
|                                  | PTP2I    | PBS0                 | ST  | —    | PTM2 capture input                                          |
|                                  | C2N      | PBS0                 | AN  | —    | Comparator 2 negative input                                 |
|                                  | PTP1B    | PBS0                 | —   | CMOS | PTM1 inverted output                                        |
|                                  | AN9      | PBS0                 | AN  | —    | A/D converter external input channel                        |

| Pin Name                        | Function | OPT          | I/T | O/T  | Description                                                                                                              |
|---------------------------------|----------|--------------|-----|------|--------------------------------------------------------------------------------------------------------------------------|
| PB3/PTCK0/H1/<br>PTP0B/C3N/AN13 | PB3      | PBPU<br>PBS0 | ST  | CMOS | General purpose I/O. Register enabled pull-high                                                                          |
|                                 | PTCK0    | PBS0         | ST  | —    | PTM0 clock input or capture input                                                                                        |
|                                 | H1       | PBS0<br>IFS0 | ST  | —    | Hall sensor input                                                                                                        |
|                                 | PTP0B    | PBS0         | —   | CMOS | PTM0 inverted output                                                                                                     |
|                                 | C3N      | PBS0         | AN  | —    | Comparator 3 negative input                                                                                              |
|                                 | AN13     | PBS0         | AN  | —    | A/D converter external input channel                                                                                     |
| PB4/H3/CTIN/RX/TX               | PB4      | PBPU<br>PBS1 | ST  | CMOS | General purpose I/O. Register enabled pull-high                                                                          |
|                                 | H3       | PBS1<br>IFS0 | ST  | —    | Hall sensor input                                                                                                        |
|                                 | CTIN     | PBS1<br>IFS1 | ST  | —    | CAPTM input                                                                                                              |
|                                 | RX/TX    | PBS1<br>IFS1 | ST  | CMOS | UART serial data input in full-duplex communication or UART serial data input / output in Single Wire Mode communication |
| PB5/PTP2/TX/GBT                 | PB5      | PBPU<br>PBS1 | ST  | CMOS | General purpose I/O. Register enabled pull-high                                                                          |
|                                 | PTP2     | PBS1         | —   | CMOS | PTM2 output                                                                                                              |
|                                 | TX       | PBS1         | —   | CMOS | UART serial data output                                                                                                  |
|                                 | GBT      | PBS1         | —   | CMOS | Pulse width modulation complementary output                                                                              |
| PB6/PTP3/OPAO/AN12              | PB6      | PBPU<br>PBS1 | ST  | CMOS | General purpose I/O. Register enabled pull-high                                                                          |
|                                 | PTP3     | PBS1         | —   | CMOS | PTM3 output                                                                                                              |
|                                 | OPAO     | PBS1         | —   | AN   | OPA output                                                                                                               |
|                                 | AN12     | PBS1         | AN  | —    | A/D converter external input channel                                                                                     |
| PB7/HAO/PTP1/RX/TX              | PB7      | PBPU<br>PBS1 | ST  | CMOS | General purpose I/O. Register enabled pull-high                                                                          |
|                                 | HAO      | PBS1         | —   | CMOS | Test pin for Hall sensor                                                                                                 |
|                                 | PTP1     | PBS1         | —   | CMOS | PTM1 output                                                                                                              |
|                                 | RX/TX    | PBS1<br>IFS1 | ST  | CMOS | UART serial data input in full-duplex communication or UART serial data input / output in Single Wire Mode communication |
| PC0/NFIN/GAT/GCB/AN11           | PC0      | PCPU<br>PCS0 | ST  | CMOS | General purpose I/O. Register enabled pull-high                                                                          |
|                                 | NFIN     | PCS0<br>IFS0 | ST  | —    | Noise filter input                                                                                                       |
|                                 | GAT      | PCS0         | —   | CMOS | Pulse width modulation complementary output                                                                              |
|                                 | GCB      | PCS0         | —   | CMOS | Pulse width modulation complementary output                                                                              |
|                                 | AN11     | PCS0         | AN  | —    | A/D converter external input channel                                                                                     |
| PC1/GAB/GCT/AN10                | PC1      | PCPU<br>PCS0 | ST  | CMOS | General purpose I/O. Register enabled pull-high                                                                          |
|                                 | GAB      | PCS0         | —   | CMOS | Pulse width modulation complementary output                                                                              |
|                                 | GCT      | PCS0         | —   | CMOS | Pulse width modulation complementary output                                                                              |
|                                 | AN10     | PCS0         | AN  | —    | A/D converter external input channel                                                                                     |

| Pin Name                                                   | Function | OPT                            | I/T | O/T  | Description                                     |
|------------------------------------------------------------|----------|--------------------------------|-----|------|-------------------------------------------------|
| PC2/H3/GBT/GAB/GAT                                         | PC2      | PCPU<br>PCS0                   | ST  | CMOS | General purpose I/O. Register enabled pull-high |
|                                                            | H3       | PCS0<br>IFS0                   | ST  | —    | Hall sensor input                               |
|                                                            | GBT      | PCS0                           | —   | CMOS | Pulse width modulation complementary output     |
|                                                            | GAB      | PCS0                           | —   | CMOS | Pulse width modulation complementary output     |
|                                                            | GAT      | PCS0                           | —   | CMOS | Pulse width modulation complementary output     |
| PC3/H2/GBB/GAB/GAT                                         | PC3      | PCPU<br>PCS0                   | ST  | CMOS | General purpose I/O. Register enabled pull-high |
|                                                            | H2       | PCS0<br>IFS0                   | ST  | —    | Hall sensor input                               |
|                                                            | GBB      | PCS0                           | —   | CMOS | Pulse width modulation complementary output     |
|                                                            | GAB      | PCS0                           | —   | CMOS | Pulse width modulation complementary output     |
|                                                            | GAT      | PCS0                           | —   | CMOS | Pulse width modulation complementary output     |
| PC4/H1/GCT/GCB/GBB                                         | PC4      | PCPU<br>PCS1                   | ST  | CMOS | General purpose I/O. Register enabled pull-high |
|                                                            | H1       | PCS1<br>IFS0                   | ST  | —    | Hall sensor input                               |
|                                                            | GCT      | PCS1                           | —   | CMOS | Pulse width modulation complementary output     |
|                                                            | GCB      | PCS1                           | —   | CMOS | Pulse width modulation complementary output     |
|                                                            | GBB      | PCS1                           | —   | CMOS | Pulse width modulation complementary output     |
| PC5/H2/INT/GCB/GBB/GBT                                     | PC5      | PCPU<br>PCS1                   | ST  | CMOS | General purpose I/O. Register enabled pull-high |
|                                                            | H2       | PCS1<br>IFS0                   | ST  | —    | Hall sensor input                               |
|                                                            | INT      | PCS1<br>IFS1<br>INTEG<br>INTC0 | ST  | CMOS | External interrupt input                        |
|                                                            | GCB      | PCS1                           | —   | CMOS | Pulse width modulation complementary output     |
|                                                            | GBB      | PCS1                           | —   | CMOS | Pulse width modulation complementary output     |
|                                                            | GBT      | PCS1                           | —   | CMOS | Pulse width modulation complementary output     |
| PC6/GBB/GCT/PTP0B<br>(16-pin NSOP and 20-pin<br>SSOP Only) | PC6      | PCPU<br>PCS1                   | ST  | CMOS | General purpose I/O. Register enabled pull-high |
|                                                            | GBB      | PCS1                           | —   | CMOS | Pulse width modulation complementary output     |
|                                                            | GCT      | PCS1                           | —   | CMOS | Pulse width modulation complementary output     |
|                                                            | PTP0B    | PCS1                           | —   | CMOS | PTM0 inverted output                            |
| VDD/AVDD                                                   | VDD      | —                              | PWR | —    | Digital positive power supply                   |
|                                                            | AVDD     | —                              | PWR | —    | Analog positive power supply                    |
| VSS/AVSS                                                   | VSS      | —                              | PWR | —    | Digital negative power supply, ground           |
|                                                            | AVSS     | —                              | PWR | —    | Analog negative power supply, ground            |

Legend: I/T: Input type;  
 OPT: Optional by register option;  
 ST: Schmitt Trigger input;  
 AN: Analog signal.

O/T: Output type;  
 PWR: Power;  
 CMOS: CMOS output;

## Absolute Maximum Ratings

|                               |                                  |
|-------------------------------|----------------------------------|
| Supply Voltage .....          | $V_{SS}-0.3V$ to $6.0V$          |
| Input Voltage .....           | $V_{SS}-0.3V$ to $V_{DD}+0.3V$   |
| Storage Temperature.....      | $-60^{\circ}C$ to $150^{\circ}C$ |
| Operating Temperature.....    | $-40^{\circ}C$ to $105^{\circ}C$ |
| $I_{OH}$ Total .....          | $-80mA$                          |
| $I_{OL}$ Total .....          | $80mA$                           |
| Total Power Dissipation ..... | $500mW$                          |

Note: These are stress ratings only. Stresses exceeding the range specified under “Absolute Maximum Ratings” may cause substantial damage to the device. Functional operation of the device at other conditions beyond those listed in the specification is not implied and prolonged exposure to extreme conditions may affect device reliability.

## D.C. Characteristics

For data in the following tables, note that factors such as oscillator type, operating voltage, operating frequency, pin load conditions, temperature and program instruction type, etc., can all exert an influence on the measured values.

### Operating Voltage Characteristics

$T_a = -40^{\circ}C \sim 105^{\circ}C$

| Symbol   | Parameter                | Test Conditions                                | Min. | Typ. | Max. | Unit |
|----------|--------------------------|------------------------------------------------|------|------|------|------|
| $V_{DD}$ | Operating Voltage – HIRC | $f_{SYS}=f_{HIRC}=20MHz$                       | 4.5  | —    | 5.5  | V    |
|          |                          | $CKS[2:0]=010B$ , $f_H=20MHz$ , $f_{SYS}=5MHz$ | 4.0  | —    | 5.5  |      |
|          | Operating Voltage – LIRC | $f_{SYS}=f_{LIRC}=32kHz$                       | 4.5  | —    | 5.5  |      |

### Operating Current Characteristics

$T_a = -40^{\circ}C \sim 105^{\circ}C$

| Symbol   | Parameter                | Test Conditions |                                                   | Min. | Typ. | Max. | Unit    |
|----------|--------------------------|-----------------|---------------------------------------------------|------|------|------|---------|
|          |                          | $V_{DD}$        | Conditions                                        |      |      |      |         |
| $I_{DD}$ | Operating Current – LIRC | 5V              | $f_{SYS}=f_{LIRC}=32kHz$                          | —    | 30   | 50   | $\mu A$ |
|          | Operating Current – HIRC | 5V              | $CKS[2:0]=010B$ , $f_H=20MHz$ ,<br>$f_{SYS}=5MHz$ | —    | 0.8  | 1.2  | mA      |
|          |                          | 5V              | $f_{SYS}=f_{HIRC}=20MHz$                          | —    | 9    | 12   | mA      |

Note: When using the characteristic table data, the following notes should be taken into consideration:

1. Any digital inputs are setup in a non-floating condition.
2. All measurements are taken under conditions of no load and with all peripherals in an off state.
3. There are no DC current paths.
4. All Operating Current values are measured using a continuous NOP instruction program loop.

## Standby Current Characteristics

Ta=25°C, unless otherwise specified

| Symbol           | Standby Mode      | Test Conditions |                                                                 | Min. | Typ. | Max. | Max.<br>@105°C | Unit |
|------------------|-------------------|-----------------|-----------------------------------------------------------------|------|------|------|----------------|------|
|                  |                   | V <sub>DD</sub> | Conditions                                                      |      |      |      |                |      |
| I <sub>STB</sub> | SLEEP Mode        | 5V              | WDT off                                                         | —    | 0.5  | 2.0  | 8.0            | μA   |
|                  | SLEEP Mode        | 5V              | WDT on                                                          | —    | 3    | 5    | 10             |      |
|                  | IDLE0 Mode – LIRC | 5V              | f <sub>SUB</sub> on                                             | —    | 5    | 10   | 12             |      |
|                  | IDLE1 Mode – HIRC | 5V              | CKS[2:0]=010B, f <sub>H</sub> =20MHz,<br>f <sub>SYS</sub> =5MHz | —    | 400  | 600  | 720            | μA   |
|                  |                   | 4.5V            | f <sub>SUB</sub> on, f <sub>SYS</sub> =f <sub>HIRC</sub> =20MHz | —    | 1.32 | 1.98 | 2.37           | mA   |
|                  |                   | 5V              |                                                                 | —    | 2.50 | 3.30 | 3.96           |      |

Note: When using the characteristic table data, the following notes should be taken into consideration:

1. Any digital inputs are setup in a non-floating condition.
2. All measurements are taken under conditions of no load and with all peripherals in an off state.
3. There are no DC current paths.
4. All Standby Current values are taken after a HALT instruction execution thus stopping all instruction execution.

## A.C. Characteristics

For data in the following tables, note that factors such as oscillator type, operating voltage, operating frequency and temperature etc., can all exert an influence on the measured values.

### High Speed Internal Oscillator – HIRC – Frequency Accuracy

During the program writing operation the writer will trim the HIRC oscillator at a user selected HIRC frequency and user selected voltage of 5V.

| Symbol            | Parameter                           | Test Conditions |             | Min.  | Typ. | Max.  | Unit |
|-------------------|-------------------------------------|-----------------|-------------|-------|------|-------|------|
|                   |                                     | V <sub>DD</sub> | Temp.       |       |      |       |      |
| f <sub>HIRC</sub> | 20MHz Writer Trimmed HIRC Frequency | 5V              | 25°C        | -1%   | 20   | +1%   | MHz  |
|                   |                                     |                 | -40°C~105°C | -2.5% | 20   | +2.5% |      |
|                   |                                     | 4.5V~5.5V       | 25°C        | -2.5% | 20   | +2.5% |      |
|                   |                                     |                 | -40°C~105°C | -3%   | 20   | +3%   |      |


Note: 1. The 5V value for V<sub>DD</sub> is provided as this is the fixed voltage at which the HIRC frequency is trimmed by the writer.

2. The row below the 5V trim voltage row is provided to show the values for the full V<sub>DD</sub> range operating voltage.

### Low Speed Internal Oscillator Characteristics – LIRC

| Symbol             | Parameter          | Test Conditions        |             | Min. | Typ. | Max. | Unit |
|--------------------|--------------------|------------------------|-------------|------|------|------|------|
|                    |                    | V <sub>DD</sub>        | Temp.       |      |      |      |      |
| f <sub>LIRC</sub>  | LIRC Frequency     | V <sub>LVR</sub> ~5.5V | 25°C        | -10% | 32   | +10% | kHz  |
|                    |                    |                        | -40°C~105°C | -50% | 32   | +60% |      |
| t <sub>START</sub> | LIRC Start Up Time | —                      | -40°C~105°C | —    | —    | 500  | μs   |

## Operating Frequency Characteristic Curves

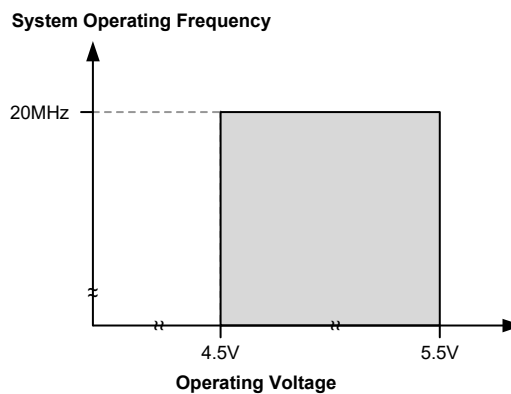

## System Start Up Time Characteristics

Ta=-40°C~105°C

| Symbol              | Parameter                                                                           | Test Conditions |                                                                                         | Min. | Typ. | Max. | Unit              |
|---------------------|-------------------------------------------------------------------------------------|-----------------|-----------------------------------------------------------------------------------------|------|------|------|-------------------|
|                     |                                                                                     | V <sub>DD</sub> | Conditions                                                                              |      |      |      |                   |
| t <sub>SST</sub>    | System Start-up Time<br>(Wake-up from Condition where f <sub>sys</sub> is off)      | —               | f <sub>sys</sub> =f <sub>H</sub> ~f <sub>H</sub> /64, f <sub>H</sub> =f <sub>HIRC</sub> | —    | 16   | —    | t <sub>HIRC</sub> |
|                     |                                                                                     | —               | f <sub>sys</sub> =f <sub>SUB</sub> =f <sub>LIRC</sub>                                   | —    | 2    | —    | t <sub>LIRC</sub> |
|                     | System Start-up Time<br>(Wake-up from Condition where f <sub>sys</sub> is on)       | —               | f <sub>sys</sub> =f <sub>H</sub> ~f <sub>H</sub> /64, f <sub>H</sub> =f <sub>HIRC</sub> | —    | 2    | —    | t <sub>H</sub>    |
|                     |                                                                                     | —               | f <sub>sys</sub> =f <sub>SUB</sub> =f <sub>LIRC</sub>                                   | —    | 2    | —    | t <sub>SUB</sub>  |
|                     | System Speed Switch Time<br>(FAST to SLOW Mode or SLOW to FAST Mode)                | —               | f <sub>HIRC</sub> off → on                                                              | —    | 16   | —    | t <sub>HIRC</sub> |
| t <sub>RSTD</sub>   | System Reset Delay Time<br>(Reset Source from Power-on Reset or LVR Hardware Reset) | —               | RR <sub>POR</sub> =5V/ms                                                                | 14   | 16   | 18   | ms                |
|                     | System Reset Delay Time (LVRC/WDTC Software Reset)                                  | —               | —                                                                                       |      |      |      |                   |
|                     | System Reset Delay Time<br>(WDT Time-out Reset)                                     | —               | —                                                                                       |      |      |      |                   |
| t <sub>SRESET</sub> | Minimum Software Reset Width to Reset                                               | —               | —                                                                                       | 45   | 90   | 120  | μs                |

- Note: 1. For the System Start-up time values, whether f<sub>sys</sub> is on or off depends upon the mode type and the chosen f<sub>sys</sub> system oscillator. Details are provided in the System Operating Modes section.
2. The time units, shown by the symbols t<sub>HIRC</sub>, t<sub>sys</sub> etc. are the inverse of the corresponding frequency values as provided in the frequency tables. For example t<sub>HIRC</sub>=1/f<sub>HIRC</sub>, t<sub>sys</sub>=1/f<sub>sys</sub> etc.
3. If the LIRC is used as the system clock and if it is off when in the SLEEP Mode, then an additional LIRC start up time, t<sub>START</sub>, as provided in the LIRC frequency table, must be added to the t<sub>SST</sub> time in the table above.
4. The System Speed Switch Time is effectively the time taken for the newly activated oscillator to start up.

## Input/Output Characteristics

Ta=-40°C~105°C

| Symbol             | Parameter                                         | Test Conditions |                                                                      | Min.               | Typ. | Max.               | Unit             |
|--------------------|---------------------------------------------------|-----------------|----------------------------------------------------------------------|--------------------|------|--------------------|------------------|
|                    |                                                   | V <sub>DD</sub> | Conditions                                                           |                    |      |                    |                  |
| V <sub>IL</sub>    | Input Low Voltage for I/O Ports                   | 5V              | —                                                                    | 0                  | —    | 1.5                | V                |
|                    |                                                   | —               | —                                                                    | 0                  | —    | 0.2V <sub>DD</sub> | V                |
| V <sub>IH</sub>    | Input High Voltage for I/O Ports                  | 5V              | —                                                                    | 3.5                | —    | 5.0                | V                |
|                    |                                                   | —               | —                                                                    | 0.8V <sub>DD</sub> | —    | V <sub>DD</sub>    | V                |
| I <sub>OL</sub>    | Sink Current for I/O Ports                        | 4.5V            | V <sub>OL</sub> =0.1V <sub>DD</sub>                                  | 16                 | 32   | —                  | mA               |
|                    |                                                   | 5V              |                                                                      | 32                 | 65   | —                  | mA               |
| I <sub>OH</sub>    | Source Current for I/O Ports                      | 4.5V            | V <sub>OH</sub> =0.9V <sub>DD</sub>                                  | -4                 | -8   | —                  | mA               |
|                    |                                                   | 5V              |                                                                      | -8                 | -16  | —                  | mA               |
| R <sub>PH</sub>    | Pull-high Resistance for I/O Ports <sup>(1)</sup> | 4.5V            | —                                                                    | 20                 | 60   | 100                | kΩ               |
|                    |                                                   | 5V              |                                                                      | 10                 | 30   | 50                 | kΩ               |
| I <sub>LEAK</sub>  | Input Leakage Current                             | 5V              | V <sub>IN</sub> =V <sub>DD</sub> or V <sub>IN</sub> =V <sub>SS</sub> | —                  | —    | ±1                 | μA               |
| t <sub>TPI</sub>   | PTP0I Input Pin Minimum Pulse Width               | —               | —                                                                    | 50                 | —    | —                  | ns               |
|                    | PTP1I~PTP3I Input Pin Minimum Pulse Width         | —               | —                                                                    | 0.3                | —    | —                  | μs               |
| t <sub>TCK</sub>   | PTCKn Input Pin Minimum Pulse Width               | —               | —                                                                    | 0.3                | —    | —                  | μs               |
| f <sub>TMCLK</sub> | PTMn Maximum Timer Clock Source Frequency         | 5V              | —                                                                    | —                  | —    | 1                  | f <sub>SYS</sub> |
| t <sub>CPW</sub>   | PTM Minimum Capture Pulse Width <sup>(2)</sup>    | —               | —                                                                    | t <sub>CPW</sub>   | —    | —                  | μs               |
| t <sub>INT</sub>   | External Interrupt Minimum Pulse Width            | —               | —                                                                    | 10                 | —    | —                  | μs               |

Note: 1. The R<sub>PH</sub> internal pull-high resistance value is calculated by connecting to ground and enabling the input pin with a pull-high resistor and then measuring the pin current at the specified supply voltage level. Dividing the voltage by this measured current provides the R<sub>PH</sub> value.

2. If PTnCAPTS=0, then t<sub>CPW</sub>=max(2×t<sub>TMCLK</sub>, t<sub>TPI</sub>). If PTnCAPTS=1, then t<sub>CPW</sub>=max(2×t<sub>TMCLK</sub>, t<sub>TCK</sub>).

$$t_{TMCLK} = 1/f_{TMCLK}$$

Example 1: If PT1CAPTS=0, f<sub>TMCLK</sub>=16MHz, t<sub>TPI</sub>=0.3μs, then t<sub>CPW</sub>=max(0.125μs, 0.3μs)=0.3μs

Example 2: If PT1CAPTS=1, f<sub>TMCLK</sub>=16MHz, t<sub>TPI</sub>=0.3μs, then t<sub>CPW</sub>=max(0.125μs, 0.3μs)=0.3μs

Example 3: If PT1CAPTS=0, f<sub>TMCLK</sub>=8MHz, t<sub>TPI</sub>=0.3μs, then t<sub>CPW</sub>=max(0.25μs, 0.3μs)=0.3μs

Example 4: If PT1CAPTS=0, f<sub>TMCLK</sub>=4MHz, t<sub>TPI</sub>=0.3μs, then t<sub>CPW</sub>=max(0.5μs, 0.3μs)=0.5μs

## Memory Electrical Characteristics

Ta=-40°C~105°C, unless otherwise specified

| Symbol                      | Parameter                                                         | Test Conditions |              | Min.               | Typ.  | Max.               | Unit |
|-----------------------------|-------------------------------------------------------------------|-----------------|--------------|--------------------|-------|--------------------|------|
|                             |                                                                   | V <sub>DD</sub> | Conditions   |                    |       |                    |      |
| V <sub>RW</sub>             | V <sub>DD</sub> for Read/Write                                    | —               | —            | V <sub>DDmin</sub> | —     | V <sub>DDmax</sub> | V    |
| <b>Flash Program Memory</b> |                                                                   |                 |              |                    |       |                    |      |
| t <sub>FER</sub>            | ROM Erase Time                                                    | —               | —            | 2.273              | 2.500 | 2.778              | ms   |
|                             | IAP Erase Time                                                    | —               | FWERTS bit=0 | —                  | 3.2   | 3.9                | ms   |
|                             |                                                                   |                 | FWERTS bit=1 | —                  | 3.7   | 4.5                |      |
| t <sub>FWR</sub>            | ROM Write Time                                                    | —               | —            | 1.364              | 1.500 | 1.667              | ms   |
|                             | IAP Write Time                                                    | —               | FWERTS bit=0 | —                  | 2.2   | 2.7                | ms   |
|                             |                                                                   |                 | FWERTS bit=1 | —                  | 3.0   | 3.6                |      |
| E <sub>P</sub>              | Cell Endurance                                                    | —               | —            | 100K               | —     | —                  | E/W  |
| t <sub>RETD</sub>           | ROM Data Retention Time                                           | —               | Ta=25°C      | —                  | 40    | —                  | Year |
| t <sub>ACTV</sub>           | ROM Activation Time – Wake-up from Power Down Mode <sup>(1)</sup> | —               | —            | 32                 | —     | 64                 | μs   |

| Symbol          | Parameter                  | Test Conditions |            | Min. | Typ. | Max. | Unit |
|-----------------|----------------------------|-----------------|------------|------|------|------|------|
|                 |                            | V <sub>DD</sub> | Conditions |      |      |      |      |
| RAM Data Memory |                            |                 |            |      |      |      |      |
| V <sub>DR</sub> | RAM Data Retention Voltage | —               | —          | 1    | —    | —    | V    |

Note: 1. The ROM activation time  $t_{ACTV}$  should be added when calculating the total system start-up time of a wake-up from the IDLE/SLEEP mode.

2. “E/W” means Erase/Write times.

## LVR/LVD Electrical Characteristics

Ta=25°C

| Symbol            | Parameter                              | Test Conditions |                                  | Min. | Typ. | Max. | Unit |
|-------------------|----------------------------------------|-----------------|----------------------------------|------|------|------|------|
|                   |                                        | V <sub>DD</sub> | Conditions                       |      |      |      |      |
| V <sub>LVR</sub>  | Low Voltage Reset Voltage              | —               | LVR enable, voltage select 1.7V  | -5%  | 1.7  | +5%  | V    |
|                   |                                        | —               | LVR enable, voltage select 1.9V  | -5%  | 1.9  | +5%  | V    |
|                   |                                        | —               | LVR enable, voltage select 2.55V | -3%  | 2.55 | +3%  | V    |
|                   |                                        | —               | LVR enable, voltage select 3.15V | -3%  | 3.15 | +3%  | V    |
|                   |                                        | —               | LVR enable, voltage select 3.8V  | -3%  | 3.8  | +3%  | V    |
| V <sub>LVD</sub>  | Low Voltage Detection Voltage          | —               | LVD enable, voltage select 3.3V  | -5%  | 3.3  | +5%  | V    |
|                   |                                        | —               | LVD enable, voltage select 3.6V  | -5%  | 3.6  | +5%  | V    |
|                   |                                        | —               | LVD enable, voltage select 4.0V  | -5%  | 4.0  | +5%  | V    |
| t <sub>LVDs</sub> | LVDO Stable Time                       | —               | For LVR enable, LVD off → on     | —    | —    | 18   | μs   |
|                   |                                        | —               | For LVR disable, LVD off → on    | —    | —    | 150  | μs   |
| t <sub>LVR</sub>  | Minimum Low Voltage Width to Reset     | —               | TLVR[1:0]=00B                    | 120  | 240  | 480  | μs   |
|                   |                                        | —               | TLVR[1:0]=01B                    | 0.5  | 1.0  | 2.0  | ms   |
|                   |                                        | —               | TLVR[1:0]=10B                    | 1    | 2    | 4    | ms   |
|                   |                                        | —               | TLVR[1:0]=11B                    | 2    | 4    | 8    | ms   |
| t <sub>LVD</sub>  | Minimum Low Voltage Width to Interrupt | —               | —                                | 60   | 120  | 240  | μs   |
| I <sub>LVR</sub>  | Additional Current for LVR Enable      | —               | LVD disable                      | —    | —    | 14   | μA   |
| I <sub>LVD</sub>  | Additional Current for LVD Enable      | —               | LVR disable                      | —    | —    | 14   | μA   |

## A/D Converter Electrical Characteristics

Ta=25°C

| Symbol             | Parameter                                              | Test Conditions |                                                                                         | Min. | Typ. | Max.             | Unit              |
|--------------------|--------------------------------------------------------|-----------------|-----------------------------------------------------------------------------------------|------|------|------------------|-------------------|
|                    |                                                        | V <sub>DD</sub> | Conditions                                                                              |      |      |                  |                   |
| V <sub>ADI</sub>   | A/D Converter Input Voltage                            | —               | —                                                                                       | 0    | —    | V <sub>REF</sub> | V                 |
| V <sub>REF</sub>   | A/D Converter Reference Voltage                        | —               | —                                                                                       | 2    | —    | AV <sub>DD</sub> | V                 |
| N <sub>R</sub>     | Resolution                                             | —               | —                                                                                       | —    | —    | 12               | Bit               |
| DNL                | Differential Non-linearity                             | —               | V <sub>REF</sub> =AV <sub>DD</sub> =V <sub>DD</sub> , no load, t <sub>ADCK</sub> =0.8μs | -3   | —    | 3                | LSB               |
| INL                | Integral Non-linearity                                 | —               | V <sub>REF</sub> =AV <sub>DD</sub> =V <sub>DD</sub> , no load, t <sub>ADCK</sub> =0.8μs | -4   | —    | 4                | LSB               |
| I <sub>ADC</sub>   | Additional Current for A/D Converter Enable            | 5V              | No load (t <sub>ADCK</sub> =0.8μs)                                                      | —    | 850  | 1000             | μA                |
| t <sub>ON2ST</sub> | A/D Converter On-to-Start Time                         | —               | —                                                                                       | 4    | —    | —                | μs                |
| t <sub>ADS</sub>   | A/D Converter Sampling Time                            | —               | —                                                                                       | —    | 4    | —                | t <sub>ADCK</sub> |
| t <sub>ADC</sub>   | A/D Conversion Time (Include ADC Sample and Hold Time) | —               | —                                                                                       | —    | 16   | —                | t <sub>ADCK</sub> |

## OCP Electrical characteristics

Ta=25°C

| Symbol              | Parameter                            | Test Conditions |                                                     | Min.                 | Typ. | Max.                 | Unit |
|---------------------|--------------------------------------|-----------------|-----------------------------------------------------|----------------------|------|----------------------|------|
|                     |                                      | V <sub>DD</sub> | Conditions                                          |                      |      |                      |      |
| AV <sub>DD</sub>    | Operating Voltage                    | —               | —                                                   | V <sub>LVR</sub>     | —    | 5.5                  | V    |
| I <sub>OCP</sub>    | Operating Current                    | 5V              | COHYEN=0,<br>OPAVS[2:0]=111,<br>OPCM[7:0]=1000 0000 | —                    | 450  | 600                  | μA   |
| V <sub>REF</sub>    | DAC Reference Voltage                | 5V              | —                                                   | 2.2                  | —    | AV <sub>DD</sub>     | V    |
| V <sub>OS_CMP</sub> | Comparator Input Offset Voltage      | 5V              | Without calibration                                 | -15                  | —    | 15                   | mV   |
| V <sub>HYS0</sub>   | Hysteresis                           | 5V              | Comparator 0                                        | 50                   | 100  | 150                  | mV   |
| V <sub>CM_CMP</sub> | Comparator Common Mode Voltage Range | 5V              | —                                                   | 0.1                  | —    | V <sub>DD</sub> -1.4 | V    |
| V <sub>OS_OPA</sub> | OPA Input Offset Voltage             | 5V              | Without calibration<br>(AOF[4:0]=10000B)            | -15                  | —    | 15                   | mV   |
|                     |                                      | 5V              | With calibration                                    | -2                   | —    | 2                    | mV   |
| V <sub>CM_OPA</sub> | OPA Common Mode Voltage Range        | 5V              | —                                                   | 0.1                  | —    | V <sub>DD</sub> -1.4 | V    |
| V <sub>OR</sub>     | OPA Maximum Output Voltage Range     | 5V              | —                                                   | V <sub>SS</sub> +0.1 | —    | V <sub>DD</sub> -0.1 | V    |
| Ga                  | PGA Gain Accuracy                    | 5V              | All gain                                            | -5                   | —    | 5                    | %    |
| DNL                 | Differential Non-linearity           | 5V              | DAC V <sub>REF</sub> =V <sub>DD</sub>               | —                    | —    | ±1                   | LSB  |
| INL                 | Integral Non-linearity               | 5V              | DAC V <sub>REF</sub> =V <sub>DD</sub>               | —                    | —    | ±1.5                 | LSB  |


## Comparator Electrical Characteristics

Ta=25°C

| Symbol            | Parameter                                | Test Conditions |                                         | Min. | Typ. | Max.                 | Unit |
|-------------------|------------------------------------------|-----------------|-----------------------------------------|------|------|----------------------|------|
|                   |                                          | V <sub>DD</sub> | Conditions                              |      |      |                      |      |
| I <sub>CMP</sub>  | Additional Current for Comparator Enable | 5V              | —                                       | —    | —    | 200                  | μA   |
| I <sub>CSTB</sub> | Comparator Power Down Current            | 5V              | Comparator disable                      | —    | —    | 0.1                  | μA   |
| V <sub>HYS</sub>  | Hysteresis                               | 5V              | Comparator 0                            | 0    | 0    | 5                    | mV   |
|                   |                                          |                 | Comparator 1, 2, 3                      | 20   | 40   | 60                   | mV   |
| V <sub>CM</sub>   | Input Common Mode Voltage Range          | 5V              | —                                       | 0.1  | —    | V <sub>DD</sub> -1.4 | V    |
| A <sub>OL</sub>   | Comparator Open Loop Gain                | 5V              | —                                       | 60   | 80   | —                    | dB   |
| t <sub>RP</sub>   | Comparator Response Time                 | 5V              | With 100mV overdrive <sup>(1) (2)</sup> | —    | 200  | 400                  | ns   |

Note: 1. Measured with comparator one input pin at V<sub>CM</sub>=(V<sub>DD</sub>-1.0)/2 while the other pin input transition from V<sub>SS</sub> to (V<sub>CM</sub>+100mV) or from V<sub>DD</sub> to (V<sub>CM</sub>-100mV).

2. Load Condition: C<sub>LOAD</sub>=50pF



## DNF Electrical Characteristics


Ta=25°C

| Symbol            | Parameter                                | Test Conditions |                                     | Min. | Typ. | Max. | Unit               |
|-------------------|------------------------------------------|-----------------|-------------------------------------|------|------|------|--------------------|
|                   |                                          | V <sub>DD</sub> | Conditions                          |      |      |      |                    |
| t <sub>NFIN</sub> | Digital Noise Filter Capture Pulse Width | —               | f <sub>SYS</sub> =f <sub>HIRC</sub> | 4    | —    | 128  | 1/f <sub>SYS</sub> |

## Power-on Reset Characteristics

Ta=25°C

| Symbol            | Parameter                                                                           | Test Conditions |            | Min.  | Typ. | Max. | Unit |
|-------------------|-------------------------------------------------------------------------------------|-----------------|------------|-------|------|------|------|
|                   |                                                                                     | V <sub>DD</sub> | Conditions |       |      |      |      |
| V <sub>POR</sub>  | V <sub>DD</sub> Start Voltage to Ensure Power-on Reset                              | —               | —          | —     | —    | 100  | mV   |
| RR <sub>POR</sub> | V <sub>DD</sub> Rising Rate to Ensure Power-on Reset                                | —               | —          | 0.035 | —    | —    | V/ms |
| t <sub>POR</sub>  | Minimum Time for V <sub>DD</sub> Stays at V <sub>POR</sub> to Ensure Power-on Reset | —               | —          | 1     | —    | —    | ms   |

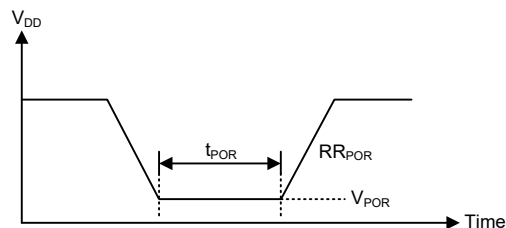

## System Architecture


A key factor in the high-performance features of the Holtek range of microcontrollers is attributed to their internal system architecture. The range of the device take advantage of the usual features found within RISC microcontrollers providing increased speed of operation and enhanced performance. The pipelining scheme is implemented in such a way that instruction fetching and instruction execution are overlapped, hence instructions are effectively executed in one or two cycles for most of the standard or extended instructions respectively, with the exception of branch or call instructions which needs one more cycle. An 8-bit wide ALU is used in practically all instruction set operations, which carries out arithmetic operations, logic operations, rotation, increment, decrement, branch decisions, etc. The internal data path is simplified by moving data through the Accumulator and the ALU. Certain internal registers are implemented in the Data Memory and can be directly or indirectly addressed. The simple addressing methods of these registers along with additional architectural features ensure that a minimum of external components is required to provide a functional I/O and A/D control system with maximum reliability and flexibility. This makes the device suitable for low-cost, high-volume production for controller applications.

### Clocking and Pipelining


The main system clock, derived from either an HIRC or LIRC oscillator is subdivided into four internally generated non-overlapping clocks, T1~T4. The Program Counter is incremented at the beginning of the T1 clock during which time a new instruction is fetched. The remaining T2~T4 clocks carry out the decoding and execution functions. In this way, one T1~T4 clock cycle forms one instruction cycle. Although the fetching and execution of instructions takes place in consecutive instruction cycles, the pipelining structure of the microcontroller ensures that instructions are effectively executed in one instruction cycle. The exception to this are instructions where the

contents of the Program Counter are changed, such as subroutine calls or jumps, in which case the instruction will take one more instruction cycle to execute.

For instructions involving branches, such as jump or call instructions, two machine cycles are required to complete instruction execution. An extra cycle is required as the program takes one cycle to first obtain the actual jump or call address and then another cycle to actually execute the branch. The requirement for this extra cycle should be taken into account by programmers in timing sensitive applications.

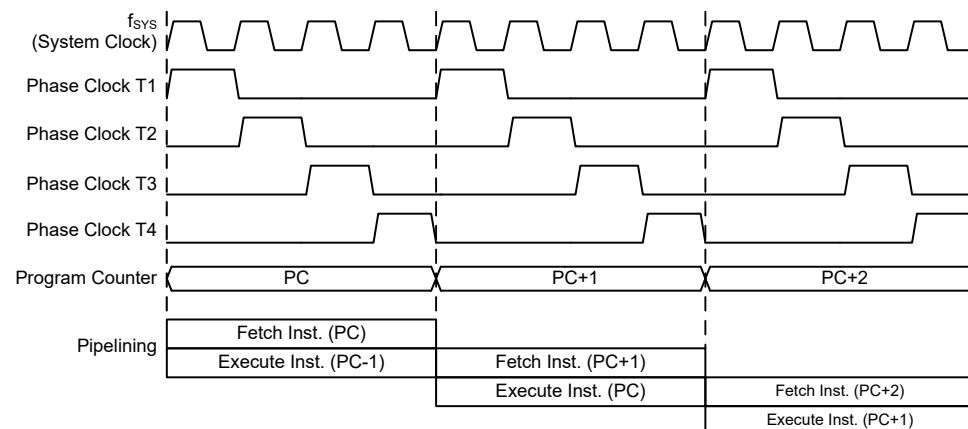

**System Clocking and Pipelining**

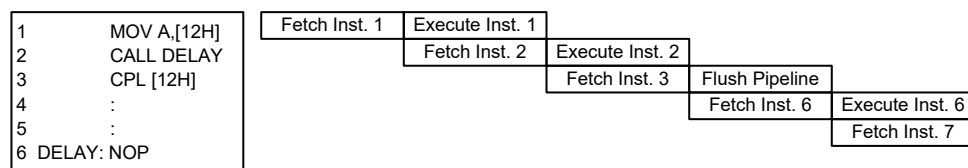

**Instruction Fetching**

## Program Counter – PC

During program execution, the Program Counter is used to keep track of the address of the next instruction to be executed. It is automatically incremented by one each time an instruction is executed except for instructions, such as “JMP” or “CALL” that demand a jump to a non-consecutive Program Memory address. Only the lower 8 bits, known as the Program Counter Low Register, are directly addressable by the application program.

When executing instructions requiring jumps to non-consecutive addresses such as a jump instruction, a subroutine call, interrupt or reset, etc., the microcontroller manages program control by loading the required address into the Program Counter. For conditional skip instructions, once the condition has been met, the next instruction, which has already been fetched during the present instruction execution, is discarded and a dummy cycle takes its place while the correct instruction is obtained.

| Program Counter |                |
|-----------------|----------------|
| High Byte       | Low Byte (PCL) |
| PC11~PC8        | PCL7~PCL0      |

**Program Counter**


The lower byte of the Program Counter, known as the Program Counter Low register or PCL, is available for program control and is a readable and writeable register. By transferring data directly into this register, a short program jump can be executed directly; however, as only this low byte is available for manipulation, the jumps are limited to the present page of memory that is 256 locations. When such program jumps are executed it should also be noted that a dummy cycle will be inserted. Manipulating the PCL register may cause program branching, so an extra cycle is needed to pre-fetch.

## Stack

This is a special part of the memory which is used to save the contents of the Program Counter only. For this device the stack has 8 levels and neither part of the data nor part of the program space, and is neither readable nor writeable. The activated level is indexed by the Stack Pointer, and is neither readable nor writeable. At a subroutine call or interrupt acknowledge signal, the contents of the Program Counter are pushed onto the stack. At the end of a subroutine or an interrupt routine, signaled by a return instruction, RET or RETI, the Program Counter is restored to its previous value from the stack. After a device reset, the Stack Pointer will point to the top of the stack.

If the stack is full and an enabled interrupt takes place, the interrupt request flag will be recorded but the acknowledge signal will be inhibited. When the Stack Pointer is decremented, by RET or RETI, the interrupt will be serviced. This feature prevents stack overflow allowing the programmer to use the structure more easily. However, when the stack is full, a CALL subroutine instruction can still be executed which will result in a stack overflow. Precautions should be taken to avoid such cases which might cause unpredictable program branching.

If the stack is overflow, the first Program Counter save in the stack will be lost.

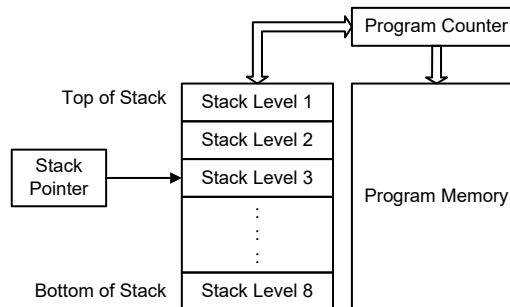

## Arithmetic and Logic Unit – ALU

The arithmetic-logic unit or ALU is a critical area of the microcontroller that carries out arithmetic and logic operations of the instruction set. Connected to the main microcontroller data bus, the ALU receives related instruction codes and performs the required arithmetic or logical operations after which the result will be placed in the specified register. As these ALU calculation or operations may result in carry, borrow or other status changes, the status register will be correspondingly updated to reflect these changes. The ALU supports the following functions:

- Arithmetic operations:  
 ADD, ADDM, ADC, ADCM, SUB, SUBM, SBC, SBCM, DAA,  
 LADD, LADDM, LADC, LADCM, LSUB, LSUBM, LSBC, LSBCM, LDAA
- Logic operations:  
 AND, OR, XOR, ANDM, ORM, XORM, CPL, CPLA,  
 LAND, LANDM, LOR, LORM, LXOR, LXORM, LCPL, LCPLA


- Rotation:  
RRA, RR, RRCA, RRC, RLA, RL, RLCA, RLC,  
LRR, LRRA, LRRCA, LRRC, LRLA, LRL, LRLCA, LRLC
- Increment and Decrement:  
INCA, INC, DECA, DEC,  
LINCA, LINC, LDECA, LDEC
- Branch decision:  
JMP, SZ, SZA, SNZ, SIZ, SDZ, SIZA, SDZA, CALL, RET, RETI,  
LSNZ, LSZ, LSZA, LSIZ, LSIZA, LSDZ, LSDZA

## Flash Program Memory

The Program Memory is the location where the user code or program is stored. For the device the Program Memory is Flash type, which means it can be programmed and re-programmed a large number of times, allowing the user the convenience of code modification on the same device. By using the appropriate programming tools, the Flash device offers users the flexibility to conveniently debug and develop their applications while also offering a means of field programming and updating.

### Structure

The Program Memory has a capacity of 4K×16 bits. The Program Memory is addressed by the Program Counter and also contains data, table information and interrupt entries. Table data, which can be setup in any location within the Program Memory, is addressed by a pair of data table pointer registers.

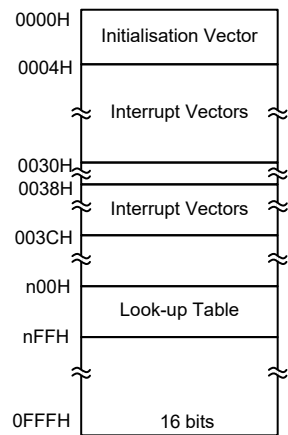

**Program Memory Structure**

### Special Vectors


Within the Program Memory, certain locations are reserved for the reset and interrupts. The location 0000H is reserved for use by the device reset for program initialisation. After a device reset is initiated, the program will jump to this location and begin execution.

### Look-up Table

Any location within the Program Memory can be defined as a look-up table where programmers can store fixed data. To use the look-up table, the table pointer must first be setup by placing the address of the look up data to be retrieved in the table pointer register, TBLP and TBHP. These registers define the total address of the look-up table.

After setting up the table pointer, the table data can be retrieved from the Program Memory using the corresponding table read instruction such as “TABRD [m]” or “TABRDL [m]” respectively when the data table is located in sector 0. If the data table is located in other sectors, the data can be retrieved from the program memory using the corresponding extended table read instruction such as “LTABRD [m]” or “LTABRDL [m]” respectively. When the instruction is executed, the lower order table byte from the Program Memory will be transferred to the user defined Data Memory register [m] as specified in the instruction. The higher order table data byte from the Program Memory will be transferred to the TBLH special register.

The accompanying diagram illustrates the addressing data flow of the look-up table.

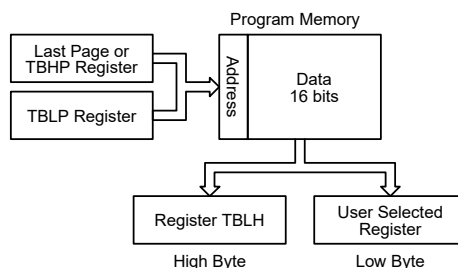

### Table Program Example

The following example shows how the table pointer and table data is defined and retrieved from the microcontroller. This example uses raw table data located in the Program Memory which is stored there using the ORG statement. The value at this ORG statement is “0F00H” which refers to the start address of the last page within the 4K words Program Memory of the device. The table pointer low byte register is setup here to have an initial value of “06H”. This will ensure that the first data read from the data table will be at the Program Memory address “0F06H” or 6 locations after the start of the last page if using the the “TABRDL [m]” or “LTABRDL [m]” instruction. Note that the value for the table pointer is referenced to the specified address pointed by the TBLP and TBHP registers if the “TABRD [m]” or “LTABRD [m]” instruction is being used. In this case the high byte of the table data which is equal to zero will be transferred to the TBLH register automatically when the “TABRD [m]” or “LTABRD [m]” instruction is executed.

Because the TBLH register is a read/write register and can be restored, care should be taken to ensure its protection if both the main routine and Interrupt Service Routine use table read instructions. If using the table read instructions, the Interrupt Service Routines may change the value of the TBLH and subsequently cause errors if used again by the main routine. As a rule it is recommended that simultaneous use of the table read instructions should be avoided. However, in situations where simultaneous use cannot be avoided, the interrupts should be disabled prior to the execution of any main routine table-read instructions. Note that all table related instructions require two instruction cycles to complete their operation.

### Table Read Program Example

```

tempreg1 db ?      ; temporary register #1
tempreg2 db ?      ; temporary register #2
:
:
mov a,06h          ; initialise low table pointer - note that this address is referenced
mov tblp,a         ; to the last page or the page that tbhp pointed
mov a,0fh          ; initialise high table pointer
mov tbhp,a         ; it is not necessary to set tbhp if executing tabrdl or ltabrdl
:
:

```

```

tabrd tempreg1    ; transfers value in table referenced by table pointer
                  ; data at program memory address "0F06H" transferred to tempreg1 and TBLH
dec tblp          ; reduce value of table pointer by one
tabrd tempreg2    ; transfers value in table referenced by table pointer
                  ; data at program memory address "0F05H" transferred to tempreg2 and TBLH
                  ; in this example the data "1AH" is transferred to tempreg1 and data "0FH"
                  ; to tempreg2
                  ; the value "00H" will be transferred to the high byte register TBLH
:
:
org 0F00h         ; set initial address of last page
dc 00Ah,00Bh,00Ch,00Dh,00Eh,00Fh,01Ah,01Bh

```

## In Circuit Programming – ICP


The provision of Flash type Program Memory provides the user with a means of convenient and easy upgrades and modifications to their programs on the same device.

As an additional convenience, Holtek has provided a means of programming the microcontroller in-circuit using a 4-pin interface. This provides manufacturers with the possibility of manufacturing their circuit boards complete with a programmed or un-programmed microcontroller, and then programming or upgrading the program at a later stage. This enables product manufacturers to easily keep their manufactured products supplied with the latest program releases without removal and re-insertion of the device.

| Holtek Writer Pins | MCU Programming Pins | Pin Description                 |
|--------------------|----------------------|---------------------------------|
| ICPDA              | PA0                  | Programming Serial Data/Address |
| ICPCK              | PA2                  | Programming Clock               |
| VDD                | VDD                  | Power Supply (5V)               |
| VSS                | VSS                  | Ground                          |

The Program Memory can be programmed serially in-circuit using this 4-wire interface. Data is downloaded and uploaded serially on a single pin with an additional line for the clock. Two additional lines are required for the power supply and one line for the reset. The technical details regarding the in-circuit programming of the device is beyond the scope of this document and will be supplied in supplementary literature.

During the programming process, the user must take care of the ICPDA and ICPCK pins for data and clock programming purposes to ensure that no other outputs are connected to these two pins.

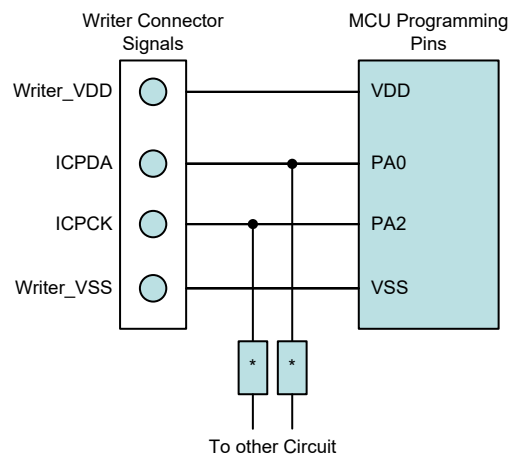

Note: \* may be resistor or capacitor. The resistance of \* must be greater than 1kΩ or the capacitance of \* must be less than 1nF.

## On-Chip Debug Support – OCDS

An EV chip exists for the purposes of device emulation. This EV chip device also provides an “On-Chip Debug” function to debug the real MCU device during the development process. The EV chip and the real MCU device are almost functionally compatible except for “On-Chip Debug” function. Users can use the EV chip device to emulate the real chip device behavior by connecting the OCSDSA and OCDSCK pins to the Holtek HT-IDE development tools. The OCSDSA pin is the OCDS Data/Address input/output pin while the OCDSCK pin is the OCDS clock input pin. When users use the EV chip for debugging, other functions which are shared with the OCSDSA and OCDSCK pins in the device will have no effect in the EV chip. However, the two OCDS pins which are pin-shared with the ICP programming pins are still used as the Flash Memory programming pins for ICP. For more detailed OCDS information, refer to the corresponding document named “Holtek e-Link for 8-bit MCU OCDS User’s Guide”.

| Holtek e-Link Pins | EV Chip Pins | Pin Description                                 |
|--------------------|--------------|-------------------------------------------------|
| OCSDSA             | OCSDSA       | On-Chip Debug Support Data/Address input/output |
| OCDSCK             | OCDSCK       | On-Chip Debug Support Clock input               |
| VDD                | VDD          | Power Supply (5V)                               |
| VSS                | VSS          | Ground                                          |

## In Application Programming – IAP

Flash type Program Memory provides the user with a means of convenient and easy upgrades and modifications to their programs on the same device. The provision of the IAP function offers users the convenience of Flash Memory multi-programming features. The convenience of the IAP function is that it can execute the updated program procedure using its internal firmware, without requiring an external Program Writer or PC. In addition, the IAP interface can also be any type of communication protocol, such as UART, using I/O pins. Regarding the internal firmware, the user can select versions provided by Holtek or create their own. The following section illustrates the procedures regarding how to implement the IAP firmware.

### Flash Memory Read/Write Size

The Flash memory Erase and Write operations are carried out in a page format while the Read operation is carried out in a word format. The page size and write buffer size are both assigned with a capacity of 32 words. Note that the Erase operation should be executed before the Write operation is executed.

When the Flash Memory Erase/Write Function is successfully enabled, the CFWEN bit will be set high. When the CFWEN bit is set high, the data can be written into the write buffer. The FWT bit is used to initiate the write process and then indicate the write operation status. This bit is set high by application programs to initiate a write process and will be cleared by hardware if the write process is finished.


The Read operation can be carried out by executing a specific read procedure. The FRDEN bit is used to enable the read function and the FRD bit is used to initiate the read process by application programs and then indicate the read operation status. When the read process is finished, this bit will be cleared by hardware.

| Operations                                      | Format        |
|-------------------------------------------------|---------------|
| Erase                                           | 32 words/page |
| Write                                           | 32 words/time |
| Read                                            | 1 word/time   |
| Note: Page size = Write buffer size = 32 words. |               |

### IAP Operation Format

| Page | FARH      | FARL[7:5] | FARL[4:0]   |
|------|-----------|-----------|-------------|
| 0    | 0000 0000 | 000       | Tag Address |
| 1    | 0000 0000 | 001       |             |
| 2    | 0000 0000 | 010       |             |
| 3    | 0000 0000 | 011       |             |
| 4    | 0000 0000 | 100       |             |
| ⋮    | ⋮         | ⋮         |             |
| 126  | 0000 1111 | 110       |             |
| 127  | 0000 1111 | 111       |             |

**Page Number and Address Selection**

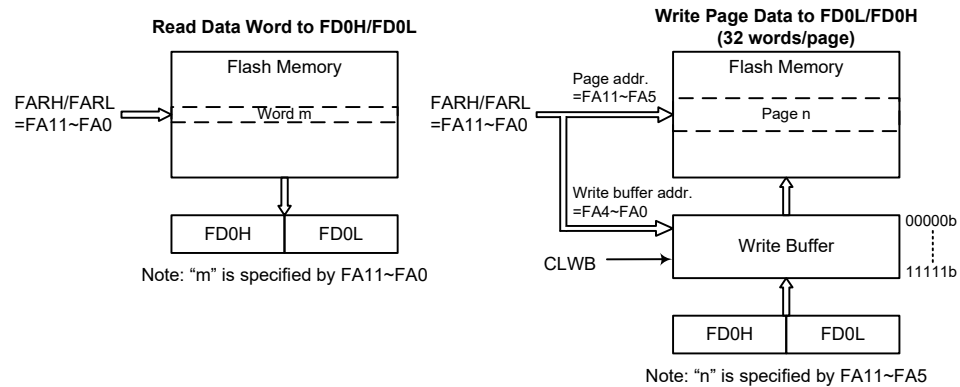

**Flash Memory IAP Read/Write Structure**

### Write Buffer

The write buffer is used to store the written data temporarily when executing the write operation. The Write Buffer can be filled with written data after the Flash Memory Erase/Write Function has been successfully enabled by executing the Flash Memory Erase/Write Function Enable procedure. The write buffer can be cleared by configuring the CLWB bit in the FC2 register. The CLWB bit can be set high to enable the Clear Write Buffer procedure. When the procedure is finished this bit will be cleared to zero by hardware. It is recommended that the write buffer should be cleared by setting the CLWB bit high before the write buffer is used for the first time or when the data in the write buffer is updated.

The write buffer size is 32 words corresponding to a page. The write buffer address is mapped to a specific Flash memory page specified by the memory address bits, FA11~FA5. The data written into the FD0L and FD0H registers will be loaded into the write buffer. When data is written into the high byte data register, FD0H, it will result in the data stored in the high and low byte data registers both being written into the write buffer. It will also cause the Flash memory address to be incremented by one, after which the new address will be loaded into the FARH and FARL address registers. When the Flash memory address reaches the page boundary, 11111b of a page with 32 words, the address will now not be incremented but stop at the last address of the page. At this point a new page address should be specified for any other erase/write operations.

After a write process is finished, the write buffer will automatically be cleared by hardware. Note that the write buffer should be cleared manually by the application program when the data written into the Flash memory is incorrect in the data verification step. The data should again be written into the write buffer after the write buffer has been cleared when the data is found to be incorrect during the data verification step.

## IAP Flash Program Memory Registers

There are two address registers, four 16-bit data registers and three control registers, located in Sector 1. Read and Write operations to the Flash memory are carried out using 16-bit data operations using the address and data registers and the control register. Several registers control the overall operation of the internal Flash Program Memory. The address registers are named FARL and FARH, the data registers are named FDnL and FDnH and the control registers are named FC0, FC1 and FC2. As all the registers are located in Sector 1, they can be addressed directly using the corresponding extended instructions or can be read from or written to indirectly using the MP1H/ MP1L or MP2H/MP2L Memory Pointer pairs and Indirect Addressing Register, IAR1 or IAR2.

| Register Name | Bit   |       |       |       |       |      |        |      |
|---------------|-------|-------|-------|-------|-------|------|--------|------|
|               | 7     | 6     | 5     | 4     | 3     | 2    | 1      | 0    |
| FC0           | CFWEN | FMOD2 | FMOD1 | FMOD0 | FWPEN | FWT  | FRDEN  | FRD  |
| FC1           | D7    | D6    | D5    | D4    | D3    | D2   | D1     | D0   |
| FC2           | —     | —     | —     | —     | —     | —    | FWERTS | CLWB |
| FARL          | FA7   | FA6   | FA5   | FA4   | FA3   | FA2  | FA1    | FA0  |
| FARH          | —     | —     | —     | —     | FA11  | FA10 | FA9    | FA8  |
| FD0L          | D7    | D6    | D5    | D4    | D3    | D2   | D1     | D0   |
| FD0H          | D15   | D14   | D13   | D12   | D11   | D10  | D9     | D8   |
| FD1L          | D7    | D6    | D5    | D4    | D3    | D2   | D1     | D0   |
| FD1H          | D15   | D14   | D13   | D12   | D11   | D10  | D9     | D8   |
| FD2L          | D7    | D6    | D5    | D4    | D3    | D2   | D1     | D0   |
| FD2H          | D15   | D14   | D13   | D12   | D11   | D10  | D9     | D8   |
| FD3L          | D7    | D6    | D5    | D4    | D3    | D2   | D1     | D0   |
| FD3H          | D15   | D14   | D13   | D12   | D11   | D10  | D9     | D8   |

IAP Register List

### • FC0 Register

| Bit  | 7     | 6     | 5     | 4     | 3     | 2   | 1     | 0   |
|------|-------|-------|-------|-------|-------|-----|-------|-----|
| Name | CFWEN | FMOD2 | FMOD1 | FMOD0 | FWPEN | FWT | FRDEN | FRD |
| R/W  | R/W   | R/W   | R/W   | R/W   | R/W   | R/W | R/W   | R/W |
| POR  | 0     | 0     | 0     | 0     | 0     | 0   | 0     | 0   |

Bit 7

**CFWEN:** Flash Memory Erase/Write function enable control

0: Flash memory erase/write function is disabled

1: Flash memory erase/write function has been successfully enabled

When this bit is cleared to 0 by application program, the Flash memory erase/write function is disabled. Note that this bit cannot be set high by application programs. Writing a “1” into this bit results in no action. This bit is used to indicate the Flash memory erase/write function status. When this bit is set to 1 by hardware, it means that the Flash memory erase/write function is enabled successfully. Otherwise, the Flash memory erase/write function is disabled if the bit is zero.

Bit 6~4

**FMOD2~FMOD0:** Flash memory Mode selection

000: Write Mode

001: Page Erase Mode

010: Reserved

011: Read Mode

100: Reserved

101: Reserved

110: Flash memory Erase/Write function Enable Mode

111: Reserved

These bits are used to select the Flash Memory operation modes. Note that the “Flash memory Erase/Write function Enable Mode” should first be successfully enabled before the Erase or Write Flash memory operation is executed.

- Bit 3      **FWPEN**: Flash memory Erase/Write function enable procedure Trigger  
 0: Erase/Write function enable procedure is not triggered or procedure timer times out  
 1: Erase/Write function enable procedure is triggered and procedure timer starts to count  
 This bit is used to activate the Flash memory Erase/Write function enable procedure and an internal timer. It is set by the application programs and then cleared by hardware when the internal timer times out. The correct patterns must be written into the FD1L/FD1H, FD2L/FD2H and FD3L/FD3H register pairs respectively as soon as possible after the FWPEN bit is set high.
- Bit 2      **FWT**: Flash memory write initiate control  
 0: Do not initiate Flash memory write or indicating that a Flash memory write process has completed  
 1: Initiate Flash memory write process  
 This bit is set by software and cleared by hardware when the Flash memory write process has completed.
- Bit 1      **FRDEN**: Flash memory read enable control  
 0: Flash memory read disable  
 1: Flash memory read enable  
 This is the Flash memory Read Enable Bit which must be set high before any Flash memory read operations are carried out. Clearing this bit to zero will inhibit Flash memory read operations.
- Bit 0      **FRD**: Flash memory read initiate control  
 0: Do not initiate Flash memory read or indicating that a Flash memory read process has completed  
 1: Initiate Flash memory read process  
 This bit is set by software and cleared by hardware when the Flash memory read process has completed.

- Note: 1. The FWT, FRDEN and FRD bits cannot be set to “1” at the same time with a single instruction.  
 2. Ensure that the  $f_{SUB}$  clock is stable before executing the erase or write operation.  
 3. Note that the CPU will be stopped when a read, write or erase operation is successfully activated.  
 4. Ensure that the read, erase or write operation is totally complete before executing other operations.

• **FC1 Register**

| Bit  | 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
|------|-----|-----|-----|-----|-----|-----|-----|-----|
| Name | D7  | D6  | D5  | D4  | D3  | D2  | D1  | D0  |
| R/W  | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| POR  | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   |

- Bit 7~0      **D7~D0**: Chip Reset Pattern  
 When a specific value of “55H” is written into this register, a reset signal will be generated to reset the whole chip.

• **FC2 Register**

| Bit  | 7 | 6 | 5 | 4 | 3 | 2 | 1      | 0    |
|------|---|---|---|---|---|---|--------|------|
| Name | — | — | — | — | — | — | FWERTS | CLWB |
| R/W  | — | — | — | — | — | — | R/W    | R/W  |
| POR  | — | — | — | — | — | — | 0      | 0    |

- Bit 7~2      Unimplemented, read as “0”
- Bit 1      **FWERTS**: Erase time and Write time selection  
 0: Erase time is 3.2ms ( $t_{FER}$ ) / Write time is 2.2ms ( $t_{FWR}$ )  
 1: Erase time is 3.7ms ( $t_{FER}$ ) / Write time is 3.0ms ( $t_{FWR}$ )

Bit 0      **CLWB:** Flash memory Write Buffer Clear control  
 0: Do not initiate a Write Buffer Clear process or indicating that a Write Buffer Clear process has completed  
 1: Initiate Write Buffer Clear process  
 This bit is set by software and cleared by hardware when the Write Buffer Clear process has completed.

• **FARL Register**

| Bit  | 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
|------|-----|-----|-----|-----|-----|-----|-----|-----|
| Name | FA7 | FA6 | FA5 | FA4 | FA3 | FA2 | FA1 | FA0 |
| R/W  | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| POR  | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   |

Bit 7~0      **FA7~FA0:** Flash Memory Address bit 7 ~ bit 0

• **FARH Register**

| Bit  | 7 | 6 | 5 | 4 | 3    | 2    | 1   | 0   |
|------|---|---|---|---|------|------|-----|-----|
| Name | — | — | — | — | FA11 | FA10 | FA9 | FA8 |
| R/W  | — | — | — | — | R/W  | R/W  | R/W | R/W |
| POR  | — | — | — | — | 0    | 0    | 0   | 0   |

Bit 7~4      Unimplemented, read as “0”

Bit 3~0      **FA11~FA8:** Flash Memory Address bit 11 ~ bit 8

• **FD0L Register**

| Bit  | 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
|------|-----|-----|-----|-----|-----|-----|-----|-----|
| Name | D7  | D6  | D5  | D4  | D3  | D2  | D1  | D0  |
| R/W  | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| POR  | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   |

Bit 7~0      **D7~D0:** The first Flash Memory data word bit 7 ~ bit 0

Note that data written into the low byte data register FD0L will only be stored in the FD0L register and not loaded into the lower 8-bit write buffer.

• **FD0H Register**

| Bit  | 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
|------|-----|-----|-----|-----|-----|-----|-----|-----|
| Name | D15 | D14 | D13 | D12 | D11 | D10 | D9  | D8  |
| R/W  | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| POR  | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   |

Bit 7~0      **D15~D8:** The first Flash Memory data word bit 15 ~ bit 8

Note that when 8-bit data is written into the high byte data register FD0H, the whole 16 bits of data stored in the FD0H and FD0L registers will simultaneously be loaded into the 16-bit write buffer after which the contents of the Flash memory address register pair, FARH and FARL, will be incremented by one.

• **FD1L Register**

| Bit  | 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
|------|-----|-----|-----|-----|-----|-----|-----|-----|
| Name | D7  | D6  | D5  | D4  | D3  | D2  | D1  | D0  |
| R/W  | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| POR  | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   |

Bit 7~0      **D7~D0:** The second Flash Memory data word bit 7 ~ bit 0

• **FD1H Register**

| Bit  | 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
|------|-----|-----|-----|-----|-----|-----|-----|-----|
| Name | D15 | D14 | D13 | D12 | D11 | D10 | D9  | D8  |
| R/W  | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| POR  | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   |

Bit 7~0      **D15~D8**: The second Flash Memory data word bit 15 ~ bit 8

• **FD2L Register**

| Bit  | 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
|------|-----|-----|-----|-----|-----|-----|-----|-----|
| Name | D7  | D6  | D5  | D4  | D3  | D2  | D1  | D0  |
| R/W  | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| POR  | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   |

Bit 7~0      **D7~D0**: The third Flash Memory data word bit 7 ~ bit 0

• **FD2H Register**

| Bit  | 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
|------|-----|-----|-----|-----|-----|-----|-----|-----|
| Name | D15 | D14 | D13 | D12 | D11 | D10 | D9  | D8  |
| R/W  | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| POR  | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   |

Bit 7~0      **D15~D8**: The third Flash Memory data word bit 15 ~ bit 8

**FD3L Register**

| Bit  | 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
|------|-----|-----|-----|-----|-----|-----|-----|-----|
| Name | D7  | D6  | D5  | D4  | D3  | D2  | D1  | D0  |
| R/W  | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| POR  | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   |

Bit 7~0      **D7~D0**: The fourth Flash Memory data word bit 7 ~ bit 0

• **FD3H Register**

| Bit  | 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
|------|-----|-----|-----|-----|-----|-----|-----|-----|
| Name | D15 | D14 | D13 | D12 | D11 | D10 | D9  | D8  |
| R/W  | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| POR  | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   |


Bit 7~0      **D15~D8**: The fourth Flash Memory data word bit 15 ~ bit 8

### Flash Memory Erase/Write Flow

It is important to understand the Flash memory Erase/Write flow before the Flash memory contents are updated. Users can refer to the corresponding operation procedures when developing their IAP program to ensure that the Flash memory contents are correctly updated.

### Flash Memory Erase/Write Flow Descriptions

1. Activate the “Flash Memory Erase/Write function enable procedure” first. When the Flash Memory Erase/Write function is successfully enabled, the CFWEN bit in the FC0 register will automatically be set high by hardware. After this, Erase or Write operations can be executed on the Flash memory. Refer to the “Flash Memory Erase/Write Function Enable Procedure” for details.
2. Configure the Flash memory address to select the desired erase page, tag address and then erase this page.  
  
For a page erase operation, set the FARL and FARH registers to specify the start address of the erase page, then write dummy data into the FD0H register to tag address. The current address will be internally incremented by one after each dummy data is written into the FD0H register. When the address reaches the page boundary, 11111b, the address will not be further incremented but stop at the last address of the page. Note that the write operation to the FD0H register is used to tag address, it must be implemented to determine which addresses to be erased.
3. Execute a Blank Check operation to ensure whether the page erase operation is successful or not. The “TABRD” instruction should be executed to read the Flash memory contents and to check if the contents is 0000h or not. If the Flash memory page erase operation fails, users should go back to Step 2 and execute the page erase operation again.
4. Write data into the specific page. Refer to the “Flash Memory Write Procedure” for details.
5. Execute the “TABRD” instruction to read the Flash memory contents and check if the written data is correct or not. If the data read from the Flash memory is different from the written data, it means that the page write operation has failed. The CLWB bit should be set high to clear the write buffer and then write the data into the specific page again if the write operation has failed.
6. Clear the CFWEN bit to disable the Flash Memory Erase/Write function enable mode if the current page Erase and Write operations are complete if no more pages need to be erased or written.

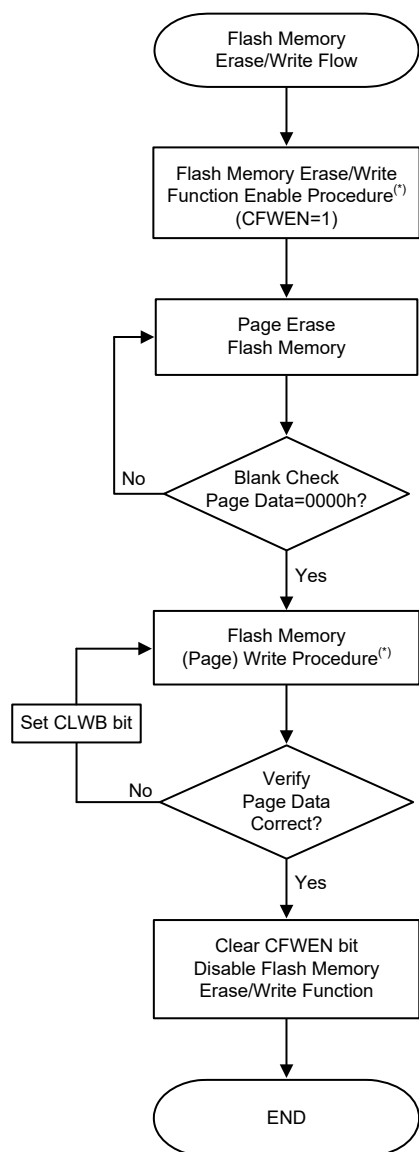

**Flash Memory Erase/Write Flow**

Note: The Flash Memory Erase/Write Function Enable procedure and Flash Memory Write procedure will be described in the following sections.


### **Flash Memory Erase/Write Function Enable Procedure**

The Flash Memory Erase/Write Function Enable Mode is specially designed to prevent the Flash memory contents from being wrongly modified. In order to allow users to change the Flash memory data using the IAP control registers, users must first enable the Flash memory Erase/Write function.

### **Flash Memory Erase/Write Function Enable Procedure Description**

1. Write data “110” to the FMOD[2:0] bits in the FC0 register to select the Flash Memory Erase/Write Function Enable Mode.
2. Set the FWPEN bit in the FC0 register to “1” to activate the Flash Memory Erase/Write Function. This will also activate an internal timer.
3. Write the correct data pattern into the Flash data registers, FD1L~FD3L and FD1H~FD3H, as soon as possible after the FWPEN bit is set high. The enable Flash memory erase/write function data pattern is 00H, 0DH, C3H, 04H, 09H and 40H corresponding to the FD1L~FD3L and FD1H~FD3H registers respectively.
4. Once the timer has timed out, the FWPEN bit will automatically be cleared to 0 by hardware regardless of the input data pattern.
5. If the written data pattern is incorrect, the Flash memory erase/write function will not be enabled successfully and the above steps should be repeated. If the written data pattern is correct, the Flash memory erase/write function will be enabled successfully.
6. Once the Flash memory erase/write function is enabled, the Flash memory contents can be updated by executing the page erase and write operations using the IAP control registers.

To disable the Flash memory erase/write function, the CFWEN bit in the FC0 register can be cleared. There is no need to execute the above procedure.

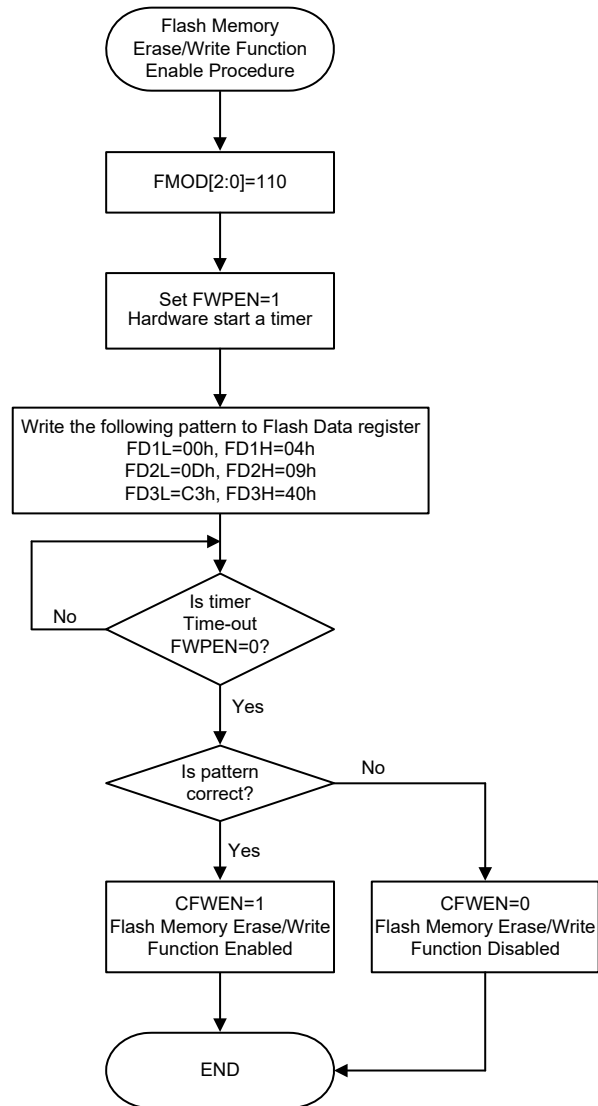

**Flash Memory Erase/Write Function Enable Procedure**

### Flash Memory Write Procedure


After the Flash memory erase/write function has been successfully enabled as the CFWEN bit is set high, the data to be written into the Flash memory can be loaded into the write buffer. The selected Flash memory page data should be erased by properly configuring the IAP control registers before the data write procedure is executed.

The write buffer size is 32 words, known as a page, whose address is mapped to a specific Flash memory page specified by the memory address bits, FA11~FA5. It is important to ensure that the page where the write buffer data is located is the same one which the memory address bits, FA11~FA5, specify.

### Flash Memory Consecutive Write Description

The maximum amount of write data is 32 words for each write operation. The write buffer address will be automatically incremented by one when consecutive write operations are executed. The start address of a specific page should first be written into the FARL and FARH registers. Then the data word should be written into the FD0L register and then the FD0H register. At the same time the write buffer address will be incremented by one and then the next data word can be written into the FD0L and FD0H registers for the next address without modifying the address register pair, FARH and FARL. When the write buffer address reaches the page boundary the address will not be further incremented but will stop at the last address of the page.

1. Activate the “Flash Memory Erase/Write function enable procedure”. Check the CFWEN bit value and then execute the erase/write operations if the CFWEN bit is set high. Refer to the “Flash Memory Erase/Write function enable procedure” for more details.
2. Set the FMOD field to “001” to select the erase operation and set the CLWB bit high to clear the write buffer. Set the FWT bit high to erase the desired page which is specified by the FARH and FARL registers and has been tagged address. Wait until the FWT bit goes low.
3. Execute a Blank Check operation using the table read instruction to ensure that the erase operation has successfully completed.  
Go to step 2 if the erase operation is not successful.  
Go to step 4 if the erase operation is successful.
4. Set the FMOD field to “000” to select the write operation.
5. Setup the desired start address in the FARH and FARL registers. Write the desired data words consecutively into the FD0L and FD0H registers within a page as specified by their consecutive addresses. The maximum written data number is 32 words.
6. Set the FWT bit high to write the data words from the write buffer to the Flash memory. Wait until the FWT bit goes low.
7. Verify the data using the table read instruction to ensure that the write operation has successfully completed.  
If the write operation has not successfully completed, set the CLWB bit high to clear the write buffer and then go to step 5.  
Go to step 8 if the write operation is successful.
8. Clear the CFWEN bit low to disable the Flash memory erase/write function.

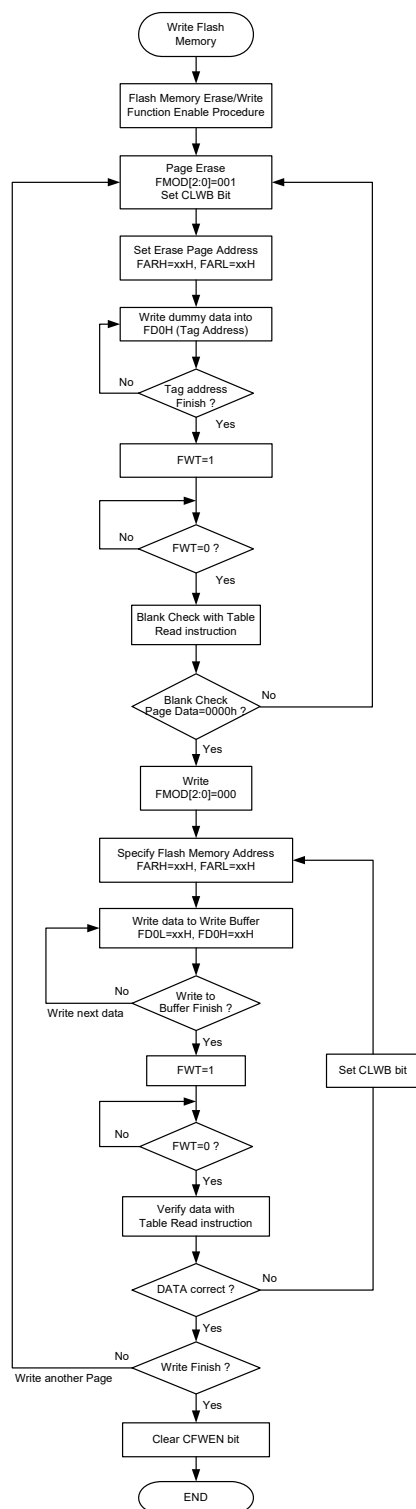

#### Flash Memory Consecutive Write Procedure

Note: 1. When the erase or write operation is successfully activated, all CPU operations will temporarily cease.


2. It will take certain time for the FWT bit state changing from high to low in the erase or write operation, which can be selected by the FWERTS bit in the FC2 register.

### Flash Memory Non-consecutive Write Description

The main difference between Flash Memory Consecutive and Non-Consecutive Write operations is whether the data words to be written are located in consecutive addresses or not. If the data to be written is not located in consecutive addresses the desired address should be re-assigned after a data word is successfully written into the Flash Memory.

A two data word non-consecutive write operation is taken as an example here and described as follows:

1. Activate the “Flash Memory Erase/Write function enable procedure”. Check the CFWEN bit value and then execute the erase/write operation if the CFWEN bit is set high. Refer to the “Flash Memory Erase/Write function enable procedure” for more details.
2. Set the FMOD field to “001” to select the erase operation and set the CLWB bit high to clear the write buffer. Set the FWT bit high to erase the desired page which is specified by the FARH and FARL registers and has been tagged address. Wait until the FWT bit goes low.
3. Execute a Blank Check operation using the table read instruction to ensure that the erase operation has successfully completed.  
Go to step 2 if the erase operation is not successful.  
Go to step 4 if the erase operation is successful.
4. Set the FMOD field to “000” to select the write operation.
5. Setup the desired address ADDR1 in the FARH and FARL registers. Write the desired data word DATA1 first into the FD0L register and then into the FD0H register.
6. Set the FWT bit high to transfer the data word from the write buffer to the Flash memory. Wait until the FWT bit goes low.
7. Verify the data using the table read instruction to ensure that the write operation has successfully completed.  
If the write operation has not successfully completed, set the CLWB bit high to clear the write buffer and then go to step 5.  
Go to step 8 if the write operation is successful.
8. Setup the desired address ADDR2 in the FARH and FRARL registers. Write the desired data word DATA2 first into the FD0L register and then into the FD0H register.
9. Set the FWT bit high to transfer the data word from the write buffer to the Flash memory. Wait until the FWT bit goes low.
10. Verify the data using the table read instruction to ensure that the write operation has successfully completed.  
If the write operation has not successfully completed, set the CLWB bit high to clear the write buffer and then go to step 8.  
Go to step 11 if the write operation is successful.
11. Clear the CFWEN bit low to disable the Flash memory erase/write function.

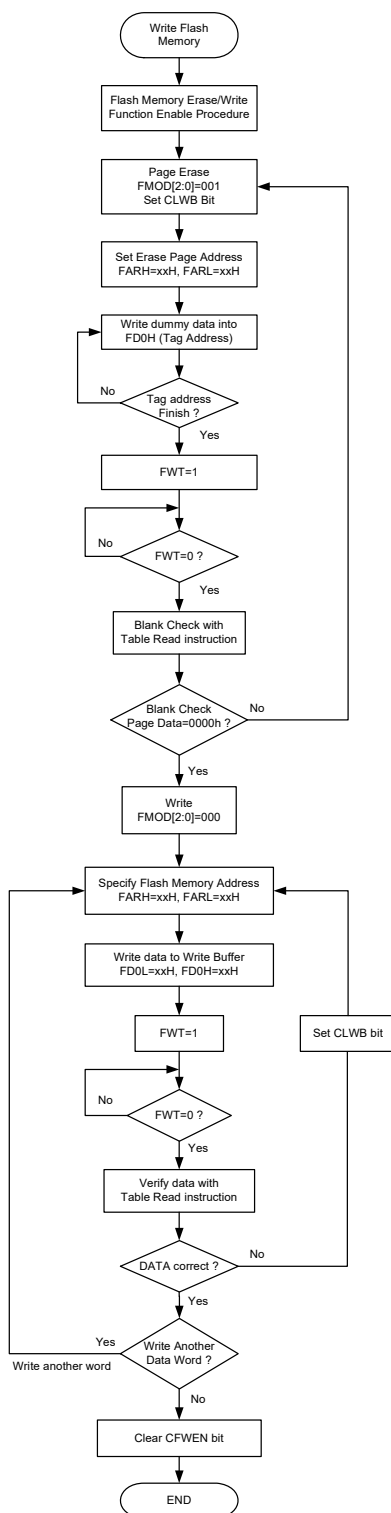

#### Flash Memory Non-consecutive Write Procedure

Note: 1. When the erase or write operation is successfully activated, all CPU operations will temporarily cease.


2. It will take certain time for the FWT bit state changing from high to low in the erase or write operation, which can be selected by the FWERTS bit in the FC2 register.

**Important Points to Note for Flash Memory Write Operations**

1. The “Flash Memory Erase/Write Function Enable Procedure” must be successfully activated before the Flash Memory erase/write operation is executed.
2. The Flash Memory erase operation is executed to erase a whole page.
3. The whole write buffer data will be written into the Flash memory in a page format. The corresponding address cannot exceed the page boundary.
4. After the data is written into the Flash memory the Flash memory contents must be read out using the table read instruction, TABRD, and checked if it is correct or not. If the data written into the Flash memory is incorrect, the write buffer should be cleared by setting the CLWB bit high and then writing the data again into the write buffer. Then activate a write operation on the same Flash memory page without erasing it. The data check, buffer clear and data re-write steps should be repeatedly executed until the data written into the Flash memory is correct.
5. The system frequency should be setup to the maximum application frequency when data write and data check operations are executed using the IAP function.

**Flash Memory Read Procedure**

To activate the Flash Memory Read procedure, the FMOD field should be set to “011” to select the Flash memory read mode and the FRDEN bit should be set high to enable the read function. The desired Flash memory address should be written into the FARH and FARL registers and then the FRD bit should be set high. After this the Flash memory read operation will be activated. The data stored in the specified address can be read from the data registers, FD0H and FD0L, when the FRD bit goes low. There is no need to first activate the Flash Memory Erase/Write Function Enable Procedure before the Flash memory read operation is executed.

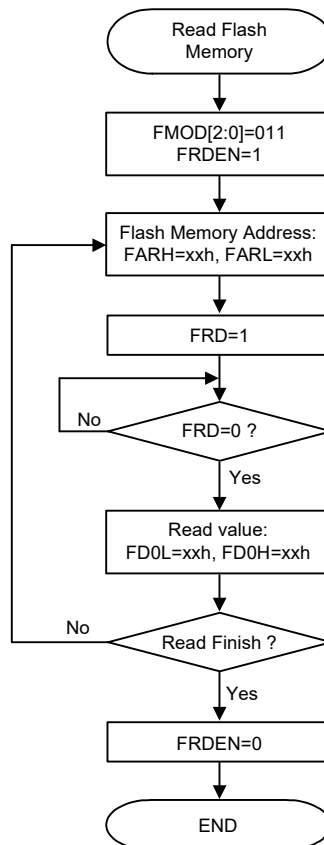

**Flash Memory Read Procedure**

- Note: 1. When the read operation is successfully activated, all CPU operations will temporarily cease.  
2. It will take a typical time of three instruction cycles for the FRD bit state changing from high to low.

## Data Memory

The Data Memory is a volatile area of 8-bit wide RAM internal memory and is the location where temporary information is stored.

Categorized into two types, the first of these is an area of RAM where special function registers are located. These registers have fixed locations and are necessary for correct operation of the device. Many of these registers can be read from and written to directly under program control, however, some remain protected from user manipulation. The second area of Data Memory is reserved for general purpose use. All locations within this area are read and write accessible under program control.


Switching between the different Data Memory sectors is achieved by properly setting the Memory Pointers to correct value if using the indirect addressing method.

### Structure

The Data Memory is subdivided into two sectors, all of which are implemented in 8-bit wide RAM. In Special Purpose Data Memory most of the registers are accessible in Sector 0 while several registers are only accessible in Sector 1. The address range of the Special Purpose Data Memory for the device is from 00H to 7FH while the General Purpose Data Memory address range is from 80H to FFH.

| Special Purpose Data Memory | General Purpose Data Memory |                                                      |
|-----------------------------|-----------------------------|------------------------------------------------------|
| Located Sectors             | Capacity                    | Sector: Address                                      |
| 0, 1                        | 512×8                       | 0: 80H~FFH<br>1: 80H~FFH<br>2: 80H~FFH<br>3: 80H~FFH |

**Data Memory Summary**

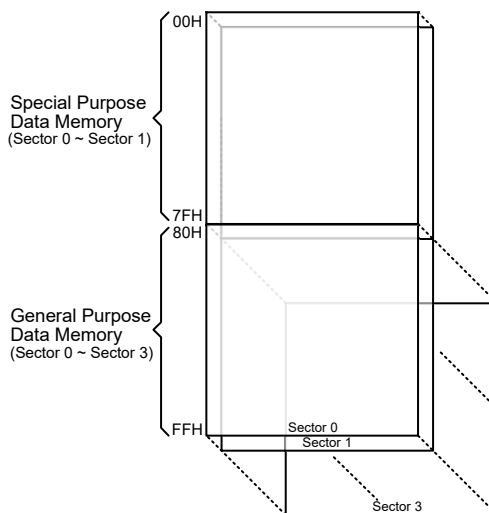

**Data Memory Structure**

## **Data Memory Addressing**

For the device that supports the extended instructions, the desired Data Memory Sector is selected by the MP1H or MP2H register and the certain Data Memory address in the pointed sector is specified by the MP1L or MP2L register when using indirect addressing access.

Direct Addressing can be used in all sectors using the corresponding instructions which can address all available data memory space. For the accessed data memory which is located in any data memory sector except sector 0, the extended instructions can be used to access the data memory instead of using the indirect addressing access. The main difference between standard instructions and extended instructions is that the data memory address “m” in the extended instructions has 10 valid bits for this device, the high byte indicates a sector and the low byte indicates a specific address.

## **General Purpose Data Memory**

All microcontroller programs require an area of read/write memory where temporary data can be stored and retrieved for use later. It is this area of RAM memory that is known as General Purpose Data Memory. This area of Data Memory is fully accessible by the user programming for both reading and writing operations. By using the bit operation instructions individual bits can be set or reset under program control giving the user a large range of flexibility for bit manipulation in the Data Memory.

## **Special Purpose Data Memory**

This area of Data Memory is where registers, necessary for the correct operation of the microcontroller, are stored. Most of the registers are both readable and writeable but some are protected and are readable only, the details of which are located under the relevant Special Function Register section. Note that for locations that are unused, any read instruction to these addresses will return the value “00H”.

|     | Sector 0 | Sector 1 |
|-----|----------|----------|
| 00H | IAR0     |          |
| 01H | MP0      |          |
| 02H | IAR1     |          |
| 03H | MP1L     |          |
| 04H | MP1H     |          |
| 05H | ACC      |          |
| 06H | PCL      |          |
| 07H | TBLP     |          |
| 08H | TBLH     |          |
| 09H | TBHP     |          |
| 0AH | STATUS   |          |
| 0BH |          |          |
| 0CH | IAR2     |          |
| 0DH | MP2L     |          |
| 0EH | MP2H     |          |
| 0FH | RSTFC    |          |
| 10H | HIRCC    |          |
| 11H | LVDC     |          |
| 12H | LVRC     |          |
| 13H | SCC      |          |
| 14H | PA       |          |
| 15H | PAC      |          |
| 16H | PAPU     |          |
| 17H | PAWU     |          |
| 18H | WDTC     |          |
| 19H | TBC      |          |
| 1AH | INTEG    |          |
| 1BH | INTC0    |          |
| 1CH | INTC1    |          |
| 1DH | INTC2    |          |
| 1EH | INTC3    |          |
| 1FH | PWMCS    |          |
| 20H | PB       |          |
| 21H | PBC      |          |
| 22H | PBPU     |          |
| 23H | PC       |          |
| 24H | PCC      |          |
| 25H | PCPU     |          |
| 26H | SADC0    |          |
| 27H | SADC1    |          |
| 28H |          |          |
| 29H | CAPTC0   |          |
| 2AH | CAPTC1   |          |
| 2BH | CAPTMDL  |          |
| 2CH | CAPTMDH  | PAS0     |
| 2DH | CAPTMAL  | PAS1     |
| 2EH | CAPTMAH  | PBS0     |
| 2FH | CAPTMCL  | PBS1     |
| 30H | CAPTMCH  | PCS0     |
| 31H | ADCR2    | PCS1     |
| 32H | ADDL     |          |
| 33H | CMPSEL   |          |
| 34H | CMPC     | PTM2C0   |
| 35H | OPOMS    | PTM2C1   |
| 36H | OPCM     | PTM2DL   |
| 37H | OPACAL   | PTM2DH   |
| 38H | SADOH    | PTM2AL   |
| 39H | SADOL    | PTM2AH   |
| 3AH | ADLVDH   | PTM2RPL  |
| 3BH | ADLVDL   | PTM2RPH  |
| 3CH | ADHVDH   |          |
| 3DH | ADHVDL   |          |
| 3EH | HINTEG   |          |
| 3FH | PSCR     |          |

□ : Unused, read as 00H

|     | Sector 0 | Sector 1 |
|-----|----------|----------|
| 40H | PWMC     |          |
| 41H | OCPS     |          |
| 42H | HDCR     |          |
| 43H | HDCD     |          |
| 44H | MPTC1    |          |
| 45H | MPTC2    |          |
| 46H | PTM1C0   |          |
| 47H | PTM1C1   | USR      |
| 48H | PTM1DL   | UCR1     |
| 49H | PTM1DH   | UCR2     |
| 4AH | PTM1AL   | UCR3     |
| 4BH | PTM1AH   | BRDH     |
| 4CH | PTM1RPL  | BRDL     |
| 4DH | PTM1RPH  | UFCR     |
| 4EH | PTM0C0   | TXR_RXR  |
| 4FH | PTM0C1   | RxCNT    |
| 50H | PTM0C2   |          |
| 51H | PTM0DL   | FC0      |
| 52H | PTM0DH   | FC1      |
| 53H | PTM0AL   | FC2      |
| 54H | PTM0AH   | FARL     |
| 55H | PTM0BL   | FARH     |
| 56H | PTM0BH   | FD0L     |
| 57H | PTM0RPL  | FD0H     |
| 58H | PTM0RPH  | FD1L     |
| 59H | MDUWR0   | FD1H     |
| 5AH | MDUWR1   | FD2L     |
| 5BH | MDUWR2   | FD2H     |
| 5CH | MDUWR3   | FD3L     |
| 5DH | MDUWR4   | FD3H     |
| 5EH | MDUWR5   | IFS0     |
| 5FH | MDUWCTRL | IFS1     |
| 60H | DUTR0L   |          |
| 61H | DUTR0H   |          |
| 62H | DUTR1L   | HDCT0    |
| 63H | DUTR1H   | HDCT1    |
| 64H | DUTR2L   | HDCT2    |
| 65H | DUTR2H   | HDCT3    |
| 66H | PRDRL    | HDCT4    |
| 67H | PRDRH    | HDCT5    |
| 68H | PWMRL    | HDCT6    |
| 69H | PWMRH    | HDCT7    |
| 6AH | PWMME    | HDCT8    |
| 6BH | PWMMD    | HDCT9    |
| 6CH | MCF      | HDCT10   |
| 6DH | MCD      | HDCT11   |
| 6EH | DTS      |          |
| 6FH | PLC      |          |
| 70H | MF10     |          |
| 71H | MF11     | PTM3C0   |
| 72H | MF12     | PTM3C1   |
| 73H | MF13     | PTM3DL   |
| 74H | MF14     | PTM3DH   |
| 75H | MF15     | PTM3AL   |
| 76H | MF16     | PTM3AH   |
| 77H |          | PTM3RPL  |
| 78H |          | PTM3RPH  |
| 79H |          |          |
| 7AH | TLVRC    |          |
| 7BH |          |          |
| 7CH | HCHK_NUM |          |
| 7DH | HNF_MSEL |          |
| 7EH | NF_VIH   |          |
| 7FH | NF_VIL   |          |

▤ : Reserved, cannot be changed

### Special Purpose Data Memory

## Special Function Register Description

Most of the Special Function Register details will be described in the relevant functional section; however several registers require a separate description in this section.

### Indirect Addressing Registers – IAR0, IAR1, IAR2

The Indirect Addressing Registers, IAR0, IAR1 and IAR2, although having their locations in normal RAM register space, do not actually physically exist as normal registers. The method of indirect addressing for RAM data manipulation uses these Indirect Addressing Registers and Memory Pointers, in contrast to direct memory addressing, where the actual memory address is specified. Actions on the IAR0, IAR1 and IAR2 registers will result in no actual read or write operation to these registers but rather to the memory location specified by their corresponding Memory Pointers, MP0, MP1L/MP1H or MP2L/MP2H. Acting as a pair, IAR0 and MP0 can together access data only from Sector 0 while the IAR1 register together with the MP1L/MP1H register pair and IAR2 register together with the MP2L/MP2H register pair can access data from any Data Memory Sector. As the Indirect Addressing Registers are not physically implemented, reading the Indirect Addressing Registers will return a result of “00H” and writing to the registers will result in no operation.

### Memory Pointers – MP0, MP1L, MP1H, MP2L, MP2H

Five Memory Pointers, known as MP0, MP1L, MP1H, MP2L, MP2H, are provided. These Memory Pointers are physically implemented in the Data Memory and can be manipulated in the same way as normal registers providing a convenient way with which to address and track data. When any operation to the relevant Indirect Addressing Registers is carried out, the actual address that the microcontroller is directed to is the address specified by the related Memory Pointer. MP0, together with Indirect Addressing Register, IAR0, are used to access data from Sector 0, while MP1L/MP1H together with IAR1 and MP2L/MP2H together with IAR2 are used to access data from all sectors according to the corresponding MP1H or MP2H register. Direct Addressing can be used in all sectors using the corresponding extended instructions which can address all available data memory space.

The following example shows how to clear a section of four Data Memory locations already defined as locations adres1 to adres4.

#### Indirect Addressing Program Example 1

```
data .section 'data'
adres1  db ?
adres2  db ?
adres3  db ?
adres4  db ?
block   db ?
code .section at 0 'code'
org 00h
start:
    mov a, 04h           ; setup size of block
    mov block, a
    mov a, offset adres1 ; Accumulator loaded with first RAM address
    mov mp0, a           ; setup memory pointer with first RAM address
loop:
    clr IAR0             ; clear the data at address defined by MP0
    inc mp0              ; increment memory pointer
    sdz block            ; check if last memory location has been cleared
    jmp loop
continue:
```

### Indirect Addressing Program Example 2

```
data .section 'data'
adres1 db ?
adres2 db ?
adres3 db ?
adres4 db ?
block db ?
code .section at 0 'code'
org 00h
start:
    mov a, 04h            ; setup size of block
    mov block, a
    mov a, 01h            ; setup the memory sector
    mov mplh, a
    mov a, offset adres1  ; Accumulator loaded with first RAM address
    mov mpll, a           ; setup memory pointer with first RAM address
loop:
    clr IAR1              ; clear the data at address defined by MPIL
    inc mpll               ; increment memory pointer MPIL
    sdz block              ; check if last memory location has been cleared
    jmp loop
continue:
```

The important point to note here is that in the examples shown above, no reference is made to specific Data Memory addresses.

### Direct Addressing Program Example using Extended Instructions

```
data .section 'data'
temp db ?
code .section at 0 'code'
org 00h
start:
    lmov a, [m]            ; move [m] data to acc
    lsub a, [m+1]          ; compare [m] and [m+1] data
    snz c                  ; [m]>[m+1]?
    jmp continue           ; no
    lmov a, [m]             ; yes, exchange [m] and [m+1] data
    mov temp, a
    lmov a, [m+1]
    lmov [m], a
    mov a, temp
    lmov [m+1], a
continue:
```

Note: Here “m” is a data memory address located in any data memory sectors. For example, m=1F0H, it indicates address 0F0H in Sector 1.

### Accumulator – ACC

The Accumulator is central to the operation of any microcontroller and is closely related with operations carried out by the ALU. The Accumulator is the place where all intermediate results from the ALU are stored. Without the Accumulator it would be necessary to write the result of each calculation or logical operation such as addition, subtraction, shift, etc., to the Data Memory resulting in higher programming and timing overheads. Data transfer operations usually involve the temporary storage function of the Accumulator; for example, when transferring data between one user-defined register and another, it is necessary to do this by passing the data through the Accumulator as no direct transfer between two registers is permitted.

## **Program Counter Low Byte Register – PCL**

To provide additional program control functions, the low byte of the Program Counter is made accessible to programmers by locating it within the Special Purpose area of the Data Memory. By manipulating this register, direct jumps to other program locations are easily implemented. Loading a value directly into this PCL register will cause a jump to the specified Program Memory location, however, as the register is only 8-bit wide, only jumps within the current Program Memory page are permitted. When such operations are used, note that a dummy cycle will be inserted.

## **Look-up Table Registers – TBLP, TBHP, TBLH**

These three special function registers are used to control operation of the look-up table which is stored in the Program Memory. TBLP and TBHP are the table pointers and indicate the location where the table data is located. Their value must be setup before any table read commands are executed. Their value can be changed, for example using the “INC” or “DEC” instructions, allowing for easy table data pointing and reading. TBLH is the location where the high order byte of the table data is stored after a table read data instruction has been executed. Note that the lower order table data byte is transferred to a user defined location.

## **Status Register – STATUS**

This 8-bit register contains the SC flag, CZ flag, zero flag (Z), carry flag (C), auxiliary carry flag (AC), overflow flag (OV), power down flag (PDF), and watchdog time-out flag (TO). These arithmetic/logical operation and system management flags are used to record the status and operation of the microcontroller.

With the exception of the TO and PDF flags, bits in the status register can be altered by instructions like most other registers. Any data written into the status register will not change the TO or PDF flag. In addition, operations related to the status register may give different results due to the different instruction operations. The TO flag can be affected only by a system power-up, a WDT time-out or by executing the “CLR WDT” or “HALT” instruction. The PDF flag is affected only by executing the “HALT” or “CLR WDT” instruction or during a system power-up.

The Z, OV, AC, C, SC and CZ flags generally reflect the status of the latest operations.

- C is set if an operation results in a carry during an addition operation or if a borrow does not take place during a subtraction operation; otherwise C is cleared. C is also affected by a rotate through carry instruction.
- AC is set if an operation results in a carry out of the low nibbles in addition, or no borrow from the high nibble into the low nibble in subtraction; otherwise AC is cleared.
- Z is set if the result of an arithmetic or logical operation is zero; otherwise Z is cleared.
- OV is set if an operation results in a carry into the highest-order bit but not a carry out of the highest-order bit, or vice versa; otherwise OV is cleared.
- PDF is cleared by a system power-up or executing the “CLR WDT” instruction. PDF is set by executing the “HALT” instruction.
- TO is cleared by a system power-up or executing the “CLR WDT” or “HALT” instruction. TO is set by a WDT time-out.
- CZ is the operational result of different flags for different instructions. Refer to register definitions for more details.
- SC is the result of the “XOR” operation which is performed by the OV flag and the MSB of the current instruction operation result.

In addition, on entering an interrupt sequence or executing a subroutine call, the status register will not be pushed onto the stack automatically. If the contents of the status registers are important and if the subroutine can corrupt the status register, precautions must be taken to correctly save it.

### • STATUS Register

| Bit  | 7   | 6   | 5  | 4   | 3   | 2   | 1   | 0   |
|------|-----|-----|----|-----|-----|-----|-----|-----|
| Name | SC  | CZ  | TO | PDF | OV  | Z   | AC  | C   |
| R/W  | R/W | R/W | R  | R   | R/W | R/W | R/W | R/W |
| POR  | x   | x   | 0  | 0   | x   | x   | x   | x   |

"x": unknown

- Bit 7 **SC**: The result of the "XOR" operation which is performed by the OV flag and the MSB of the instruction operation result
- Bit 6 **CZ**: The operational result of different flags for different instructions  
For SUB/SUBM/LSUB/LSUBM instructions, the CZ flag is equal to the Z flag.  
For SBC/SBCM/LSBC/LSBCM instructions, the CZ flag is the "AND" operation result which is performed by the previous operation CZ flag and current operation Z flag.  
For other instructions, the CZ flag will not be affected.
- Bit 5 **TO**: Watchdog Time-out flag  
0: After power up or executing the "CLR WDT" or "HALT" instruction  
1: A watchdog time-out occurred
- Bit 4 **PDF**: Power down flag  
0: After power up or executing the "CLR WDT" instruction  
1: By executing the "HALT" instruction
- Bit 3 **OV**: Overflow flag  
0: No overflow  
1: An operation results in a carry into the highest-order bit but not a carry out of the highest-order bit or vice versa
- Bit 2 **Z**: Zero flag  
0: The result of an arithmetic or logical operation is not zero  
1: The result of an arithmetic or logical operation is zero
- Bit 1 **AC**: Auxiliary flag  
0: No auxiliary carry  
1: An operation results in a carry out of the low nibbles in addition, or no borrow from the high nibble into the low nibble in subtraction
- Bit 0 **C**: Carry flag  
0: No carry-out  
1: An operation results in a carry during an addition operation or if a borrow does not take place during a subtraction operation  
The "C" flag is also affected by a rotate through carry instruction.

## Oscillators

Various oscillator options offer the user a wide range of functions according to their various application requirements. The flexible features of the oscillator functions ensure that the best optimisation can be achieved in terms of speed and power saving. Oscillator operations are selected through the relevant control registers.

### Oscillator Overview

In addition to being the source of the main system clock the oscillators also provide clock sources for the Watchdog Timer and Time Base Interrupt. The fully integrated internal oscillators, requiring no external components, are provided to form a wide range of both fast and slow system oscillators. The higher frequency oscillator provides higher performance but carry with it the disadvantage of higher power requirements, while the opposite is of course true for the lower frequency oscillator. With the capability of dynamically switching between fast and slow system clock, the device has the flexibility to optimize the performance/power ratio, a feature especially important in power sensitive portable applications.


| Type                   | Name | Frequency |
|------------------------|------|-----------|
| Internal High Speed RC | HIRC | 20MHz     |
| Internal Low Speed RC  | LIRC | 32kHz     |

**Oscillator Types**

## System Clock Configurations

There are two oscillator sources, one high speed oscillator and one low speed oscillator. The high speed system clock is sourced from the internal 20MHz RC oscillator, HIRC. The low speed oscillator is the internal 32kHz RC oscillator, LIRC. Selecting whether the low or high speed oscillator is used as the system oscillator is implemented using the CKS2~CKS0 bits in the SCC register and the system clock can be dynamically selected.

The frequency of the slow speed or high speed system clock is determined using the CKS2~CKS0 bits in the SCC register. Note that two oscillator selections must be made namely one high speed and one low speed system oscillators.

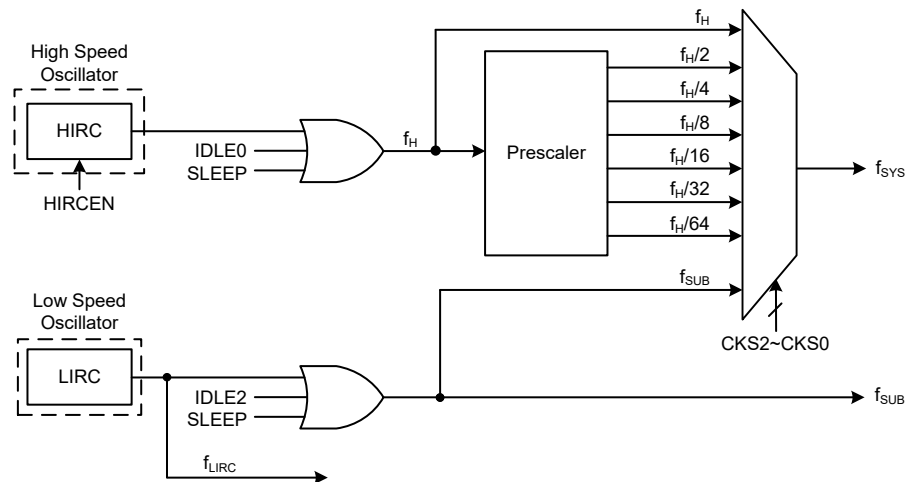

**System Clock Configurations**

## Internal High Speed RC Oscillator – HIRC

The internal RC oscillator is a fully integrated system oscillator requiring no external components. The internal high speed RC oscillator has a fixed frequency of 20MHz.

## Internal 32kHz Oscillator – LIRC

The Internal 32kHz System Oscillator is a fully integrated low frequency RC oscillator with a typical frequency of 32kHz, requiring no external components for its implementation. Device trimming during the manufacturing process and the inclusion of internal frequency compensation circuits are used to ensure that the influence of the power supply voltage, temperature and process variations on the oscillation frequency are minimised.


## Operating Modes and System Clocks

Present day applications require that their microcontrollers have high performance but often still demand that they consume as little power as possible, conflicting requirements that are especially true in battery powered portable applications. The fast clocks required for high performance will by their nature increase current consumption and of course vice versa, lower speed clocks reduce current consumption. As Holtek has provided the device with both high and low speed clock sources and the means to switch between them dynamically, the user can optimise the operation of their microcontroller to achieve the best performance/power ratio.

### System Clocks

The device has many different clock sources for both the CPU and peripheral function operation. By providing the user with a wide range of clock options using register programming, a clock system can be configured to obtain maximum application performance.

The main system clock can come from either a high speed frequency,  $f_H$ , or a low frequency,  $f_{SUB}$ , source, and is selected using the CKS2~CKS0 bits in the SCC register. The high speed system clock is sourced from the HIRC oscillator. The low speed system clock source is sourced from the LIRC oscillator. The other choice, which is a divided version of the high speed system oscillator has a range of  $f_H/2 \sim f_H/64$ .

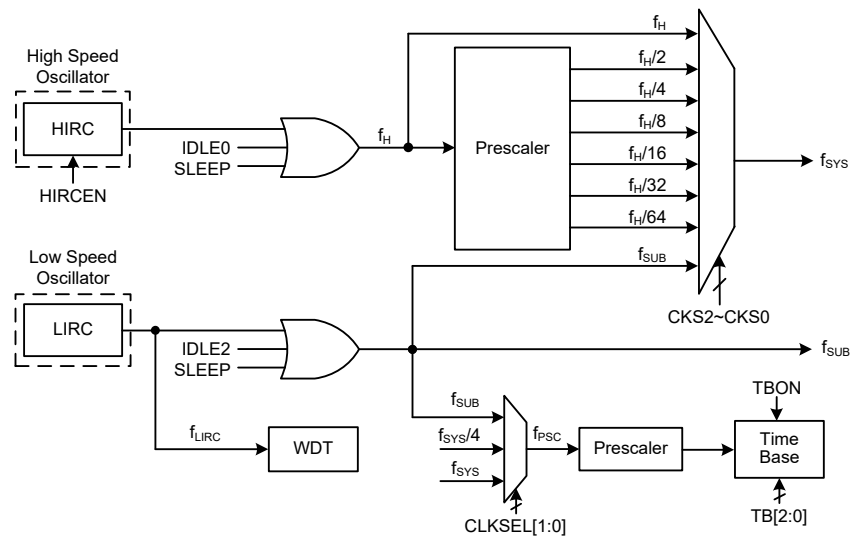

**Device Clock Configurations**

Note: When the system clock source  $f_{SYS}$  is switched to  $f_{SUB}$  from  $f_H$ , the high speed oscillator will stop to conserve the power or continue to oscillate to provide the clock source,  $f_H \sim f_H/64$ , for peripheral circuit to use, which is determined by configuring the corresponding high speed oscillator enable control bit.

### System Operation Modes

There are six different modes of operation for the microcontrollers, each one with its own special characteristics and which can be chosen according to the specific performance and power requirements of the application. There are two modes allowing normal operation of the microcontroller, the FAST Mode and SLOW Mode. The remaining four modes, the SLEEP, IDLE0, IDLE1 and IDLE2 Modes are used when the microcontroller CPU is switched off to conserve power.

| Operation Mode | CPU | Register Setting |        |           | $f_{sys}$         | $f_H$                 | $f_{SUB}$ | $f_{LIRC}$            |
|----------------|-----|------------------|--------|-----------|-------------------|-----------------------|-----------|-----------------------|
|                |     | FHIDEN           | FSIDEN | CKS2~CKS0 |                   |                       |           |                       |
| FAST           | On  | x                | x      | 000~110   | $f_H \sim f_H/64$ | On                    | On        | On                    |
| SLOW           | On  | x                | x      | 111       | $f_{SUB}$         | On/Off <sup>(1)</sup> | On        | On                    |
| IDLE0          | Off | 0                | 1      | 000~110   | Off               | Off                   | On        | On                    |
|                |     |                  |        | 111       | On                |                       |           |                       |
| IDLE1          | Off | 1                | 1      | xxx       | On                | On                    | On        | On                    |
| IDLE2          | Off | 1                | 0      | 000~110   | On                | On                    | Off       | On                    |
|                |     |                  |        | 111       | Off               |                       |           |                       |
| SLEEP          | Off | 0                | 0      | xxx       | Off               | Off                   | Off       | On/Off <sup>(2)</sup> |

"x": Don't care

- Note: 1. The  $f_H$  clock will be switched on or off by configuring the corresponding oscillator enable bit in the SLOW mode.
2. The  $f_{LIRC}$  clock can be on or off which is controlled by the WDT function being enabled or disabled in the SLEEP mode.

### FAST Mode

This is one of the main operating modes where the microcontrollers have all of their functions operational and where the system clock is provided by the high speed oscillator. This mode operates allowing the microcontrollers to operate normally with a clock source which will come from the high speed oscillator, HIRC. The high speed oscillator will however first be divided by a ratio ranging from 1 to 64, the actual ratio being selected by the CKS2~CKS0 bits in the SCC register. Although a high speed oscillator is used, running the microcontrollers at a divided clock ratio reduces the operating current.

### SLOW Mode

This is also a mode where the microcontroller operates normally although now with a slower speed clock source. The clock source used will be from  $f_{SUB}$ , which is derived from the LIRC oscillator.

### SLEEP Mode

The SLEEP Mode is entered when a HALT instruction is executed and when the FHIDEN and FSIDEN bit are low. In the SLEEP mode the CPU will be stopped. The  $f_{SUB}$  clock provided to the peripheral function will also be stopped, too. However the  $f_{LIRC}$  clock will continue to operate if the WDT function is enabled by the WDTC register.

### IDLE0 Mode

The IDLE0 Mode is entered when a HALT instruction is executed and when the FHIDEN bit in the SCC register is low and the FSIDEN bit in the SCC register is high. In the IDLE0 Mode the CPU will be switched off but the low speed oscillator will be turned on to drive some peripheral functions.

### IDLE1 Mode

The IDLE1 Mode is entered when a HALT instruction is executed and when the FHIDEN bit in the SCC register is high and the FSIDEN bit in the SCC register is high. In the IDLE1 Mode the CPU will be switched off but both the high and low speed oscillators will be turned on to provide a clock source to keep some peripheral functions operational.

### IDLE2 Mode

The IDLE2 Mode is entered when a HALT instruction is executed and when the FHIDEN bit in the SCC register is high and the FSIDEN bit in the SCC register is low. In the IDLE2 Mode the CPU will be switched off but the high speed oscillator will be turned on to provide a clock source to keep some peripheral functions operational.

## Control Registers

The SCC and HIRCC registers are used to control the system clock and the corresponding oscillator configurations.

| Register Name | Bit  |      |      |   |   |   |        |        |
|---------------|------|------|------|---|---|---|--------|--------|
|               | 7    | 6    | 5    | 4 | 3 | 2 | 1      | 0      |
| SCC           | CKS2 | CKS1 | CKS0 | — | — | — | FHIDEN | FSIDEN |
| HIRCC         | —    | —    | —    | — | — | — | HIRCF  | HIRCEN |

**System Operating Mode Control Register List**

### • SCC Register

| Bit  | 7    | 6    | 5    | 4 | 3 | 2 | 1      | 0      |
|------|------|------|------|---|---|---|--------|--------|
| Name | CKS2 | CKS1 | CKS0 | — | — | — | FHIDEN | FSIDEN |
| R/W  | R/W  | R/W  | R/W  | — | — | — | R/W    | R/W    |
| POR  | 0    | 1    | 0    | — | — | — | 0      | 0      |

Bit 7~5 **CKS2~CKS0**: System clock selection

000:  $f_H$   
 001:  $f_H/2$   
 010:  $f_H/4$   
 011:  $f_H/8$   
 100:  $f_H/16$   
 101:  $f_H/32$   
 110:  $f_H/64$   
 111:  $f_{SUB}$

These three bits are used to select which clock is used as the system clock source. In addition to the system clock source directly derived from  $f_H$  or  $f_{SUB}$ , a divided version of the high speed system oscillator can also be chosen as the system clock source.

Bit 4~2 Unimplemented, read as “0”

Bit 1 **FHIDEN**: High frequency oscillator control when CPU is switched off

0: Disable  
 1: Enable

This bit is used to control whether the high speed oscillator is activated or stopped when the CPU is switched off by executing a “HALT” instruction.

Bit 0 **FSIDEN**: Low frequency oscillator control when CPU is switched off

0: Disable  
 1: Enable

This bit is used to control whether the low speed oscillator is activated or stopped when the CPU is switched off by executing a “HALT” instruction.

Note: A certain delay is required before the relevant clock is successfully switched to the target clock source after any clock switching setup using the CKS2~CKS0 bits. A proper delay time must be arranged before executing the following operations which require immediate reaction with the target clock source.

Clock switching delay time =  $4 \times t_{SYS} + [0 \sim (1.5 \times t_{CURR} + 0.5 \times t_{TAR})]$ , where  $t_{CURR}$  indicates the current clock period,  $t_{TAR}$  indicates the target clock period and  $t_{SYS}$  indicates the current system clock period.

• **HIRCC Register**

| Bit  | 7 | 6 | 5 | 4 | 3 | 2 | 1     | 0      |
|------|---|---|---|---|---|---|-------|--------|
| Name | — | — | — | — | — | — | HIRCF | HIRCEN |
| R/W  | — | — | — | — | — | — | R     | R/W    |
| POR  | — | — | — | — | — | — | 0     | 1      |

Bit 7~2 Unimplemented, read as “0”

Bit 1 **HIRCF**: HIRC oscillator stable flag  
 0: HIRC unstable  
 1: HIRC stable


This bit is used to indicate whether the HIRC oscillator is stable or not. When the HIRCEN bit is set to 1 to enable the HIRC oscillator, the HIRCF bit will first be cleared to 0 and then set to 1 after the HIRC oscillator is stable. The HIRC stable time will spend 16 clock.

Bit 0 **HIRCEN**: HIRC oscillator enable control  
 0: Disable  
 1: Enable

## Operating Mode Switching

The device can switch between operating modes dynamically allowing the user to select the best performance/power ratio for the present task in hand. In this way microcontroller operations that do not require high performance can be executed using slower clocks thus requiring less operating current and prolonging battery life in portable applications.


In simple terms, mode switching between the FAST Mode and SLOW Mode is executed using the CKS2~CKS0 bits in the SCC register while mode switching from the FAST/SLOW Modes to the SLEEP/IDLE Modes is executed via the HALT instruction. When a HALT instruction is executed, whether the device enters the IDLE Mode or the SLEEP Mode is determined by the condition of the FHIDEN and FSIDEN bits in the SCC register.

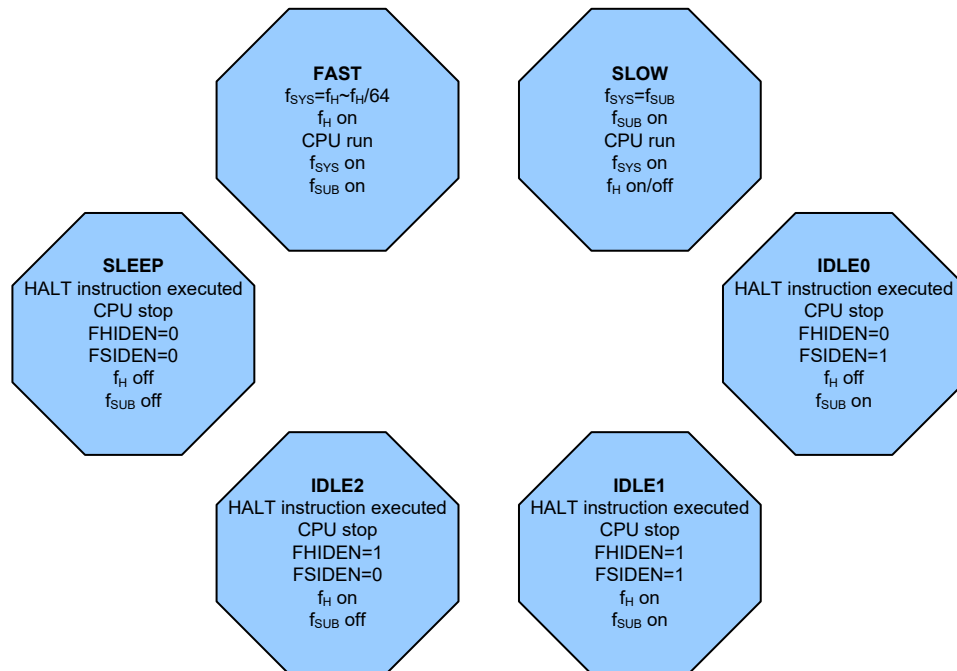

### FAST Mode to SLOW Mode Switching

When running in the FAST Mode, which uses the high speed system oscillator, and therefore consumes more power, the system clock can switch to run in the SLOW Mode by setting the CKS2~CKS0 bits to “111” in the SCC register. This will then use the low speed system oscillator which will consume less power. Users may decide to do this for certain operations which do not require high performance and can subsequently reduce power consumption.


The SLOW Mode system clock is sourced from the LIRC oscillator and therefore requires this oscillator to be stable before full mode switching occurs.

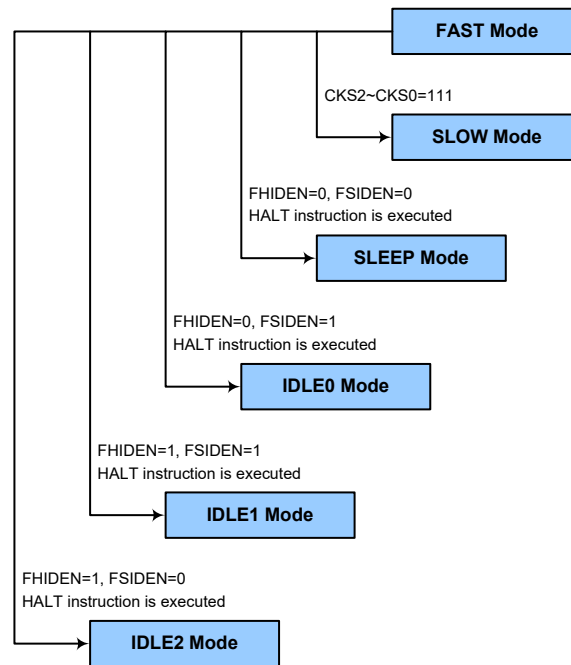

### SLOW Mode to FAST Mode Switching

In the SLOW mode the system clock is derived from  $f_{SUB}$ . When system clock is switched back to the FAST mode from  $f_{SUB}$ , the CKS2~CKS0 bits should be set to “000”~“110” and then the system clock will respectively be switched to  $f_H \sim f_H/64$ .

However, if  $f_H$  is not used in the SLOW mode and thus switched off, it will take some time to re-oscillate and stabilise when switching to the FAST mode from the SLOW Mode. This is monitored using the HIRCF bit in the HIRCC register. The time duration required for the high speed system oscillator stabilisation is specified in the System Start Up Time Characteristics.

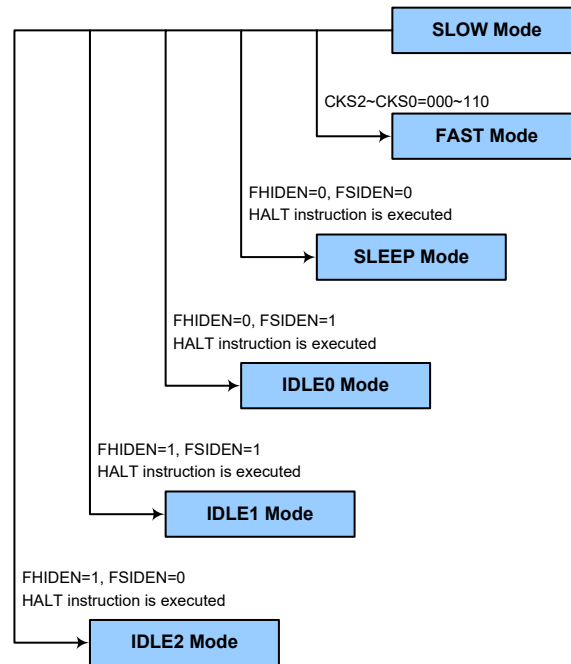

### Entering the SLEEP Mode

There is only one way for the device to enter the SLEEP Mode and that is to execute the “HALT” instruction in the application program with both the FHIDEN and FSIDEN bits in the SCC register equal to “0”. In this mode all the clocks and functions will be switched off except the WDT function. When this instruction is executed under the conditions described above, the following will occur:

- The system clock will be stopped and the application program will stop at the “HALT” instruction.
- The Data Memory contents and registers will maintain their present condition.
- The I/O ports will maintain their present conditions.
- In the status register, the Power Down flag, PDF, will be set and the Watchdog time-out flag, TO, will be cleared.
- The WDT will be cleared and resume counting if the WDT function is enabled. If the WDT function is disabled, the WDT will be cleared and then stopped.

### Entering the IDLE0 Mode

There is only one way for the device to enter the IDLE0 Mode and that is to execute the “HALT” instruction in the application program with the FHIDEN bit in the SCC register equal to “0” and the FSIDEN bit in the SCC register equal to “1”. When this instruction is executed under the conditions described above, the following will occur:

- The  $f_H$  clock will be stopped and the application program will stop at the “HALT” instruction, but the  $f_{SUB}$  clock will be on.
- The Data Memory contents and registers will maintain their present condition.
- The I/O ports will maintain their present conditions.
- In the status register, the Power Down flag, PDF, will be set and the Watchdog time-out flag, TO, will be cleared.
- The WDT will be cleared and resume counting if the WDT function is enabled. If the WDT function is disabled, the WDT will be cleared and then stopped.

### Entering the IDLE1 Mode

There is only one way for the device to enter the IDLE1 Mode and that is to execute the “HALT” instruction in the application program with both the FHIDEN and FSIDEN bits in the SCC register equal to “1”. When this instruction is executed under the conditions described above, the following will occur:

- The  $f_H$  and  $f_{SUB}$  clocks will be on but the application program will stop at the “HALT” instruction.
- The Data Memory contents and registers will maintain their present condition.
- The I/O ports will maintain their present conditions.
- In the status register, the Power Down flag, PDF, will be set and the Watchdog time-out flag, TO, will be cleared.
- The WDT will be cleared and resume counting if the WDT function is enabled. If the WDT function is disabled, the WDT will be cleared and then stopped.

### Entering the IDLE2 Mode

There is only one way for the device to enter the IDLE2 Mode and that is to execute the “HALT” instruction in the application program with the FHIDEN bit in the SCC register equal to “1” and the FSIDEN bit in the SCC register equal to “0”. When this instruction is executed under the conditions described above, the following will occur:

- The  $f_H$  clock will be on but the  $f_{SUB}$  clock will be off and the application program will stop at the “HALT” instruction.
- The Data Memory contents and registers will maintain their present condition.
- The I/O ports will maintain their present conditions.
- In the status register, the Power Down flag, PDF, will be set and the Watchdog time-out flag, TO, will be cleared.
- The WDT will be cleared and resume counting if the WDT function is enabled. If the WDT function is disabled, the WDT will be cleared and then stopped.

### Standby Current Considerations

As the main reason for entering the SLEEP or IDLE Mode is to keep the current consumption of the device to as low a value as possible, perhaps only in the order of several micro-amps except in the IDLE1 and IDLE2 Mode, there are other considerations which must also be taken into account by the circuit designer if the power consumption is to be minimised. Special attention must be made to the I/O pins on the device. All high-impedance input pins must be connected to either a fixed high or low level as any floating input pins could create internal oscillations and result in increased current consumption. This also applies to the device which has different package types, as there may be unbonded pins. These must either be set as outputs or if set as inputs must have pull-high resistors connected.

Care must also be taken with the loads, which are connected to I/O pins, which are set as outputs. These should be placed in a condition in which minimum current is drawn or connected only to external circuits that do not draw current, such as other CMOS inputs. Also note that additional standby current will also be required if the LIRC oscillator has enabled.

In the IDLE1 and IDLE2 Mode the high speed oscillator is on, if the peripheral function clock source is derived from the high speed oscillator, the additional standby current will also be perhaps in the order of several hundred micro-amps.

## Wake-up

To minimise power consumption the device can enter the SLEEP or any IDLE Mode, where the CPU will be switched off. However, when the device is woken up again, they will take a considerable time for the original system oscillator to restart, stabilise and allow normal operation to resume.

After the system enters the SLEEP or IDLE Mode, it can be woken up from one of various sources listed as follows:

- An external falling edge on Port A
- A system interrupt
- A WDT overflow

When the device executes the “HALT” instruction, it will enter the IDLE or SLEEP mode and the PDF flag will be set to 1. The PDF flag will be cleared to 0 if the device experiences a system power-up or executes the clear Watchdog Timer instruction. If the system is woken up by a WDT overflow, a Watchdog Timer reset will be initiated and the TO flag will be set to 1. The TO flag is set if a WDT time-out occurs and causes a wake-up that only resets the Program Counter and Stack Pointer, other flags remain in their original status.

Each pin on Port A can be set using the PAWU register to permit a negative transition on the pin to wake-up the system. When a pin wake-up occurs, the program will resume execution at the instruction following the “HALT” instruction. If the system is woken up by an interrupt, then two possible situations may occur. The first is where the related interrupt is disabled or the interrupt is enabled but the stack is full, in which case the program will resume execution at the instruction following the “HALT” instruction. In this situation, the interrupt which woke up the device will not be immediately serviced, but will rather be serviced later when the related interrupt is finally enabled or when a stack level becomes free. The other situation is where the related interrupt is enabled and the stack is not full, in which case the regular interrupt response takes place. If an interrupt request flag is set high before entering the SLEEP or IDLE Mode, the wake-up function of the related interrupt will be disabled.

## Watchdog Timer

The Watchdog Timer is provided to prevent program malfunctions or sequences from jumping to unknown locations, due to certain uncontrollable external events such as electrical noise.

### Watchdog Timer Clock Source

The Watchdog Timer clock source is provided by the internal clock,  $f_{LIRC}$ . The LIRC internal oscillator has an approximate frequency of 32kHz and this specified internal clock period can vary with  $V_{DD}$ , temperature and process variations. The Watchdog Timer source clock is then subdivided by a ratio of  $2^8$  to  $2^{18}$  to give longer timeouts, the actual value being chosen using the WS2~WS0 bits in the WDTC register.

### Watchdog Timer Control Register

A single register, WDTC, controls the required timeout period as well as the enable/disable and reset MCU operation.

**• WDTFC Register**

| Bit  | 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
|------|-----|-----|-----|-----|-----|-----|-----|-----|
| Name | WE4 | WE3 | WE2 | WE1 | WE0 | WS2 | WS1 | WS0 |
| R/W  | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| POR  | 0   | 1   | 0   | 1   | 0   | 0   | 1   | 1   |

Bit 7~3 **WE4~WE0**: WDT function software control

10101: Disable

01010: Enable

Others: Reset MCU

When these bits are changed by the environmental noise or software setting to reset the microcontroller, the reset operation will be activated after a delay time,  $t_{SRESET}$ , and the WRF bit in the RSTFC register will be set high.

Bit 2~0 **WS2~WS0**: WDT time-out period selection

000:  $2^8/f_{LIRC}$

001:  $2^{10}/f_{LIRC}$

010:  $2^{12}/f_{LIRC}$

011:  $2^{14}/f_{LIRC}$

100:  $2^{15}/f_{LIRC}$

101:  $2^{16}/f_{LIRC}$

110:  $2^{17}/f_{LIRC}$

111:  $2^{18}/f_{LIRC}$

These three bits determine the division ratio of the watchdog timer source clock, which in turn determines the time-out period.

**• RSTFC Register**

| Bit  | 7 | 6 | 5 | 4 | 3 | 2    | 1   | 0   |
|------|---|---|---|---|---|------|-----|-----|
| Name | — | — | — | — | — | LVRF | LRF | WRF |
| R/W  | — | — | — | — | — | R/W  | R/W | R/W |
| POR  | — | — | — | — | — | x    | 0   | 0   |

“x”: Unknown

Bit 7~3 Unimplemented, read as “0”

Bit 2 **LVRF**: LVR function reset flag

Refer to the “Low Voltage Reset” section.

Bit 1 **LRF**: LVR control register software reset flag

Refer to the “Low Voltage Reset” section.

Bit 0 **WRF**: WDT control register software reset flag

0: Not occurred

1: Occurred

This bit is set high by the WDT control register software reset and cleared by the application program. Note that this bit can only be cleared to zero by the application program.

## Watchdog Timer Operation

The Watchdog Timer operates by providing a device reset when its timer overflows. This means that in the application program and during normal operation the user has to strategically clear the Watchdog Timer before it overflows to prevent the Watchdog Timer from executing a reset. This is done using the clear watchdog instruction. If the program malfunctions for whatever reason, jumps to an unknown location, or enters an endless loop, this clear instruction will not be executed in the correct manner, in which case the Watchdog Timer will overflow and reset the device. There are five bits, WE4~WE0, in the WDTC register to offer the enable/disable control and reset control of the Watchdog Timer and the MCU reset. The WDT function will be disabled when the WE4~WE0 bits are set to a value of 10101B while the WDT function will be enabled if the WE4~WE0 bits are equal to 01010B. If the WE4~WE0 bits are set to any other values, other than 01010B and 10101B, it will reset the device after a delay time,  $t_{SRESET}$ . After power-on these bits will have a value of 01010B.


| WE4~WE0 Bits     | WDT Function |
|------------------|--------------|
| 10101B           | Disable      |
| 01010B           | Enable       |
| Any other values | Reset MCU    |

**Watchdog Timer Function Control**

Under normal program operation, a Watchdog Timer time-out will initialise a device reset and set the status bit TO. However, if the system is in the SLEEP or IDLE Mode, when a Watchdog Timer time-out occurs, the TO and PDF bits in the status register will be set and only the Program Counter and Stack Pointer will be reset. Three methods can be adopted to clear the contents of the Watchdog Timer. The first is a WDT software reset, which means a certain value except 01010B and 10101B written into the WE4~WE0 bit field, the second is using the Watchdog Timer software clear instruction and the third is via a HALT instruction.

There is only one method of using software instruction to clear the Watchdog Timer. That is to use the single “CLR WDT” instruction to clear the WDT.

The maximum time out period is when the  $2^{18}$  division ratio is selected. As an example, with a 32kHz LIRC oscillator as its source clock, this will give a maximum watchdog period of around 8 seconds for the  $2^{18}$  division ratio, and a minimum timeout of 8ms for the  $2^8$  division ratio.

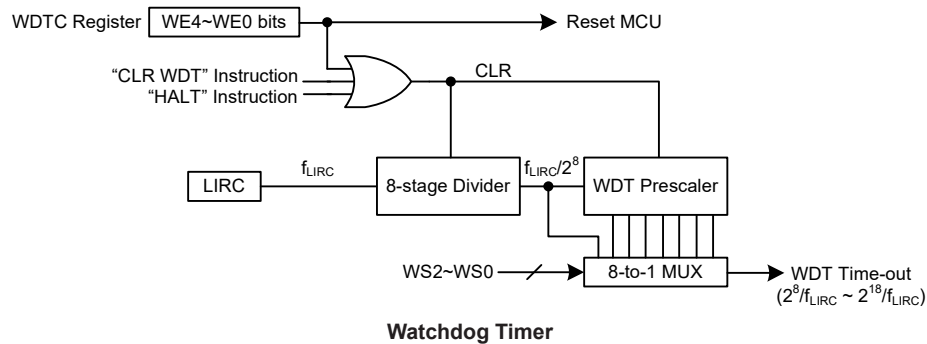

## Reset and Initialisation

A reset function is a fundamental part of any microcontroller ensuring that the device can be set to some predetermined condition irrespective of outside parameters. The most important reset condition is after power is first applied to the microcontroller. In this case, internal circuitry will ensure that the microcontroller, after a short delay, will be in a well-defined state and ready to execute the first program instruction. After this power-on reset, certain important internal registers will be set to defined states before the program commences. One of these registers is the Program Counter, which will be reset to zero forcing the microcontroller to begin program execution from the lowest Program Memory address.


Another reset exists in the form of a Low Voltage Reset, LVR, where a full reset is implemented in situations where the power supply voltage falls below a certain threshold. Another type of reset is when the Watchdog Timer overflows and resets the microcontroller. All types of reset operations result in different register conditions being setup.

### Reset Functions

There are several ways in which a microcontroller reset can occur, through events occurring internally.

#### Power-on Reset

The most fundamental and unavoidable reset is the one that occurs after power is first applied to the microcontroller. As well as ensuring that the Program Memory begins execution from the first memory address, a power-on reset also ensures that certain other registers are preset to known conditions. All the I/O port and port control registers will power up in a high condition ensuring that all pins will be first set to inputs.

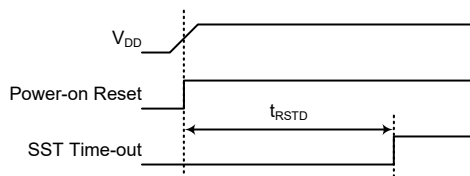


**Power-on Reset Timing Chart**

#### Low Voltage Reset – LVR

The microcontroller contains a low voltage reset circuit in order to monitor the supply voltage of the device and provides an MCU reset should the value fall below a certain predefined level. The LVR function can be enabled or disabled by the LVRC control register. If the supply voltage of the device drops to within a range of  $0.9V \sim V_{LVR}$  such as might occur when changing the battery, the LVR will automatically reset the device internally and the LVRF bit in the RSTFC register will also be set high. For a valid LVR signal, a low supply voltage, i.e., a voltage in the range between  $0.9V \sim V_{LVR}$  must exist for a time greater than that specified by  $t_{LVR}$  in the LVD/LVR Electrical Characteristics. If the low supply voltage state does not exceed this value, the LVR will ignore the low supply voltage and will not perform a reset function. The actual  $t_{LVR}$  value can be selected by the TLVR1~TLVR0 bits in the TLVRC register.

The actual  $V_{LVR}$  value can be selected by the LVS7~LVS0 bits in the LVRC register. If the LVS7~LVS0 bits are changed to some certain values by the environmental noise or software setting, the LVR will reset the device after a delay time,  $t_{SRESET}$ . When this happens, the LRF bit in the RSTFC register will be set high. After power on the register will have the value of 10011001B. Note that the LVR function will be automatically disabled when the device enters the IDLE/SLEEP mode.

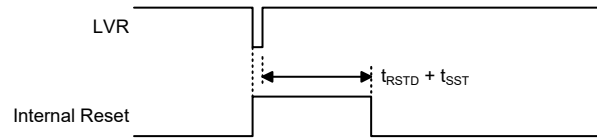

**Low Voltage Reset Timing Chart**

• **LVRC Register**

| Bit  | 7    | 6    | 5    | 4    | 3    | 2    | 1    | 0    |
|------|------|------|------|------|------|------|------|------|
| Name | LVS7 | LVS6 | LVS5 | LVS4 | LVS3 | LVS2 | LVS1 | LVS0 |
| R/W  | R/W  | R/W  | R/W  | R/W  | R/W  | R/W  | R/W  | R/W  |
| POR  | 1    | 0    | 0    | 1    | 1    | 0    | 0    | 1    |

Bit 7~0 **LVS7~LVS0**: LVR voltage select control

01100110: 1.7V  
01010101: 1.9V  
00110011: 2.55V  
10011001: 3.15V  
10101010: 3.8V  
11110000: disable

Other values: MCU reset – register is reset to POR value

When an actual low voltage condition occurs, as specified by one of the five defined LVR voltage values above, an MCU reset will be generated. The reset operation will be activated after the low voltage condition keeps more than a  $t_{LVR}$  time. The actual  $t_{LVR}$  value can be selected by the TLVR1~TLVR0 bits in the TLVRC register. In this situation the register contents will remain the same after such a reset occurs.

Any register value, other than 11110000B and the five defined LVR values above, will also result in the generation of an MCU reset. The reset operation will be activated after a delay time,  $t_{SRESET}$ . However in this situation the register contents will be reset to the POR value.

• **TLVRC Register**

| Bit  | 7 | 6 | 5 | 4 | 3 | 2 | 1     | 0     |
|------|---|---|---|---|---|---|-------|-------|
| Name | — | — | — | — | — | — | TLVR1 | TLVR0 |
| R/W  | — | — | — | — | — | — | R/W   | R/W   |
| POR  | — | — | — | — | — | — | 0     | 1     |

Bit 7~2 Unimplemented, read as “0”

Bit 1~0 **TLVR1~TLVR0**: Minimum low voltage width to reset time,  $t_{LVR}$ , selection

00:  $(7 \sim 8) \times t_{LIRC}$   
01:  $(31 \sim 32) \times t_{LIRC}$   
10:  $(63 \sim 64) \times t_{LIRC}$   
11:  $(127 \sim 128) \times t_{LIRC}$

**• RSTFC Register**

| Bit  | 7 | 6 | 5 | 4 | 3 | 2    | 1   | 0   |
|------|---|---|---|---|---|------|-----|-----|
| Name | — | — | — | — | — | LVRF | LRF | WRF |
| R/W  | — | — | — | — | — | R/W  | R/W | R/W |
| POR  | — | — | — | — | — | x    | 0   | 0   |

“x”: unknown

Bit 7~3 Unimplemented, read as “0”

Bit 2 **LVRF**: LVR function reset flag

0: Not occurred

1: Occurred

This bit is set to 1 when a specific Low Voltage Reset situation condition occurs. This bit can only be cleared to 0 by the application program.

Bit 1 **LRF**: LVR control register software reset flag

0: Not occurred

1: Occurred

This bit is set to 1 if the LVRC register contains any non-defined LVR voltage register values. This in effect acts like a software-reset function. This bit can only be cleared to 0 by the application program.

Bit 0 **WRF**: WDT control register software reset flag


Refer to the “Watchdog Timer Control Register” section.

**In Application Programming Reset**

When a specific value of “55H” is written into the FC1 register, a reset signal will be generated to reset the whole device. Refer to the IAP section for more associated details.

**Watchdog Time-out Reset during Normal Operation**


The Watchdog time-out flag TO will be set to “1” when the Watchdog time-out Reset during normal operation.

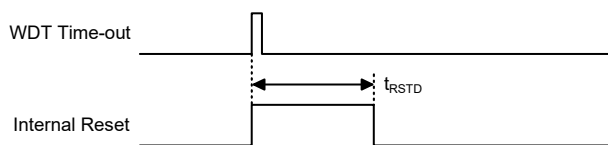

**WDT Time-out Reset during Normal Operation Timing Chart**

**Watchdog Time-out Reset during SLEEP or IDLE Mode**

The Watchdog time-out Reset during SLEEP or IDLE Mode is a little different from other kinds of reset. Most of the conditions remain unchanged except that the Program Counter and the Stack Pointer will be cleared to “0” and the TO and PDF flags will be set to “1”. Refer to the System Start Up Time Characteristics for  $t_{SST}$  details.

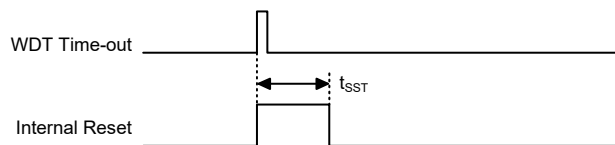

**WDT Time-out Reset during SLEEP or IDLE Mode Timing Chart**

## Reset Initial Conditions

The different types of reset described affect the reset flags in different ways. These flags, known as PDF and TO are located in the status register and are controlled by various microcontroller operations, such as the SLEEP or IDLE Mode function or Watchdog Timer. The reset flags are shown in the table:

| TO | PDF | RESET Conditions                                       |
|----|-----|--------------------------------------------------------|
| 0  | 0   | Power-on reset                                         |
| u  | u   | LVR reset during FAST or SLOW Mode operation           |
| 1  | u   | WDT time-out reset during FAST or SLOW Mode operation  |
| 1  | 1   | WDT time-out reset during IDLE or SLEEP Mode operation |

“u” stands for unchanged

The following table indicates the way in which the various components of the microcontroller are affected after a power-on reset occurs.

| Item               | Condition after RESET                            |
|--------------------|--------------------------------------------------|
| Program Counter    | Reset to zero                                    |
| Interrupts         | All interrupts will be disabled                  |
| WDT, Time Bases    | Cleared after reset, WDT begins counting         |
| Timer Modules      | Timer Modules will be turned off                 |
| Input/Output Ports | I/O ports will be setup as inputs                |
| Stack Pointer      | Stack Pointer will point to the top of the stack |

The different kinds of resets all affect the internal registers of the microcontroller in different ways. To ensure reliable continuation of normal program execution after a reset occurs, it is important to know what condition the microcontroller is in after a particular reset occurs. The following table describes how each type of reset affects each of the microcontroller internal registers. Note that as more than one package type exist, the table reflects the situation for the larger package type.

| Register | Power-on Reset | WDT Time-out<br>(Normal Operation) | WDT Time-out<br>(IDLE/SLEEP) |
|----------|----------------|------------------------------------|------------------------------|
| IAR0     | 0000 0000      | 0000 0000                          | uuuu uuuu                    |
| MP0      | 0000 0000      | 0000 0000                          | uuuu uuuu                    |
| IAR1     | 0000 0000      | 0000 0000                          | uuuu uuuu                    |
| MP1L     | 0000 0000      | 0000 0000                          | uuuu uuuu                    |
| MP1H     | 0000 0000      | 0000 0000                          | uuuu uuuu                    |
| ACC      | xxxx xxxx      | uuuu uuuu                          | uuuu uuuu                    |
| PCL      | 0000 0000      | 0000 0000                          | 0000 0000                    |
| TBLP     | xxxx xxxx      | uuuu uuuu                          | uuuu uuuu                    |
| TBLH     | xxxx xxxx      | uuuu uuuu                          | uuuu uuuu                    |
| TBHP     | ---- xxxx      | ---- uuuu                          | ---- uuuu                    |
| STATUS   | xx00 xxxx      | uu1u uuuu                          | uu11 uuuu                    |
| IAR2     | 0000 0000      | 0000 0000                          | uuuu uuuu                    |
| MP2L     | 0000 0000      | 0000 0000                          | uuuu uuuu                    |
| MP2H     | 0000 0000      | 0000 0000                          | uuuu uuuu                    |
| RSTFC    | ---- -000      | ---- -uuu                          | ---- -uuu                    |
| HIRCC    | ---- --01      | ---- --01                          | ---- --uu                    |
| LVDC     | --00 -000      | --00 -000                          | --uu -uuu                    |
| LVRC     | 1001 1001      | 1001 1001                          | uuuu uuuu                    |
| SCC      | 010- --00      | 010- --00                          | uuu- --uu                    |
| PA       | 1111 1111      | 1111 1111                          | uuuu uuuu                    |
| PAC      | 1111 1111      | 1111 1111                          | uuuu uuuu                    |

| Register | Power-on Reset | WDT Time-out<br>(Normal Operation) | WDT Time-out<br>(IDLE/SLEEP) |
|----------|----------------|------------------------------------|------------------------------|
| PAPU     | 0000 0000      | 0000 0000                          | uuuu uuuu                    |
| PAWU     | 0000 0000      | 0000 0000                          | uuuu uuuu                    |
| WDTC     | 0101 0011      | 0101 0011                          | uuuu uuuu                    |
| TBC      | 0--- -000      | 0--- -000                          | u--- -uuu                    |
| INTEG    | ---- --00      | ---- --00                          | ---- --uu                    |
| INTC0    | -000 0000      | -000 0000                          | -uuu uuuu                    |
| INTC1    | 0000 0000      | 0000 0000                          | uuuu uuuu                    |
| INTC2    | 0000 0000      | 0000 0000                          | uuuu uuuu                    |
| INTC3    | 00-0 00-0      | 00-0 00-0                          | uu-u uu-u                    |
| PWMCS    | ---- 0000      | ---- 0000                          | ---- uuuu                    |
| PB       | 1111 1111      | 1111 1111                          | uuuu uuuu                    |
| PBC      | 1111 1111      | 1111 1111                          | uuuu uuuu                    |
| PBPU     | 0000 0000      | 0000 0000                          | uuuu uuuu                    |
| PC       | --11 1111      | --11 1111                          | --uu uuuu                    |
| PCC      | --11 1111      | --11 1111                          | --uu uuuu                    |
| PCPU     | --00 0000      | --00 0000                          | --uu uuuu                    |
| SADC0    | 0000 0000      | 0000 0000                          | uuuu uuuu                    |
| SADC1    | 000- -000      | 000- -000                          | uuu- -uuu                    |
| CAPTC0   | 0000 0-00      | 0000 0-00                          | uuuu u-uu                    |
| CAPTC1   | 0000 0000      | 0000 0000                          | uuuu uuuu                    |
| CAPTMDL  | 0000 0000      | 0000 0000                          | uuuu uuuu                    |
| CAPTMDH  | 0000 0000      | 0000 0000                          | uuuu uuuu                    |
| CAPTMAL  | 0000 0000      | 0000 0000                          | uuuu uuuu                    |
| CAPTMAH  | 0000 0000      | 0000 0000                          | uuuu uuuu                    |
| CAPTMCL  | xxxx xxxx      | xxxx xxxx                          | uuuu uuuu                    |
| CAPTMCH  | xxxx xxxx      | xxxx xxxx                          | uuuu uuuu                    |
| ADCR2    | 0000 0-00      | 0000 0-00                          | uuu u-uu                     |
| ADDL     | 0000 0000      | 0000 0000                          | uuuu uuuu                    |
| CMPSEL   | 0000 000-      | 0000 000-                          | uuuu uuu-                    |
| CMPC     | 1111 0000      | 1111 0000                          | uuuu uuuu                    |
| OPOMS    | 110- -010      | 110- -010                          | uuu- -uuu                    |
| OPCM     | 0000 0000      | 0000 0000                          | uuuu uuuu                    |
| OPACAL   | 00-1 0000      | 00-1 0000                          | uu-u uuuu                    |
| SADOH    | xxxx xxxx      | xxxx xxxx                          | uuuu uuuu<br>(ADRF=0)        |
|          |                |                                    | ---- uuuu<br>(ADRF=1)        |
| SADOL    | xxxx ----      | xxxx ----                          | uuuu ----<br>(ADRF=0)        |
|          |                |                                    | uuuu uuuu<br>(ADRF=1)        |
| ADLVDH   | 0000 0000      | 0000 0000                          | uuuu uuuu<br>(ADRF=0)        |
|          |                |                                    | ---- uuuu<br>(ADRF=1)        |
| ADLVDL   | 0000 ----      | 0000 ----                          | uuuu ----<br>(ADRF=0)        |
|          |                |                                    | uuuu uuuu<br>(ADRF=1)        |

| Register | Power-on Reset | WDT Time-out<br>(Normal Operation) | WDT Time-out<br>(IDLE/SLEEP) |
|----------|----------------|------------------------------------|------------------------------|
| ADHVDH   | 1111 1111      | 1111 1111                          | uuuu uuuu<br>(ADRFS=0)       |
|          |                |                                    | ---- uuuu<br>(ADRFS=1)       |
| ADHVDL   | 1111 ----      | 1111 ----                          | uuuu ----<br>(ADRFS=0)       |
|          |                |                                    | uuuu uuuu<br>(ADRFS=1)       |
| HINTEG   | -000 0000      | -000 0000                          | -uuu uuuu                    |
| PSCR     | ---- --00      | ---- --00                          | ---- --uu                    |
| PWMC     | 0000 0000      | 0000 0000                          | uuuu uuuu                    |
| OCPS     | --00 0000      | --00 0000                          | --uu uuuu                    |
| HDCR     | 0001 0000      | 0001 0000                          | uuuu uuuu                    |
| HDCD     | ---- -000      | ---- -000                          | ---- -uuu                    |
| MPTC1    | 0000 0000      | 0000 0000                          | uuuu uuuu                    |
| MPTC2    | -000 0000      | -000 0000                          | -uuu uuuu                    |
| PTM1C0   | 0000 0---      | 0000 0---                          | uuuu u---                    |
| PTM1C1   | 0000 0000      | 0000 0000                          | uuuu uuuu                    |
| PTM1DL   | 0000 0000      | 0000 0000                          | uuuu uuuu                    |
| PTM1DH   | 0000 0000      | 0000 0000                          | uuuu uuuu                    |
| PTM1AL   | 0000 0000      | 0000 0000                          | uuuu uuuu                    |
| PTM1AH   | 0000 0000      | 0000 0000                          | uuuu uuuu                    |
| PTM1RPL  | 0000 0000      | 0000 0000                          | uuuu uuuu                    |
| PTM1RPH  | 0000 0000      | 0000 0000                          | uuuu uuuu                    |
| PTM0C0   | 0000 0---      | 0000 0---                          | uuuu u---                    |
| PTM0C1   | 0000 0000      | 0000 0000                          | uuuu uuuu                    |
| PTM0C2   | ---- -000      | ---- -000                          | ---- -uuu                    |
| PTM0DL   | 0000 0000      | 0000 0000                          | uuuu uuuu                    |
| PTM0DH   | 0000 0000      | 0000 0000                          | uuuu uuuu                    |
| PTM0AL   | 0000 0000      | 0000 0000                          | uuuu uuuu                    |
| PTM0AH   | 0000 0000      | 0000 0000                          | uuuu uuuu                    |
| PTM0BL   | 0000 0000      | 0000 0000                          | uuuu uuuu                    |
| PTM0BH   | 0000 0000      | 0000 0000                          | uuuu uuuu                    |
| PTM0RPL  | 0000 0000      | 0000 0000                          | uuuu uuuu                    |
| PTM0RPH  | 0000 0000      | 0000 0000                          | uuuu uuuu                    |
| MDUWR0   | xxxx xxxx      | 0000 0000                          | uuuu uuuu                    |
| MDUWR1   | xxxx xxxx      | 0000 0000                          | uuuu uuuu                    |
| MDUWR2   | xxxx xxxx      | 0000 0000                          | uuuu uuuu                    |
| MDUWR3   | xxxx xxxx      | 0000 0000                          | uuuu uuuu                    |
| MDUWR4   | xxxx xxxx      | 0000 0000                          | uuuu uuuu                    |
| MDUWR5   | xxxx xxxx      | 0000 0000                          | uuuu uuuu                    |
| MDUWCTRL | 00-- ----      | 00-- ----                          | uu-- ----                    |
| DUTR0L   | 0000 0000      | 0000 0000                          | uuuu uuuu                    |
| DUTR0H   | ---- --00      | ---- --00                          | ---- --uu                    |
| DUTR1L   | 0000 0000      | 0000 0000                          | uuuu uuuu                    |
| DUTR1H   | ---- --00      | ---- --00                          | ---- --uu                    |
| DUTR2L   | 0000 0000      | 0000 0000                          | uuuu uuuu                    |
| DUTR2H   | ---- --00      | ---- --00                          | ---- --uu                    |

| Register | Power-on Reset | WDT Time-out<br>(Normal Operation) | WDT Time-out<br>(IDLE/SLEEP) |
|----------|----------------|------------------------------------|------------------------------|
| PRDRL    | 0000 0000      | 0000 0000                          | uuuu uuuu                    |
| PRDRH    | ---- --00      | ---- --00                          | ---- --uu                    |
| PWMRL    | 0000 0000      | 0000 0000                          | uuuu uuuu                    |
| PWMRH    | ---- --00      | ---- --00                          | ---- --uu                    |
| PWMME    | --00 0000      | --00 0000                          | --uu uuuu                    |
| PWMMD    | --00 0000      | --00 0000                          | --uu uuuu                    |
| MCF      | 0--- 0100      | 0--- 0100                          | u--- uuuu                    |
| MCD      | --00 0xxx      | --00 0 xxx                         | --uu uuuu                    |
| DTS      | 0000 0000      | 0000 0000                          | uuuu uuuu                    |
| PLC      | --00 0000      | --00 0000                          | --uu uuuu                    |
| MFI0     | -000 -000      | -000 -000                          | -uuu -uuu                    |
| MFI1     | 0000 0000      | 0000 0000                          | uuuu uuuu                    |
| MFI2     | 0000 0000      | 0000 0000                          | uuuu uuuu                    |
| MFI3     | --00 --00      | --00 --00                          | --uu --uu                    |
| MFI4     | --00 --00      | --00 --00                          | --uu --uu                    |
| MFI5     | --00 --00      | --00 --00                          | --uu --uu                    |
| MFI6     | --00 --00      | --00 --00                          | --uu --uu                    |
| TLVRC    | ---- --01      | ---- --01                          | ---- --uu                    |
| HCHK_NUM | ---0 0000      | ---0 0000                          | ---u uuuu                    |
| HNF_MSEL | ---- 0000      | ---- 0000                          | ---- uuuu                    |
| NF_VIH   | 00-1 1001      | 00-1 1001                          | uu-u uuuu                    |
| NF_VIL   | 00-0 1010      | 00-0 1010                          | uu-u uuuu                    |
| PAS0     | 0000 0000      | 0000 0000                          | uuuu uuuu                    |
| PAS1     | 0000 0000      | 0000 0000                          | uuuu uuuu                    |
| PBS0     | 0000 0000      | 0000 0000                          | uuuu uuuu                    |
| PBS1     | 0000 0000      | 0000 0000                          | uuuu uuuu                    |
| PCS0     | 0000 0000      | 0000 0000                          | uuuu uuuu                    |
| PCS1     | 0000 0000      | 0000 0000                          | uuuu uuuu                    |
| PTM2C0   | 0000 0---      | 0000 0---                          | uuuu u---                    |
| PTM2C1   | 0000 0000      | 0000 0000                          | uuuu uuuu                    |
| PTM2DL   | 0000 0000      | 0000 0000                          | uuuu uuuu                    |
| PTM2DH   | ---- --00      | ---- --00                          | ---- --uu                    |
| PTM2AL   | 0000 0000      | 0000 0000                          | uuuu uuuu                    |
| PTM2AH   | ---- --00      | ---- --00                          | ---- --uu                    |
| PTM2RPL  | 0000 0000      | 0000 0000                          | uuuu uuuu                    |
| PTM2RPH  | ---- --00      | ---- --00                          | uuuu uuuu                    |
| USR      | 0000 1011      | 0000 1011                          | uuuu uuuu                    |
| UCR1     | 0000 00x0      | 0000 00x0                          | uuuu uuuu                    |
| UCR2     | 0000 0000      | 0000 0000                          | uuuu uuuu                    |
| UCR3     | ---- ---0      | ---- ---0                          | ---- ---u                    |
| BRDH     | 0000 0000      | 0000 0000                          | uuuu uuuu                    |
| BRDL     | 0000 0000      | 0000 0000                          | uuuu uuuu                    |
| UFCR     | --00 0000      | --00 0000                          | --uu uuuu                    |
| TXR_RXR  | xxxx xxxx      | xxxx xxxx                          | uuuu uuuu                    |
| RxCNT    | ---- -000      | ---- -000                          | ---- -uuu                    |
| FC0      | 0000 0000      | 0000 0000                          | uuuu uuuu                    |
| FC1      | 0000 0000      | 0000 0000                          | uuuu uuuu                    |

| Register | Power-on Reset | WDT Time-out<br>(Normal Operation) | WDT Time-out<br>(IDLE/SLEEP) |
|----------|----------------|------------------------------------|------------------------------|
| FC2      | ---- --00      | ---- --00                          | ---- --uu                    |
| FARL     | 0000 0000      | 0000 0000                          | uuuu uuuu                    |
| FARH     | ---- 0000      | ---- 0000                          | ---- uuuu                    |
| FD0L     | 0000 0000      | 0000 0000                          | uuuu uuuu                    |
| FD0H     | 0000 0000      | 0000 0000                          | uuuu uuuu                    |
| FD1L     | 0000 0000      | 0000 0000                          | uuuu uuuu                    |
| FD1H     | 0000 0000      | 0000 0000                          | uuuu uuuu                    |
| FD2L     | 0000 0000      | 0000 0000                          | uuuu uuuu                    |
| FD2H     | 0000 0000      | 0000 0000                          | uuuu uuuu                    |
| FD3L     | 0000 0000      | 0000 0000                          | uuuu uuuu                    |
| FD3H     | 0000 0000      | 0000 0000                          | uuuu uuuu                    |
| IFS0     | 0000 0000      | 0000 0000                          | uuuu uuuu                    |
| IFS1     | ---- 0000      | ---- 0000                          | ---- uuuu                    |
| HDCT0    | --00 0000      | --00 0000                          | --uu uuuu                    |
| HDCT1    | --00 0000      | --00 0000                          | --uu uuuu                    |
| HDCT2    | --00 0000      | --00 0000                          | --uu uuuu                    |
| HDCT3    | --00 0000      | --00 0000                          | --uu uuuu                    |
| HDCT4    | --00 0000      | --00 0000                          | --uu uuuu                    |
| HDCT5    | --00 0000      | --00 0000                          | --uu uuuu                    |
| HDCT6    | --00 0000      | --00 0000                          | --uu uuuu                    |
| HDCT7    | --00 0000      | --00 0000                          | --uu uuuu                    |
| HDCT8    | --00 0000      | --00 0000                          | --uu uuuu                    |
| HDCT9    | --00 0000      | --00 0000                          | --uu uuuu                    |
| HDCT10   | --00 0000      | --00 0000                          | --uu uuuu                    |
| HDCT11   | --00 0000      | --00 0000                          | --uu uuuu                    |
| PTM3C0   | 0000 0---      | 0000 0---                          | uuuu u---                    |
| PTM3C1   | 0000 0000      | 0000 0000                          | uuuu uuuu                    |
| PTM3DL   | 0000 0000      | 0000 0000                          | uuuu uuuu                    |
| PTM3DH   | ---- --00      | ---- --00                          | ---- --uu                    |
| PTM3AL   | 0000 0000      | 0000 0000                          | uuuu uuuu                    |
| PTM3AH   | ---- --00      | ---- --00                          | ---- --uu                    |
| PTM3RPL  | 0000 0000      | 0000 0000                          | uuuu uuuu                    |
| PTM3RPH  | ---- --00      | ---- --00                          | ---- --uu                    |

Note: “u” stands for unchanged  
“x” stands for unknown  
“-” stands for unimplemented

## Input/Output Ports

Holtek microcontrollers offer considerable flexibility on their I/O ports. With the input or output designation of every pin fully under user program control, pull-high selections for all ports and wake-up selections on certain pins, the user is provided with an I/O structure to meet the needs of a wide range of application possibilities.

The device provides bidirectional input/output lines labeled with port names PA~PC. These I/O ports are mapped to the RAM Data Memory with specific addresses as shown in the Special Purpose Data Memory table. All of these I/O ports can be used for input and output operations. For input operation, these ports are non-latching, which means the inputs must be ready at the T2 rising edge of instruction “MOV A, [m]”, where m denotes the port address. For output operation, all the data is latched and remains unchanged until the output latch is rewritten.

| Register Name | Bit   |       |       |       |       |       |       |       |
|---------------|-------|-------|-------|-------|-------|-------|-------|-------|
|               | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
| PA            | PA7   | PA6   | PA5   | PA4   | PA3   | PA2   | PA1   | PA0   |
| PAC           | PAC7  | PAC6  | PAC5  | PAC4  | PAC3  | PAC2  | PAC1  | PAC0  |
| PAPU          | PAPU7 | PAPU6 | PAPU5 | PAPU4 | PAPU3 | PAPU2 | PAPU1 | PAPU0 |
| PAWU          | PAWU7 | PAWU6 | PAWU5 | PAWU4 | PAWU3 | PAWU2 | PAWU1 | PAWU0 |
| PB            | PB7   | PB6   | PB5   | PB4   | PB3   | PB2   | PB1   | PB0   |
| PBC           | PBC7  | PBC6  | PBC5  | PBC4  | PBC3  | PBC2  | PBC1  | PBC0  |
| PBPU          | PBPU7 | PBPU6 | PBPU5 | PBPU4 | PBPU3 | PBPU2 | PBPU1 | PBPU0 |
| PC            | PC7   | PC6   | PC5   | PC4   | PC3   | PC2   | PC1   | PC0   |
| PCC           | PCC7  | PCC6  | PCC5  | PCC4  | PCC3  | PCC2  | PCC1  | PCC0  |
| PCPU          | PCPU7 | PCPU6 | PCPU5 | PCPU4 | PCPU3 | PCPU2 | PCPU1 | PCPU0 |

I/O Logic Function Register List

## Pull-high Resistors

Many product applications require pull-high resistors for their switch inputs usually requiring the use of an external resistor. To eliminate the need for these external resistors, all I/O pins, when configured as a digital input have the capability of being connected to an internal pull-high resistor. These pull-high resistors are selected using registers, namely PAPU~PCPU, and are implemented using weak PMOS transistors.

Note that the pull-high resistor can be controlled by the relevant pull-high control register only when the pin-shared functional pin is selected as a digital input or NMOS output. Otherwise, the pull-high resistors cannot be enabled.

### • PxPU Register

| Bit  | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|------|-------|-------|-------|-------|-------|-------|-------|-------|
| Name | PxPU7 | PxPU6 | PxPU5 | PxPU4 | PxPU3 | PxPU2 | PxPU1 | PxPU0 |
| R/W  | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   |
| POR  | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     |

**PxPU**: I/O Port x pin pull-high function control

0: Disable

1: Enable

The PxPU bit is used to control the pin pull-high function. Here the “x” can be A, B or C. However, the actual available bits for each I/O Port may be different.

## Port A Wake-up

The HALT instruction forces the microcontroller into the SLEEP or IDLE Mode which preserves power, a feature that is important for battery and other low-power applications. Various methods exist to wake-up the microcontroller, one of which is to change the logic condition on one of the Port A pins from high to low. This function is especially suitable for applications that can be woken up via external switches. Each pin on Port A can be selected individually to have this wake-up feature using the PAWU register.

Note that the wake-up function can be controlled by the wake-up control register only when the pin is selected as a general purpose input and the MCU enters the IDLE or SLEEP modes.

### • PAWU Register

| Bit  | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|------|-------|-------|-------|-------|-------|-------|-------|-------|
| Name | PAWU7 | PAWU6 | PAWU5 | PAWU4 | PAWU3 | PAWU2 | PAWU1 | PAWU0 |
| R/W  | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   |
| POR  | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     |

**PAWUn:** Port A pin wake-up function control

0: Disable

1: Enable

## I/O Port Control Registers

Each I/O port has its own control register known as PAC~PCC, to control the input/output configuration. With this control register, each CMOS output or input can be reconfigured dynamically under software control. Each pin of the I/O ports is directly mapped to a bit in its associated port control register. For the I/O pin to function as an input, the corresponding bit of the control register must be written as a “1”. This will then allow the logic state of the input pin to be directly read by instructions. When the corresponding bit of the control register is written as a “0”, the I/O pin will be setup as a CMOS output. If the pin is currently setup as an output, instructions can still be used to read the output register. However, it should be noted that the program will in fact only read the status of the output data latch and not the actual logic status of the output pin.

### • PxC Register

| Bit  | 7    | 6    | 5    | 4    | 3    | 2    | 1    | 0    |
|------|------|------|------|------|------|------|------|------|
| Name | PxC7 | PxC6 | PxC5 | PxC4 | PxC3 | PxC2 | PxC1 | PxC0 |
| R/W  | R/W  | R/W  | R/W  | R/W  | R/W  | R/W  | R/W  | R/W  |
| POR  | 1    | 1    | 1    | 1    | 1    | 1    | 1    | 1    |

**PxCn:** I/O port x pin input/output type selection

0: Output

1: Input

The PxCn bit is used to control the pin type selection. Here the “x” can be A, B or C, However, the actual available bits for each I/O Port may be different.

Note that the PC7 line is not connected to the external pin, it is recommended that the corresponding PxCn bit should be cleared to zero to set these I/O line as outputs after power on. This can avoid unwanted power consumption resulting from floating input conditions.

## Pin-shared Functions

The flexibility of the microcontroller range is greatly enhanced by the use of pins that have more than one function. Limited numbers of pins can force serious design constraints on designers but by supplying pins with multi-functions, many of these difficulties can be overcome. For these pins, the desired function of the multi-function I/O pins is selected by a series of registers via the application program control.

### Pin-shared Function Selection Registers

The limited number of supplied pins in a package can impose restrictions on the amount of functions a certain device can contain. However by allowing the same pins to share several different functions and providing a means of function selection, a wide range of different functions can be incorporated into even relatively small package sizes. The device includes Port “x” pin shared function selection register “n”, labeled as P<sub>x</sub>Sn, and input function selection register, labeled as IFS<sub>i</sub>, which can select the desired functions of the multi-function pin-shared pins.

The most important point to note is to make sure that the desired pin-shared function is properly selected and also deselected. For most pin-shared functions, to select the desired pin-shared function, the pin-shared function should first be correctly selected using the corresponding pin-shared control register. After that the corresponding peripheral functional setting should be configured and then the peripheral function can be enabled. However, a special point must be noted for some digital input pins, such as INT, PTCK<sub>n</sub>, PTPnI, NFIN, etc, which share the same pin-shared control configuration with their corresponding general purpose I/O functions when setting the relevant pin-shared control bits. To select these pin functions, in addition to the necessary pin-shared control and peripheral functional setup aforementioned, they must also be setup as an input by setting the corresponding bit in the I/O port control register. To correctly deselect the pin-shared function, the peripheral function should first be disabled and then the corresponding pin-shared function control register can be modified to select other pin-shared functions.

| Register Name | Bit   |       |       |       |       |       |       |       |
|---------------|-------|-------|-------|-------|-------|-------|-------|-------|
|               | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
| PAS0          | PAS07 | PAS06 | PAS05 | PAS04 | PAS03 | PAS02 | PAS01 | PAS00 |
| PAS1          | PAS17 | PAS16 | PAS15 | PAS14 | PAS13 | PAS12 | PAS11 | PAS10 |
| PBS0          | PBS07 | PBS06 | PBS05 | PBS04 | PBS03 | PBS02 | PBS01 | PBS00 |
| PBS1          | PBS17 | PBS16 | PBS15 | PBS14 | PBS13 | PBS12 | PBS11 | PBS10 |
| PCS0          | PCS07 | PCS06 | PCS05 | PCS04 | PCS03 | PCS02 | PCS01 | PCS00 |
| PCS1          | PCS17 | PCS16 | PCS15 | PCS14 | PCS13 | PCS12 | PCS11 | PCS10 |
| IFS0          | IFS07 | IFS06 | IFS05 | IFS04 | IFS03 | IFS02 | IFS01 | IFS00 |
| IFS1          | —     | —     | —     | —     | IFS13 | IFS12 | IFS11 | IFS10 |

“—”: unimplemented, read as “0”

#### Pin-shared Function Selection Register List

##### • PAS0 Register

| Bit  | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|------|-------|-------|-------|-------|-------|-------|-------|-------|
| Name | PAS07 | PAS06 | PAS05 | PAS04 | PAS03 | PAS02 | PAS01 | PAS00 |
| R/W  | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   |
| POR  | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     |

Bit 7~6      **PAS07~PAS06:** PA3 pin-shared function selection  
 00: PA3/H1  
 01: C1P  
 10: GAT  
 11: AN5

- Bit 5~4     **PAS05~PAS04**: PA2 pin-shared function selection  
                  00: PA2/PTP1I/INT  
                  01: PTP1  
                  10: TX  
                  11: PA2/PTP1I/INT
- Bit 3~2     **PAS03~PAS02**: PA1 pin-shared function selection  
                  00: PA1  
                  01: PTP3B  
                  10: AP  
                  11: AN3
- Bit 1~0     **PAS01~PAS00**: PA0 pin-shared function selection  
                  00: PA0/PTP0I/NFIN  
                  01: PTP0  
                  10: RX/TX  
                  11: AN0

• **PAS1 Register**

| Bit  | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|------|-------|-------|-------|-------|-------|-------|-------|-------|
| Name | PAS17 | PAS16 | PAS15 | PAS14 | PAS13 | PAS12 | PAS11 | PAS10 |
| R/W  | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   |
| POR  | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     |

- Bit 7~6     **PAS17~PAS16**: PA7 pin-shared function selection  
                  00: PA7/PTCK2/NFIN  
                  01: PTP0  
                  10: GCB  
                  11: AN7
- Bit 5~4     **PAS15~PAS14**: PA6 pin-shared function selection  
                  00: PA6/PTCK1/CTIN  
                  01: PTP2B  
                  10: HBO  
                  11: AN8
- Bit 3~2     **PAS13~PAS12**: PA5 pin-shared function selection  
                  00: PA5/H3  
                  01: C3P  
                  10: GBT  
                  11: AN2
- Bit 1~0     **PAS11~PAS10**: PA4 pin-shared function selection  
                  00: PA4/H2  
                  01: C2P  
                  10: GAB  
                  11: AN4

• **PBS0 Register**

| Bit  | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|------|-------|-------|-------|-------|-------|-------|-------|-------|
| Name | PBS07 | PBS06 | PBS05 | PBS04 | PBS03 | PBS02 | PBS01 | PBS00 |
| R/W  | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   |
| POR  | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     |

- Bit 7~6     **PBS07~PBS06**: PB3 pin-shared function selection  
                  00: PB3/PTCK0/H1  
                  01: PTP0B  
                  10: C3N  
                  11: AN13

- Bit 5~4     **PBS05~PBS04:** PB2 pin-shared function selection  
                  00: PB2/H2/PTP2I  
                  01: C2N  
                  10: PTP1B  
                  11: AN9
- Bit 3~2     **PBS03~PBS02:** PB1 pin-shared function selection  
                  00: PB1/H3/PTP3I  
                  01: C1N  
                  10: CPN  
                  11: AN6
- Bit 1~0     **PBS01~PBS00:** PB0 pin-shared function selection  
                  00: PB0/PTCK3  
                  01: HCO  
                  10: GCT  
                  11: AN1

• **PBS1 Register**

| Bit  | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|------|-------|-------|-------|-------|-------|-------|-------|-------|
| Name | PBS17 | PBS16 | PBS15 | PBS14 | PBS13 | PBS12 | PBS11 | PBS10 |
| R/W  | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   |
| POR  | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     |

- Bit 7~6     **PBS17~PBS16:** PB7 pin-shared function selection  
                  00: PB7  
                  01: HAO  
                  10: PTP1  
                  11: RX/TX
- Bit 5~4     **PBS15~PBS14:** PB6 pin-shared function selection  
                  00: PB6  
                  01: PTP3  
                  10: OPAO  
                  11: AN12
- Bit 3~2     **PBS13~PBS12:** PB5 pin-shared function selection  
                  00: PB5  
                  01: PTP2  
                  10: TX  
                  11: GBT
- Bit 1~0     **PBS11~PBS10:** PB4 pin-shared function selection  
                  00: PB4/H3/CTIN  
                  01: RX/TX  
                  10: PB4/H3/CTIN  
                  11: PB4/H3/CTIN

• **PCS0 Register**

| Bit  | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|------|-------|-------|-------|-------|-------|-------|-------|-------|
| Name | PCS07 | PCS06 | PCS05 | PCS04 | PCS03 | PCS02 | PCS01 | PCS00 |
| R/W  | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   |
| POR  | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     |

- Bit 7~6     **PCS07~PCS06:** PC3 pin-shared function selection  
                  00: PC3/H2  
                  01: GBB  
                  10: GAB  
                  11: GAT

- Bit 5~4     **PCS05~PCS04**: PC2 pin-shared function selection  
                  00: PC2/H3  
                  01: GBT  
                  10: GAB  
                  11: GAT
- Bit 3~2     **PCS03~PCS02**: PC1 pin-shared function selection  
                  00: PC1  
                  01: GAB  
                  10: GCT  
                  11: AN10
- Bit 1~0     **PCS01~PCS00**: PC0 pin-shared function selection  
                  00: PC0/NFIN  
                  01: GAT  
                  10: GCB  
                  11: AN11

• **PCS1 Register**

| Bit  | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|------|-------|-------|-------|-------|-------|-------|-------|-------|
| Name | PCS17 | PCS16 | PCS15 | PCS14 | PCS13 | PCS12 | PCS11 | PCS10 |
| R/W  | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   |
| POR  | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     |

- Bit 7~4     **PCS17~PCS14**: These bits should be kept unchanged after power on
- Bit 3~2     **PCS13~PCS12**: PC5 pin-shared function selection  
                  00: PC5/H2/INT  
                  01: GCB  
                  10: GBB  
                  11: GBT
- Bit 1~0     **PCS11~PCS10**: PC4 pin-shared function selection  
                  00: PC4/H1  
                  01: GCT  
                  10: GCB  
                  11: GBB

• **IFS0 Register**

| Bit  | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|------|-------|-------|-------|-------|-------|-------|-------|-------|
| Name | IFS07 | IFS06 | IFS05 | IFS04 | IFS03 | IFS02 | IFS01 | IFS00 |
| R/W  | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   |
| POR  | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     |

- Bit 7~6     **IFS07~IFS06**: H3 input source pin selection  
                  00: PC2  
                  01: PA5  
                  10: PB1  
                  11: PB4
- Bit 5~4     **IFS05~IFS04**: H2 input source pin selection  
                  00: PC3  
                  01: PA4  
                  10: PB2  
                  11: PC5
- Bit 3~2     **IFS03~IFS02**: H1 input source pin selection  
                  00: PC4  
                  01: PA3  
                  10: PB3  
                  11: PC4

Bit 1~0     **IFS01~IFS00**: NFIN input source pin selection  
               00: PC0  
               01: PA7  
               10: PA0  
               11: PC0

• **IFS1 Register**

| Bit  | 7 | 6 | 5 | 4 | 3     | 2     | 1     | 0     |
|------|---|---|---|---|-------|-------|-------|-------|
| Name | — | — | — | — | IFS13 | IFS12 | IFS11 | IFS10 |
| R/W  | — | — | — | — | R/W   | R/W   | R/W   | R/W   |
| POR  | — | — | — | — | 0     | 0     | 0     | 0     |

Bit 7~4     Unimplemented, read as “0”


Bit 3~2     **IFS13~IFS12**: RX/TX input source pin selection  
               00: PB4  
               01: PB7  
               10: PA0  
               11: PB4

Bit 1        **IFS11**: CTIN input source pin selection  
               0: PA6  
               1: PB4

Bit 0        **IFS10**: INT input source pin selection  
               0: PC5  
               1: PA2

**I/O Pin Structures**

The accompanying diagram illustrates the internal structure of the I/O logic function. As the exact logical construction of the I/O pin will differ from this drawing, it is supplied as a guide only to assist with the functional understanding of the I/O logic function. The wide range of pin-shared structures does not permit all types to be shown.

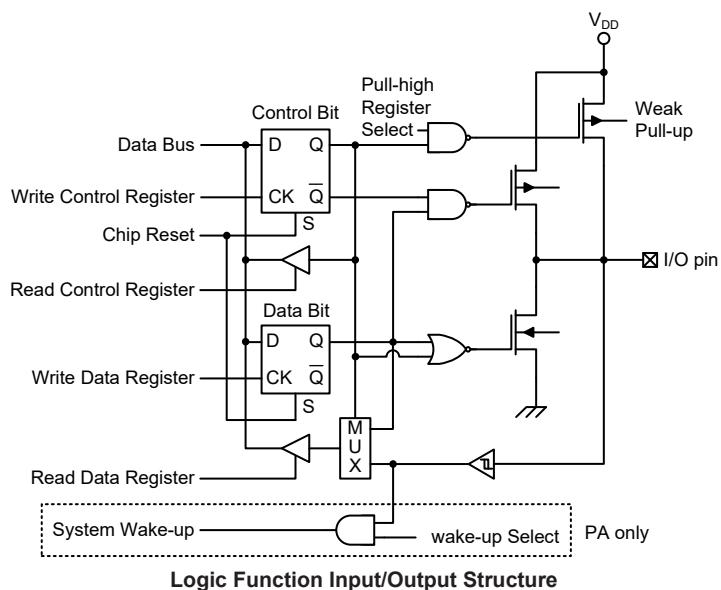

## Programming Considerations

Within the user program, one of the first things to consider is port initialisation. After a reset, all of the I/O data and port control registers will be set high. This means that all I/O pins will default to an input state, the level of which depends on the other connected circuitry and whether pull-high selections have been chosen. If the port control registers are then programmed to setup some pins as outputs, these output pins will have an initial high output value unless the associated port data registers are first programmed. Selecting which pins are inputs and which are outputs can be achieved byte-wide by loading the correct values into the appropriate I/O Port Control register or by programming individual bits in the port control register using the “SET [m].i” and “CLR [m].i” instructions. Note that when using these bit control instructions, a read-modify-write operation takes place. The microcontroller must first read in the data on the entire port, modify it to the required new bit values and then rewrite this data back to the output ports.

Port A has the additional capability of providing wake-up function. When the device is in the SLEEP or IDLE Mode, various methods are available to wake the device up. One of these is a high to low transition of any of the Port A pins. Single or multiple pins on Port A can be setup to have this function.

## Timer Modules – TM

One of the most fundamental functions in any microcontroller device is the ability to control and measure time. To implement time related functions each device includes several Timer Modules, abbreviated to the name TM. The TMs are multi-purpose timing units and serve to provide operations such as Timer/Counter, Input Capture, Compare Match Output and Single Pulse Output as well as being the functional unit for the generation of PWM signals. Each of the TMs has two individual interrupts. The addition of input and output pins for each TM ensures that users are provided with timing units with a wide and flexible range of features.

### Introduction

The device contains four Periodic Type TMs with each TM having a reference name of PTMn (n=0~3). The PTM0 and PTM1 are 16-bit Periodic Type TMs while the PTM2 and PTM3 are 10-bit Periodic Type TMs. The common features to the 16-bit and 10-bit Periodic Type TMs will be described in this section and the detailed operation will be described in the Periodic Type TMs section. The main features of TMs are summarised in the accompanying table.

| Function                     | PTM            |
|------------------------------|----------------|
| Timer/Counter                | √              |
| Input Capture                | √              |
| Compare Match Output         | √              |
| PWM Output                   | √              |
| Single Pulse Output          | √              |
| PWM Alignment                | Edge           |
| PWM Adjustment Period & Duty | Duty or Period |

**TM Function Summary**

| PTM0       | PTM1       | PTM2       | PTM3       |
|------------|------------|------------|------------|
| 16-bit PTM | 16-bit PTM | 10-bit PTM | 10-bit PTM |

**TM Name/Type Reference**

## TM Operation

The different types of TM offer a diverse range of functions, from simple timing operations to PWM signal generation. The key to understanding how the TM operates is to see it in terms of a free running counter whose value is then compared with the value of pre-programmed internal comparators. When the free running counter has the same value as the pre-programmed comparator, known as a compare match situation, a TM interrupt signal will be generated which can clear the counter and perhaps also change the condition of the TM output pin. The internal TM counter is driven by a user selectable clock source, which can be an internal clock or an external pin.

## TM Clock Source

The clock source which drives the main counter in each TM can originate from various sources. The selection of the required clock source is implemented using the PTnCK2~PTnCK0 bits in the PTMn control registers, where “n” stands for the specific TM serial number. The clock source can be a ratio of the system clock  $f_{SYS}$  or the internal high clock  $f_H$ , the  $f_{SUB}$  clock source or the external PTCKn pin. The PTCKn pin clock source is used to allow an external signal to drive the TM as an external clock source or for event counting.

## TM Interrupts

The TMs each has two internal interrupts, the internal comparator A and comparator P, which generate a TM interrupt when a compare match condition occurs. When a TM interrupt is generated it can be used to clear the counter and also to change the state of the TM output pin.

## TM External Pins


Each of the TMs has two TM input pins, with the label PTCKn and PTPnI. These two pins can be used as the capture input source pin whose active edge can be a rising edge, a falling edge or both rising and falling edges and the active edge transition type is selected using the PTnIO1~PTnIO0 bits in the PTMnC1 register. The capture input comes from PTCKn or PTPnI is determined by the PTnCAPTS bit in the PTMnC1 register. The PTCKn input pin is also a clock source for the PTMn and is selected using the PTnCK2~PTnCK0 bits in the PTMnC0 register. This PTCKn input pin allows an external clock source to drive the internal TM. The PTCKn input pin can be chosen to have either a rising or falling active edge. The PTCKn pin is also used as the external trigger input pin in single pulse output mode.

The TMs each have two output pins, PTPn and PTPnB. When the TM is in the Compare Match Output Mode, the PTPn pin can be controlled by the TM to switch to a high or low level or to toggle when a compare match situation occurs. The PTPnB pin outputs the inverted signal of the PTPn. The external output pins are also the pins where the TM generates the PWM output waveform.

As the TM input and output pins are pin-shared with other functions, the TM input and output function must first be setup using relevant pin-shared function selection bits described in the Pin-shared Functions section. The details of the pin-shared function selection are described in the pin-shared function section.

| PTMn         |             |
|--------------|-------------|
| Input        | Output      |
| PTCKn, PTPnI | PTPn, PTPnB |

**TM External Pins (n=0~3)**

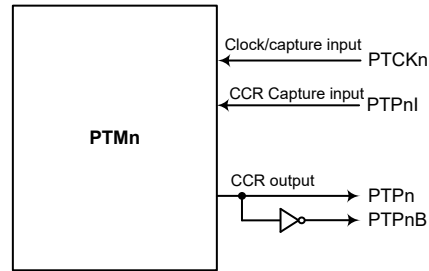


**PTMn Function Pin Block Diagram (n=0~3)**

## Programming Considerations

The TM Counter Registers and the Capture/Compare CCRA, CCRB and CCRP registers, all have a low and high byte structure. The high bytes can be directly accessed, but as the low bytes can only be accessed via an internal 8-bit buffer, reading or writing to these register pairs must be carried out in a specific way. The important point to note is that data transfer to and from the 8-bit buffer and its related low byte only takes place when a write or read operation to its corresponding high byte is executed.

As the CCRA, CCRB and CCRP registers are implemented in the way shown in the following diagram and accessing these register pairs is carried out in a specific way as described above, it is recommended to use the “MOV” instruction to access the CCRA, CCRB and CCRP low byte registers, named PTMnAL, PTMnBL and PTMnRPL, using the following access procedures. Accessing the CCRA, CCRB or CCRP low byte registers without following these access procedures will result in unpredictable values.

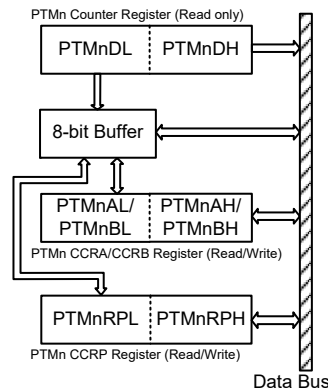


The following steps show the read and write procedures:

- Writing Data to CCRA, CCRB or CCRP
  - ♦ Step 1. Write data to Low Byte PTMnAL, PTMnBL or PTMnRPL
    - Note that here data is only written to the 8-bit buffer.
  - ♦ Step 2. Write data to High Byte PTMnAH, PTMnBH or PTMnRPH
    - Here data is written directly to the high byte registers and simultaneously data is latched from the 8-bit buffer to the Low Byte registers.
- Reading Data from the Counter Registers and CCRA, CCRB or CCRP
  - ♦ Step 1. Read data from the High Byte PTMnDH, PTMnAH, PTMnBH or PTMnRPH
    - Here data is read directly from the High Byte registers and simultaneously data is latched from the Low Byte register into the 8-bit buffer.
  - ♦ Step 2. Read data from the Low Byte PTMnDL, PTMnAL, PTMnBL or PTMnRPL
    - This step reads data from the 8-bit buffer.

The Periodic Type TM contains five operating modes, which are Compare Match Output, Timer/Event Counter, Capture Input, Single Pulse Output and PWM Output modes. The Periodic Type TM can be controlled with two external input pins and can drive two external output pins.

| Type       | Name       | TM Input Pin                  | TM Output Pin               |
|------------|------------|-------------------------------|-----------------------------|
| 16-bit PTM | PTM0, PTM1 | PTCK0, PTP0I;<br>PTCK1, PTP1I | PTP0; PTP1,<br>PTP0B, PTP1B |
| 10-bit PTM | PTM2, PTM3 | PTCK2, PTP2I;<br>PTCK3, PTP3I | PTP2; PTP3,<br>PTP2B, PTP3B |



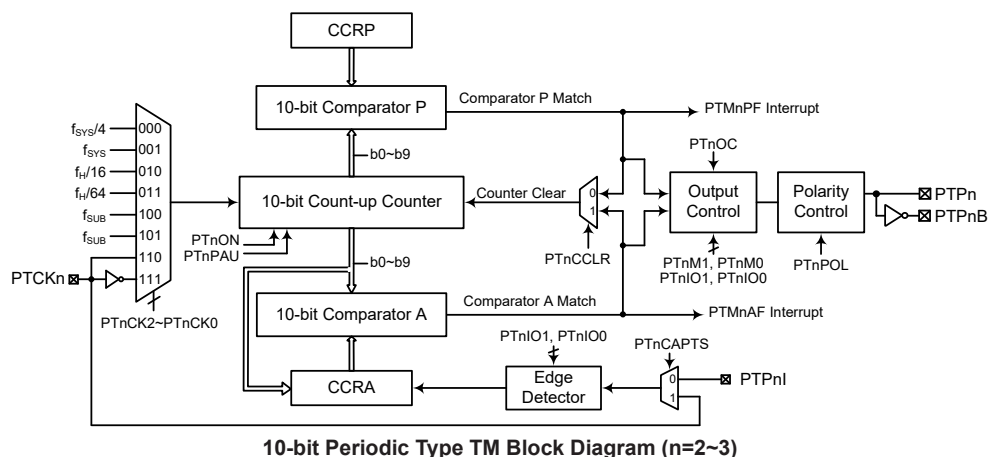

**10-bit Periodic Type TM Block Diagram (n=2~3)**

## Periodic Type TM Operation

There are two sizes of Periodic Type TMs, one is 10-bit wide and the other is 16-bit wide. At their core is a 10-bit or 16-bit count-up counter which is driven by a user selectable internal or external clock source. There are also two internal comparators with the names, Comparator A and Comparator P. These comparators will compare the value in the counter with CCRP and CCRA registers. The CCRA and CCRP comparators are 10-bit or 16-bit wide whose value is respectively compared with all counter bits.

The only way of changing the value of the 10-bit or 16-bit counter using the application program, is to clear the counter by changing the PTnON bit from low to high. The counter will also be cleared automatically by a counter overflow or a compare match with one of its associated comparators. When these conditions occur, a PTMn interrupt signal will also usually be generated. The Periodic Type TM can operate in a number of different operational modes, can be driven by different clock sources including an input pin and can also control different outputs. All operating setup conditions are selected using relevant internal registers.

## Periodic Type TM Register Description

Overall operation of the Periodic Type TM is controlled using a series of registers. A read only register pair exists to store the internal counter 10-bit or 16-bit value, while two read/write register pairs exist to store the internal 10-bit or 16-bit CCRA value and CCRP value. The remaining two registers are control registers which setup the different operating and control modes. For the PTM0, there are another read/write register pair used to store the 16-bit CCRB value, and another control register is provided for its capture input operation.

| Register Name | Bit    |        |        |        |       |          |          |         |
|---------------|--------|--------|--------|--------|-------|----------|----------|---------|
|               | 7      | 6      | 5      | 4      | 3     | 2        | 1        | 0       |
| PTMnC0        | PTnPAU | PTnCK2 | PTnCK1 | PTnCK0 | PTnON | —        | —        | —       |
| PTMnC1        | PTnM1  | PTnM0  | PTnIO1 | PTnIO0 | PTnOC | PTnPOL   | PTnCAPTS | PTnCCLR |
| PTMnC2*       | —      | —      | —      | —      | —     | PTnTCLR1 | PTnTCLR0 | PTnVLF  |
| PTMnDL        | D7     | D6     | D5     | D4     | D3    | D2       | D1       | D0      |
| PTMnDH        | D15    | D14    | D13    | D12    | D11   | D10      | D9       | D8      |
| PTMnAL        | D7     | D6     | D5     | D4     | D3    | D2       | D1       | D0      |
| PTMnAH        | D15    | D14    | D13    | D12    | D11   | D10      | D9       | D8      |
| PTMnBL*       | D7     | D6     | D5     | D4     | D3    | D2       | D1       | D0      |
| PTMnBH*       | D15    | D14    | D13    | D12    | D11   | D10      | D9       | D8      |
| PTMnRPL       | D7     | D6     | D5     | D4     | D3    | D2       | D1       | D0      |

| Register Name | Bit |     |     |     |     |     |    |    |
|---------------|-----|-----|-----|-----|-----|-----|----|----|
|               | 7   | 6   | 5   | 4   | 3   | 2   | 1  | 0  |
| PTMnRPH       | D15 | D14 | D13 | D12 | D11 | D10 | D9 | D8 |

Note: The registers with \* symbol are only available for PTM0.

#### 16-bit Periodic Type TM Register List (n=0~1)

| Register Name | Bit    |        |        |        |       |        |         |         |
|---------------|--------|--------|--------|--------|-------|--------|---------|---------|
|               | 7      | 6      | 5      | 4      | 3     | 2      | 1       | 0       |
| PTMnC0        | PTnPAU | PTnCK2 | PTnCK1 | PTnCK0 | PTnON | —      | —       | —       |
| PTMnC1        | PTnM1  | PTnM0  | PTnIO1 | PTnIO0 | PTnOC | PTnPOL | PTnCPTS | PTnCCLR |
| PTMnDL        | D7     | D6     | D5     | D4     | D3    | D2     | D1      | D0      |
| PTMnDH        | —      | —      | —      | —      | —     | —      | D9      | D8      |
| PTMnAL        | D7     | D6     | D5     | D4     | D3    | D2     | D1      | D0      |
| PTMnAH        | —      | —      | —      | —      | —     | —      | D9      | D8      |
| PTMnRPL       | D7     | D6     | D5     | D4     | D3    | D2     | D1      | D0      |
| PTMnRPH       | —      | —      | —      | —      | —     | —      | D9      | D8      |

#### 10-bit Periodic Type TM Register List (n=2~3)

#### • PTMnC0 Register (n=0~3)

| Bit  | 7      | 6      | 5      | 4      | 3     | 2 | 1 | 0 |
|------|--------|--------|--------|--------|-------|---|---|---|
| Name | PTnPAU | PTnCK2 | PTnCK1 | PTnCK0 | PTnON | — | — | — |
| R/W  | R/W    | R/W    | R/W    | R/W    | R/W   | — | — | — |
| POR  | 0      | 0      | 0      | 0      | 0     | — | — | — |

Bit 7 **PTnPAU**: PTMn counter pause control

0: Run

1: Pause

The counter can be paused by setting this bit high. Clearing the bit to zero restores normal counter operation. When in a Pause condition the PTMn will remain powered up and continue to consume power. The counter will retain its residual value when this bit changes from low to high and resume counting from this value when the bit changes to a low value again.

Bit 6~4 **PTnCK2~PTnCK0**: Select PTMn counter clock

000:  $f_{SYS}/4$

001:  $f_{SYS}$

010:  $f_H/16$

011:  $f_H/64$

100:  $f_{SUB}$

101:  $f_{SUB}$

110: PTCKn rising edge clock

111: PTCKn falling edge clock

These three bits are used to select the clock source for the PTMn. The external pin clock source can be chosen to be active on the rising or falling edge. The clock source  $f_{SYS}$  is the system clock, while  $f_H$  and  $f_{SUB}$  are other internal clocks, the details of which can be found in the Operating Modes and System Clocks section.

Bit 3 **PTnON**: PTMn counter on/off control

0: Off

1: On

This bit controls the overall on/off function of the PTMn. Setting the bit high enables the counter to run, clearing the bit disables the PTMn. Clearing this bit to zero will stop the counter from counting and turn off the PTMn which will reduce its power consumption. When the bit changes state from low to high the internal counter value

will be reset to zero, however when the bit changes from high to low, the internal counter will retain its residual value until the bit returns high again.

If the PTMn is in the Compare Match Output Mode, PWM Output Mode or Single Pulse Output Mode then the PTMn output pin will be reset to its initial condition, as specified by the PTnOC bit, when the PTnON bit changes from low to high.

Bit 2~0 Unimplemented, read as “0”

• **PTMnC1 Register (n=0~3)**

| Bit  | 7     | 6     | 5      | 4      | 3     | 2      | 1       | 0       |
|------|-------|-------|--------|--------|-------|--------|---------|---------|
| Name | PTnM1 | PTnM0 | PTnIO1 | PTnIO0 | PTnOC | PTnPOL | PTnCPTS | PTnCCLR |
| R/W  | R/W   | R/W   | R/W    | R/W    | R/W   | R/W    | R/W     | R/W     |
| POR  | 0     | 0     | 0      | 0      | 0     | 0      | 0       | 0       |

Bit 7~6 **PTnM1~PTnM0**: Select PTMn operating mode

- 00: Compare Match Output Mode
- 01: Capture Input Mode
- 10: PWM Output Mode or Single Pulse Output Mode
- 11: Timer/Counter Mode

These bits setup the required operating mode for the PTMn. To ensure reliable operation the PTMn should be switched off before any changes are made to the PTnM1 and PTnM0 bits. In the Timer/Counter Mode, the PTMn output pin state is undefined.

Bit 5~4 **PTnIO1~PTnIO0**: Select PTMn external pin function

Compare Match Output Mode

- 00: No change
- 01: Output low
- 10: Output high
- 11: Toggle output

PWM Output Mode/Single Pulse Output Mode

- 00: PWM output inactive state
- 01: PWM output active state
- 10: PWM output
- 11: Single pulse output

Capture Input Mode (n=0)

PTnTCLR[1:0]=00B:

- 00: Input capture at rising edge of input signal and the counter value will be latched into CCRA
- 01: Input capture at falling edge of input signal and the counter value will be latched into CCRA
- 10: Input capture at falling/rising edge of input signal and the counter value will be latched into CCRA
- 11: Input capture disabled

PTnTCLR[1:0]=01B or 10B or 11B:

- 00: Input capture at rising edge of input signal and the counter value will be latched into CCRB
- 01: Input capture at falling edge of input signal and the counter value will be latched into CCRA
- 10: Input capture at falling/rising edge of input signal and the counter value will be latched into CCRA at falling edge and into CCRB at rising edge
- 11: Input capture disabled

Capture Input Mode (n=1~3)

- 00: Input capture at rising edge of PTPnI or PTCKn
- 01: Input capture at falling edge of PTPnI or PTCKn
- 10: Input capture at rising/falling edge of PTPnI or PTCKn
- 11: Input capture disabled

#### Timer/Counter Mode

##### Unused

These two bits are used to determine how the PTMn external pin changes state when a certain condition is reached. The function that these bits select depends upon in which mode the PTMn is running.

In the Compare Match Output Mode, the PTnIO1 and PTnIO0 bits determine how the PTMn output pin changes state when a compare match occurs from the Comparator A. The PTMn output pin can be setup to switch high, switch low or to toggle its present state when a compare match occurs from the Comparator A. When the bits are both zero, then no change will take place on the output. The initial value of the PTMn output pin should be setup using the PTnOC bit in the PTMnC1 register. Note that the output level requested by the PTnIO1 and PTnIO0 bits must be different from the initial value setup using the PTnOC bit otherwise no change will occur on the PTMn output pin when a compare match occurs. After the PTMn output pin changes state, it can be reset to its initial level by changing the level of the PTnON bit from low to high.

In the PWM Output Mode, the PTnIO1 and PTnIO0 bits determine how the PTMn output pin changes state when a certain compare match condition occurs. The PWM output function is modified by changing these two bits. It is necessary to only change the values of the PTnIO1 and PTnIO0 bits after the PTMn has been switched off. Unpredictable PWM outputs will occur if the PTnIO1 and PTnIO0 bits are changed when the PTMn is running.

In the Capture Input Mode, the PTnIO1 and PTnIO0 bits are used to select the active trigger edge on the selected input signal.

Bit 3 **PTnOC**: PTMn PTP output control bit

##### Compare Match Output Mode

0: Initial low

1: Initial high

##### PWM Output Mode/Single Pulse Output Mode

0: Active low

1: Active high

This is the output control bit for the PTMn output pin. Its operation depends upon whether PTMn is being used in the Compare Match Output Mode or in the PWM Output Mode/Single Pulse Output Mode. It has no effect if the PTMn is in the Timer/Counter Mode. In the Compare Match Output Mode it determines the logic level of the PTMn output pin before a compare match occurs. In the PWM Output Mode it determines if the PWM signal is active high or active low. In the Single Pulse Output Mode it determines the logic level of the PTMn output pin when the PTnON bit changes from low to high.

Bit 2 **PTnPOL**: PTMn output polarity control

0: Non-invert

1: Invert

This bit controls the polarity of the output pins. When the bit is set high the PTMn output pin will be inverted and not inverted when the bit is zero. It has no effect if the PTMn is in the Timer/Counter Mode.

Bit 1 **PTnCAPTS**: PTMn capture trigger source selection

n=0

0: From PTPnI pin

1: From PTCKn pin (with 150ns filter) or Noise Filter Dat\_Out

This bit is used to select the PTMn capture input trigger source. When the PTnCAPTS bit is set to 1, the capture input trigger source can be PTCKn or noise filtered Dat\_Out signal determined using the CINS bit in the NF\_VIH register.

n=1~3

0: From PTPnI pin

1: From PTCKn pin

Bit 0 **PTnCCLR**: Select PTMn counter clear condition

0: PTMn Comparator P match

1: PTMn Comparator A match

This bit is used to select the method which clears the counter. Remember that the Periodic Type TM contains two comparators, Comparator A and Comparator P, either of which can be selected to clear the internal counter. With the PTnCCLR bit set high, the counter will be cleared when a compare match occurs from the Comparator A. When the bit is low, the counter will be cleared when a compare match occurs from the Comparator P or with a counter overflow. A counter overflow clearing method can only be implemented if the CCRP bits are all cleared to zero. The PTnCCLR bit is not used in the PWM Output Mode, Single Pulse Output Mode or Capture Input Mode.

• **PTMnC2 Register (n=0 only)**

| Bit  | 7 | 6 | 5 | 4 | 3 | 2        | 1        | 0      |
|------|---|---|---|---|---|----------|----------|--------|
| Name | — | — | — | — | — | PTnTCLR1 | PTnTCLR0 | PTnVLF |
| R/W  | — | — | — | — | — | R/W      | R/W      | R      |
| POR  | — | — | — | — | — | 0        | 0        | 0      |

Bit 7~3 Unimplemented, read as “0”

Bit 2~1 **PTnTCLR1~PTnTCLR0**: Select PTMn timer clear condition (for capture input mode only)

00: Comparator P match clear only

01: Comparator P match clear or rising edge clear

10: Comparator P match clear or falling edge clear

11: Comparator P match clear or dual edges clear

Bit 0 **PTnVLF**: PTMn counter value latch trigger edge flag

0: Falling edge trigger the counter value latch

1: Rising edge trigger the counter value latch

When the PTnTCLR1~PTnTCLR0 bits are 00B, ignore this flag state.

• **PTMnBL Register (n=0 only)**

| Bit  | 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
|------|-----|-----|-----|-----|-----|-----|-----|-----|
| Name | D7  | D6  | D5  | D4  | D3  | D2  | D1  | D0  |
| R/W  | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| POR  | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   |

Bit 7~0 **D7~D0**: PTM0 CCRB low byte register bit 7 ~ bit 0

PTM0 16-bit CCRB bit 7 ~ bit 0

• **PTMnBH Register (n=0 only)**

| Bit  | 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
|------|-----|-----|-----|-----|-----|-----|-----|-----|
| Name | D15 | D14 | D13 | D12 | D11 | D10 | D9  | D8  |
| R/W  | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| POR  | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   |

Bit 7~0 **D15~D8**: PTM0 CCRB high byte register bit 7 ~ bit 0

PTM0 16-bit CCRB bit 15 ~ bit 8

• **PTMnDL Register (n=0~3)**

| Bit  | 7  | 6  | 5  | 4  | 3  | 2  | 1  | 0  |
|------|----|----|----|----|----|----|----|----|
| Name | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
| R/W  | R  | R  | R  | R  | R  | R  | R  | R  |
| POR  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  |

Bit 7~0 **D7~D0**: PTMn counter low byte register bit 7 ~ bit 0

PTMn 10-bit/16-bit Counter bit 7 ~ bit 0

**• PTMnDH Register (n=0~1)**

| Bit  | 7   | 6   | 5   | 4   | 3   | 2   | 1  | 0  |
|------|-----|-----|-----|-----|-----|-----|----|----|
| Name | D15 | D14 | D13 | D12 | D11 | D10 | D9 | D8 |
| R/W  | R   | R   | R   | R   | R   | R   | R  | R  |
| POR  | 0   | 0   | 0   | 0   | 0   | 0   | 0  | 0  |

Bit 7~0      **D15~D8**: PTMn counter high byte register bit 7 ~ bit 0  
PTMn 16-bit Counter bit 15 ~ bit 8

**• PTMnDH Register (n=2~3)**

| Bit  | 7 | 6 | 5 | 4 | 3 | 2 | 1  | 0  |
|------|---|---|---|---|---|---|----|----|
| Name | — | — | — | — | — | — | D9 | D8 |
| R/W  | — | — | — | — | — | — | R  | R  |
| POR  | — | — | — | — | — | — | 0  | 0  |

Bit 7~2      Unimplemented, read as “0”  
Bit 1~0      **D9~D8**: PTMn counter high byte register bit 1 ~ bit 0  
PTMn 10-bit Counter bit 9 ~ bit 8

**• PTMnAL Register (n=0~3)**

| Bit  | 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
|------|-----|-----|-----|-----|-----|-----|-----|-----|
| Name | D7  | D6  | D5  | D4  | D3  | D2  | D1  | D0  |
| R/W  | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| POR  | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   |

Bit 7~0      **D7~D0**: PTMn CCRA low byte register bit 7 ~ bit 0  
PTMn 10-bit/16-bit CCRA bit 7 ~ bit 0

**• PTMnAH Register (n=0~1)**

| Bit  | 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
|------|-----|-----|-----|-----|-----|-----|-----|-----|
| Name | D15 | D14 | D13 | D12 | D11 | D10 | D9  | D8  |
| R/W  | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| POR  | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   |

Bit 7~0      **D15~D8**: PTMn CCRA high byte register bit 7 ~ bit 0  
PTMn 16-bit CCRA bit 15 ~ bit 8

**• PTMnAH Register (n=2~3)**

| Bit  | 7 | 6 | 5 | 4 | 3 | 2 | 1   | 0   |
|------|---|---|---|---|---|---|-----|-----|
| Name | — | — | — | — | — | — | D9  | D8  |
| R/W  | — | — | — | — | — | — | R/W | R/W |
| POR  | — | — | — | — | — | — | 0   | 0   |

Bit 7~2      Unimplemented, read as “0”  
Bit 1~0      **D9~D8**: PTMn CCRA high byte register bit 1 ~ bit 0  
PTMn 10-bit CCRA bit 9 ~ bit 8

• **PTMnRPL Register (n=0~3)**

| Bit  | 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
|------|-----|-----|-----|-----|-----|-----|-----|-----|
| Name | D7  | D6  | D5  | D4  | D3  | D2  | D1  | D0  |
| R/W  | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| POR  | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   |

Bit 7~0      **D7~D0:** PTMn CCRP low byte register bit 7 ~ bit 0  
PTMn 10-bit/16-bit CCRP bit 7 ~ bit 0

• **PTMnRPH Register (n=0~1)**

| Bit  | 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
|------|-----|-----|-----|-----|-----|-----|-----|-----|
| Name | D15 | D14 | D13 | D12 | D11 | D10 | D9  | D8  |
| R/W  | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| POR  | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   |

Bit 7~0      **D15~D8:** PTMn CCRP high byte register bit 7 ~ bit 0  
PTMn 16-bit CCRP bit 15 ~ bit 8

• **PTMnRPH Register (n=2~3)**

| Bit  | 7 | 6 | 5 | 4 | 3 | 2 | 1   | 0   |
|------|---|---|---|---|---|---|-----|-----|
| Name | — | — | — | — | — | — | D9  | D8  |
| R/W  | — | — | — | — | — | — | R/W | R/W |
| POR  | — | — | — | — | — | — | 0   | 0   |

Bit 7~2      Unimplemented, read as “0”  
Bit 1~0      **D9~D8:** PTMn CCRP high byte register bit 1 ~ bit 0  
PTMn 10-bit CCRP bit 9 ~ bit 8

## Periodic Type TM Operating Modes

The Periodic Type TM can operate in one of five operating modes, Compare Match Output Mode, PWM Output Mode, Single Pulse Output Mode, Capture Input Mode or Timer/Counter Mode. The operating mode is selected using the PTnM1 and PTnM0 bits in the PTMnC1 register.


### Compare Match Output Mode

To select this mode, bits PTnM1 and PTnM0 in the PTMnC1 register, should be set to 00 respectively. In this mode once the counter is enabled and running it can be cleared by three methods. These are a counter overflow, a compare match from Comparator A and a compare match from Comparator P. When the PTnCCLR bit is low, there are two ways in which the counter can be cleared. One is when a compare match from Comparator P, the other is when the CCRP bits are all zero which allows the counter to overflow. Here both PTMnAF and PTMnPF interrupt request flags for Comparator A and Comparator P respectively, will both be generated.

If the PTnCCLR bit in the PTMnC1 register is high then the counter will be cleared when a compare match occurs from Comparator A. However, here only the PTMnAF interrupt request flag will be generated even if the value of the CCRP bits is less than that of the CCRA registers. Therefore when PTnCCLR is high no PTMnPF interrupt request flag will be generated. In the Compare Match Output Mode, the CCRA can not be cleared to zero.


If the CCRA bits are all zero, the counter will overflow when it reaches its maximum value 3FFH for 10-bit or FFFFH for 16-bit, however here the PTMnAF interrupt request flag will not be generated.

As the name of the mode suggests, after a comparison is matched, the PTMn output pin will change state. The PTMn output pin condition however only changes state when a PTMnAF interrupt request flag is generated after a compare match occurs from Comparator A. The PTMnPF interrupt request flag, generated from a compare match occurs from Comparator P, will have no effect on the PTMn output pin. The way in which the PTMn output pin changes state are determined by the condition of the PTnIO1 and PTnIO0 bits in the PTMnC1 register. The PTMn output pin can be selected using the PTnIO1 and PTnIO0 bits to go high, to go low or to toggle from its present condition when a compare match occurs from Comparator A. The initial condition of the PTMn output pin, which is setup after the PTnON bit changes from low to high, is setup using the PTnOC bit. Note that if the PTnIO1 and PTnIO0 bits are zero then no pin change will take place.

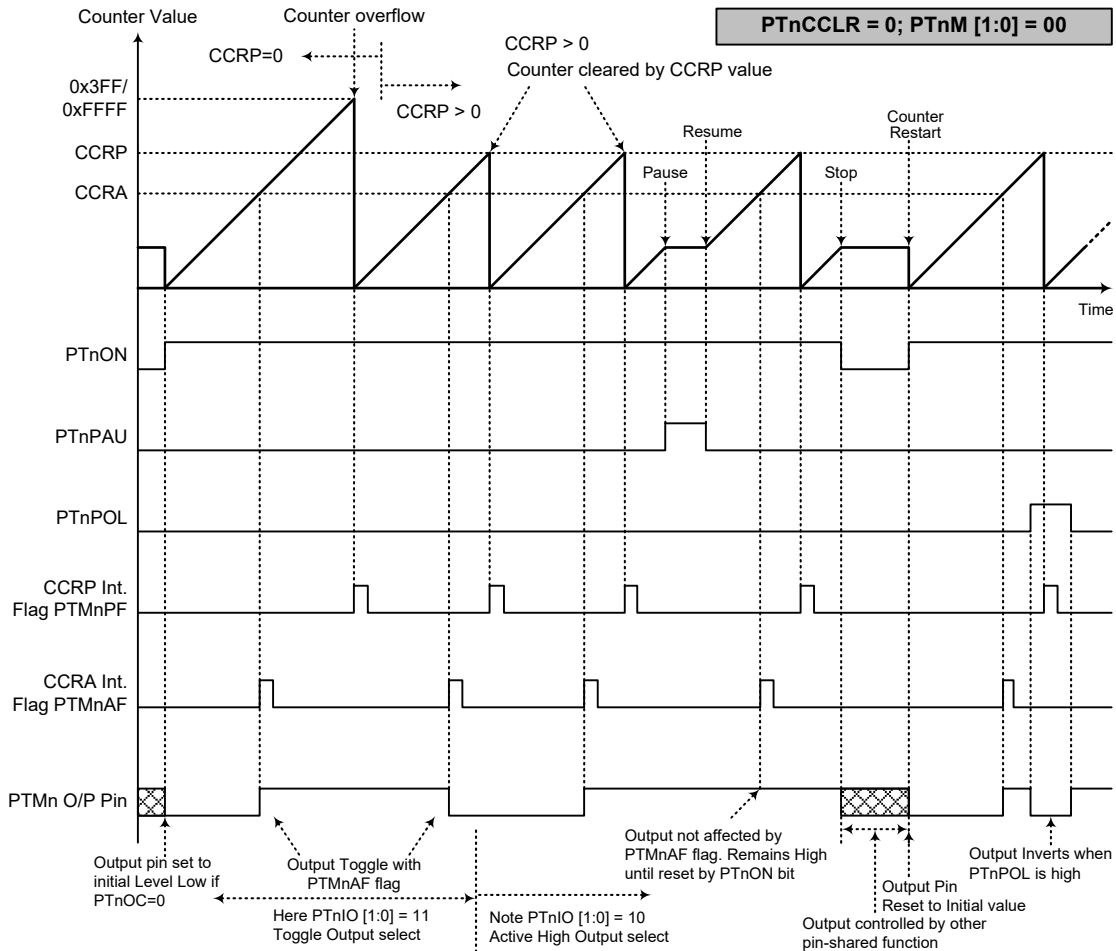

**Compare Match Output Mode – PTnCCR=0 (n=0~3)**

- Note: 1. With PTnCCR=0 a Comparator P match will clear the counter
2. The PTMn output pin controlled only by the PTMnAF flag
3. The output pin reset to its initial state by a PTnON bit rising edge

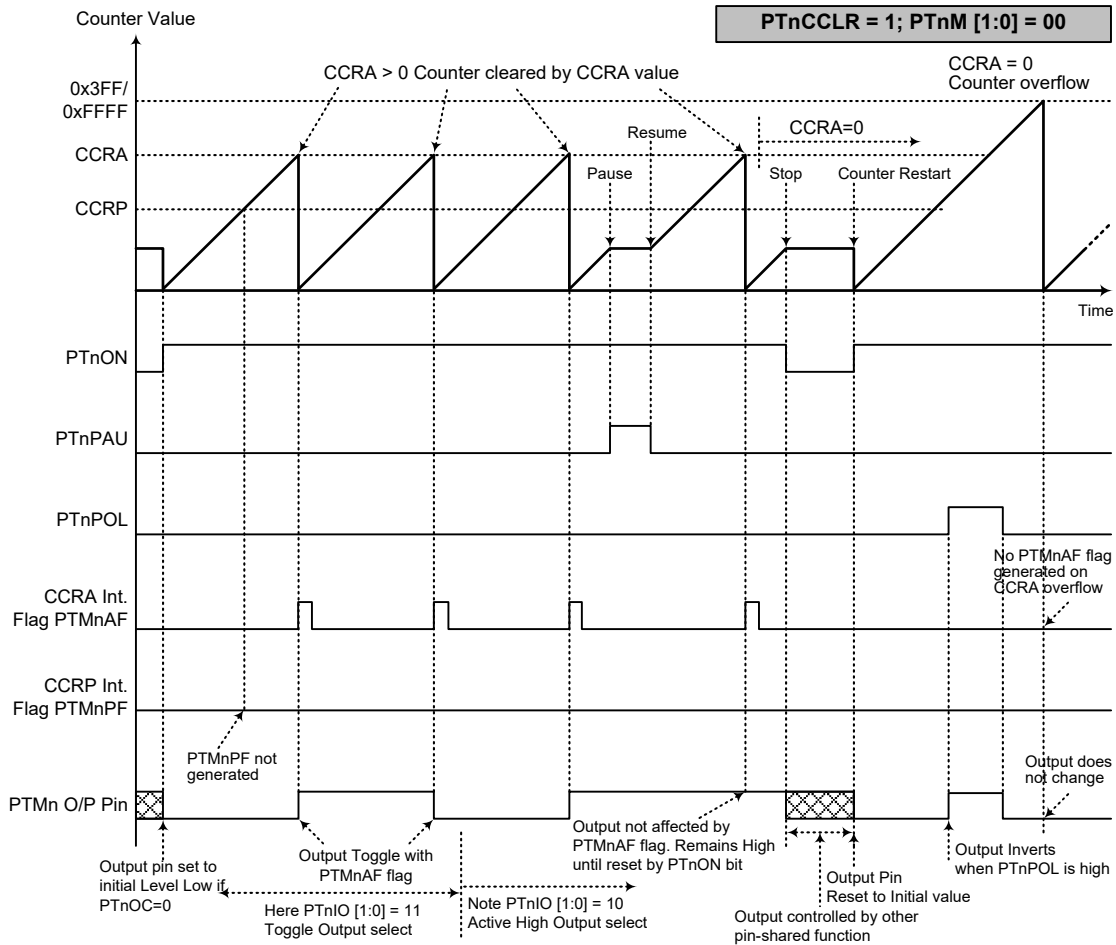

**Compare Match Output Mode – PTnCCR=1 (n=0~3)**

- Note: 1. With  $PTnCCR=1$  a Comparator A match will clear the counter  
 2. The PTMn output pin controlled only by the PTMnAF flag  
 3. The output pin reset to its initial state by a PTnON bit rising edge  
 4. A PTMnPF flag is not generated when  $PTnCCR=1$

### Timer/Counter Mode

To select this mode, bits PTnM1 and PTnM0 in the PTMnC1 register should be set to 11 respectively. The Timer/Counter Mode operates in an identical way to the Compare Match Output Mode generating the same interrupt flags. The exception is that in the Timer/Counter Mode the PTMn output pin is not used. Therefore the above description and Timing Diagrams for the Compare Match Output Mode can be used to understand its function. As the TM output pin is not used in this mode, the pin can be used as a normal I/O pin or other pin-shared function.

### PWM Output Mode

To select this mode, bits PTnM1 and PTnM0 in the PTMnC1 register should be set to 10 respectively. The PWM function within the PTMn is useful for applications which require functions such as motor control, heating control, illumination control etc. By providing a signal of fixed frequency but of varying duty cycle on the PTMn output pin, a square wave AC waveform can be generated with varying equivalent DC RMS values.

As both the period and duty cycle of the PWM waveform can be controlled, the choice of generated waveform is extremely flexible. In the PWM Output Mode, the PTnCCLR bit has no effect on the PWM operation. Both of the CCRA and CCRP registers are used to generate the PWM waveform, CCRP register is used to clear the internal counter and thus control the PWM waveform frequency, while CCRA register is used to control the duty cycle. The PWM waveform frequency and duty cycle can therefore be controlled by the values in the CCRA and CCRP registers.

An interrupt flag, one for each of the CCRA and CCRP, will be generated when a compare match occurs from either Comparator A or Comparator P. The PTnOC bit in the PTMnC1 register is used to select the required polarity of the PWM waveform while the two PTnIO1 and PTnIO0 bits are used to enable the PWM output or to force the PTMn output pin to a fixed high or low level. The PTnPOL bit is used to reverse the polarity of the PWM output waveform.

#### • 16-bit PTMn, PWM Output Mode, Edge-aligned Mode

| CCRP   | 1~65535 | 0     |
|--------|---------|-------|
| Period | 1~65535 | 65536 |
| Duty   | CCRA    |       |


#### • 10-bit PTMn, PWM Output Mode, Edge-aligned Mode

| CCRP   | 1~1023 | 0    |
|--------|--------|------|
| Period | 1~1023 | 1024 |
| Duty   | CCRA   |      |

If  $f_{SYS}=4\text{MHz}$ , PTMn clock source select  $f_{SYS}/4$ , CCRP=512 and CCRA=128,

The PTMn PWM output frequency= $(f_{SYS}/4)/512=f_{SYS}/2048=2\text{kHz}$ , duty= $128/512=25\%$ .

If the Duty value defined by the CCRA register is equal to or greater than the Period value, then the PWM output duty is 100%.

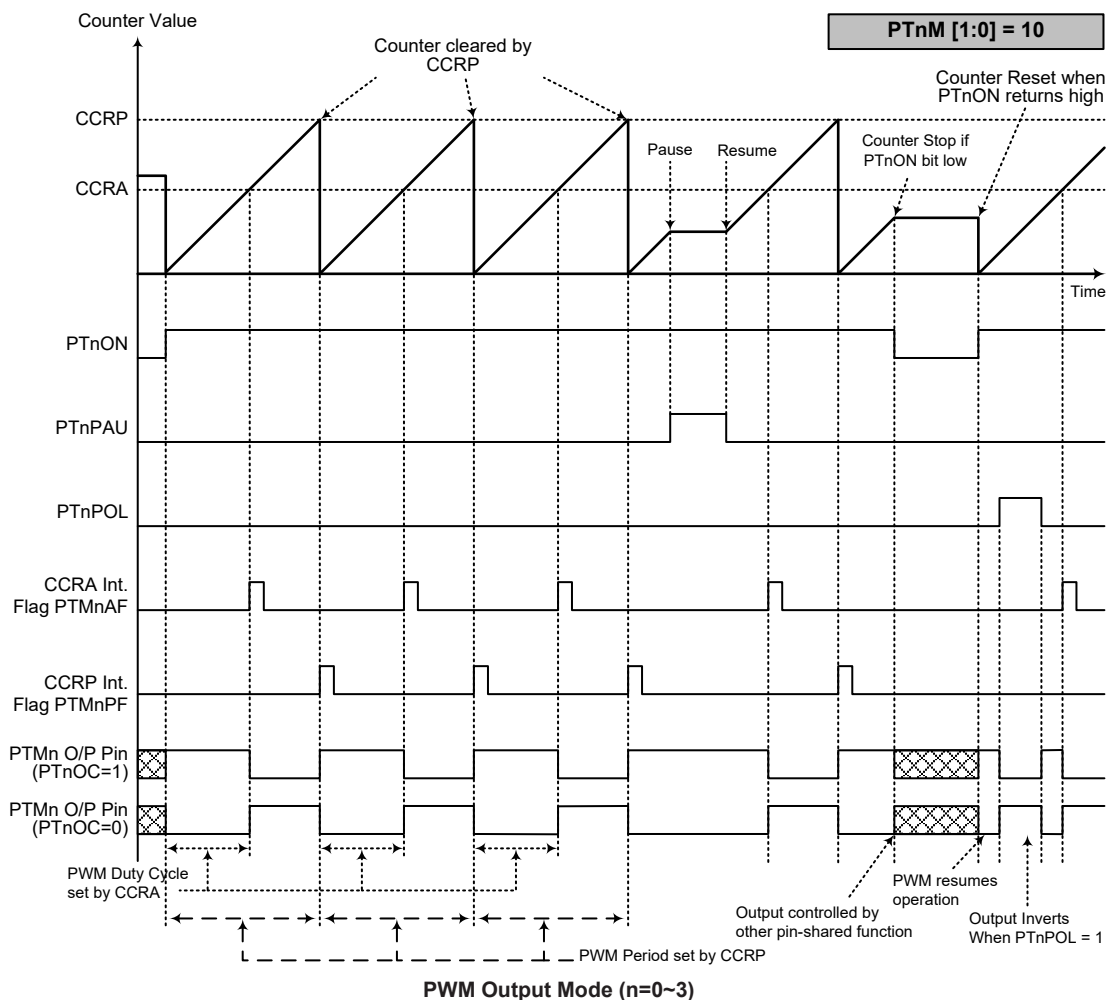


- Note:
1. Counter cleared by CCRP
  2. A counter clear sets the PWM Period
  3. The internal PWM function continues running even when PTnIO[1:0]=00 or 01
  4. The PTnCCLR bit has no influence on PWM operation


### Single Pulse Output Mode

To select this mode, bits PTnM1 and PTnM0 in the PTMnC1 register should be set to 10 respectively and also the PTnIO1 and PTnIO0 bits should be set to 11 respectively. The Single Pulse Output Mode, as the name suggests, will generate a single shot pulse on the PTMn output pin.

The trigger for the pulse output leading edge is a low to high transition of the PTnON bit, which can be implemented using the application program. However in the Single Output Pulse Mode, the PTnON bit can also be made to automatically change from low to high using the external PTCKn pin, which will in turn initiate the Single Pulse output. When the PTnON bit transitions to a high level, the counter will start running and the pulse leading edge will be generated. The PTnON bit should remain high when the pulse is in its active state. The generated pulse trailing edge will be generated when the PTnON bit is cleared to zero, which can be implemented using the application program or when a compare match occurs from Comparator A.

However a compare match from Comparator A will also automatically clear the PTnON bit and thus generate the Single Pulse output trailing edge. In this way the CCRA value can be used to control the pulse width. A compare match from Comparator A will also generate a PTMn interrupt. The counter can only be reset back to zero when the PTnON bit changes from low to high when the counter restarts. In the Single Pulse Output Mode CCRP is not used. The PTnCCLR bit is not used in this Mode.

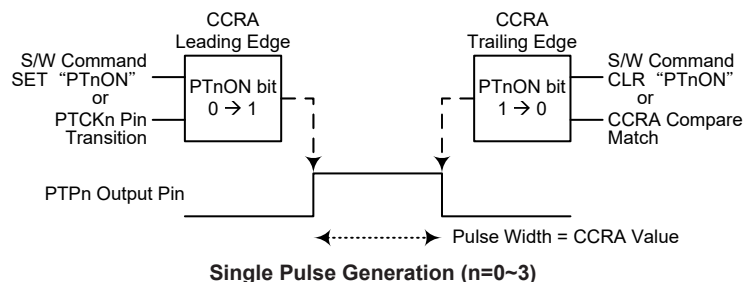

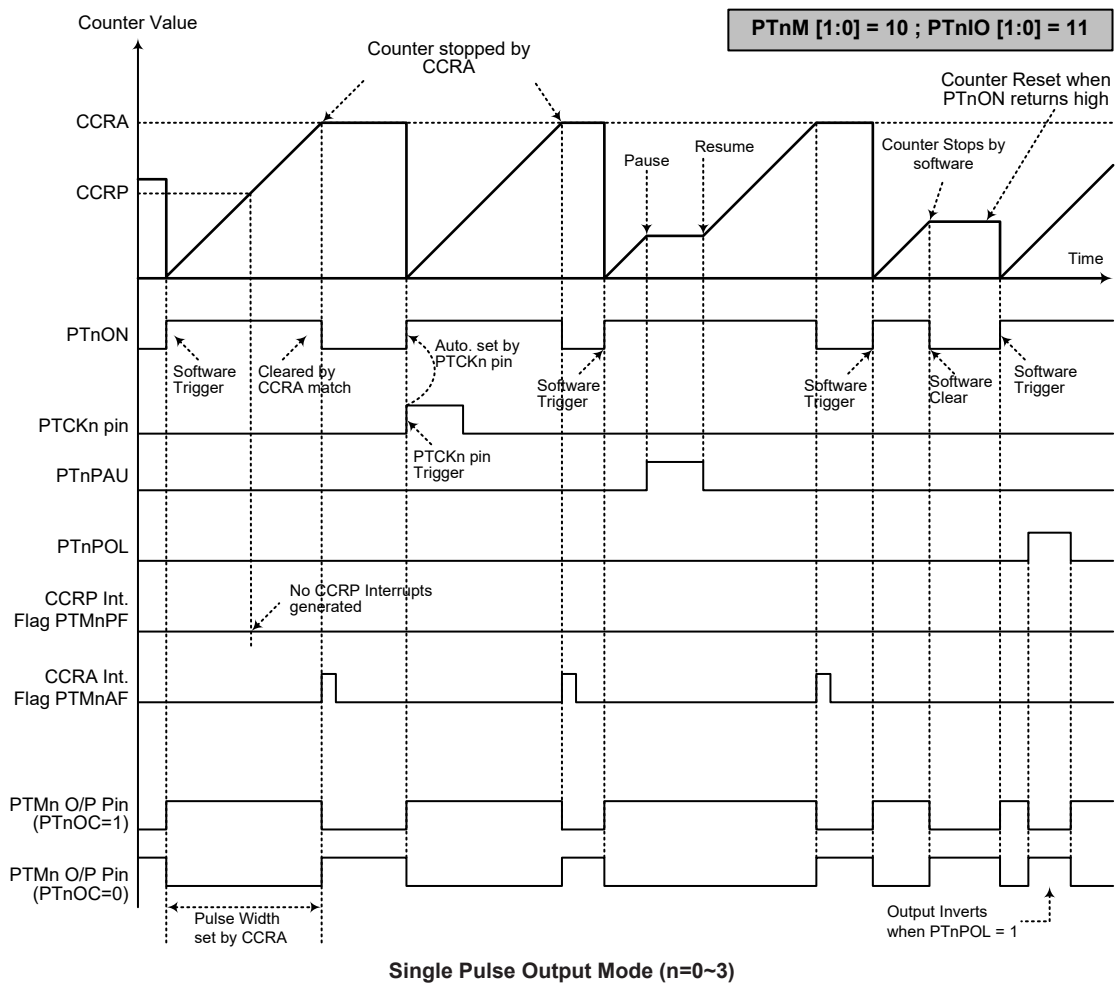

Note: 1. Counter stopped by CCRA

2. CCRP is not used

3. The pulse is triggered by the PTCKn pin or by setting the PTnON bit high.

4. A PTCKn pin active edge will automatically set the PTnON bit high

5. In the Single Pulse Output Mode, PTnIO[1:0] must be set to “11” and cannot be changed

### Capture Input Mode (PTM0)

To select this mode bits PTnM1 and PTnM0 in the PTMnC1 register should be set to 01 respectively. This mode enables external signals to capture and store the present value of the internal counter and can therefore be used for applications such as pulse width measurements. The external signal is supplied on the PTPnI or PTCKn pin which is selected using the PTnCAPTS bit in the PTMnC1 register. The signal sourced from the Noise Filter Dat\_Out, which is a filtered signal of the NFIN pin input, can also be selected as the capture input signal. The input signal active edge can be either a rising edge, a falling edge or both rising and falling edges; the active edge transition type is selected using the PTnIO1 and PTnIO0 bits in the PTMnC1 register. The counter is started when the PTnON bit changes from low to high which is initiated using the application program.


The PTnIO1 and PTnIO0 bits decide which active edge transition type to be latched and to generate an interrupt. The PTnTCLR1 and PTnTCLR0 bits decide the condition that the counter reset back to zero. The present counter value latched into CCRA or CCRB is decided by PTnIO1~PTnIO0 together with PTnTCLR1~PTnTCLR0 setting. The PTnIO1~PTnIO0 and PTnTCLR1~PTnTCLR0 bits are setup independently on each other.

When the required edge transition appears on the PTPnI or PTCKn pin or Dat\_Out signal the present value in the counter will be latched into the CCRA or CCRB registers and a PTMn interrupt generated. Irrespective of what events occur on the PTPnI or PTCKn pin or Dat\_Out signal, the counter will continue to free run until the PTnON bit changes from high to low. When a CCRP compare match occurs the counter will reset back to zero; in this way the CCRP value can be used to control the maximum counter value. When a CCRP compare match occurs from Comparator P, a PTMn interrupt will also be generated. Counting the number of overflow interrupt signals from the CCRP can be a useful method in measuring long pulse widths. The PTnIO1 and PTnIO0 bits can select the active trigger edge on the PTPnI or PTCKn pin or Dat\_Out signal to be a rising edge, falling edge or both edge types. If the PTnIO1 and PTnIO0 bits are both set high, then no capture operation will take place irrespective of what happens on the PTPnI or PTCKn pin or Dat\_Out signal, however it must be noted that the counter will continue to run. The PTnCCLR, PTnOC and PTnPOL bits are not used in this Mode.


There are some considerations that should be noted. If PTCKn is used as the capture input source, then it cannot be selected as the PTMn clock source. If the captured pulse width is less than 2 timer clock periods, it may be ignored by hardware. After the counter value is latched to CCRA or CCRB registers by an active capture edge, the PTMnAF flag will be set high and the PTnVLF flag status will be changed after 0.5 timer clock period. The delay time from the active capture edge received to the action of latching counter value to CCRA or CCRB registers is less than 1.5 timer clock periods.




8. The capture input mode cannot be used if the selected PTMn counter clock is not available

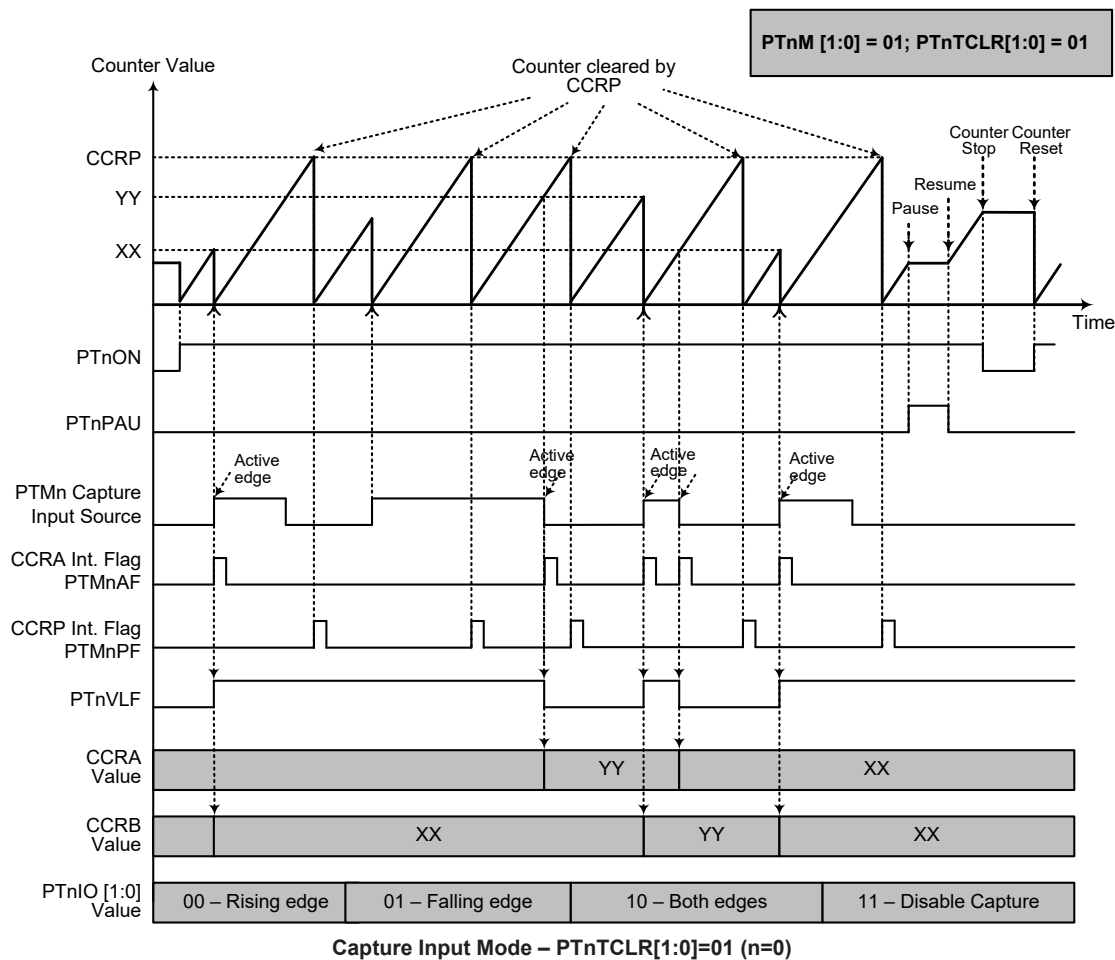

- Note: 1. PTnM[1:0]=01, PTnTCLR[1:0]=01 and active edge set by the PTnIO[1:0] bits  
 2. A PTMn Capture input pin active edge transfers the counter value to CCRA or CCRB  
 3. Comparator P match or PTMn capture input rising edge will clear the counter  
 4. PTnCCLR bit is not used  
 5. No output function – PTnOC and PTnPOL bits are not used  
 6. CCRP determines the counter value and the counter has a maximum count value when CCRP is equal to zero  
 7. The capture input mode cannot be used if the selected PTMn counter clock is not available

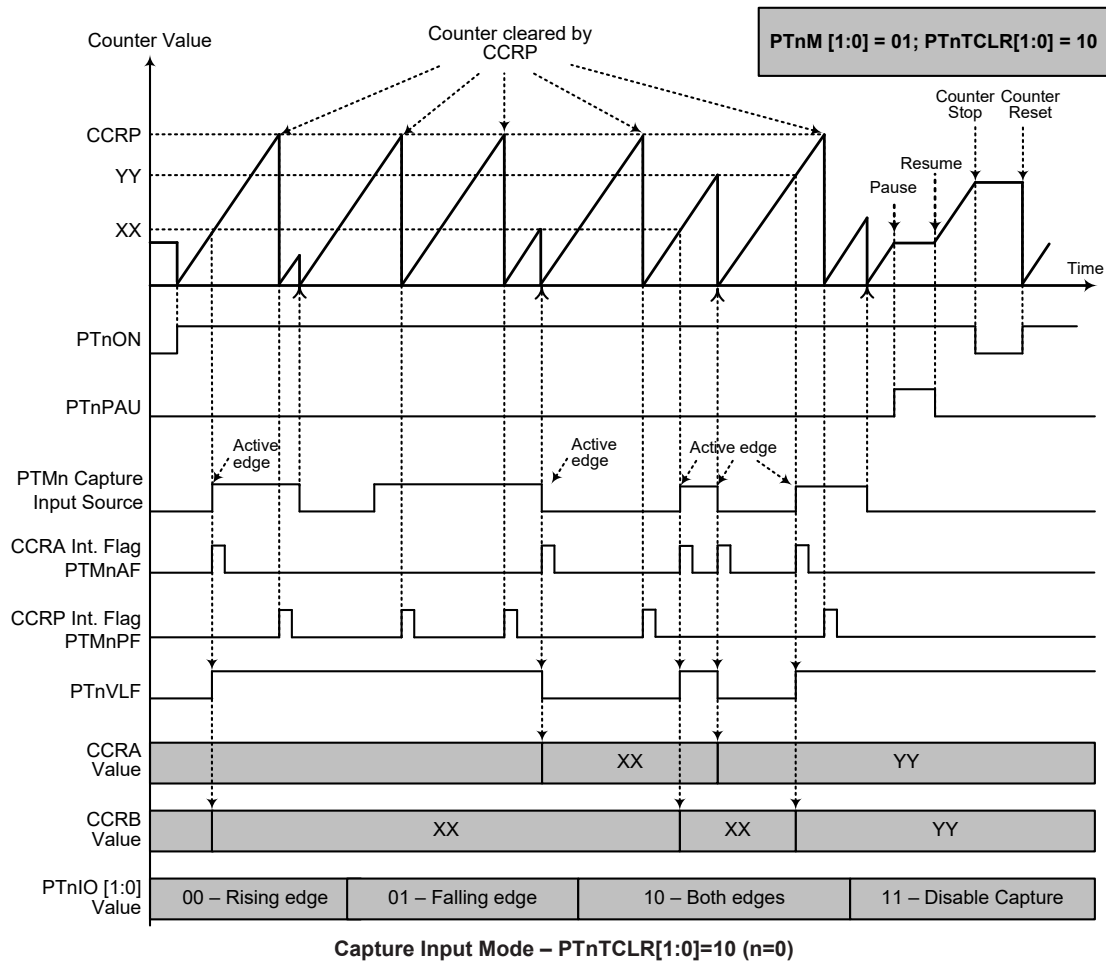

- Note: 1. PTnM[1:0]=01, PTnTCLR[1:0]=10 and active edge set by the PTnIO[1:0] bits
2. A PTMn Capture input pin active edge transfers the counter value to CCRA or CCRB
3. Comparator P match or PTMn capture input falling edge will clear the counter
4. PTnCCLR bit is not used
5. No output function – PTnOC and PTnPOL bits are not used
6. CCRP determines the counter value and the counter has a maximum count value when CCRP is equal to zero
7. The capture input mode cannot be used if the selected PTMn counter clock is not available

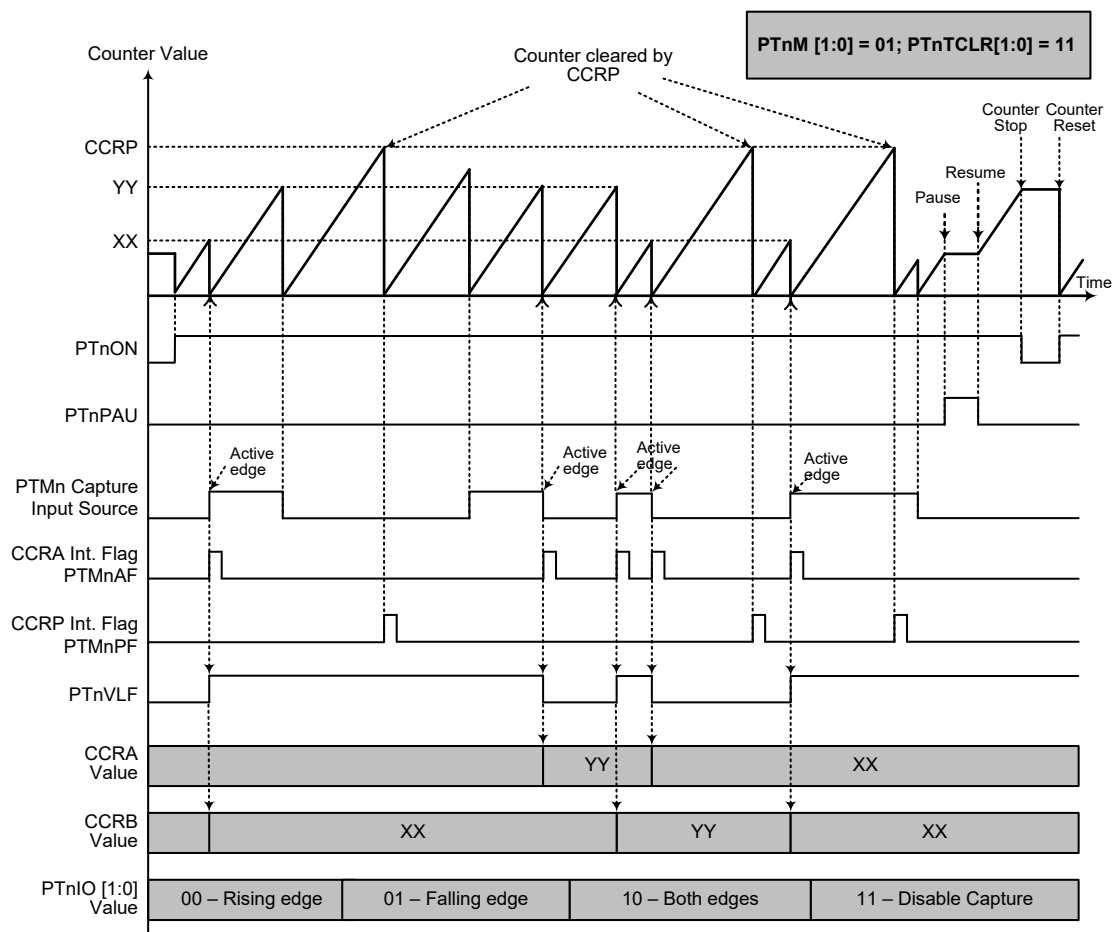

**Capture Input Mode – PTnTCLR[1:0]=11 (n=0)**


- Note: 1. PTnM[1:0]=01, PTnTCLR[1:0]=11 and active edge set by the PTnIO[1:0] bits  
 2. A PTMn Capture input pin active edge transfers the counter value to CCRA or CCRB  
 3. Comparator P match or PTMn capture input pin rising or falling edge will clear the counter  
 4. PTnCCLR bit is not used  
 5. No output function, PTnOC and PTnPOL bits not used  
 6. CCRP determines the counter value and the counter has a maximum count value when CCRP is equal to zero  
 7. The capture input mode cannot be used if the selected PTMn counter clock is not available

### **Capture Input Mode (PTM1~PTM3)**

To select this mode bits PTnM1 and PTnM0 in the PTMnC1 register should be set to 01 respectively. This mode enables external signals to capture and store the present value of the internal counter and can therefore be used for applications such as pulse width measurements. The external signal is supplied on the PTPnI or PTCKn pin which is selected using the PTnCAPTS bit in the PTMnC1 register. The input pin active edge can be either a rising edge, a falling edge or both rising and falling edges; the active edge transition type is selected using the PTnIO1 and PTnIO0 bits in the PTMnC1 register. The counter is started when the PTnON bit changes from low to high which is initiated using the application program.

When the required edge transition appears on the PTPnI or PTCKn pin the present value in the counter will be latched into the CCRA registers and a PTMn interrupt generated. Irrespective of what events occur on the PTPnI or PTCKn pin, the counter will continue to free run until the PTnON bit changes from high to low. When a CCRP compare match occurs the counter will reset back to zero; in this way the CCRP value can be used to control the maximum counter value. When a CCRP compare match occurs from Comparator P, a PTMn interrupt will also be generated. Counting the number of overflow interrupt signals from the CCRP can be a useful method in measuring long pulse widths. The PTnIO1 and PTnIO0 bits can select the active trigger edge on the PTPnI or PTCKn pin to be a rising edge, falling edge or both edge types. If the PTnIO1 and PTnIO0 bits are both set high, then no capture operation will take place irrespective of what happens on the PTPnI or PTCKn pin, however it must be noted that the counter will continue to run. The PTnCCLR, PTnOC and PTnPOL bits are not used in this Mode.

There are some considerations that should be noted. If PTCKn is used as the capture input source, then it cannot be selected as the PTMn clock source. If the captured pulse width is less than 2 timer clock periods, it may be ignored by hardware. After the counter value is latched to CCRA registers by an active capture edge, the PTMnAF flag will be set high after 0.5 timer clock period. The delay time from the active capture edge received to the action of latching counter value to CCRA registers is less than 1.5 timer clock periods.

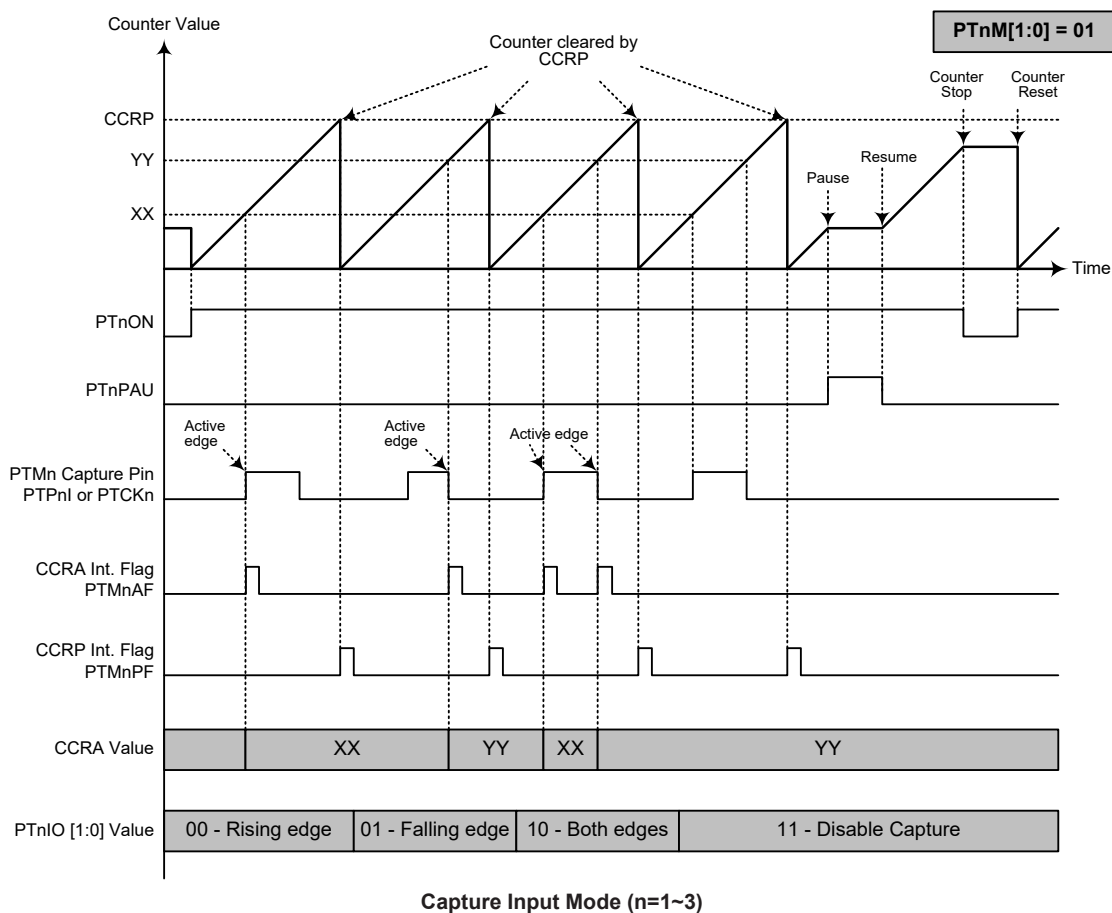


- Note: 1. PTnM[1:0]=01 and active edge set by the PTnIO[1:0] bits
2. A PTMn Capture input pin active edge transfers the counter value to CCRA
3. PTnCCLR bit not used
4. No output function – PTnOC and PTnPOL bits are not used
5. CCRP determines the counter value and the counter has a maximum count value when CCRP is equal to zero
6. The capture input mode cannot be used if the selected PTMn counter clock is not available

## Capture Timer Module – CAPTM

The Capture Timer Module is a timing unit specifically used for Motor Control purposes. The CAPTM is controlled by a programmable clock source.

### Capture Timer Overview

At the core of the Capture Timer Module is a 16-bit count-up counter which is driven by a user selectable internal clock source which is a divided version of the system clock or from the PWMO. There is also an internal comparator which compares the value of this 16-bit counter with a pre-programmed 16-bit value stored in two registers. There are two basic modes of operation, a Compare Mode and a Capture Mode, each of which can be used to reset the internal counter. When a compare match occurs a signal will be generated to reset the internal counter. The counter can also be cleared when a capture trigger is generated by one of four sources, FHA, FHB, FHC and CTIN.

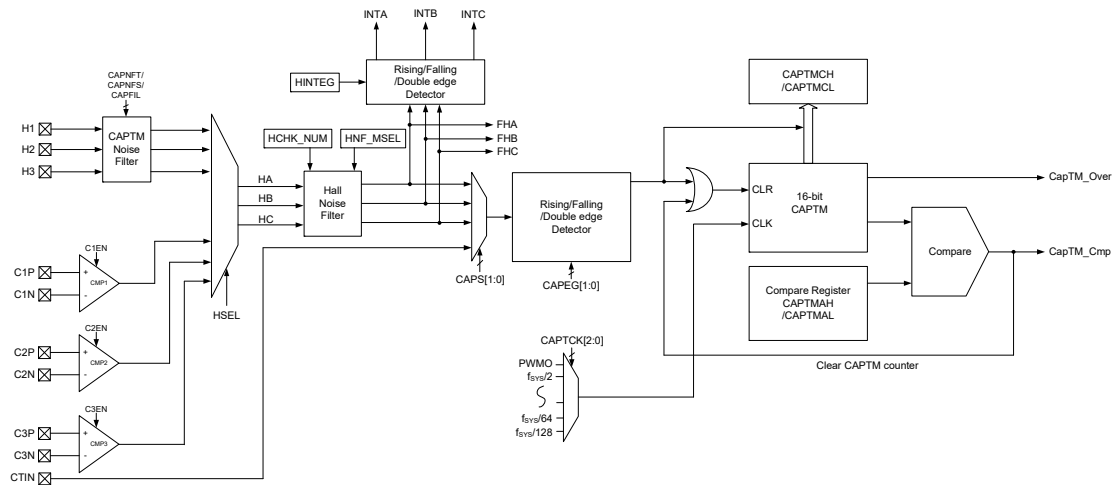

Note: The detailed control and input selection for the Hall noise filter is described in the “Hall Sensor Noise Filter” section.

**Capture Timer Block Diagram**

### Capture Timer Register Description

Overall operation of the Capture Timer is controlled using eight registers. A read only register pair exists to store the internal counter 16-bit value, while a read/write register pair exists to store the internal 16-bit compare value. Another read only register pair is used to store the capture value. The remaining two registers are control registers which setup the different operating and control modes.

| Register Name | Bit     |         |         |         |        |        |        |        |
|---------------|---------|---------|---------|---------|--------|--------|--------|--------|
|               | 7       | 6       | 5       | 4       | 3      | 2      | 1      | 0      |
| CAPTC0        | CAPTPAU | CAPTCK2 | CAPTCK1 | CAPTCK0 | CAPTON | —      | CAPS1  | CAPS0  |
| CAPTC1        | CAPEG1  | CAPEG0  | CAPEN   | CAPNFT  | CAPNFS | CAPFIL | CAPCLR | CAMCLR |
| CAPTMDL       | D7      | D6      | D5      | D4      | D3     | D2     | D1     | D0     |
| CAPTMDH       | D15     | D14     | D13     | D12     | D11    | D10    | D9     | D8     |
| CAPTMAL       | D7      | D6      | D5      | D4      | D3     | D2     | D1     | D0     |
| CAPTMAH       | D15     | D14     | D13     | D12     | D11    | D10    | D9     | D8     |
| CAPTMCL       | D7      | D6      | D5      | D4      | D3     | D2     | D1     | D0     |
| CAPTMCH       | D15     | D14     | D13     | D12     | D11    | D10    | D9     | D8     |

**Capture Timer Register List**

**• CAPTC0 Register**

| Bit  | 7       | 6       | 5       | 4       | 3      | 2 | 1     | 0     |
|------|---------|---------|---------|---------|--------|---|-------|-------|
| Name | CAPTPAU | CAPTCK2 | CAPTCK1 | CAPTCK0 | CAPTON | — | CAPS1 | CAPS0 |
| R/W  | R/W     | R/W     | R/W     | R/W     | R/W    | — | R/W   | R/W   |
| POR  | 0       | 0       | 0       | 0       | 0      | — | 0     | 0     |

- Bit 7      **CAPTPAU**: CAPTM counter pause control  
0: Run  
1: Pause  
The counter can be paused by setting this bit high. Clearing the bit to zero restores normal counter operation. When in a Pause condition the CAPTM will remain powered up and continue to consume power. The counter will retain its residual value when this bit changes from low to high and resume counting from this value when the bit changes to a low value again.
- Bit 6~4    **CAPTCK2~CAPTCK0**: Select CAPTM counter clock  
000: PWMO periodic signal  
001:  $f_{SYS}/2$   
010:  $f_{SYS}/4$   
011:  $f_{SYS}/8$   
100:  $f_{SYS}/16$   
101:  $f_{SYS}/32$   
110:  $f_{SYS}/64$   
111:  $f_{SYS}/128$   
These three bits are used to select the clock source for the CAPTM.
- Bit 3      **CAPTON**: CAPTM counter on/off control  
0: Off  
1: On  
This bit controls the overall on/off function of the CAPTM. Setting the bit high enables the counter to run, clearing the bit disables the CAPTM. Clearing this bit to zero will stop the counter from counting and turn off the CAPTM which will reduce its power consumption. When the bit changes state from low to high the internal counter value will be reset to zero, however when the bit changes from high to low, the internal counter will retain its residual value.
- Bit 2      Unimplemented, read as “0”
- Bit 1~0    **CAPS1~CAPS0**: CAPTM capture source selection  
00: FHA  
01: FHB  
10: FHC  
11: CTIN pin

**• CAPTC1 Register**

| Bit  | 7      | 6      | 5     | 4      | 3      | 2      | 1      | 0      |
|------|--------|--------|-------|--------|--------|--------|--------|--------|
| Name | CAPEG1 | CAPEG0 | CAPEN | CAPNFT | CAPNFS | CAPFIL | CAPCLR | CAMCLR |
| R/W  | R/W    | R/W    | R/W   | R/W    | R/W    | R/W    | R/W    | R/W    |
| POR  | 0      | 0      | 0     | 0      | 0      | 0      | 0      | 0      |

- Bit 7~6    **CAPEG1~CAPEG0**: CAPTM capture active edge selection  
00: CAPTM capture disabled  
01: Capture at rising edge  
10: Capture at falling edge  
11: Capture at dual edges
- Bit 5      **CAPEN**: CAPTM capture input control  
0: Disable  
1: Enable

- Bit 4      **CAPNFT**: CAPTM Noise Filter sampling times  
0: 2 times  
1: 4 times  
The CAPTM Noise Filter circuit requires sampling the signal twice or 4 times continuously, when the sampled signals are all the same, the signal will be acknowledged. The sample frequency is decided by the CAPNFS bit.
- Bit 3      **CAPNFS**: CAPTM Noise Filter clock source selection  
0:  $f_{sys}$   
1:  $f_{sys}/4$   
The clock source for the Capture Timer Module Counter is provided by  $f_{sys}$  or  $f_{sys}/4$ .
- Bit 2      **CAPFIL**: CAPTM capture input noise filter control  
0: Disable  
1: Enable  
This bit is used to enable and disable the CAPTM capture input noise filter. If the CAPTON bit is equal to “1” and the CAPFIL bit is also equal to “1”, the CAPTM capture input noise filter will be enabled.
- Bit 1      **CAPCLR**: CAPTM counter capture auto-reset control  
0: Disable  
1: Enable  
If this bit is set high, when FHA/FHB/FHC/CTIN generates the required capture edge, the hardware will automatically transfer the value in the CAPTMDL and CAPTMDH registers to the capture register pair CAPTMCL and CAPTMCH, after which the CAPTM counter will be cleared and restart to count automatically.
- Bit 0      **CAMCLR**: CAPTM counter compare match auto-reset control  
0: Disable  
1: Enable  
If this bit is set high, when a compare match condition occurs, the hardware will automatically reset the CAPTM counter. When CAPTMAH/CAPTMAL=0000H, it also can generate a compare match interrupt.

• **CAPTMDL Register**

| Bit  | 7  | 6  | 5  | 4  | 3  | 2  | 1  | 0  |
|------|----|----|----|----|----|----|----|----|
| Name | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
| R/W  | R  | R  | R  | R  | R  | R  | R  | R  |
| POR  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  |

- Bit 7~0      **D7~D0**: CAPTM counter low byte register bit 7 ~ bit 0  
CAPTM 16-bit counter bit 7 ~ bit 0

• **CAPTMDH Register**

| Bit  | 7   | 6   | 5   | 4   | 3   | 2   | 1  | 0  |
|------|-----|-----|-----|-----|-----|-----|----|----|
| Name | D15 | D14 | D13 | D12 | D11 | D10 | D9 | D8 |
| R/W  | R   | R   | R   | R   | R   | R   | R  | R  |
| POR  | 0   | 0   | 0   | 0   | 0   | 0   | 0  | 0  |

- Bit 7~0      **D15~D8**: CAPTM counter high byte register bit 7 ~ bit 0  
CAPTM 16-bit counter bit 15 ~ bit 8

• **CAPTMAL Register**

| Bit  | 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
|------|-----|-----|-----|-----|-----|-----|-----|-----|
| Name | D7  | D6  | D5  | D4  | D3  | D2  | D1  | D0  |
| R/W  | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| POR  | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   |

Bit 7~0      **D7~D0:** CAPTM compare low byte register bit 7 ~ bit 0  
CAPTM 16-bit compare register bit 7 ~ bit 0

• **CAPTMALH Register**

| Bit  | 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
|------|-----|-----|-----|-----|-----|-----|-----|-----|
| Name | D15 | D14 | D13 | D12 | D11 | D10 | D9  | D8  |
| R/W  | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| POR  | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   |

Bit 7~0      **D15~D8:** CAPTM compare high byte register bit 7 ~ bit 0  
CAPTM 16-bit compare register bit 15 ~ bit 8

• **CAPTMCL Register**

| Bit  | 7  | 6  | 5  | 4  | 3  | 2  | 1  | 0  |
|------|----|----|----|----|----|----|----|----|
| Name | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
| R/W  | R  | R  | R  | R  | R  | R  | R  | R  |
| POR  | x  | x  | x  | x  | x  | x  | x  | x  |

"x": unknown

Bit 7~0      **D7~D0:** CAPTM capture low byte register bit 7 ~ bit 0  
CAPTM 16-bit capture register bit 7 ~ bit 0

• **CAPTMCH Register**

| Bit  | 7   | 6   | 5   | 4   | 3   | 2   | 1  | 0  |
|------|-----|-----|-----|-----|-----|-----|----|----|
| Name | D15 | D14 | D13 | D12 | D11 | D10 | D9 | D8 |
| R/W  | R   | R   | R   | R   | R   | R   | R  | R  |
| POR  | x   | x   | x   | x   | x   | x   | x  | x  |

"x": unknown


Bit 7~0      **D15~D8:** CAPTM capture high byte register bit 7 ~ bit 0  
CAPTM 16-bit capture register bit 15 ~ bit 8

## Capture Timer Operation

The Capture Timer is used to detect and measure input signal pulse widths and periods. It can operate in either Capture or Compare Mode. There are four timer capture inputs, FHA, FHB, FHC and CTIN. The capture input has an edge detection selection, it can be either a rising edge, a falling edge or both rising and falling edges.

The CAPTON bit is used to control the overall Capture Timer module enable/disable function. Disabling the Capture Module when not used will reduce the device power consumption. Additionally the capture input control is enabled/disabled using the CAPEN control bit. The trigger edge options are setup using the CAPEG1 and CAPEG0 bits, to select either positive edge, negative edge or both edges.

The capture timer also includes an internal noise filter which is used to filter out unwanted glitches or pulses on the H1, H2 and H3 input pins. This function is enabled using the CAPFIL bit. If the noise filter is enabled, the capture input signals must be sampled either 2 or 4 times, in order to recognise an edge as a valid capture event. The number of sampling times is based on either  $f_{sys}$  or  $f_{sys}/4$  determined using the CAPNFS bit.

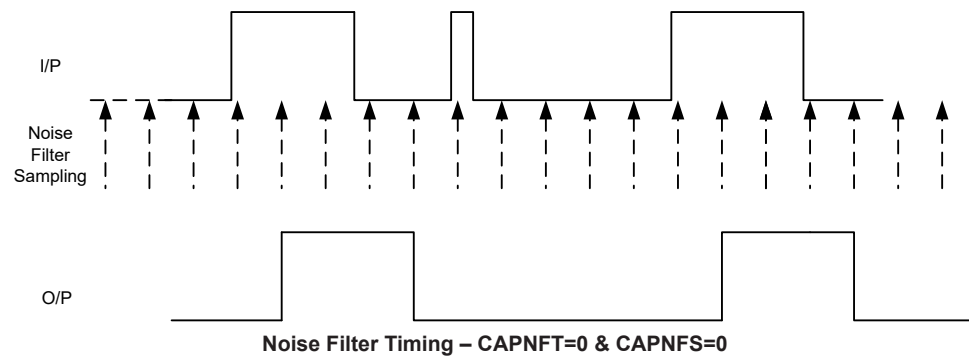

## Capture Mode Operation

The capture timer module contains two capture registers, CAPTMCL and CAPTMCH, which are used to store the present value in the counter. When the Capture Module is enabled, then each capture input source receives a valid trigger signal, the content of the free running counter-up 16-bit counter, which is contained in the CAPTMDL and CAPTMDH registers, will be transferred into the capture registers, CAPTMCL and CAPTMCH. If the count overflows, the CAPOF interrupt flag bit in the interrupt control register will be set. If the CAPCLR bit is set high, then the 16-bit counter will be automatically reset to zero after a capture event occurs.

## Compare Mode Operation

When the timer is used in the compare mode, the CAPTMAL and CAPTMAH registers are used to store the 16-bit compare value. When the free running value of the count-up 16-bit counter reaches a value equal to the programmed compare value in these compare registers, the CAPCF interrupt flag bit in the interrupt control register will be set. If the CAMCLR bit is set high, then the counter will be reset to zero automatically when a compare match condition occurs.


For motor applications, the rotor speed or a motor stall condition can be detected by setting the compare registers to compare the captured signal edge transition time. If a stall condition occurs, a compare interrupt will then be generated, after which the PWM motor drive circuit can be shut down by hardware or software to prevent a motor burn out situation.

## Digital Noise Filter

The external NFIN pin is connected to an internal filter to reduce the possibility of unwanted event counting events or inaccurate pulse width measurements due to adverse noise or spikes on the NFIN input signal and then outputs to the 16-bit PTM0 capture circuit in order to ensure that the motor control circuit works normally.

The noise filter circuit is an input/output surge filtering analog circuit which can filter micro-second grade sharp-noise. The maximum antinoise pulse width can be calculated by the following equation:

$$(NF\_VIH[4:0]-NF\_VIL[4:0]) \times (1/f_{SYS}) \times 4, \text{ where } (NF\_VIH[4:0]-NF\_VIL[4:0]) > 1$$

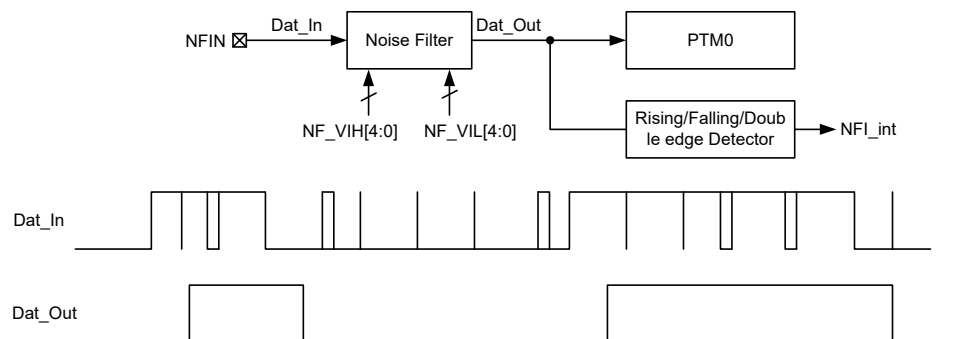

### Noise Filter Register Description

The operations of the digital noise filter are controlled by the NF\_VIH and NF\_VIL registers.

#### • NF\_VIH Register

| Bit  | 7       | 6    | 5 | 4   | 3   | 2   | 1   | 0   |
|------|---------|------|---|-----|-----|-----|-----|-----|
| Name | NF_BYPS | CINS | — | D4  | D3  | D2  | D1  | D0  |
| R/W  | R/W     | R/W  | — | R/W | R/W | R/W | R/W | R/W |
| POR  | 0       | 0    | — | 1   | 1   | 0   | 0   | 1   |

Bit 7 **NF\_BYPS**: Bypass noise filter control

0: Noise Filter used

1: Noise Filter Bypass, Dat\_Out=Dat\_In

Bit 6 **CINS**: PTM0 capture input source selection

0: Noise Filter Dat\_Out not selected (remains original PTM0 capture path)

1: Noise Filter Dat\_Out selected

Bit 5 Unimplemented, read as “0”

Bit 4~0 **D4~D0**: NF\_VIH[4:0] data

#### • NF\_VIL Register

| Bit  | 7     | 6     | 5 | 4   | 3   | 2   | 1   | 0   |
|------|-------|-------|---|-----|-----|-----|-----|-----|
| Name | NFIS1 | NFIS0 | — | D4  | D3  | D2  | D1  | D0  |
| R/W  | R/W   | R/W   | — | R/W | R/W | R/W | R/W | R/W |
| POR  | 0     | 0     | — | 0   | 1   | 0   | 1   | 0   |

Bit 7~6 **NFIS1~NFIS0**: NFIN interrupt edge control

00: Disable

01: Rising edge trigger

10: Falling edge trigger

11: Dual edge trigger

Bit 5 Unimplemented, read as “0”

Bit 4~0 **D4~D0**: NF\_VIL[4:0] data

## Analog to Digital Converter

The need to interface to real world analog signals is a common requirement for many electronic systems. However, to properly process these signals by a microcontroller, they must first be converted into digital signals by A/D converters. By integrating the A/D conversion electronic circuitry into the microcontroller, the need for external components is reduced significantly with the corresponding follow-on benefits of lower costs and reduced component space requirements.


### A/D Converter Overview

This device contains a multi-channel analog to digital converter which can directly interface to external analog signals, such as that from sensors or other control signals and convert these signals directly into a 12-bit digital value. It also can convert the internal signals, such as OPA output of the over current detection, into a 12-bit digital value. An additional channel is connected to the external current sense input pin, AP, which passes through an internal operational amplifier for signal amplification before being transferred to the A/D converter input. The external or internal analog signal to be converted is determined by the SAINS2~SAINS0 bits together with the SACS3~SACS0 bits. More detailed information about the A/D input signal is described in the “A/D Converter Input Signals” section.

Two register pairs which are known as high and low boundary registers, allow the A/D converter digital output value to be compared with upper and lower limit values and a corresponding interrupt to be generated. An additional delay function allows a delay to be inserted into the PWM triggered A/D conversion start process to reduce the possibility of erroneous analog value sampling when the output power transistors are switching large motor currents.

| External Input Channels | Internal Signals       | A/D Input Select Bits        |
|-------------------------|------------------------|------------------------------|
| AN0~AN13                | OPAO, AV <sub>SS</sub> | SAINS2~SAINS0<br>SACS3~SACS0 |

The accompanying block diagram shows the overall internal structure of the A/D converter, together with its associated registers.

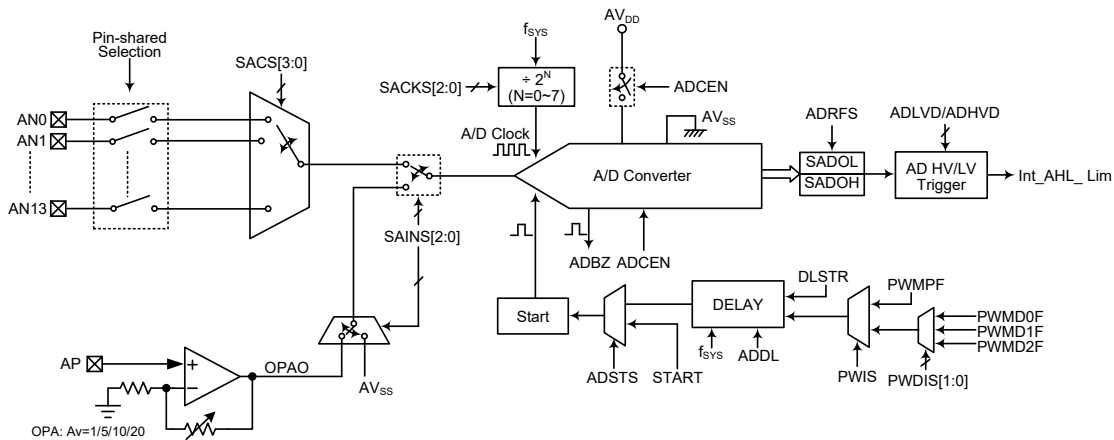

**A/D Converter Structure**

## A/D Converter Register Description

Overall operation of the A/D converter is controlled using a series of registers. A read only register pair, SADOH and SADOL, exists to store the A/D converter data 12-bit value. Two register pairs, ADLVDH/ADLVDL and ADHVDH/ADHVDL, are used to store the boundary limit values of the A/D interrupt trigger. The ADDL register is used to setup the start conversion delay time. The remaining registers are control registers which setup the operating and control function of the A/D converter.

| Register Name   | Bit    |        |        |        |        |        |        |        |
|-----------------|--------|--------|--------|--------|--------|--------|--------|--------|
|                 | 7      | 6      | 5      | 4      | 3      | 2      | 1      | 0      |
| SADOL (ADRF=0)  | D3     | D2     | D1     | D0     | —      | —      | —      | —      |
| SADOL (ADRF=1)  | D7     | D6     | D5     | D4     | D3     | D2     | D1     | D0     |
| SADOH (ADRF=0)  | D11    | D10    | D9     | D8     | D7     | D6     | D5     | D4     |
| SADOH (ADRF=1)  | —      | —      | —      | —      | D11    | D10    | D9     | D8     |
| ADLVDL (ADRF=0) | D3     | D2     | D1     | D0     | —      | —      | —      | —      |
| ADLVDL (ADRF=1) | D7     | D6     | D5     | D4     | D3     | D2     | D1     | D0     |
| ADLVDH (ADRF=0) | D11    | D10    | D9     | D8     | D7     | D6     | D5     | D4     |
| ADLVDH (ADRF=1) | —      | —      | —      | —      | D11    | D10    | D9     | D8     |
| ADHVDL (ADRF=0) | D3     | D2     | D1     | D0     | —      | —      | —      | —      |
| ADHVDL (ADRF=1) | D7     | D6     | D5     | D4     | D3     | D2     | D1     | D0     |
| ADHVDH (ADRF=0) | D11    | D10    | D9     | D8     | D7     | D6     | D5     | D4     |
| ADHVDH (ADRF=1) | —      | —      | —      | —      | D11    | D10    | D9     | D8     |
| SADC0           | START  | ADBZ   | ADCEN  | ADRF   | SACS3  | SACS2  | SACS1  | SACS0  |
| SADC1           | SAINS2 | SAINS1 | SAINS0 | —      | —      | SACKS2 | SACKS1 | SACKS0 |
| ADCR2           | ADSTS  | DLSTR  | PWIS   | ADCHVE | ADCLVE | —      | PWDIS1 | PWDIS0 |
| ADDL            | D7     | D6     | D5     | D4     | D3     | D2     | D1     | D0     |

**A/D Converter Register List**

## A/D Converter Data Registers

As this device contains an internal 12-bit A/D converter, it requires two data registers to store the converted value. These are a high byte register, known as SADOH, and a low byte register, known as SADOL. After the conversion process takes place, these registers can be directly read by the microcontroller to obtain the digitised conversion value. As only 12 bits of the 16-bit register space is utilised, the format in which the data is stored is controlled by the ADRF bit in the SADC0 register as shown in the accompanying table. D0~D11 are the A/D conversion result data bits. Any unused bits will be read as zero. The A/D data register contents will be unchanged if the A/D converter is disabled.

| ADRF | SADOH |     |    |    |     |     |    |    | SADOL |    |    |    |    |    |    |    |
|------|-------|-----|----|----|-----|-----|----|----|-------|----|----|----|----|----|----|----|
|      | 7     | 6   | 5  | 4  | 3   | 2   | 1  | 0  | 7     | 6  | 5  | 4  | 3  | 2  | 1  | 0  |
| 0    | D11   | D10 | D9 | D8 | D7  | D6  | D5 | D4 | D3    | D2 | D1 | D0 | 0  | 0  | 0  | 0  |
| 1    | 0     | 0   | 0  | 0  | D11 | D10 | D9 | D8 | D7    | D6 | D5 | D4 | D3 | D2 | D1 | D0 |

**A/D Converter Data Registers**

## A/D Converter Control Registers – SADC0, SADC1, ADCR2, ADDL

To control the function and operation of the A/D converter, several control registers known as SADC0, SADC1 and ADCR2 are provided. These 8-bit registers define functions such as the selection of which analog channel is connected to the internal A/D converter, the digitised data format, the A/D clock source as well as controlling the start function and monitoring the A/D converter end of conversion status. As the device contains only one actual analog to digital converter hardware circuit, each of the external and internal analog signals must be routed to the converter. The SAINS field in the SADC1 register and SACS field in the SADC0 register are used to determine which analog signal derived from the external or internal signals will be connected to the A/D converter. The ADDL register is used to store the A/D conversion start delay time if the Delay trigger circuit is selected.

The relevant pin-shared function selection bits determine which pins on I/O Ports are used as analog inputs for the A/D converter input and which pins are not to be used as the A/D converter input. When the pin is selected to be an A/D input, its original function whether it is an I/O or other pin-shared function will be removed. In addition, any internal pull-high resistor connected to the pin will be automatically removed if the pin is selected to be an A/D converter input.

### • SADC0 Register

| Bit  | 7     | 6    | 5     | 4     | 3     | 2     | 1     | 0     |
|------|-------|------|-------|-------|-------|-------|-------|-------|
| Name | START | ADBZ | ADCEN | ADRF5 | SACS3 | SACS2 | SACS1 | SACS0 |
| R/W  | R/W   | R    | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   |
| POR  | 0     | 0    | 0     | 0     | 0     | 0     | 0     | 0     |

- Bit 7**      **START:** Start the A/D Conversion  
0→1→0: Start  
This bit is used to initiate an A/D conversion process. The bit is normally low but if set high and then cleared to zero again, the A/D converter will initiate a conversion process.
- Bit 6**      **ADBZ:** A/D Converter busy flag  
0: No A/D conversion is in progress  
1: A/D conversion is in progress  
This read only flag is used to indicate whether the A/D conversion is in progress or not. When the START bit is set from low to high and then to low again, the ADBZ flag will be set to 1 to indicate that the A/D conversion is initiated. The ADBZ flag will be cleared to 0 after the A/D conversion is complete.
- Bit 5**      **ADCEN:** A/D Converter function enable control  
0: Disable  
1: Enable  
This bit controls the A/D internal function. This bit should be set to one to enable the A/D converter. If the bit is cleared to zero, then the A/D converter will be switched off reducing the device power consumption. When the A/D converter function is disabled, the contents of the A/D data register pair known as SADOH and SADOL as well as A/D boundary register pairs known as ADLVDH/ADLVDL and ADHVDH/ADHVLD will be unchanged.
- Bit 4**      **ADRF5:** A/D conversion data format selection  
0: A/D converter data format → SADOH=D[11:4]; SADOL=D[3:0]  
1: A/D converter data format → SADOH=D[11:8]; SADOL=D[7:0]  
This bit controls the format of the 12-bit converted A/D value in the two A/D data registers. Details are provided in the A/D converter data register section.
- Bit 3~0**    **SACS3~SACS0:** A/D converter external analog input channel selection  
0000: External AN0 input  
0001: External AN1 input  
0010: External AN2 input  
0011: External AN3 input

0100: External AN4 input  
 0101: External AN5 input  
 0110: External AN6 input  
 0111: External AN7 input  
 1000: External AN8 input  
 1001: External AN9 input  
 1010: External AN10 input  
 1011: External AN11 input  
 1100: External AN12 input  
 1101: External AN13 input  
 1110~1111: Undefined, input floating

#### • SADC1 Register

| Bit  | 7      | 6      | 5      | 4 | 3 | 2      | 1      | 0      |
|------|--------|--------|--------|---|---|--------|--------|--------|
| Name | SAINS2 | SAINS1 | SAINS0 | — | — | SACKS2 | SACKS1 | SACKS0 |
| R/W  | R/W    | R/W    | R/W    | — | — | R/W    | R/W    | R/W    |
| POR  | 0      | 0      | 0      | — | — | 0      | 0      | 0      |

Bit 7~5 **SAINS2~SAINS0**: A/D converter input signal selection  
 000: External source – External analog channel input, ANn  
 001: Internal source – Internal OPA output, OPAO  
 010: Internal source – Ground  
 011: Internal source – Ground  
 100~111: External source – External analog channel input, ANn  
 When the internal analog signal is selected to be converted, the external channel signal input will automatically be switched off regardless of the SACKS field value. It will prevent the external channel input from being connected together with the internal analog signal.

Bit 4~3 Unimplemented, read as “00”

Bit 2~0 **SACKS2~SACKS0**: A/D conversion clock source selection  
 000:  $f_{SYS}$   
 001:  $f_{SYS}/2$   
 010:  $f_{SYS}/4$   
 011:  $f_{SYS}/8$   
 100:  $f_{SYS}/16$   
 101:  $f_{SYS}/32$   
 110:  $f_{SYS}/64$   
 111:  $f_{SYS}/128$

#### • ADCR2 Register

| Bit  | 7     | 6     | 5    | 4      | 3      | 2 | 1      | 0      |
|------|-------|-------|------|--------|--------|---|--------|--------|
| Name | ADSTS | DLSTR | PWIS | ADCHVE | ADCLVE | — | PWDIS1 | PWDIS0 |
| R/W  | R/W   | R/W   | R/W  | R/W    | R/W    | — | R/W    | R/W    |
| POR  | 0     | 0     | 0    | 0      | 0      | — | 0      | 0      |

Bit 7 **ADSTS**: A/D conversion start trigger circuit selection  
 0: Select START bit trigger circuit  
 1: Select DELAY start

Bit 6 **DLSTR**: DELAY start function control  
 0: Disable  
 1: Enable

When this bit is cleared to zero, the ADDL register value must be cleared to zero. The ADDL register value must be set to a value except 00H if this bit is set high.

Bit 5 **PWIS**: PWM module interrupt source selection  
 0: Select PWM period match interrupt (PWMP\_Int)  
 1: Select PWM duty match interrupt (PWMD0~2\_Int)

- Bit 4~3     **ADCHVE~ADCLVE**: A/D conversion compare result interrupt trigger condition configuration (for SAIN[2:0]=001 only)  
               00: ADLVD[11:0] < SADO[11:0] < ADHVD[11:0]  
               01: SADO[11:0] ≤ ADLVD[11:0]  
               10: SADO[11:0] ≥ ADHVD[11:0]  
               11: SADO[11:0] ≤ ADLVD[11:0] or SADO[11:0] ≥ ADHVD[11:0]
- Bit 2        Unimplemented, read as “0”
- Bit 1~0     **PWDIS1~PWDIS0**: PWMn duty match interrupt source selection when PWIS=1  
               00: PWM0 duty match interrupt to trigger PWM interrupt  
               01: PWM1 duty match interrupt to trigger PWM interrupt  
               10: PWM2 duty match interrupt to trigger PWM interrupt  
               11: PWM2 duty match interrupt to trigger PWM interrupt

• **ADDL Register**

| Bit  | 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
|------|-----|-----|-----|-----|-----|-----|-----|-----|
| Name | D7  | D6  | D5  | D4  | D3  | D2  | D1  | D0  |
| R/W  | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| POR  | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   |

- Bit 7~0     **D7~D0**: Control code for A/D converter DELAY circuit delay time (counts based on system clock)  
               Delay time = (1/f<sub>sys</sub>)×D[7:0]  
               Note that when PWMPF or PWMDnF changes from 0 to 1, the Delay circuit starts counting.

**A/D Converter Boundary Registers**

The device contains two register pairs what are known as boundary registers to store fixed values for comparison with the A/D converted data value stored in SADOH and SADOL to trigger an A/D converter compare result interrupt. These two register pairs are a high boundary register pair, known as ADHVDL and ADHVDH, and a low boundary register pair known as ADLVDL and ADLVDH. Note that the A/D converter boundary register contents will be unchanged if the A/D converter is disabled.

| ADRFS | ADLVDH |     |    |    |     |     |    |    | ADLVDL |    |    |    |    |    |    |    |
|-------|--------|-----|----|----|-----|-----|----|----|--------|----|----|----|----|----|----|----|
|       | 7      | 6   | 5  | 4  | 3   | 2   | 1  | 0  | 7      | 6  | 5  | 4  | 3  | 2  | 1  | 0  |
| 0     | D11    | D10 | D9 | D8 | D7  | D6  | D5 | D4 | D3     | D2 | D1 | D0 | 0  | 0  | 0  | 0  |
| 1     | 0      | 0   | 0  | 0  | D11 | D10 | D9 | D8 | D7     | D6 | D5 | D4 | D3 | D2 | D1 | D0 |

**A/D Low Boundary Data Registers**

| ADRFS | ADHVDH |     |    |    |     |     |    |    | ADHVDL |    |    |    |    |    |    |    |
|-------|--------|-----|----|----|-----|-----|----|----|--------|----|----|----|----|----|----|----|
|       | 7      | 6   | 5  | 4  | 3   | 2   | 1  | 0  | 7      | 6  | 5  | 4  | 3  | 2  | 1  | 0  |
| 0     | D11    | D10 | D9 | D8 | D7  | D6  | D5 | D4 | D3     | D2 | D1 | D0 | 0  | 0  | 0  | 0  |
| 1     | 0      | 0   | 0  | 0  | D11 | D10 | D9 | D8 | D7     | D6 | D5 | D4 | D3 | D2 | D1 | D0 |

**A/D High Boundary Data Registers**

**A/D Converter Operation**

There are two ways to initiate an A/D converter conversion cycle, selected using the ADSTS bit. The first of these is to use the START bit in the SADC0 register to start the A/D conversion. When the microcontroller sets this bit from low to high and then low again, an analog to digital conversion cycle will be initiated. The second method of initiating a conversion is to use the PWM interrupt signal. This can be sourced from either the PWM period or the PWM duty interrupt signal, selected using the PWIS bit. If the PWM duty interrupt signal is selected, the actual PWM duty interrupt trigger source can be determined by the PWDIS1 and PWDIS0 bits in the ADCR2 register. The

DLSTR bit can activate a delay function which inserts a delay time between the incoming PWM interrupt signal and the actual start of the A/D conversion process, with the actual delay time being setup using the ADDL register. The actual delay time is calculated by the ADDL register content multiplied by the system clock period. The delay time between the PWM interrupt and the start of the A/D conversion is to reduce the possibility of erroneous analog samples being taken during the time of large transient current swithing by the motor drive tansistors. Note that if the DLSTR bit selects no delay the ADDL register must be cleared to zero and vice-versa if the delay is selected, then a non-zero value must be programmed into the ADDL register.

The ADBZ bit in the SADC0 register is used to indicate whether the analog to digital conversion process is in progress or not. This bit will be automatically cleared to zero by the microcontroller after an A/D conversion cycle has ended. This bit will be automatically set to 1 by the microcontroller after an A/D conversion is successfully initiated. When the A/D conversion is complete, the ADBZ will be cleared to 0. In addition, the corresponding A/D interrupt request flag will be set in the interrupt control register, and if the interrupts are enabled, an appropriate internal interrupt signal will be generated. This A/D internal interrupt signal will direct the program flow to the associated A/D internal interrupt address for processing. If the A/D internal interrupt is disabled, the microcontroller can poll the ADBZ bit in the SADC0 register to check whether it has been cleared as an alternative method of detecting the end of an A/D conversion cycle.

The clock source for the A/D converter, which originates from the system clock  $f_{SYS}$ , can be chosen to be either  $f_{SYS}$  or a subdivided version of  $f_{SYS}$ . The division ratio value is determined by the SACKS2~SACKS0 bits in the SADC1 register. Although the A/D clock source is determined by the system clock  $f_{SYS}$  and by bits SACKS2~SACKS0, there are some limitations on the maximum A/D clock source speed that can be selected. As the recommended range of permissible A/D clock period,  $t_{ADCK}$ , is from 0.5 $\mu$ s to 10 $\mu$ s, care must be taken for system clock frequencies. For example, as the system clock operates at a frequency of 8MHz, the SACKS2~SACKS0 bits should not be set to 000, 001 or 111. Doing so will give A/D clock periods that are less or larger than the minimum or maximum A/D clock period which may result in inaccurate A/D conversion values. Refer to the following table for examples, where values marked with an asterisk \* show where special care must be taken, as the values may be less or larger than the specified A/D Clock Period range.

| $f_{SYS}$ | A/D Clock Period ( $t_{ADCK}$ )      |                                        |                                        |                                        |                                         |                                         |                                         |                                          |
|-----------|--------------------------------------|----------------------------------------|----------------------------------------|----------------------------------------|-----------------------------------------|-----------------------------------------|-----------------------------------------|------------------------------------------|
|           | SACKS[2:0]<br>= 000<br>( $f_{SYS}$ ) | SACKS[2:0]<br>= 001<br>( $f_{SYS}/2$ ) | SACKS[2:0]<br>= 010<br>( $f_{SYS}/4$ ) | SACKS[2:0]<br>= 011<br>( $f_{SYS}/8$ ) | SACKS[2:0]<br>= 100<br>( $f_{SYS}/16$ ) | SACKS[2:0]<br>= 101<br>( $f_{SYS}/32$ ) | SACKS[2:0]<br>= 110<br>( $f_{SYS}/64$ ) | SACKS[2:0]<br>= 111<br>( $f_{SYS}/128$ ) |
| 1MHz      | 1 $\mu$ s                            | 2 $\mu$ s                              | 4 $\mu$ s                              | 8 $\mu$ s                              | 16 $\mu$ s*                             | 32 $\mu$ s*                             | 64 $\mu$ s*                             | 128 $\mu$ s*                             |
| 2MHz      | 500ns                                | 1 $\mu$ s                              | 2 $\mu$ s                              | 4 $\mu$ s                              | 8 $\mu$ s                               | 16 $\mu$ s*                             | 32 $\mu$ s*                             | 64 $\mu$ s*                              |
| 4MHz      | 250ns*                               | 500ns                                  | 1 $\mu$ s                              | 2 $\mu$ s                              | 4 $\mu$ s                               | 8 $\mu$ s                               | 16 $\mu$ s*                             | 32 $\mu$ s*                              |
| 8MHz      | 125ns*                               | 250ns*                                 | 500ns                                  | 1 $\mu$ s                              | 2 $\mu$ s                               | 4 $\mu$ s                               | 8 $\mu$ s                               | 16 $\mu$ s*                              |
| 12MHz     | 83ns*                                | 167ns*                                 | 333ns*                                 | 667ns                                  | 1.33 $\mu$ s                            | 2.67 $\mu$ s                            | 5.33 $\mu$ s                            | 10.67 $\mu$ s*                           |
| 16MHz     | 62.5ns*                              | 125ns*                                 | 250ns*                                 | 500ns                                  | 1 $\mu$ s                               | 2 $\mu$ s                               | 4 $\mu$ s                               | 8 $\mu$ s                                |
| 20MHz     | 50ns*                                | 100ns*                                 | 200ns*                                 | 400ns*                                 | 800ns                                   | 1.6 $\mu$ s                             | 3.2 $\mu$ s                             | 6.4 $\mu$ s                              |

**A/D Clock Period Examples**

Controlling the power on/off function of the A/D converter circuitry is implemented using the ADCEN bit in the SADC0 register. This bit must be set high to power on the A/D converter. When the ADCEN bit is set high to power on the A/D converter internal circuitry, a certain delay as indicated in the timing diagram must be allowed before an A/D conversion is initiated. Even if no pins are selected for use as A/D inputs, if the ADCEN bit is high, then some power will still be consumed. In power conscious applications it is therefore recommended that the ADCEN is cleared to zero to reduce power consumption when the A/D converter function is not being used.

The boundary register pairs, ADHVDH/ADHVDL and ADLVDH/ADLVDL contain preset values which can be compared with the converted values in SADOH/SADOL registers. Various types of comparisons can be made as defined by the ADCLVE and ADCHVE bits and an interrupt will be generated to inform the system that either the lower or higher boundary has been exceeded. This function can be used to ensure that the motor current operates within safe working limits.

## A/D Converter Input Signals

All the external A/D analog channel input pins are pin-shared with the I/O pins as well as other functions. The corresponding control bits for each A/D external input pin in the PxS0 and PxS1 registers determine whether the input pins are setup as A/D converter analog input channel or whether they have other functions. If the pin is setup to be as an A/D analog channel input, the original pin functions will be disabled. In this way, pins can be changed under program control to change their function between A/D inputs and other functions. All pull-high resistors, which are setup through register programming, will be automatically disconnected if the pins are setup as A/D inputs. Note that it is not necessary to first setup the A/D pin as an input in the port control register to enable the A/D input as when the pin-shared function control bits enable an A/D input, the status of the port control register will be overridden.

There is an internal analog signals derived from the operational amplifier output signal OPAO which can be connected to the A/D converter as the analog input signal by configuring the SAINS2~SAINS0 bits. If the external channel input is selected to be converted, the SAINS2~SAINS0 bits should be set to “000” or “100~111” and the SACS3~SACS0 bits can determine which external channel is selected. If the internal analog signal is selected to be converted, the external channel signal input will automatically be switched off regardless of the SACS field value. It will prevent the external channel input from being connected together with the internal analog signal.

| SAINS[2:0]   | SACS[3:0] | Input Signals    | Description                            |
|--------------|-----------|------------------|----------------------------------------|
| 000, 100~111 | 0000~1101 | AN0~AN13         | External channel analog input ANn      |
|              | 1110~1111 | —                | Non-existed channel, input is floating |
| 001          | xxxx      | OPAO             | Internal OPA output signal             |
| 010~011      | xxxx      | AV <sub>SS</sub> | Connected to the ground                |

“x”: Don't care


**A/D Converter Input Signal Selection**

## Conversion Rate and Timing Diagram

A complete A/D conversion contains two parts, data sampling and data conversion. The data sampling which is defined as  $t_{ADS}$  takes 4 A/D clock periods and the data conversion takes 12 A/D clock periods. Therefore a total of 16 A/D clock periods for an analog signal A/D conversion which is defined as  $t_{ADC}$  are necessary.

$$\text{Maximum single A/D conversion rate} = 1/(\text{A/D clock period} \times 16)$$

The accompanying diagram shows graphically the various stages involved in an external channel input signal analog to digital conversion process and its associated timing. After an A/D conversion process has been initiated by the application program, the microcontroller internal hardware will begin to carry out the conversion, during which time the program can continue with other functions. The time taken for the A/D conversion is  $16 t_{ADCK}$  where  $t_{ADCK}$  is equal to the A/D clock period.

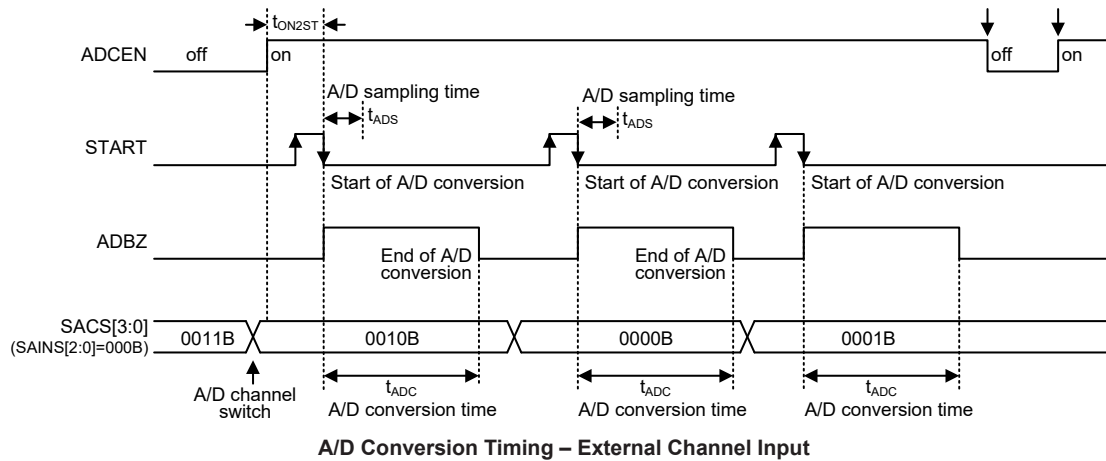

### Summary of A/D Conversion Steps

The following summarises the individual steps that should be executed in order to implement an A/D conversion process.

- Step 1  
Select the required A/D conversion clock by properly programming the SACKS2~SACKS0 bits in the SADC1 register.
- Step 2  
Enable the A/D converter by setting the ADCEN bit in the SADC0 register to one.
- Step 3  
Select which signal is to be connected to the internal A/D converter by correctly configuring the SACS and SAINS bit fields.  
Selecting the external channel input to be converted, go to Step 4.  
Selecting the internal analog signal to be converted, go to Step 5.
- Step 4  
If the SAINS field is 000, 100~111, the external channel input can be selected. The desired external channel input is selected by configuring the SACS field. When the A/D input signal comes from the external channel input, the corresponding pin should be configured as an A/D input function by selecting the relevant pin-shared function control bits. After this step, go to Step 6.
- Step 5  
If the SAINS field is set to 001, the internal OPA output signal will be selected. When the internal analog signal is selected to be converted, the external channel analog input will automatically be disconnected. Then select the A/D conversion comparison result interrupt trigger condition by configuring the ADCHVE~ADCLVE bits in the ADCR1 register. After this step, go to Step 6.
- Step 6  
Select which trigger circuit is to be used to start an A/D conversion by correctly programming the ADSTS bit in the ADCR2 register.
- Step 7  
Select the A/D converter output data format by configuring the ADRFS bit.
- Step 8  
If A/D conversion interrupt is used, the interrupt control registers must be correctly configured to ensure the A/D interrupt function is active. The master interrupt control bit, EMI, and the A/D conversion interrupt control bit, ADE, must both be set high in advance.

- Step 9

If the Step 5 selects START trigger circuit, the analog to digital conversion process can be initiated by setting the START bit from low to high and then low again. Note that this bit should have been originally cleared to zero. If the Step 5 selects PWM interrupt trigger circuit, the DELAY start function should be enabled by setting the DLSTR bit in the ADCR2 register and setup the ADDL register to achieve a delay time.

- Step 10

If A/D conversion is in progress, the ADBZ flag will be set high. After the A/D conversion process is complete, the ADBZ flag will go low and then the output data can be read from SADOH and SADOL registers.

Note: When checking for the end of the conversion process, if the method of polling the ADBZ bit in the SADC0 register is used, the interrupt enable step above can be omitted.

## Programming Considerations

During microcontroller operations where the A/D converter is not being used, the A/D internal circuitry can be switched off to reduce power consumption, by setting bit ADCEN low in the SADC0 register. When this happens, the internal A/D converter circuits will not consume power irrespective of what analog voltage is applied to their input lines. If the A/D converter input lines are used as normal I/Os, then care must be taken as if the input voltage is not at a valid logic level, then this may lead to some increase in power consumption.

## A/D Conversion Function


As the device contains a 12-bit A/D converter, its full-scale converted digitised value is equal to FFFH. Since the full-scale analog input value is equal to the actual A/D converter reference voltage,  $V_{REF}$ , this gives a single bit analog input value of  $V_{REF}$  divided by 4096.

$$1 \text{ LSB} = V_{REF} \div 4096$$

The A/D converter input voltage value can be calculated using the following equation:

$$\text{A/D input voltage} = \text{A/D output digital value} \times (V_{REF} \div 4096)$$

The diagram shows the ideal transfer function between the analog input value and the digitised output value for the A/D converter. Except for the digitised zero value, the subsequent digitised values will change at a point 0.5 LSB below where they would change without the offset, and the last full scale digitised value will change at a point 1.5 LSB below the  $V_{REF}$  level. Note that here the  $V_{REF}$  is actually supplied by the A/D converter power supply.

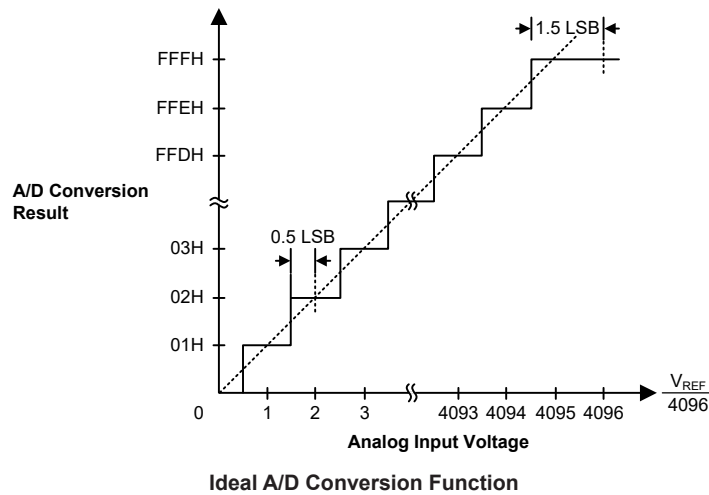

## A/D Conversion Programming Examples

The following two programming examples illustrate how to setup and implement an A/D conversion. In the first example, the method of polling the ADBZ bit in the SADC0 register is used to detect when the conversion cycle is complete, whereas in the second example, the A/D interrupt is used to determine when the conversion is complete.

### Example: using an ADBZ polling method to detect the end of conversion

```

clr ADE                ; disable ADC interrupt
mov a,03H              ; select fsys/8 as A/D clock and A/D input
mov SADC1,a            ; signal comes from external channel
mov a,03H              ; setup PAS0 to configure pin AN0
mov PAS0,a
mov a,20H              ; enable A/D converter and select AN0 as the A/D external channel input
mov SADC0,a
:
start_conversion:
clr START              ; high pulse on start bit to initiate conversion
set START              ; reset A/D
clr START              ; start A/D
:
polling_EOC:
sz ADBZ                ; poll the SADC0 register ADBZ bit to detect end of A/D conversion
jmp polling_EOC        ; continue polling
:
mov a,SADOL             ; read low byte conversion result value
mov SADOL_buffer,a     ; save result to user defined register
mov a,SAD0H            ; read high byte conversion result value
mov SAD0H_buffer,a     ; save result to user defined register
:
jmp start_conversion   ; start next A/D conversion

```

### Example: using the interrupt method to detect the end of conversion

```

clr ADE                ; disable ADC interrupt
mov a,03H              ; select fsys/8 as A/D clock and A/D input
mov SADC1,a            ; signal comes from external channel
mov a,03H              ; setup PAS0 to configure pin AN0
mov PAS0,a
mov a,20h              ; enable A/D converter and select AN0 as the A/D external channel input
mov SADC0,a
:
Start_conversion:
clr START              ; high pulse on START bit to initiate conversion
set START              ; reset A/D
clr START              ; start A/D
clr ADF                ; clear ADC interrupt request flag
set ADE                ; enable ADC interrupt
set EMI                ; enable global interrupt
:
:
ADC_ISR:               ; ADC interrupt service routine
mov acc_stack,a        ; save ACC to user defined memory
mov a,STATUS
mov status_stack,a     ; save STATUS to user defined memory
:
mov a,SADOL             ; read low byte conversion result value
mov SADOL_buffer,a     ; save result to user defined register

```

```


mov a,SADOH          ; read high byte conversion result value
mov SADOH_buffer,a   ; save result to user defined register
:
EXIT_INT_ISR:
mov a,status_stack
mov STATUS,a         ; restore STATUS from user defined memory
mov a,acc_stack      ; restore ACC from user defined memory
reti

```

## Comparators

Four independent analog comparators are contained within the device. These functions offer flexibility via their register controlled features such as power-down, hysteresis etc. In sharing their pins with normal I/O pins the comparators do not waste precious I/O pins if there functions are otherwise unused.

As the comparator pins are pin-shared with other functions, the comparator functional pins must first be setup using relevant pin-shared function selection register described in the Pin-shared Function section.

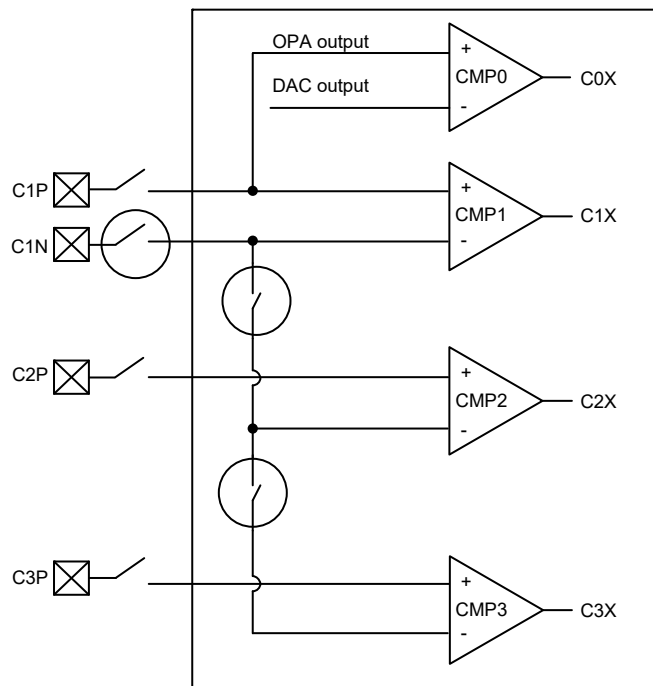

Note: When the PBS0[3:2] bits in the PBS0 register are configured to 10B to select the CPN pin function, the switches circled in the block diagram will be turned on, in which case C1N, C2N and C3N are shorted internally and connected to the CPN pin.

**Comparator Block Diagram**

## Comparator Operation

The device contains four comparator functions which are used to compare two analog voltages and provide an output based on their difference. Any pull-high resistors connected to the shared comparator input pins will be automatically disconnected when the comparator pin-share is enabled. As the comparator inputs approach their switching level, some spurious output signals may be generated on the comparator output due to the slow rising or falling nature of the input signals. This

can be minimised by selecting the hysteresis function, which will apply a small amount of positive feedback to the comparator. Ideally the comparator should switch at the point where the positive and negative inputs signals are at the same voltage level, however, unavoidable input offsets introduce some uncertainties here. The hysteresis function, if enabled, also increases the switching offset value.

### Comparator Register

The CMPC control register controls the hysteresis functions and on/off control of the four comparators. The CnHYEN bit is the comparator n hysteresis control bit and if set high will apply a limited amount of hysteresis to the comparator, as specified in the Comparator Electrical Characteristics table. The positive feedback induced by hysteresis reduces the effect of spurious switching near the comparator threshold. The CnEN bit is the comparator n on/off control bit. If the bit is zero the comparator will be switched off and no power consumed even if analog voltages are applied to its inputs. For power sensitive applications this bit should be cleared to zero if the comparator is not used or before the device enters the IDLE/SLEEP mode. The CPNSW bit controls the negative inputs of comparators 1~3.

As the comparator 0 is used in the over current detector, there will be more description about it in the associated chapter.

#### • CMPC Register

| Bit  | 7      | 6      | 5      | 4      | 3    | 2    | 1    | 0    |
|------|--------|--------|--------|--------|------|------|------|------|
| Name | C3HYEN | C2HYEN | C1HYEN | C0HYEN | C3EN | C2EN | C1EN | C0EN |
| R/W  | R/W    | R/W    | R/W    | R/W    | R/W  | R/W  | R/W  | R/W  |
| POR  | 1      | 1      | 1      | 1      | 0    | 0    | 0    | 0    |

Bit 7      **C3HYEN**: Comparator 3 hysteresis control  
0: Off  
1: On

Bit 6      **C2HYEN**: Comparator 2 hysteresis control  
0: Off  
1: On

Bit 5      **C1HYEN**: Comparator 1 hysteresis control  
0: Off  
1: On

Bit 4      **C0HYEN**: Comparator 0 hysteresis control  
0: Off  
1: On

Bit 3      **C3EN**: Comparator 3 On/Off control  
0: Off  
1: On

Bit 2      **C2EN**: Comparator 2 On/Off control  
0: Off  
1: On

Bit 1      **C1EN**: Comparator 1 On/Off control  
0: Off  
1: On

Bit 0      **C0EN**: Comparator 0 On/Off control  
0: Off  
1: On

### • CMPSEL Register


When the CnSEL[1:0] bit field (n=1~3) is set to “00”, the latch function is not executed. If the bit field is set to “01”, “10” and “11”, the latch function is switched according to the clk input signal source. If the clk signal is “0”, latch the previous data input signal (Q=D (n-1)), otherwise release it (Q=D).

| Bit  | 7      | 6      | 5      | 4      | 3      | 2      | 1     | 0 |
|------|--------|--------|--------|--------|--------|--------|-------|---|
| Name | C3SEL1 | C3SEL0 | C2SEL1 | C2SEL0 | C1SEL1 | C1SEL0 | CPNSW | — |
| R/W  | R/W    | R/W    | R/W    | R/W    | R/W    | R/W    | R/W   | — |
| POR  | 0      | 0      | 0      | 0      | 0      | 0      | 0     | — |

- Bit7~6 **C3SEL1~C3SEL0**: Comparator 3 output latch control  
 00: Always enable  
 01: PWM2O signal  
 10: The logic “OR” operation result which is performed by the AT2, BT2 or CT2 signals  
 11: The logic “OR” operation result which is performed by the AB2, BB2 or CB2 signals
- Bit5~4 **C2SEL1~C2SEL0**: Comparator 2 output latch control  
 00: Always enable  
 01: PWM1O signal  
 10: The logic “OR” operation result which is performed by the AT2, BT2 or CT2 signals  
 11: The logic “OR” operation result which is performed by the AB2, BB2 or CB2 signals
- Bit3~2 **C1SEL1~C1SEL0**: Comparator 1 output latch control  
 00: Always enable  
 01: PWM0O signal  
 10: The logic “OR” operation result which is performed by the AT2, BT2 or CT2 signals  
 11: The logic “OR” operation result which is performed by the AB2, BB2 or CB2 signals
- Bit1 **CPNSW**: CPN switch control  
 0: C1N, C2N and C3N enable/CPN disable  
 1: C1N, C2N and C3N disable/CPN enable
- Bit0 Unimplemented, read as “0”

## Over Current Detection

The device includes a fully integrated over current detection circuit which is used for motor protection.

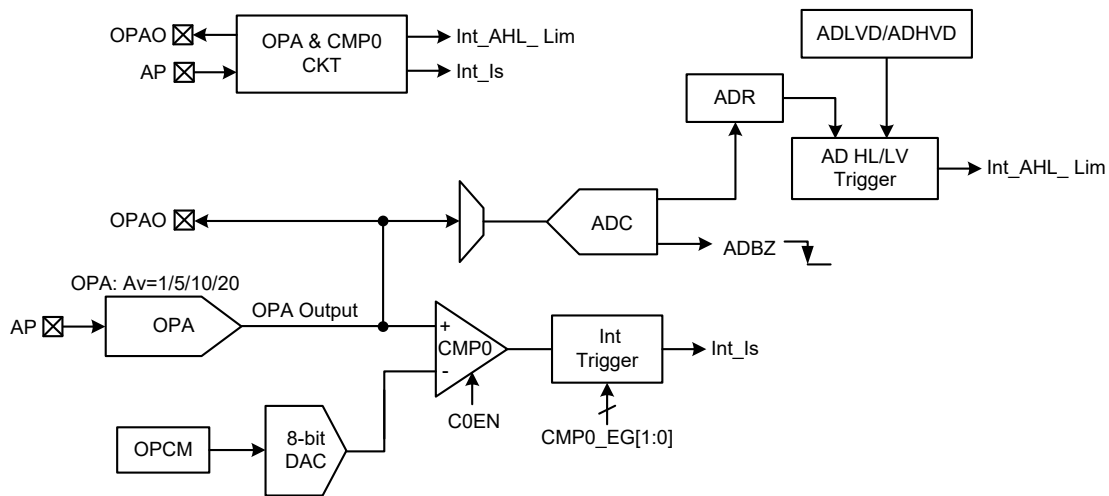

Over Current Detector Block Diagram

## Over Current Detection Functional Description

The over current detection function for motor protection can be achieved through a set of circuits which include an operational amplifier OPA, an A/D converter, an 8-bit D/A converter and the comparator 0. If an over current situation is detected then the motor external drive circuit can be switched off immediately to prevent damage to the motor.

Two kinds of interrupts can be generated for current detection.

1. A/D converter compare result interrupt – Int\_AHL\_Lim
2. Comparator 0 interrupt – Int\_Is

## Over Current Detection Registers

There are four registers to control the function and operation of the over current detection circuits, known as OPOMS, OPCM, OPACAL and CMPC. These 8-bit registers define functions such as comparator interrupt edge control, OPA operation mode selection and OPA calibration. The OPCM register is the 8-bit D/A converter output control register used for OPAO comparison. The details of the CMPC register can be referred to the “Comparator Register” chapter.

| Register Name | Bit      |          |           |        |      |        |        |        |
|---------------|----------|----------|-----------|--------|------|--------|--------|--------|
|               | 7        | 6        | 5         | 4      | 3    | 2      | 1      | 0      |
| OPOMS         | CMP0_EG1 | CMP0_EG0 | CMP1P_SEL | —      | —    | OPAVS2 | OPAVS1 | OPAVS0 |
| OPCM          | D7       | D6       | D5        | D4     | D3   | D2     | D1     | D0     |
| OPACAL        | ARS      | AOFM     | —         | AOF4   | AOF3 | AOF2   | AOF1   | AOF0   |
| CMPC          | C3HYEN   | C2HYEN   | C1HYEN    | C0HYEN | C3EN | C2EN   | C1EN   | C0EN   |

Over Current Detection Register List

### • OPOMS Register

| Bit  | 7        | 6        | 5         | 4 | 3 | 2      | 1      | 0      |
|------|----------|----------|-----------|---|---|--------|--------|--------|
| Name | CMP0_EG1 | CMP0_EG0 | CMP1P_SEL | — | — | OPAVS2 | OPAVS1 | OPAVS0 |
| R/W  | R/W      | R/W      | R/W       | — | — | R/W    | R/W    | R/W    |
| POR  | 1        | 1        | 0         | — | — | 0      | 1      | 0      |

Bit 7~6 **CMP0\_EG1~CMP0\_EG0**: Interrupt edge control for Comparator 0

00: Comparator 0 and D/A converter both disabled

01: Rising edge trigger

10: Falling edge trigger

11: Dual edge trigger

If these bits are set to “11”, a comparator 0 interrupt can be normally generated when edges appear, but it cannot be used as the protection trigger signal.

Bit 5 **CMP1P\_SEL**: CMP1 positive input source selection

0: C1P pin

1: OPA output

Bit 4~3 Unimplemented, read as “0”

Bit 2~0 **OPAVS2~OPAVS0**: OPA gain selection

000: OPA disabled

001: Av=5

010: Av=10

011: Av=20

100~110: Undefined

111: Av=1

Note that when the OPA is used, the corresponding pin-shared control bit should be properly configured to enable the AP pin function.

• **OPCM Register**

| Bit  | 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
|------|-----|-----|-----|-----|-----|-----|-----|-----|
| Name | D7  | D6  | D5  | D4  | D3  | D2  | D1  | D0  |
| R/W  | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| POR  | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   |

Bit 7~0 **D7~D0**: 8-bit D/A converter control code bit 7 ~ bit 0

The D/A converter can be enabled by setting the CMP0\_EG[1:0] bits to any value except “00”, so the two bits should be properly set before writing into the OPCM register, to make sure the D/A converter can output successfully.

$$\text{DAC } V_{\text{OUT}} = (\text{AV}_{\text{DD}}/256) \times \text{D}[7:0]$$

• **OPACAL Register**

| Bit  | 7   | 6    | 5 | 4    | 3    | 2    | 1    | 0    |
|------|-----|------|---|------|------|------|------|------|
| Name | ARS | AOFM | — | AOF4 | AOF3 | AOF2 | AOF1 | AOF0 |
| R/W  | R/W | R/W  | — | R/W  | R/W  | R/W  | R/W  | R/W  |
| POR  | 0   | 0    | — | 1    | 0    | 0    | 0    | 0    |

Bit 7 **ARS**: Reference input selection for OPA offset calibration

0: Inverting input of OPA

1: Non-inverting input of OPA

Bit 6 **AOFM**: Normal or calibration mode selection

0: Normal Mode

1: Offset Calibration Mode

Bit 5 Unimplemented, read as “0”

Bit 4~0 **AOF4~AOF0**: OPA input offset voltage calibration control code

00000: Minimum

10000: Center

11111: Maximum

## BLDC Motor Control Circuit

This section describes how the device can be used to control Brushless DC Motors, also known as BLDC Motors. Its high level of functional integration and flexibility offer a full range of driving features for motor driving.

### Functional Description

The PWM counter circuit output PWMO which has an adjustable PWM Duty can be used to control the output motor power, thus controlling the motor speed. Changing the PWM frequency can be used to enhance the motor drive efficiency or to reduce noise and resonance generated during physical motor operation.

The internal Mask circuit is used to determine which PWM modulation signals are enabled or disabled for the motor speed control. The PWM modulation signal can be output using both the high side, GAT/GBT/GCT and the low side, GAB/GBB/GCB, of the external Gate Driver Transistor Pairs under software control.


The Dead-Time Insertion circuit is used to ensure the high and low sides of a Gate Driver Transistor will not be turned on at the same time to prevent a virtual power short circuit. The dead time should be configured in the range of 0.3μs~5μs by related register under software control.

The Staggered circuit can force all the outputs to an off status if the external Gate Driver Transistor high and low sides are on simultaneously which could be due to software error or external factors such as ESD problems.

The Polarity circuit can select the output polarity of the output signals to support several driving signal combinations for different external gate drive circuit.

The Motor Protection circuit includes many detection circuits for a motor stall condition or over current condition. If any of the above described situations is detected then the motor external drive circuit can be switched off immediately to prevent damage to the motor.

The Hall Sensor Decoder circuit is a six-step system which can be used to control the motor direction. Twelve registers, each using 6 bits, are used to control the direction of the motor. The motor forward, backward, brake and free running functions are controlled by the HDCD/HDCR registers. The HA/HB/HC or SHA/S HB/SHC signals can be selected as the Hall Sensor Decoder circuit inputs.

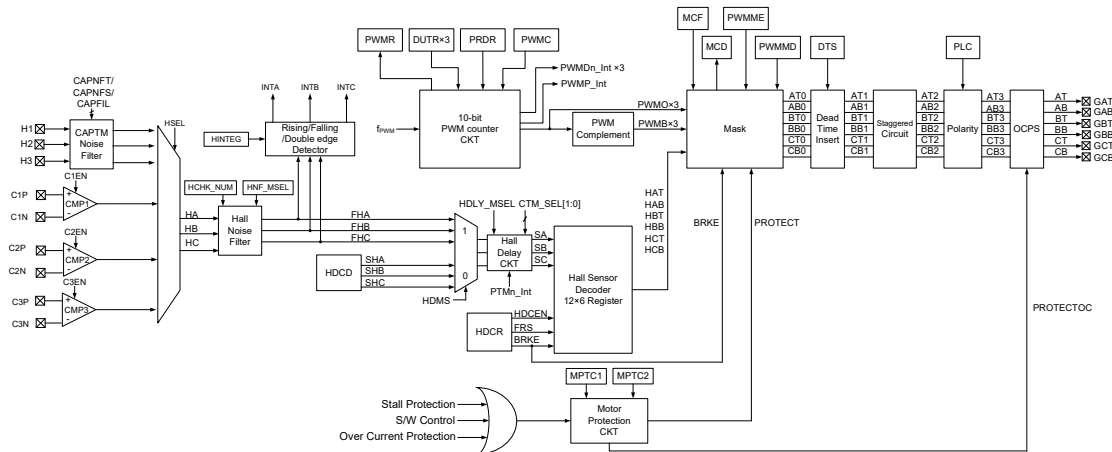


Note: The GAT, GAB, GBT, GBB, GCT, GCB are the PWM outputs of PWM0H, PWM0L, PWM1H, PWM1L, PWM2H, PWM2L respectively.



**BLDC Motor Control Block Diagram**

## PWM Counter Control Circuit

The BLDC Motor control circuit includes a 10-bit PWM generator. The duty cycle and frequency of the PWM signal can be adjusted by programming 10-bit data into the corresponding PWM duty and period control registers.

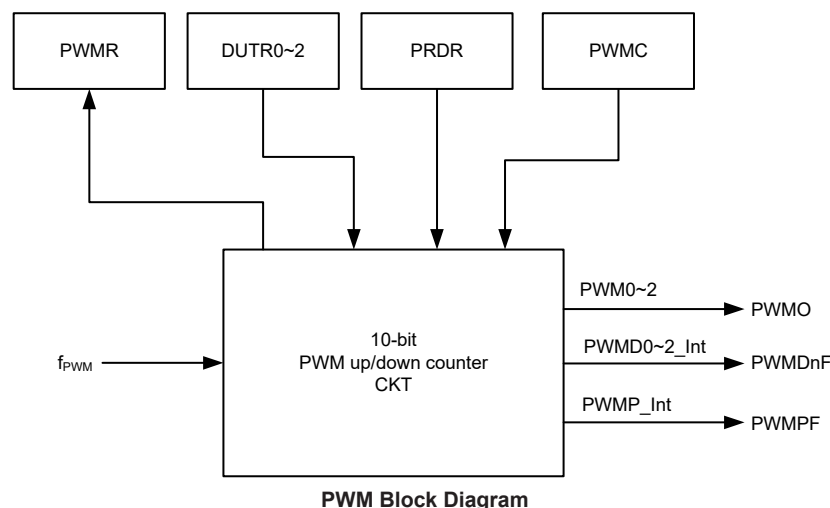

**PWM Block Diagram**

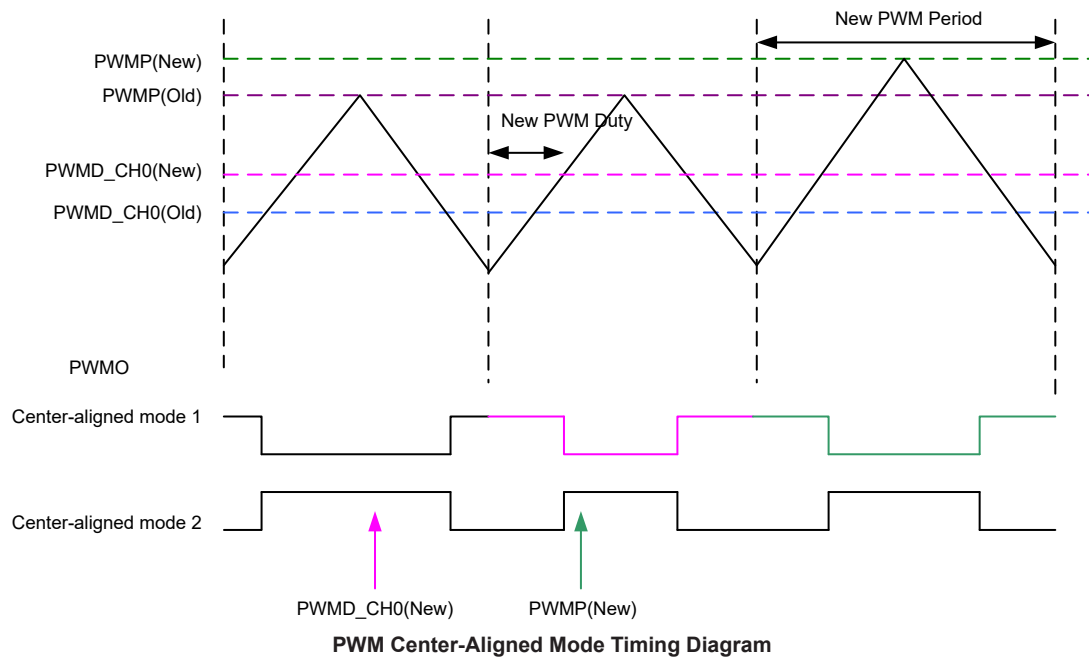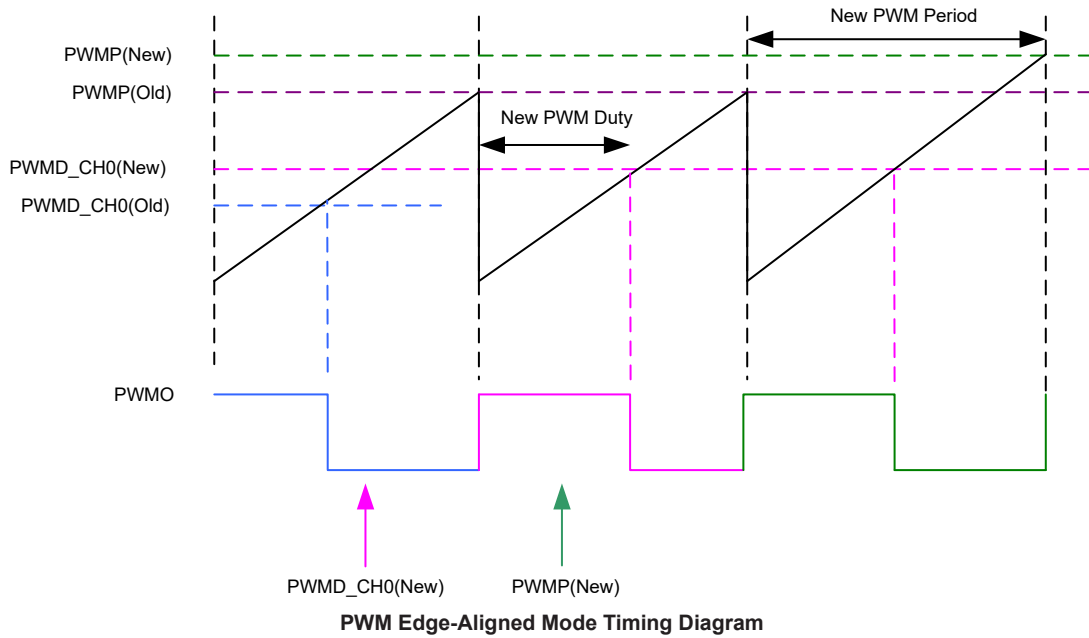

### PWM Duty Synchronous Update Modes

In high speed BLDC applications, using PWM interrupt to update the duty may result in asynchronous update for the three PWM duty values. This will generate undesired PWM duty outputs and lead to control errors. For this problem, two methods are provided for synchronous update of three PWM duty values.

- DUTR0~DUTR2 PWM duty outputs are same

Usually the three PWM duty outputs are same for square wave control. By setting the PWMSV bit high, the data written to the DUTR0H and DUTR0L registers will also be synchronously

loaded to DUTR1H/DUTR1L and DUTR2H/DUTR2L. In this way the PWM duty synchronous update is implemented with reduced instructions.


- DUTR0~DUTR2 PWM duty outputs are not the same


If the three PWM duty outputs which require to be updated synchronously are not the same, set the PWMSU bit high to enable the PWM DUTR0~DUTR2 duty synchronous update function. When the PWM DUTR0~DUTR2 duty synchronous update request flag PWMSUF is set high, the hardware will synchronously update DUTR0, DUTR1 and DUTR2 values, after which the request flag will be automatically cleared to zero.

### PWM Register Description

The overall PWM operation is controlled by a series of registers. The DUTRnL/DUTRnH register pairs are used for PWM duty control for adjustment of the motor output power, while the PRDRL/PRDRH register pair is used together to form a 10-bit value to setup the PWM period for PWM frequency adjustment. Being able to change the PWM frequency is useful for motor characteristic matching to reduce problems such as noise interference and resonance. The PWMRL/PWMRH registers are used to monitor the PWM counter dynamically. The PWMON bit in the PWMC register is on/off control bit for the 10-bit PWM counter. The PWM counter clock source can be selected by PCKS1~PCKS0 bits in the PWMC register. The PWMMS[1:0] bit field in the PWMC register determines the PWM alignment type, which can be either edge or center type.

The PWMCS register is used to control PWM DUTR0~DUTR2 duty value synchronisation update function and determine if the PWM output state can be quickly updated when the PWM phase changes. When the PWMMEDO bit is zero, if the PWM phase change occurs, the timer will continue to count until the PWM period is completed, and then output to the next phase, this circuit behavior is valid only for PMEn=0 (PWMME register) when in the Software Mask Mode, and is valid for HDCTn when in the Hardware Mask Mode. However, when the PWMMEDO bit is high, the PWM will output to the next phase immediately once the phase is changed. The timings are shown as follows.

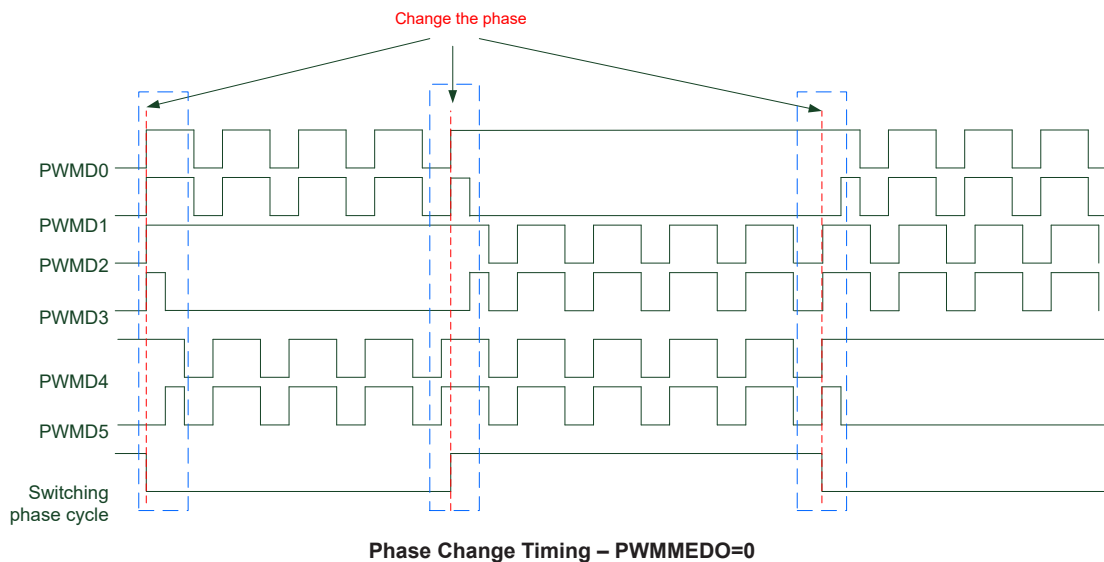

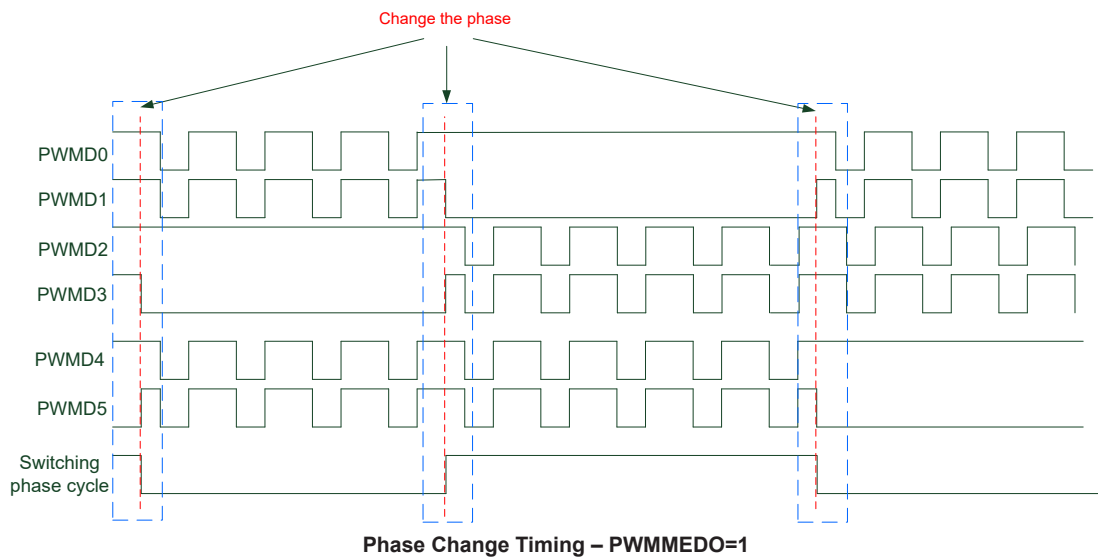

The DUTRn and PRDR registers are write-only registers, the following steps show the write procedures:

- Writing Data to DUTRn or PRDR
  - ♦ Step 1. Write data to High Byte DUTRnH or PRDRH
    - Note that here data is only written to the 2-bit buffer.
  - ♦ Step 2. Write data to Low Byte DUTRnL or PRDRL
    - Here data is written directly to the Low byte registers and simultaneously data is latched from the 2-bit buffer to the High Byte registers.

| Register Name | Bit    |        |       |       |        |        |        |       |
|---------------|--------|--------|-------|-------|--------|--------|--------|-------|
|               | 7      | 6      | 5     | 4     | 3      | 2      | 1      | 0     |
| PWMC          | PWMMS1 | PWMMS0 | PCKS1 | PCKS0 | PWMON  | ITCMS1 | ITCMS0 | PWMLD |
| PWMCs         | —      | —      | —     | —     | PWMEDO | PWMSUF | PWMSU  | PWMSV |
| DUTR0L        | D7     | D6     | D5    | D4    | D3     | D2     | D1     | D0    |
| DUTR0H        | —      | —      | —     | —     | —      | —      | D9     | D8    |
| DUTR1L        | D7     | D6     | D5    | D4    | D3     | D2     | D1     | D0    |
| DUTR1H        | —      | —      | —     | —     | —      | —      | D9     | D8    |
| DUTR2L        | D7     | D6     | D5    | D4    | D3     | D2     | D1     | D0    |
| DUTR2H        | —      | —      | —     | —     | —      | —      | D9     | D8    |
| PRDRL         | D7     | D6     | D5    | D4    | D3     | D2     | D1     | D0    |
| PRDRH         | —      | —      | —     | —     | —      | —      | D9     | D8    |
| PWMRL         | D7     | D6     | D5    | D4    | D3     | D2     | D1     | D0    |
| PWMRH         | —      | —      | —     | —     | —      | —      | D9     | D8    |

**PWM Register List**

**• PWM Register**

| Bit  | 7      | 6      | 5     | 4     | 3     | 2      | 1      | 0     |
|------|--------|--------|-------|-------|-------|--------|--------|-------|
| Name | PWMMS1 | PWMMS0 | PCKS1 | PCKS0 | PWMON | ITCMS1 | ITCMS0 | PWMLD |
| R/W  | R/W    | R/W    | R/W   | R/W   | R/W   | R/W    | R/W    | R/W   |
| POR  | 0      | 0      | 0     | 0     | 0     | 0      | 0      | 0     |

- Bit 7~6 **PWMMS1~PWMMS0**: PWM alignment mode selection  
 00: Edge-aligned mode  
 01: Edge-aligned mode  
 10: Center-aligned mode 1  
 11: Center-aligned mode 2
- Bit 5~4 **PCKS1~PCKS0**: PWM counter clock ( $f_{PWM}$ ) source selection  
 00:  $f_{SYS}$   
 01:  $f_{SYS}/2$   
 10:  $f_{SYS}/4$   
 11:  $f_{SYS}/8$
- Bit 3 **PWMON**: PWM circuit on/off control  
 0: Off  
 1: On  
 This bit controls the on/off of the overall PWM circuit. Setting the bit high enables the counter to run, clearing the bit disables the PWM. Clearing this bit to zero will stop the counter from counting and turn off the PWM which will reduce its power consumption.
- Bit 2~1 **ITCMS1~ITCMS0**: PWM center-aligned mode duty interrupt control  
 00: Disable center-aligned mode duty interrupt  
 01: Center-aligned mode duty interrupt only in counting up condition  
 10: Center-aligned mode duty interrupt only in counting down condition  
 11: Center-aligned mode duty interrupt both in counting up and down conditions
- Bit 0 **PWMLD**: PWM PRDR and DUTRn ( $n=0\sim2$ ) register data update control  
 0: Do not reload the period value and duty 0~2 values in the PRDR and DUTRn ( $n=0\sim2$ ) registers  
 1: Reload the period value and duty 0~2 values in the PRDR and DUTRn ( $n=0\sim2$ ) registers after counter overflow/underflow

**• PWMCS Register**

| Bit  | 7 | 6 | 5 | 4 | 3       | 2      | 1     | 0     |
|------|---|---|---|---|---------|--------|-------|-------|
| Name | — | — | — | — | PWMMEDO | PWMSUF | PWMSU | PWMSV |
| R/W  | — | — | — | — | R/W     | R/W    | R/W   | R/W   |
| POR  | — | — | — | — | 0       | 0      | 0     | 0     |

- Bit 7~4 Unimplemented, read as “0”
- Bit 3 **PWMMEDO**: PWM output state quickly update control bit when PWM change the phase  
 0: Disable  
 1: Enable
- Bit 2 **PWMSUF**: PWM DUTR0~DUTR2 duty synchronous update request flag (when PWMSU=1)  
 0: No request  
 1: DUTR0~DUTR2 duty synchronous update request  
 Setting this bit high will request to update DUTR0~DUTR2 duty data synchronously. When synchronous update has finished, this bit will be automatically cleared to zero by hardware.
- Bit 1 **PWMSU**: PWM DUTR0~DUTR2 duty synchronous update control (when PWMLD=1)  
 0: Disable  
 1: Enable

Bit 0      **PWMSV**: Synchronize DUTR0 content to DUTR1 and DUTR2 control (when PWMLD=1)  
 0: Disable, DUTR0~DUTR2 should be configured separately  
 1: Enable, the PWM duty value written to DUTR0 is synchronised to DUTR1 and DUTR2

• **DUTRnL Register (n=0~2)**

| Bit  | 7  | 6  | 5  | 4  | 3  | 2  | 1  | 0  |
|------|----|----|----|----|----|----|----|----|
| Name | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
| R/W  | W  | W  | W  | W  | W  | W  | W  | W  |
| POR  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  |

Bit 7~0      **D7~D0**: 10-bit PWMn duty low byte register bit 7 ~ bit 0  
 10-bit DUTRn register bit 7 ~ bit 0

• **DUTRnH Register (n=0~2)**

| Bit  | 7 | 6 | 5 | 4 | 3 | 2 | 1  | 0  |
|------|---|---|---|---|---|---|----|----|
| Name | — | — | — | — | — | — | D9 | D8 |
| R/W  | — | — | — | — | — | — | W  | W  |
| POR  | — | — | — | — | — | — | 0  | 0  |

Bit 7~2      Unimplemented, read as “0”  
 Bit 1~0      **D9~D8**: 10-bit PWMn duty high byte register bit 1 ~ bit 0  
 10-bit DUTRn register bit 9 ~ bit 8

• **PRDRL Register**

| Bit  | 7  | 6  | 5  | 4  | 3  | 2  | 1  | 0  |
|------|----|----|----|----|----|----|----|----|
| Name | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
| R/W  | W  | W  | W  | W  | W  | W  | W  | W  |
| POR  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  |

Bit 7~0      **D7~D0**: 10-bit PWM period low byte register bit 7 ~ bit 0  
 10-bit PRDR register bit 7 ~ bit 0

• **PRDRH Register**

| Bit  | 7 | 6 | 5 | 4 | 3 | 2 | 1  | 0  |
|------|---|---|---|---|---|---|----|----|
| Name | — | — | — | — | — | — | D9 | D8 |
| R/W  | — | — | — | — | — | — | W  | W  |
| POR  | — | — | — | — | — | — | 0  | 0  |

Bit 7~2      Unimplemented, read as “0”  
 Bit 1~0      **D9~D8**: 10-bit PWM period high byte register bit 1 ~ bit 0  
 10-bit PRDR register bit 9 ~ bit 8

• **PWMRL Register**

| Bit  | 7  | 6  | 5  | 4  | 3  | 2  | 1  | 0  |
|------|----|----|----|----|----|----|----|----|
| Name | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
| R/W  | R  | R  | R  | R  | R  | R  | R  | R  |
| POR  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  |

Bit 7~0      **D7~D0**: 10-bit PWM counter low byte register bit 7 ~ bit 0  
 10-bit PWM counter bit 7 ~ bit 0

• **PWMRH Register**

| Bit  | 7 | 6 | 5 | 4 | 3 | 2 | 1  | 0  |
|------|---|---|---|---|---|---|----|----|
| Name | — | — | — | — | — | — | D9 | D8 |
| R/W  | — | — | — | — | — | — | R  | R  |
| POR  | — | — | — | — | — | — | 0  | 0  |

Bit 7~2 Unimplemented, read as “0”

Bit 1~0 **D9~D8**: 10-bit PWM counter high byte register bit 1 ~ bit 0  
10-bit PWM counter bit 9 ~ bit 8

Edge-aligned Mode: PWM Period = (PRDR+1)/f<sub>PWM</sub> (PRDR cannot be set to 000H)

$$\text{PWM Duty} = \text{DUTRn}/f_{\text{PWM}}$$


Center-aligned Mode: PWM Period = (PRDR×2)/f<sub>PWM</sub> (PRDR cannot be set to 000H)

$$\text{PWM Duty} = (\text{DUTRn} \times 2 - 1)/f_{\text{PWM}}$$


**MASK Function**

The device includes a Mask function for Motor control to provide its control flexibility.

The internal mask circuit supports three operating modes, which are known as the Normal Mode, Brake Mode and Motor Protection Mode. The Normal Mode has two sub-modes, namely Hardware Mask Mode and Software Mask Mode.

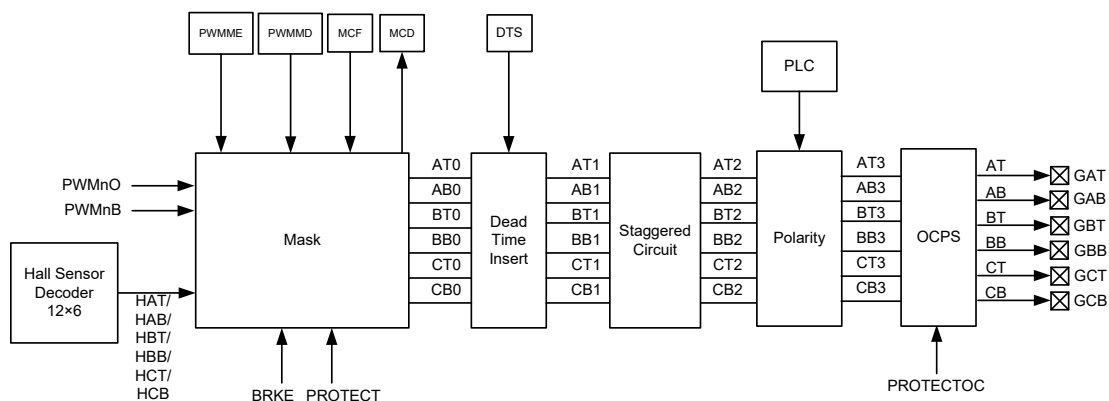

**Mask Function Block Diagram**

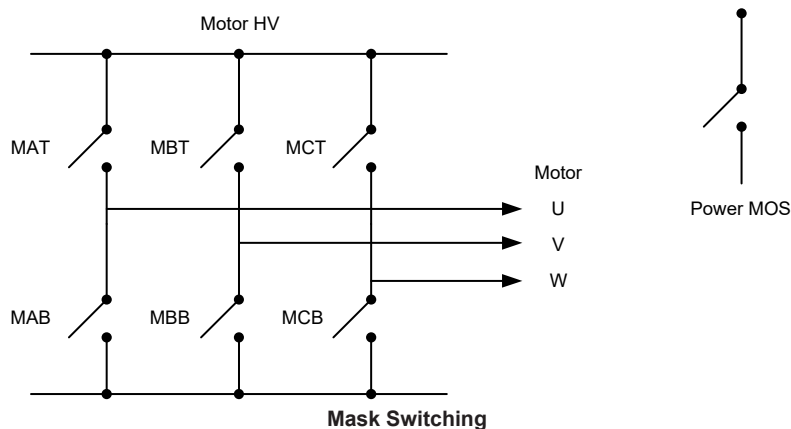

**Mask Switching**

### Normal Mode

In the Normal Mode, the motor speed control method is determined by the PWMS and MPWE bits in the MCF register.

- When PWMS=0, Transistor pair low side GAB/GBB/GCB will output PWM.
- When PWMS=1, Transistor pair high side GAT/GBT/GCT will output PWM.
- When MPWE=0, the PWM output is disabled and AT0/BT0/CT0/AB0/BB0/CB0 are all on.
- When MPWE=1, the PWM output is enabled and AT0/BT0/CT0/AB0/BB0/CB0 can output a variable PWM signal for speed control.
- When MPWMS=0, the PWM has a Complementary output.
- When MPWMS=1, the PWM has a Non-complementary output.
- When MSKMS=0, Hardware Mask Mode is selected.
- When MSKMS=1, Software Mask Mode is selected.

### • MCF Register

| Bit  | 7     | 6 | 5 | 4 | 3     | 2    | 1    | 0    |
|------|-------|---|---|---|-------|------|------|------|
| Name | MSKMS | — | — | — | MPWMS | MPWE | FMOS | PWMS |
| R/W  | R/W   | — | — | — | R/W   | R/W  | R/W  | R/W  |
| POR  | 0     | — | — | — | 0     | 1    | 0    | 0    |

Bit 7 **MSKMS**: Mask mode selection  
 0: Hardware Mask Mode  
 1: Software Mask Mode

Bit 6~4 Unimplemented, read as “0”

Bit 3 **MPWMS**: Hardware mask mode PWM output selection  
 0: Complementary output  
 1: Non-complementary output

This bit selection is invalid in the Software Mask Mode where the PWM output is determined by the PWMME and PWMMD registers.

Bit 2 **MPWE**: PWM output control  
 0: PWM output disable (AT0/BT0/CT0/AB0/BB0/CB0 can not output PWM)  
 1: PWM output enable

Bit 1 **FMOS**: Mask output control when PROTECT is triggered  
 0: AT0/BT0/CT0=0, AB0/BB0/CB0=0  
 1: AT0/BT0/CT0=0, AB0/BB0/CB0=1

Bit 0 **PWMS**: High sides or low sides output PWM selection for Hardware Mask mode  
 0: Low sides output PWM  
 1: High sides output PWM

### • MCD Register

| Bit  | 7 | 6 | 5   | 4   | 3   | 2   | 1   | 0   |
|------|---|---|-----|-----|-----|-----|-----|-----|
| Name | — | — | GAT | GAB | GBT | FHC | FHB | FHA |
| R/W  | — | — | R   | R   | R   | R   | R   | R   |
| POR  | — | — | 0   | 0   | 0   | x   | x   | x   |

“x”: unknown

Bit 7~6 Unimplemented, read as “0”

Bit 5~3 **GAT/GAB/GBT**: Gate driver output

Bit 2~0 **FHC/FHB/FHA**: HC/HB/HA filtered outputs via Hall Noise Filter

These signals are derived from the HC/HB/HA signals and filtered by the Hall Noise Filter.

- Hardware Mask Mode

Complementary control, MPWMS=0

|        | HAT | HAB | AT0   | AB0   |        | HAT | HAB | AT0   | AB0   |
|--------|-----|-----|-------|-------|--------|-----|-----|-------|-------|
| PWMS=0 | 0   | 0   | 0     | 0     | PWMS=1 | 0   | 0   | 0     | 0     |
|        | 0   | 1   | PWM0B | PWM0O |        | 0   | 1   | 0     | 1     |
|        | 1   | 0   | 1     | 0     |        | 1   | 0   | PWM0O | PWM0B |
|        | 1   | 1   | 0     | 0     |        | 1   | 1   | 0     | 0     |

|        | HBT | HBB | BT0   | BB0   |        | HBT | HBB | BT0   | BB0   |
|--------|-----|-----|-------|-------|--------|-----|-----|-------|-------|
| PWMS=0 | 0   | 0   | 0     | 0     | PWMS=1 | 0   | 0   | 0     | 0     |
|        | 0   | 1   | PWM1B | PWM1O |        | 0   | 1   | 0     | 1     |
|        | 1   | 0   | 1     | 0     |        | 1   | 0   | PWM1O | PWM1B |
|        | 1   | 1   | 0     | 0     |        | 1   | 1   | 0     | 0     |

|        | HCT | HCB | CT0   | CB0   |        | HCT | HCB | CT0   | CB0   |
|--------|-----|-----|-------|-------|--------|-----|-----|-------|-------|
| PWMS=0 | 0   | 0   | 0     | 0     | PWMS=1 | 0   | 0   | 0     | 0     |
|        | 0   | 1   | PWM2B | PWM2O |        | 0   | 1   | 0     | 1     |
|        | 1   | 0   | 1     | 0     |        | 1   | 0   | PWM2O | PWM2B |
|        | 1   | 1   | 0     | 0     |        | 1   | 1   | 0     | 0     |

Non-complementary control, MPWMS=1


|        | HAT | HAB | AT0 | AB0   |        | HAT | HAB | AT0   | AB0 |
|--------|-----|-----|-----|-------|--------|-----|-----|-------|-----|
| PWMS=0 | 0   | 0   | 0   | 0     | PWMS=1 | 0   | 0   | 0     | 0   |
|        | 0   | 1   | 0   | PWM0O |        | 0   | 1   | 0     | 1   |
|        | 1   | 0   | 1   | 0     |        | 1   | 0   | PWM0O | 0   |
|        | 1   | 1   | 0   | 0     |        | 1   | 1   | 0     | 0   |

|        | HBT | HBB | BT0 | BB0   |        | HBT | HBB | BT0   | BB0 |
|--------|-----|-----|-----|-------|--------|-----|-----|-------|-----|
| PWMS=0 | 0   | 0   | 0   | 0     | PWMS=1 | 0   | 0   | 0     | 0   |
|        | 0   | 1   | 0   | PWM1O |        | 0   | 1   | 0     | 1   |
|        | 1   | 0   | 1   | 0     |        | 1   | 0   | PWM1O | 0   |
|        | 1   | 1   | 0   | 0     |        | 1   | 1   | 0     | 0   |



|        | HCT | HCB | CT0 | CB0   |        | HCT | HCB | CT0   | CB0 |
|--------|-----|-----|-----|-------|--------|-----|-----|-------|-----|
| PWMS=0 | 0   | 0   | 0   | 0     | PWMS=1 | 0   | 0   | 0     | 0   |
|        | 0   | 1   | 0   | PWM2O |        | 0   | 1   | 0     | 1   |
|        | 1   | 0   | 1   | 0     |        | 1   | 0   | PWM2O | 0   |
|        | 1   | 1   | 0   | 0     |        | 1   | 1   | 0     | 0   |

- Software Mask Mode

To control the software Mask circuit, two registers known as PWMME and PWMMD are provided. PWMME register is used to control PWM signal masked or not and PWMMD is used to determine the MOSFET Driver Circuit is on or off.

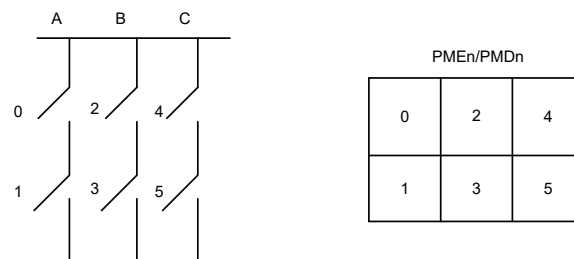

**3-Phase Inverter Symbol and Control Bits**

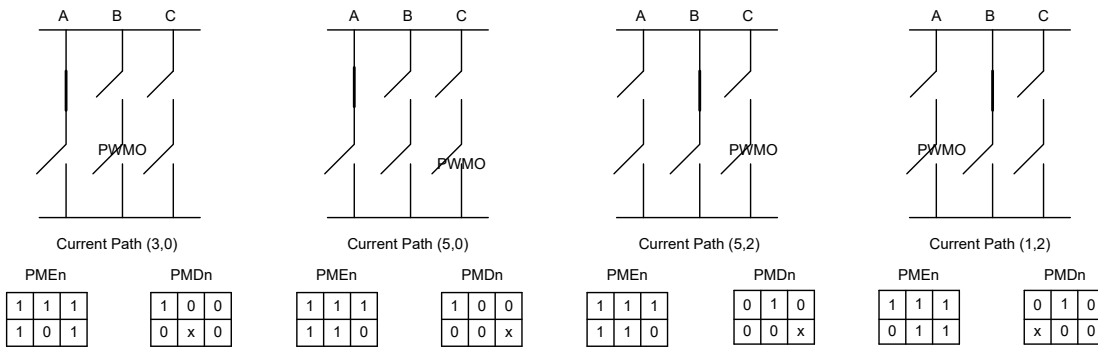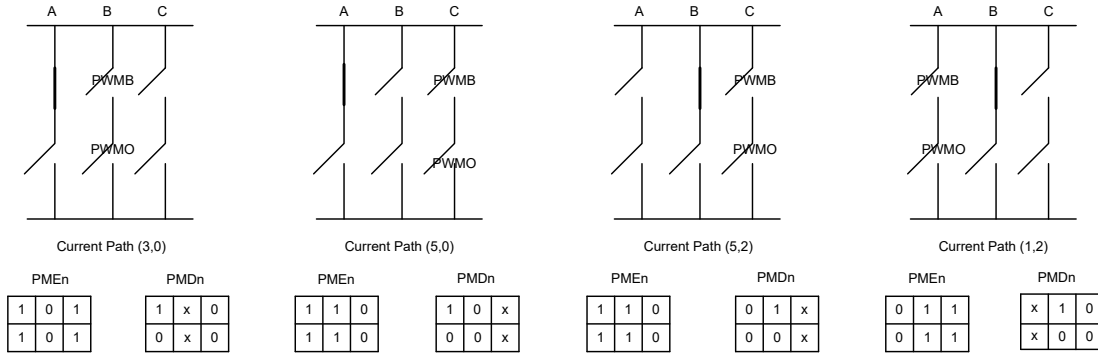

- Note: 1. If the mask mode is enabled, when PWMxH and PWMxL are masked at the same time, the two line data of each pair, PMD0 and PMD1, PMD2 and PMD3, PMD4 and PMD5, can not be both set to “1”, otherwise the output will be forced to 0.
2. If PWM and complementary PWM are both enabled, one of the complementary channels outputs PWM and the other one can not be masked to “1” but outputs “0” automatically by hardware.
3. If the GxT and GxB (x=A, B or C) pins are configured as I/O function, then PWM Mask function will be invalid.

#### • PWMME Register

| Bit  | 7 | 6 | 5    | 4    | 3    | 2    | 1    | 0    |
|------|---|---|------|------|------|------|------|------|
| Name | — | — | PME5 | PME4 | PME3 | PME2 | PME1 | PME0 |
| R/W  | — | — | R/W  | R/W  | R/W  | R/W  | R/W  | R/W  |
| POR  | — | — | 0    | 0    | 0    | 0    | 0    | 0    |

Bit 7~6 Unimplemented, read as “0”

Bit 5~0 **PMEn**: PWM mask enable bit (n=0~5)

0: Disabled, PWM generator signal is output to next stage

1: Enabled, PWM generator signal is masked

The PWM generator signal will be masked when this bit is set high. Then the corresponding PWMn channel will output with the mask data PMDn.

#### • PWMMD Register

| Bit  | 7 | 6 | 5    | 4    | 3    | 2    | 1    | 0    |
|------|---|---|------|------|------|------|------|------|
| Name | — | — | PMD5 | PMD4 | PMD3 | PMD2 | PMD1 | PMD0 |
| R/W  | — | — | R/W  | R/W  | R/W  | R/W  | R/W  | R/W  |
| POR  | — | — | 0    | 0    | 0    | 0    | 0    | 0    |

Bit 7~6 Unimplemented, read as “0”

Bit 5~0 **PMDn**: PWM mask data bit (n=0~5)  
 0: Output logic low  
 1: Output logic high  
 When the corresponding mask enable bit PMEn=1, this Mask data bit can control the output.

### Brake Mode

The brake mode has the highest priority. When this mode is activated, all the low sides of the external gate driver transistors are all on and the high sides are all turned off. When Brake mode is enabled, the truth table of the external gate driver transistor high/low side status are shown below.

| BRKE=1 | AT0 | BT0 | CT0 | AB0 | BB0 | CB0 |
|--------|-----|-----|-----|-----|-----|-----|
|        | 0   | 0   | 0   | 1   | 1   | 1   |

### Motor Protection Mode

When the PROTECT bit is set high, the motor protection mode is activated, the external gate driver transistor pair can be forced into brake status, where the high sides are all off and the low sides are all on, or free running status, where the high and low sides are all off. The protection decode table is shown below.

| PROTECT=1 | AT0 | BT0 | CT0 | AB0 | BB0 | CB0 |
|-----------|-----|-----|-----|-----|-----|-----|
| FMOS=0    | 0   | 0   | 0   | 0   | 0   | 0   |
| FMOS=1    | 0   | 0   | 0   | 1   | 1   | 1   |

### Other Functions


Several other functions exist for additional motor control drive signal flexibility. These are the Dead Time Insertion Function, Staggered Function and Polarity Control Function.

### Dead Time Insertion Function

During a transistor pair switchover, a dead time should be introduced to prevent the transistor being turned on at the same time in both the high and low sides which will provide a direct short circuit. The actual dead time must be setup in the range of 0.3μs~5μs and is selected by the application program.

- When the AT0/AB0/BT0/BB0/CT0/CB0 outputs at a rising edge, a Dead Time is inserted.
- When the AT0/AB0/BT0/BB0/CT0/CB0 outputs at a falling edge, their outputs remain unchanged.

The Dead-Time Insertion Circuit is only used during motor control. The Dead Time function is controlled by DTS register.

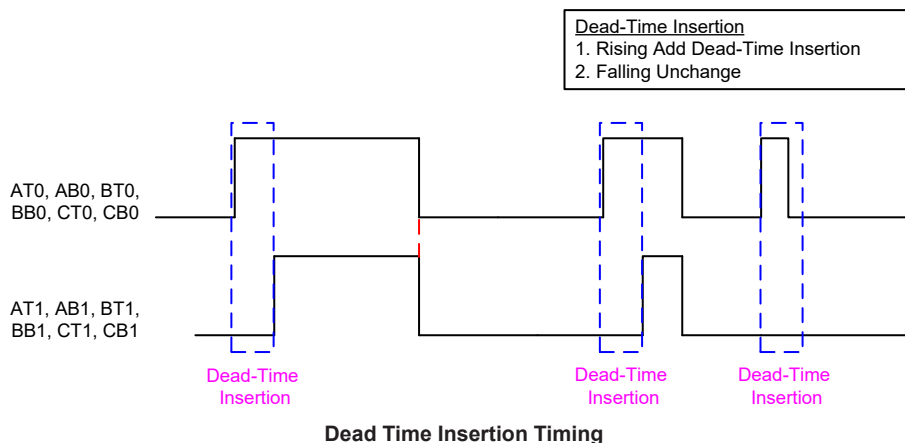

• **DTS Register**

| Bit  | 7      | 6      | 5   | 4   | 3   | 2   | 1   | 0   |
|------|--------|--------|-----|-----|-----|-----|-----|-----|
| Name | DTCKS1 | DTCKS0 | DTE | D4  | D3  | D2  | D1  | D0  |
| R/W  | R/W    | R/W    | R/W | R/W | R/W | R/W | R/W | R/W |
| POR  | 0      | 0      | 0   | 0   | 0   | 0   | 0   | 0   |

Bit 7~6 **DTCKS1~DTCKS0**: Dead Time clock source selection

00:  $f_{DT}=f_{SYS}$

01:  $f_{DT}=f_{SYS}/2$

10:  $f_{DT}=f_{SYS}/4$

11:  $f_{DT}=f_{SYS}/8$

Bit 5 **DTE**: Dead Time function control

0: Disable

1: Enable

Bit 4~0 **D4~D0**: Dead Time Register bit 4 ~ bit 0

5-bit Dead Time counter.

Dead Time = (DTS[4:0]+1)/ $f_{DT}$

**Staggered Function**

The Staggered Function will force all output drive transistors to be off when the external transistor pair high and low sides are both on resulting from a software error occurrence or other errors due to external factors such as ESD.

| AT1 | AB1 | AT2 | AB2 |
|-----|-----|-----|-----|
| 0   | 0   | 0   | 0   |
| 0   | 1   | 0   | 1   |
| 1   | 0   | 1   | 0   |
| 1   | 1   | 0   | 0   |

Note: In BLDC motor control circuits, external gate-driver transistor pairs are designed as N-type transistor pairs by default. This means a “1” value will switch the transistor on and a “0” value will switch it off. However, for P-type transistor pairs, a “0” value will switch the transistor on and a “1” value will switch it off.

**Polarity Control Function**

This function allows setup of the external gate drive transistor output polarity status. A single register, PLC, is used for the overall control.

• **PLC Register**

| Bit  | 7 | 6 | 5    | 4    | 3    | 2    | 1    | 0    |
|------|---|---|------|------|------|------|------|------|
| Name | — | — | PCBC | PCTC | PBBC | PBTC | PABC | PATC |
| R/W  | — | — | R/W  | R/W  | R/W  | R/W  | R/W  | R/W  |
| POR  | — | — | 0    | 0    | 0    | 0    | 0    | 0    |

Bit 7~6 Unimplemented, read as “0”

Bit 5 **PCBC**: GCB output polarity control

0: Non-invert

1: Invert

Bit 4 **PCTC**: GCT output polarity control

0: Non-invert

1: Invert

Bit 3 **PBBC**: GBB output polarity control

0: Non-invert


1: Invert

Note that the default output pin GAT/GAB/GBT/GBB/GCT/GCB status are all high impedance.

This device contains a fully integrated Hall Sensor decoder function which interfaces to the Hall Sensors in the BLDC motor for motor direction and speed control.



This device includes a Hall Noise Filter function to filter out the effects of noise generated by the large switching currents of the motor driver. This generated noise may affect the Hall Sensor inputs (HA/HB/HC), which in turn may result in incorrect Hall Sensor output decoding.

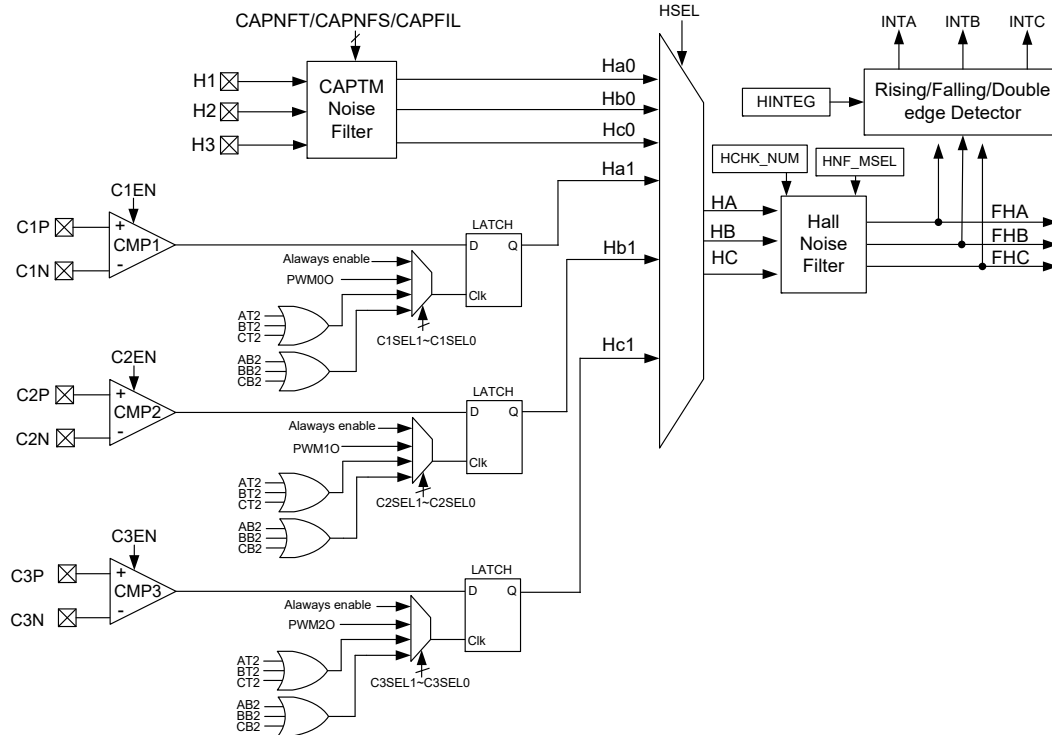

Note: The detailed control for the CAPTM noise filter is described in the Capture Timer Module section. The comparator relevant control is described in the Comparators chapter.

#### Hall Sensor Noise Filter Block Diagram

Several registers are used to control the noise filter. The HNF\_EN bit in the HNF\_MSEL register is used for the overall enable/disable control of the noise filter.

| HNF_EN bit | Status                                              |
|------------|-----------------------------------------------------|
| 0          | Noise filter off – HA/HB/HC bypass the noise filter |
| 1          | Noise filter on                                     |

#### Hall Sensor Noise Filter Enable

The sampling frequency of the Hall noise filter is setup using the HFR\_SEL[2:0] bits.

The HCK\_N[4:0] bits in the HCHK\_NUM register are used to setup the number of Hall Sensor input compare times.

$HCK\_N[4:0] \times \text{Sampling space} = \text{Anti-noise ability} = \text{Hall Delay Time}$

It should be noted that longer Hall delay time will result in worse rotor speed feedback signal distortion.

#### Hall Sensor Delay Function

The Hall sensor function in the device includes a Hall delay function which can implement a signal phase forward or phase backward operation. The following steps, which should be executed before the Hall Decoder is enabled, show how this function is activated.

- Step 1  
Set the Hall Decode table to select either the phase forward or phase backward function.
- Step 2  
Select which TM is used to generate the Delay Time by programming the CTM\_SEL1~CTM\_SEL0 bits and set the selected TM to run in the Compare Match Output Mode.

- Step 3  
Use the HDLY\_MSEL bit to select the Hall Delay circuit operating mode. The default value of HDLY\_MSEL is zero which will disable the Hall Delay circuit. If the HDLY\_MSEL bit is set high, then the Hall Delay circuit will be enabled.
- Step 4  
Enable the Hall Decoder using the HDCEN bit.


The following points should be noted regarding the HDLY\_MSEL bit.


1. When this bit is low, BUF1[2:0] and BUF2[2:0] will be cleared to zero.
2. When this bit is low, PTM0, PTM1 and PTM2 remain their original TM functions.
3. When this bit is high, the TM which is selected by the Delay function will be dedicated for use by the Hall Delay circuit. In this case, the original TM functions will still remain active except for that the PTnON bit which will be controlled automatically by the hardware. And the selected PTM should be properly configured according to the requirement.

With regard to the selected PTM functions the following notes should be taken before the Delay function is enabled.

1. Remain PTnON=0 and PTnPAU=0.
2. The PTM should be set to operate in the Compare Match Output Mode.
3. Set PTnCCLR=1, therefore the PTM counter is cleared with a comparator A match condition.
4. Setup the Delay time by properly setting the PTMn CCRA and selecting the counter clock.

After the Delay function is enabled by setting the HDLY\_MSEL bit from low to high, the Delay time must not be more than one step time of the Hall input, otherwise the output can not be anticipated and the control will drop out of step. One Hall input cycle includes six steps.

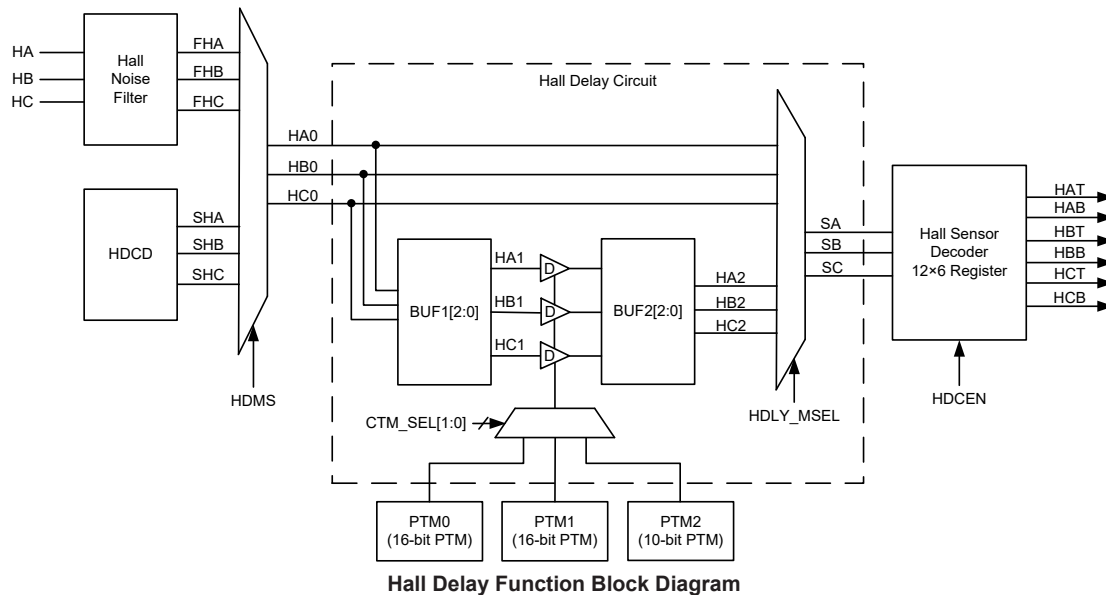

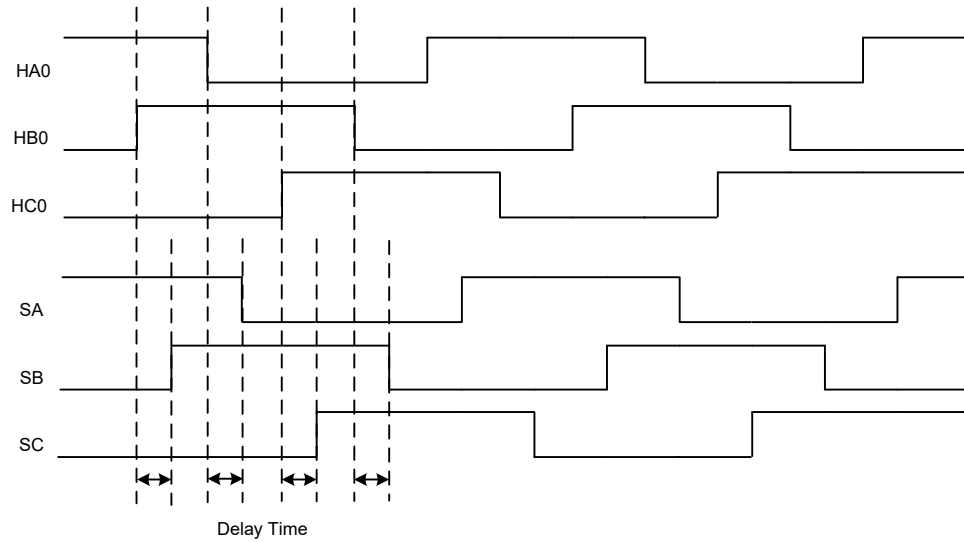

**Delay Function Timing**

### Motor Control Drive Signals


The direction of the BLDC motor is controlled using the HDCR and HDCD registers as well as a series of 6-bit HDCT registers, HDCT0~HDCT11. When using the Hall Sensor Decoder function, the direction can be determined using the FRS bit and the brake operation can be controlled using the BRKE bit. Both bits are in the HDCR register. The value of the 6-bit registers HDCT0~HDCT5 are used for the Motor Forward table, and The value of the 6-bit registers HDCT6~HDCT11 are used for the Motor Backward table.


The accompanying tables show the truth tables for each of the registers.

|                                         | 60 Degrees |    |    | 120 Degrees |    |    | Bit5        | Bit4 | Bit3 | Bit2 | Bit1 | Bit0 |
|-----------------------------------------|------------|----|----|-------------|----|----|-------------|------|------|------|------|------|
|                                         | SA         | SB | SC | SA          | SB | SC | HAT         | HAB  | HBT  | HBB  | HCT  | HCB  |
|                                         | 1          | 0  | 0  | 1           | 0  | 0  | HDCT0[5:0]  |      |      |      |      |      |
| Forward<br>(HDCEN=1, FRS=0,<br>BRKE=0)  | 1          | 1  | 0  | 1           | 1  | 0  | HDCT1[5:0]  |      |      |      |      |      |
|                                         | 1          | 1  | 1  | 0           | 1  | 0  | HDCT2[5:0]  |      |      |      |      |      |
|                                         | 0          | 1  | 1  | 0           | 1  | 1  | HDCT3[5:0]  |      |      |      |      |      |
|                                         | 0          | 0  | 1  | 0           | 0  | 1  | HDCT4[5:0]  |      |      |      |      |      |
|                                         | 0          | 0  | 0  | 1           | 0  | 1  | HDCT5[5:0]  |      |      |      |      |      |
|                                         | 0          | 0  | 0  | 1           | 0  | 1  | HDCT5[5:0]  |      |      |      |      |      |
| Backward<br>(HDCEN=1, FRS=1,<br>BRKE=0) | 60 Degrees |    |    | 120 Degrees |    |    | Bit5        | Bit4 | Bit3 | Bit2 | Bit1 | Bit0 |
|                                         | SA         | SB | SC | SA          | SB | SC | HAT         | HAB  | HBT  | HBB  | HCT  | HCB  |
|                                         | 1          | 0  | 0  | 1           | 0  | 0  | HDCT6[5:0]  |      |      |      |      |      |
|                                         | 1          | 1  | 0  | 1           | 1  | 0  | HDCT7[5:0]  |      |      |      |      |      |
|                                         | 1          | 1  | 1  | 0           | 1  | 0  | HDCT8[5:0]  |      |      |      |      |      |
|                                         | 0          | 1  | 1  | 0           | 1  | 1  | HDCT9[5:0]  |      |      |      |      |      |
|                                         | 0          | 0  | 1  | 0           | 0  | 1  | HDCT10[5:0] |      |      |      |      |      |
|                                         | 0          | 0  | 0  | 1           | 0  | 1  | HDCT11[5:0] |      |      |      |      |      |
| Brake<br>(BRKE=1, HDCEN=x,<br>FRS=x)    | 60 Degrees |    |    | 120 Degrees |    |    | Bit5        | Bit4 | Bit3 | Bit2 | Bit1 | Bit0 |
|                                         | SA         | SB | SC | SA          | SB | SC | HAT         | HAB  | HBT  | HBB  | HCT  | HCB  |
|                                         | √          | √  | √  | √           | √  | √  | 0           | 1    | 0    | 1    | 0    | 1    |

| Hall Decoder Disabled<br>(HDCEN=0)<br>Free Running | 60 Degrees |    |    | 120 Degrees |    |    | Bit5 | Bit4 | Bit3 | Bit2 | Bit1 | Bit0 |
|----------------------------------------------------|------------|----|----|-------------|----|----|------|------|------|------|------|------|
|                                                    | SA         | SB | SC | SA          | SB | SC | HAT  | HAB  | HBT  | HBB  | HCT  | HCB  |
|                                                    | √          | √  | √  | √           | √  | √  | 0    | 0    | 0    | 0    | 0    | 0    |
| Hall Decoder Error<br>(HDCEN=x)                    | 60 Degrees |    |    | 120 Degrees |    |    | Bit5 | Bit4 | Bit3 | Bit2 | Bit1 | Bit0 |
|                                                    | SA         | SB | SC | SA          | SB | SC | HAT  | HAB  | HBT  | HBB  | HCT  | HCB  |
|                                                    | 1          | 0  | 1  | 1           | 1  | 1  | 0    | 0    | 0    | 0    | 0    | 0    |
|                                                    | 0          | 1  | 0  | 0           | 0  | 0  | 0    | 0    | 0    | 0    | 0    | 0    |

The relationship between the data in the truth tables and how they relate to actual motor drive signals is shown in the accompany timing diagram. The full 6-step cycle for both forward and backward motor rotation is provided.

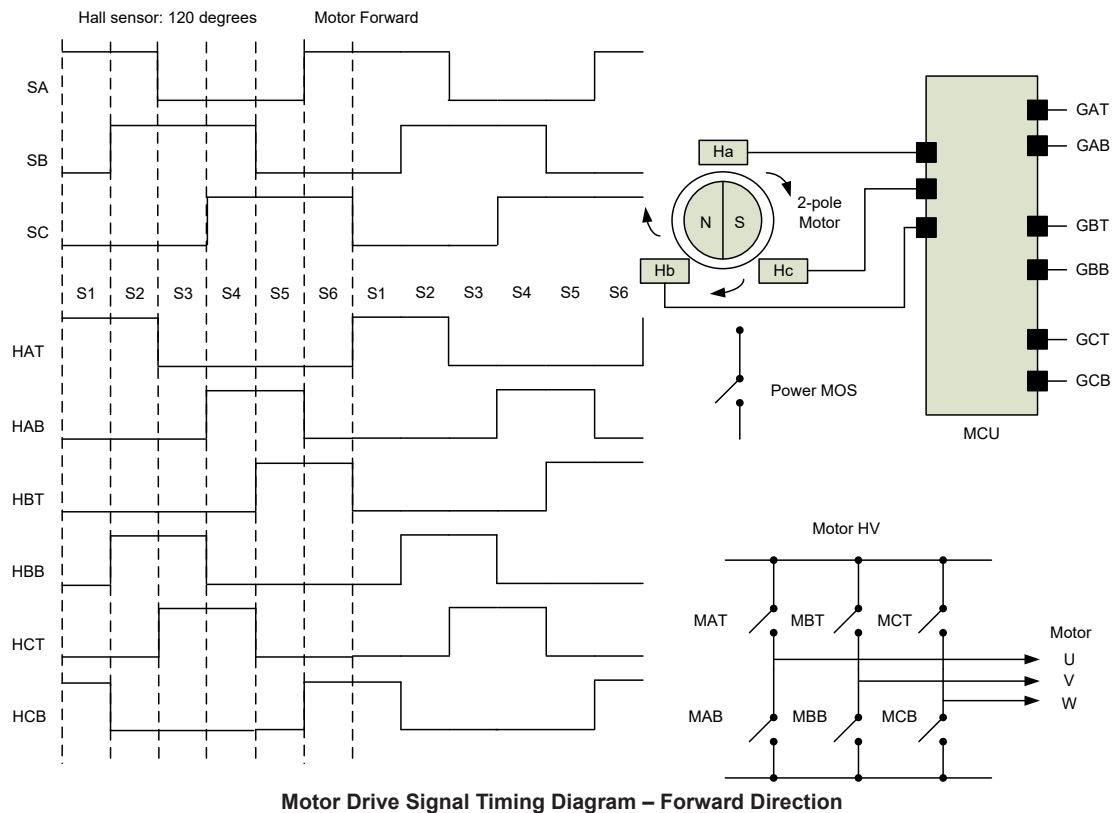

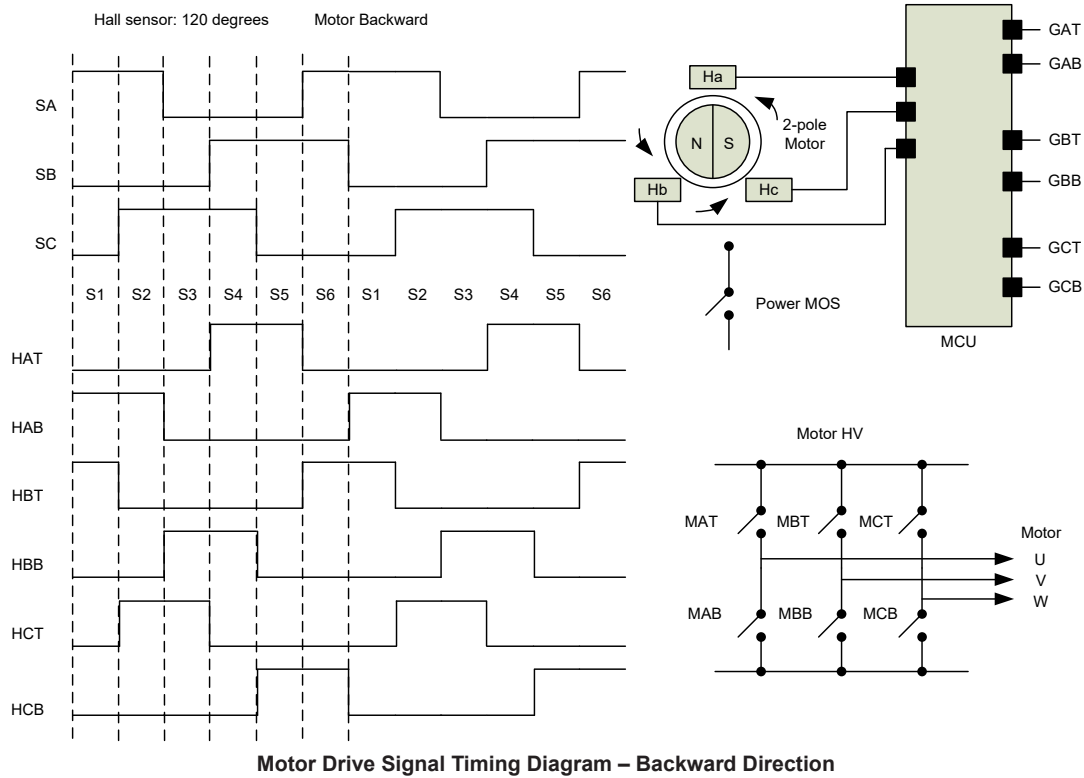

### Hall Sensor Decoder Register Description

The HDCR register is the Hall Sensor Decoder control register, HDCT0~HDCT11 are the Hall Sensor Decoder input data register, and HDCT0~HDCT11 are the Hall Sensor Decoder tables. The HCHK\_NUM register is the Hall Noise Filter check time number register and HNF\_MSEL is the Hall Noise Filter Mode selection register. The HINTEG register is Hall Noise Filter input source selection and interrupt edge control register.

#### • HINTEG Register

| Bit  | 7 | 6    | 5      | 4      | 3      | 2      | 1      | 0      |
|------|---|------|--------|--------|--------|--------|--------|--------|
| Name | — | HSEL | INTCS1 | INTCS0 | INTBS1 | INTBS0 | INTAS1 | INTAS0 |
| R/W  | — | R/W  | R/W    | R/W    | R/W    | R/W    | R/W    | R/W    |
| POR  | — | 0    | 0      | 0      | 0      | 0      | 0      | 0      |

- Bit 7      Unimplemented, read as “0”
- Bit 6      **HSEL:** HA/HB/HC source selection  
0: H1/H2/H3  
1: CMP1/CMP2/CMP3 output
- Bit 5~4    **INTCS1~INTCS0:** FHC Interrupt edge control for INTC  
00: Disable  
01: Rising edge trigger  
10: Falling edge trigger  
11: Dual edge trigger
- Bit 3~2    **INTBS1~INTBS0:** FHB Interrupt edge control for INTB  
00: Disable  
01: Rising edge trigger  
10: Falling edge trigger  
11: Dual edge trigger

Bit 1~0     **INTAS1~INTAS0**: FHA Interrupt edge control for INTA  
                  00: Disable  
                  01: Rising edge trigger  
                  10: Falling edge trigger  
                  11: Dual edge trigger

• **HDCR Register**

| Bit  | 7        | 6        | 5         | 4    | 3    | 2    | 1   | 0     |
|------|----------|----------|-----------|------|------|------|-----|-------|
| Name | CTM_SEL1 | CTM_SEL0 | HDLY_MSEL | HALS | HDMS | BRKE | FRS | HDCEN |
| R/W  | R/W      | R/W      | R/W       | R/W  | R/W  | R/W  | R/W | R/W   |
| POR  | 0        | 0        | 0         | 1    | 0    | 0    | 0   | 0     |

Bit 7~6     **CTM\_SEL1~CTM\_SEL0**: Select TM used for Hall Delay Circuit  
                  00: PTM0 (16-bit PTM)  
                  01: PTM1 (16-bit PTM)  
                  10: PTM2 (10-bit PTM)  
                  11: Unused

Bit 5        **HDLY\_MSEL**: Hall Delay Circuit selection  
                  0: Original path (Bypass Delay Circuit)  
                  1: Hall Delay Circuit

Bit 4        **HALS**: Hall Sensor decoding angle configuration selection  
                  0: 60 degrees  
                  1: 120 degrees

Bit 3        **HDMS**: Hall Sensor decoding mode selection  
                  0: Software Mode (SHA/SHB/SHC in the HDCD register)  
                  1: Hall Sensor Mode (FHA/FHB/FHC via noise filter)

Bit 2        **BRKE**: Motor brake control  
                  0: AT/BT/CT/AB/BB/CB=V  
                  1: AT/BT/CT=0, AB/BB/CB=1

Bit 1        **FRS**: Motor forward/backward selection  
                  0: Forward  
                  1: Backward

Bit 0        **HDCEN**: Hall Sensor decoder control  
                  0: Disable  
                  1: Enable

• **HDCD Register**

| Bit  | 7 | 6 | 5 | 4 | 3 | 2   | 1   | 0   |
|------|---|---|---|---|---|-----|-----|-----|
| Name | — | — | — | — | — | SHC | SHB | SHA |
| R/W  | — | — | — | — | — | R/W | R/W | R/W |
| POR  | — | — | — | — | — | 0   | 0   | 0   |

Bit 7~3     Unimplemented, read as “0”

Bit 2        **SHC**: Software Hall C

Bit 1        **SHB**: Software Hall B

Bit 0        **SHA**: Software Hall A

• **HDCTn Register (n=0~11)**

| Bit  | 7 | 6 | 5     | 4     | 3     | 2     | 1     | 0     |
|------|---|---|-------|-------|-------|-------|-------|-------|
| Name | — | — | HATDn | HABDn | HBTDn | HBBDn | HCTDn | HCBDn |
| R/W  | — | — | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   |
| POR  | — | — | 0     | 0     | 0     | 0     | 0     | 0     |

- Bit 7~6 Unimplemented, read as “0”
- Bit 5 **HATDn**: HAT output state control  
0: Output 0  
1: Output 1
- Bit 4 **HABDn**: HAB output state control  
0: Output 0  
1: Output 1
- Bit 3 **HBTDn**: HBT output state control  
0: Output 0  
1: Output 1
- Bit 2 **HBBDn**: HBB output state control  
0: Output 0  
1: Output 1
- Bit 1 **HCTDn**: HCT output state control  
0: Output 0  
1: Output 1
- Bit 0 **HCBDn**: HCB output state control  
0: Output 0  
1: Output 1

• **HCHK\_NUM Register**

| Bit  | 7 | 6 | 5 | 4      | 3      | 2      | 1      | 0      |
|------|---|---|---|--------|--------|--------|--------|--------|
| Name | — | — | — | HCK_N4 | HCK_N3 | HCK_N2 | HCK_N1 | HCK_N0 |
| R/W  | — | — | — | R/W    | R/W    | R/W    | R/W    | R/W    |
| POR  | — | — | — | 0      | 0      | 0      | 0      | 0      |

- Bit 7~5 Unimplemented, read as “0”
- Bit 4~0 **HCK\_N4~HCK\_N0**: Number of Hall Noise Filter check times

• **HNF\_MSEL Register**

| Bit  | 7 | 6 | 5 | 4 | 3      | 2        | 1        | 0        |
|------|---|---|---|---|--------|----------|----------|----------|
| Name | — | — | — | — | HNF_EN | HFR_SEL2 | HFR_SEL1 | HFR_SEL0 |
| R/W  | — | — | — | — | R/W    | R/W      | R/W      | R/W      |
| POR  | — | — | — | — | 0      | 0        | 0        | 0        |

- Bit 7~4 Unimplemented, read as “0”
- Bit 3 **HNF\_EN**: Hall Noise Filter control  
0: Disable (bypass)  
1: Enable
- Bit 2~0 **HFR\_SEL2~HFR\_SEL0**: Hall Noise Filter clock source selection  
000:  $f_{SYS}/2$   
001:  $f_{SYS}/4$   
010:  $f_{SYS}/8$   
011:  $f_{SYS}/16$   
100:  $f_{SYS}/32$   
101:  $f_{SYS}/64$   
110:  $f_{SYS}/128$   
111: Unused

Motors normally require large currents for their operation and as such need to be protected from the problems of excessive drive currents and motor stalling, etc., to reduce motor damage or for safety reasons. This device includes a range of protection and safety features.



### Motor Protection Function Description

The PROTECT mechanism provides three kinds of motor protection features to turn off motor immediately, allowing action to be taken to protect the motor from damage or to provide additional safety.

The protection features are:

- Stall detection function
- Over current protection
- Turn off the motor by software

When the motor protection circuit is on, i.e, PROTECT=1, the external Gate Drive transistor pair can be forced into two different status, which is determined by the FMOS bit in the MCF register. The first is the brake status where the high sides are all off and the low sides are all on, and the second is the free running status where both high and low sides are off.

The motor protection circuit can be triggered and released in two modes, which is selected by the MPTC2 register. One mode is the Fault Mode and the other is Pause Mode. In the Fault Mode, the PROTECT signal is set by a trigger source event occurrence and the PROTECT signal is automatically released after the trigger source trigger event is resolved. For the Pause Mode, PROTECT signal setup is determined by a trigger source event occurrence while the PROTECT signal can only be released by software.

Additionally, the PROTECTOC mechanism is used to cut off the driver signal output quickly, providing a more immediate current protection mechanism. If an over current condition was detected, the preset OCPS protection signals will be output immediately ignoring the original signals to protect the power transistors from damage. The PROTECTOC signal can be setup by software or hardware trigger mechanism which is selected by programming the corresponding OCPSE (hardware trigger) or OCPWE (software trigger) bit in the MPTC1 register. Whatever the PROTECTOC signal triggered source was, it can only be released by software.

### Current Protection Mechanism

The device contains an internal OPA, a high speed 12-bit A/D Converter, an 8-bit D/A Converter and a comparator 0 to measure the motor current and to detect excessive current values. If an over current situation should occur, then the external drive circuit can be shut down immediately to prevent motor damage. More details are provided in the Over Current Detection chapter.

As the motor driver PCB will have rather large amounts of noise, and as this noise will be amplified by the OPA, this can easily lead to false triggering. For this reason the Fault Mode must be used.


The comparator 0 output is filtered by a 2 system clock filter circuit to generate the Int\_Is signal to trigger protection.

For the MOS Limit current mechanism Int\_AHL\_Lim, when AHLHE=0 then the hardware protection mode is disabled, and when AHLHE=1 the hardware protection is enabled. The current limiting circuit is a hardware circuit, and the control can only be valid when the A/D converter channel selects the operational amplifier output.

AHLPS=0 → The protection circuit will allow the PWM output to immediately restart once the Int\_AHL\_Lim interrupt protection is released.

AHLPS=1 → The protection circuit will only allow the PWM output to restart on the next PWM period once the Int\_AHL\_Lim interrupt protection is released.

For the MOS over current mechanism Int\_Is, when ISHE=0 the hardware trigger mode is disabled. When ISHE=1 the hardware trigger mode is enabled. Then select the Fault mode by clearing the ISPS bit to zero.

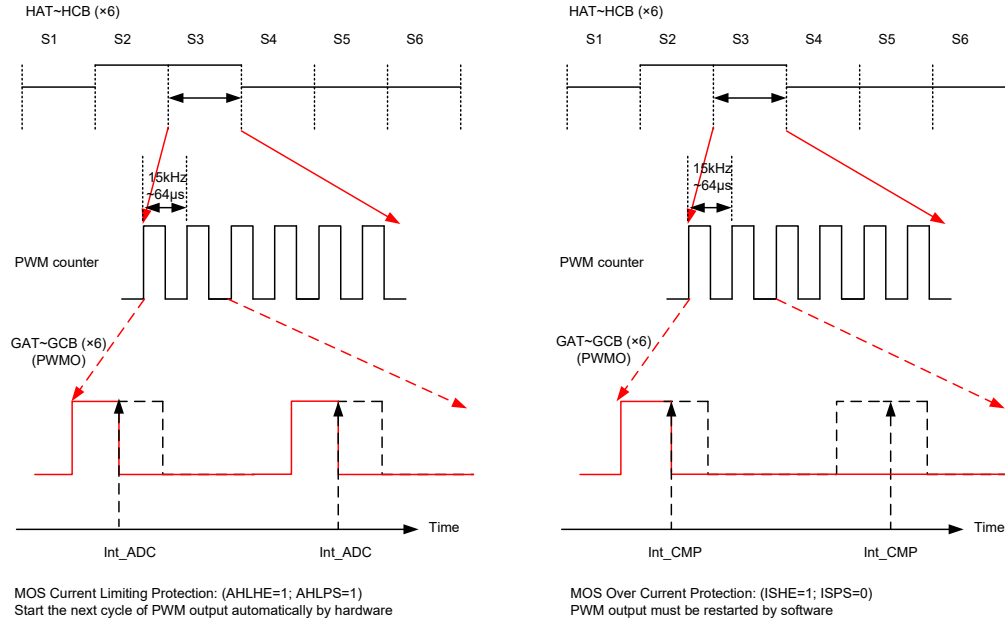

### Current Protection Timing

The PROTECTOC signal can be triggered by software or hardware trigger mechanism which is selected by programming the corresponding OCPSE or OCPWE bit in the MPTC1 register.

- **OCPSE=1: H/W direct over current trigger & S/W release**  
Ensure that the ISHE bit has been set to select the hardware Int\_Is over current protection before setting the OCPSE bit high. Then the over current compare interrupt signal Int\_Is can be used to directly switch off the drive signals. Since Int\_Is is a pulse signal, the over current trigger signal must be latched. When the PROTECTOC signal is logic high, the drive signals at the polarity stage will be ignored and the over current protection logics in the OCPS register are used to immediately switch off drive signals to protect the power MOS. To release the PROTECTOC over current protection mechanism, set the OCPSE bit from low to high to trigger the software reset function thus pulling the PROTECTOC signal to low, after which the normal drive signals at the Polarity stage will be recovered.
- **OCPWE=1: S/W trigger & S/W release**  
It is a more immediate current protection mechanism. The PROTECTOC signal will be triggered directly by setting the OCPWE bit high. To release the over current protection, clear the OCPWE bit to zero to reset the PROTECTOC signal, after which the normal Polarity drive signal will be recovered.

### Motor Stall Detection Function

For 3-phase BLDC applications with Hall Sensors, the integrated 16-bit CAPTM can be used to monitor the H1, H2 and H3 inputs for rotor speed detection. The software will setup the CAPTMH and CAPTMAL registers to monitor the Hall sensor inputs H1, H2 and H3 for rotor speed control. If an abnormal situation occurs, a CapTM\_Cmp or CapTM\_Over interrupt will be generated, which is described in the CAPTM section.

**CapTM\_Cmp Stall Detection Mechanism:** CapCHE=0 disables the hardware trigger mode, and CapCHE=1 enables the hardware trigger mode. The stall detection mechanism must use the Pause Mode which is selected by setting the CAPCPS bit.

**CapTM\_Over Stall Detection Mechanism:** CapOHE=0 disables the hardware trigger mode, and CapOHE=1 enables the hardware trigger Mode. Then select the Pause Mode by setting the CAPOPS bit.

### Motor Protection Register Description

There are three registers, MPTC1, MPTC2 and OCPS, which are used for the motor protection control function.

#### • MPTC1 Register

| Bit  | 7    | 6    | 5      | 4      | 3    | 2     | 1     | 0     |
|------|------|------|--------|--------|------|-------|-------|-------|
| Name | PSWD | PSWE | CapOHE | CapCHE | ISHE | AHLHE | OCPWE | OCPSE |
| R/W  | R/W  | R/W  | R/W    | R/W    | R/W  | R/W   | R/W   | R/W   |
| POR  | 0    | 0    | 0      | 0      | 0    | 0     | 0     | 0     |

- Bit 7      **PSWD**: Motor protection software mode data  
0: PSWD=0  
1: PSWD=1  
In the Pause Mode, the PSWD bit can be used to trigger protection and release protection. In the Fault Mode, the PSWD bit can only be used to release protection, in which case the PSWE bit should be set to “1”.
- Bit 6      **PSWE**: Motor protection software mode control  
0: Disable  
1: Enable  
When the motor protection software mode has been enabled and triggered, it can be released by setting this bit from 1→0→1.
- Bit 5      **CapOHE**: CapTM\_Over hardware trigger mode control  
0: Disable  
1: Enable
- Bit 4      **CapCHE**: CapTM\_Cmp hardware trigger mode control  
0: Disable  
1: Enable
- Bit 3      **ISHE**: Int\_Is hardware trigger mode control  
0: Disable  
1: Enable
- Bit 2      **AHLHE**: Int\_AHL\_Lim Hardware trigger Mode control  
0: Disable  
1: Enable
- Bit 1      **OCPWE**: PROTECTOC software trigger & software release control  
0: Disable  
1: Enable
- Bit 0      **OCPSE**: PROTECTOC over current hardware trigger & software release control  
0: Disable  
1: Enable  
When this function has been enabled and the PROTECTOC has been triggered, the PROTECTOC protection can only be released by by setting this bit from high to low then to high.

#### • MPTC2 Register

| Bit  | 7 | 6      | 5     | 4     | 3     | 2    | 1      | 0      |
|------|---|--------|-------|-------|-------|------|--------|--------|
| Name | — | OCPOSE | ICYCE | PSWPS | AHLPS | ISPS | CAPCPS | CAPOPS |
| R/W  | — | R/W    | R/W   | R/W   | R/W   | R/W  | R/W    | R/W    |
| POR  | — | 0      | 0     | 0     | 0     | 0    | 0      | 0      |

- Bit 7      Unimplemented, read as “0”
- Bit 6      **OCPOSE**: PROTECTOC hardware trigger source selection  
0: Int\_Is  
1: CMP1 output rising edge

- Bit 5 **ICYCE**: Over current hardware cycle-by-cycle protection  
 0: Disable  
 1: Enable  
 The protection circuit will switch off the PWM output once the Int\_Is has an over current condition, and recover the PWM output on the next PWM period. However the PWM output will be switch off again immediately if there is still an over current condition.
- Bit 4 **PSWPS**: Pause/Fault mode selection in software mode  
 0: Fault mode  
 1: Pause mode
- Bit 3 **AHLPS**: Int\_AHL\_Lim mode selection  
 0: Protection circuit allows immediate restart of PWM output when the Int\_AHL\_Lim interrupt has been reset  
 1: Protection circuit allows restart of PWM output on the next PWM period when the Int\_AHL\_Lim interrupt has been reset
- Bit 2 **ISPS**: Int\_Is Pause/Fault mode selection  
 0: Fault mode  
 1: Pause mode
- Bit 1 **CAPCPS**: CapTM\_Cmp mode selection  
 0: Undefined, cannot be used  
 1: Pause Mode  
 Note if the CapTM\_Cmp trigger protection is enabled, the mode must be selected as Pause Mode by setting the CAPCPS bit high.
- Bit 0 **CAPOPS**: CapTM\_Over Pause Mode selection  
 0: Undefined, cannot be used  
 1: Pause Mode  
 Note if the CapTM\_Over trigger protection is enabled, the mode must be selected as Pause Mode by setting the CAPOPS bit high.

• **OCPs Register**

| Bit  | 7 | 6 | 5     | 4     | 3     | 2     | 1     | 0     |
|------|---|---|-------|-------|-------|-------|-------|-------|
| Name | — | — | OCPCB | OCPCT | OCPBB | OCPBT | OCPAB | OCPAT |
| R/W  | — | — | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   |
| POR  | — | — | 0     | 0     | 0     | 0     | 0     | 0     |


- Bit 7~6 Unimplemented, read as “0”
- Bit 5 **OCPCB**: GCB over current protection output selection  
 0: Output 0  
 1: Output 1
- Bit 4 **OCPCT**: GCT over current protection output selection  
 0: Output 0  
 1: Output 1
- Bit 3 **OCPBB**: GBB over current protection output selection  
 0: Output 0  
 1: Output 1
- Bit 2 **OCPBT**: GBT over current protection output selection  
 0: Output 0  
 1: Output 1
- Bit 1 **OCPAB**: GAB over current protection output selection  
 0: Output 0  
 1: Output 1
- Bit 0 **OCPAT**: GAT over current protection output selection  
 0: Output 0  
 1: Output 1

## UART Interface


The device contains an integrated full-duplex or half-duplex asynchronous serial communications UART interface that enables communication with external devices that contain a serial interfaces. Each UART function has many features and can transmit and receive data serially by transferring a frame of data with eight or nine data bits per transmission as well as being able to detect errors when the data is overwritten or incorrectly framed. Each UART function possesses its own internal interrupt which can be used to indicate when a reception occurs or when a transmission terminates.

The integrated UART function contains the following features:

- Full-duplex or half-duplex (single wire mode) asynchronous communication
- 8 or 9 bits character length
- Even, odd , mark, space or no parity options
- One or two stop bits configurable for receiver
- Two stop bits for transmitter
- Baud rate generator with 16-bit prescaler
- Parity, framing, noise and overrun error detection
- Support for interrupt on address detect (last character bit=1)
- Separately enabled transmitter and receiver
- 4-byte Deep FIFO Receive Data Buffer
- 1-byte Deep FIFO Transmit Data Buffer
- RX/TX pin wake-up function
- Transmit and receive interrupts
- Interrupts can be triggered by the following conditions:
  - ♦ Transmitter Empty
  - ♦ Transmitter Idle
  - ♦ Receiver reaching FIFO trigger level
  - ♦ Receiver Overrun
  - ♦ Address Mode Detect

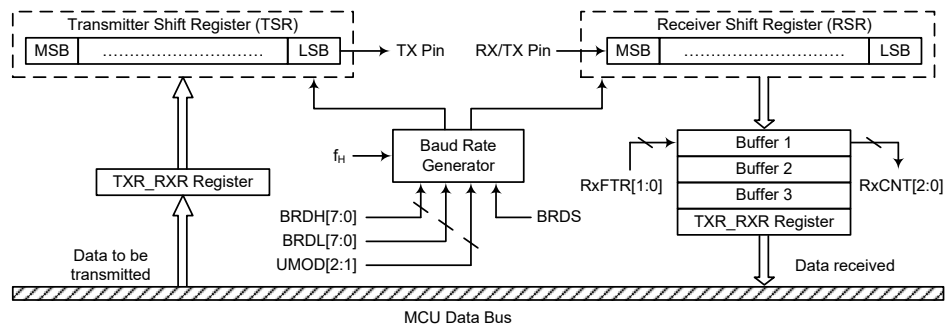

**UART Data Transfer Block Diagram – SWM=0**

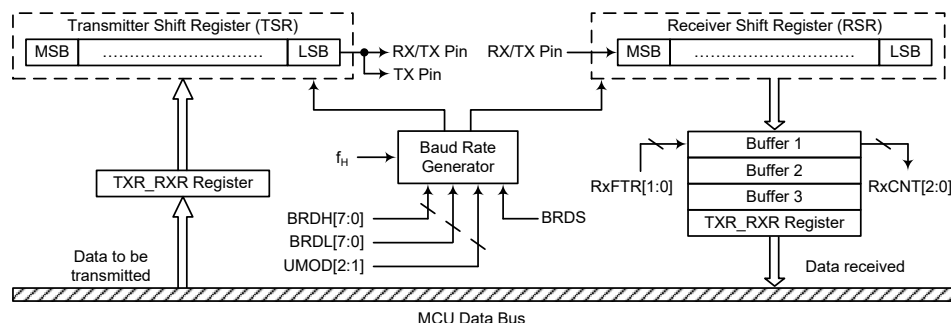

**UART Data Transfer Block Diagram – SWM=1**

## UART External Pins

To communicate with an external serial interface, the internal UART has two external pins known as TX and RX/TX, which are pin-shared with I/O or other pin functions. The TX and RX/TX pin function should first be selected by the corresponding pin-shared function selection register before the UART function is used. Along with the UARTEN bit, the TXEN and RXEN bits, if set, will configure these pins to transmitter output and receiver input conditions. At this time the internal pull-high resistor related to the transmitter output pin will be disabled, while the internal pull-high resistor related to the receiver input pin is controlled by the corresponding I/O pull-high function control bit. When the TX or RX/TX pin function is disabled by clearing the UARTEN, TXEN or RXEN bit, the TX or RX/TX pin will be set to a floating state. At this time whether the internal pull-high resistor is connected to the TX or RX/TX pin or not is determined by the corresponding I/O pull-high function control bit.

## UART Single Wire Mode

The UART function also supports a Single Wire Mode communication which is selected using the SWM bit in the UCR3 register. When the SWM bit is set high, the UART function will be in the single wire mode. In the single wire mode, a single RX/TX pin can be used to transmit and receive data depending upon the corresponding control bits. When the RXEN bit is set high, the RX/TX pin is used as a receiver pin. When the RXEN bit is cleared to zero and the TXEN bit is set high, the RX/TX pin will act as a transmitter pin.

It is recommended not to set both the RXEN and TXEN bits high in the single wire mode. If both the RXEN and TXEN bits are set high, the RXEN bit will have the priority and the UART will act as a receiver.

It is important to note that the functional description in this UART chapter, which is described from the full-duplex communication standpoint, also applies to the half-duplex (single wire mode) communication except the pin usage. In the single wire mode, the TX pin mentioned in this chapter should be replaced by the RX/TX pin to understand the whole UART single wire mode function.

In the single wire mode, the data can also be transmitted on the TX pin in a transmission operation with proper software configurations. Therefore, the data will be output on the RX/TX and TX pins.

## UART Data Transfer Scheme

The UART Data Transfer Block Diagram shows the overall data transfer structure arrangement for the UART. The actual data to be transmitted from the MCU is first transferred to the TXR\_RXR register by the application program. The data will then be transferred to the Transmit Shift Register from where it will be shifted out, LSB first, onto the TX pin at a rate controlled by the Baud Rate Generator. Only the TXR\_RXR register is mapped onto the MCU Data Memory, the Transmit Shift Register is not mapped and is therefore inaccessible to the application program.

Data to be received by the UART is accepted on the external RX/TX pin, from where it is shifted in, LSB first, to the Receiver Shift Register at a rate controlled by the Baud Rate Generator. When the shift register is full, the data will then be transferred from the shift register to the internal TXR\_RXR register, where it is buffered and can be manipulated by the application program. Only the TXR\_RXR register is mapped onto the MCU Data Memory, the Receiver Shift Register is not mapped and is therefore inaccessible to the application program.

It should be noted that the actual register for data transmission and reception only exists as a single shared register, TXR\_RXR, in the Data Memory.

## UART Status and Control Registers

There are nine control registers associated with the UART function. The SWM bit in the UCR3 register is used to enable/disable the UART Single Wire Mode. The USR, UCR1, UCR2, UFCR and RxCNT registers control the overall function of the UART, while the BRDH and BRDL registers control the Baud rate. The actual data to be transmitted and received on the serial interface is managed through the TXR\_RXR data register.

| Register Name | Bit    |      |       |       |       |       |        |        |
|---------------|--------|------|-------|-------|-------|-------|--------|--------|
|               | 7      | 6    | 5     | 4     | 3     | 2     | 1      | 0      |
| USR           | PERR   | NF   | FERR  | OERR  | RIDLE | RXIF  | TIDLE  | TXIF   |
| UCR1          | UARTEN | BNO  | PREN  | PRT1  | PRT0  | TXBRK | RX8    | TX8    |
| UCR2          | TXEN   | RXEN | STOPS | ADDEN | WAKE  | RIE   | TIIE   | TEIE   |
| UCR3          | —      | —    | —     | —     | —     | —     | —      | SWM    |
| TXR_RXR       | D7     | D6   | D5    | D4    | D3    | D2    | D1     | D0     |
| BRDH          | D7     | D6   | D5    | D4    | D3    | D2    | D1     | D0     |
| BRDL          | D7     | D6   | D5    | D4    | D3    | D2    | D1     | D0     |
| UFCR          | —      | —    | UMOD2 | UMOD1 | UMOD0 | BRDS  | RxFTR1 | RxFTR0 |
| RxCNT         | —      | —    | —     | —     | —     | D2    | D1     | D0     |

UART Register List

### • USR Register

The USR register is the status register for the UART, which can be read by the program to determine the present status of the UART. All flags within the USR register are read only. Further explanation on each of the flags is given below:

| Bit  | 7    | 6  | 5    | 4    | 3     | 2    | 1     | 0    |
|------|------|----|------|------|-------|------|-------|------|
| Name | PERR | NF | FERR | OERR | RIDLE | RXIF | TIDLE | TXIF |
| R/W  | R    | R  | R    | R    | R     | R    | R     | R    |
| POR  | 0    | 0  | 0    | 0    | 1     | 0    | 1     | 1    |

Bit 7 **PERR:** Parity error flag  
 0: No parity error is detected  
 1: Parity error is detected

The PERR flag is the parity error flag. When this read only flag is “0”, it indicates a parity error has not been detected. When the flag is “1”, it indicates that the parity of the received word is incorrect. This error flag is applicable only if the parity is enabled and the parity type (odd, even, mark or space) is selected. The flag can also be cleared by a software sequence which involves a read to the status register USR followed by an access to the TXR\_RXR data register.

Bit 6 **NF:** Noise flag  
 0: No noise is detected  
 1: Noise is detected

The NF flag is the noise flag. When this read only flag is “0”, it indicates no noise condition. When the flag is “1”, it indicates that the UART has detected noise on the receiver input. The NF flag is set during the same cycle as the RXIF flag but will not be set in the case of an overrun. The NF flag can be cleared by a software sequence which will involve a read to the status register USR followed by an access to the TXR\_RXR data register.

- Bit 5      **FERR:** Framing error flag  
             0: No framing error is detected  
             1: Framing error is detected

The FERR flag is the framing error flag. When this read only flag is “0”, it indicates that there is no framing error. When the flag is “1”, it indicates that a framing error has been detected for the current character. The flag can also be cleared by a software sequence which will involve a read to the status register USR followed by an access to the TXR\_RXR data register.

- Bit 4      **OERR:** Overrun error flag  
             0: No overrun error is detected  
             1: Overrun error is detected

The OERR flag is the overrun error flag which indicates when the receiver buffer has overflowed. When this read only flag is “0”, it indicates that there is no overrun error. When the flag is “1”, it indicates that an overrun error occurs which will inhibit further transfers to the TXR\_RXR receive data register. The flag is cleared by a software sequence, which is a read to the status register USR followed by an access to the TXR\_RXR data register.

- Bit 3      **RIDLE:** Receiver status  
             0: Data reception is in progress (Data being received)  
             1: No data reception is in progress (Receiver is idle)

The RIDLE flag is the receiver status flag. When this read only flag is “0”, it indicates that the receiver is between the initial detection of the start bit and the completion of the stop bit. When the flag is “1”, it indicates that the receiver is idle. Between the completion of the stop bit and the detection of the next start bit, the RIDLE bit is “1” indicating that the UART receiver is idle and the RX/TX pin stays in logic high condition.

- Bit 2      **RXIF:** Receive TXR\_RXR data register status  
             0: TXR\_RXR data register is empty  
             1: TXR\_RXR data register has available data and Receiver FIFO trigger level is reached

The RXIF flag is the receive data register status flag. When this read only flag is “0”, it indicates that the TXR\_RXR read data register is empty. When the flag is “1”, it indicates that the TXR\_RXR read data register contains new data and reaches the Receiver FIFO trigger level. When the contents of the shift register are transferred to the TXR\_RXR register, and Receiver FIFO trigger level is reached, an interrupt is generated if RIE=1 in the UCR2 register. If one or more errors are detected in the received word, the appropriate receive-related flags NF, FERR, and/or PERR are set within the same clock cycle. The RXIF flag is cleared when the USR register is read with RXIF set, followed by a read from the TXR\_RXR register, and if the TXR\_RXR register has no data available.

- Bit 1      **TIDLE:** Transmission idle  
             0: Data transmission is in progress (Data being transmitted)  
             1: No data transmission is in progress (Transmitter is idle)

The TIDLE flag is known as the transmission complete flag. When this read only flag is “0”, it indicates that a transmission is in progress. This flag will be set high when the TXIF flag is “1” and when there is no transmit data or break character being transmitted. When TIDLE is equal to “1”, the TX pin becomes idle with the pin state in logic high condition. The TIDLE flag is cleared by reading the USR register with TIDLE set and then writing to the TXR\_RXR register. The flag is not generated when a data character or a break is queued and ready to be sent.

Bit 0      **TXIF**: Transmit TXR\_RXR data register status  
             0: Character is not transferred to the transmit shift register  
             1: Character has transferred to the transmit shift register (TXR\_RXR data register is empty)  
 The TXIF flag is the transmit data register empty flag. When this read only flag is “0”, it indicates that the character is not transferred to the transmitter shift register. When the flag is “1”, it indicates that the transmitter shift register has received a character from the TXR\_RXR data register. The TXIF flag is cleared by reading the UART status register (USR) with TXIF set and then writing to the TXR\_RXR data register. Note that when the TXEN bit is set, the TXIF flag bit will also be set since the transmit data register is not yet full.

#### • UCR1 Register

The UCR1 register together with the UCR2 and UCR3 register are the three UART control registers that are used to set the various options for the UART function, such as overall on/off control, parity control, data transfer bit length and single wire mode communication etc. Further explanation on each of the bits is given below:

| Bit  | 7      | 6   | 5    | 4    | 3    | 2     | 1   | 0   |
|------|--------|-----|------|------|------|-------|-----|-----|
| Name | UARTEN | BNO | PREN | PRT1 | PRT0 | TXBRK | RX8 | TX8 |
| R/W  | R/W    | R/W | R/W  | R/W  | R/W  | R/W   | R   | W   |
| POR  | 0      | 0   | 0    | 0    | 0    | 0     | x   | 0   |

“x”: Unknown

Bit 7      **UARTEN**: UART function enable control  
             0: Disable UART. TX and RX/TX pins are in a floating state  
             1: Enable UART. TX and RX/TX pins function as UART pins  
 The UARTEN bit is the UART enable bit. When this bit is equal to “0”, the UART will be disabled and the RX/TX pin as well as the TX pin will be set in a floating state. When the bit is equal to “1”, the UART will be enabled and the TX and RX/TX pins will function as defined by the TXEN and RXEN enable control bits.  
 When the UART is disabled, it will empty the buffer so any character remaining in the buffer will be discarded. In addition, the value of the baud rate counter will be reset. If the UART is disabled, all error and status flags will be reset. Also the TXEN, RXEN, TXBRK, RXIF, OERR, FERR, PERR and NF bits as well as the RxCNT register will be cleared, while the TIDLE, TXIF and RIDLE bits will be set. Other control bits in UCR1, UCR2, UCR3, UFCR, BRDH and BRDL registers will remain unaffected. If the UART is active and the UARTEN bit is cleared, all pending transmissions and receptions will be terminated and the module will be reset as defined above. When the UART is re-enabled, it will restart in the same configuration.

Bit 6      **BNO**: Number of data transfer bits selection  
             0: 8-bit data transfer  
             1: 9-bit data transfer  
 This bit is used to select the data length format, which can have a choice of either 8-bit or 9-bit format. When this bit is equal to “1”, a 9-bit data length format will be selected. If the bit is equal to “0”, then an 8-bit data length format will be selected. If 9-bit data length format is selected, then bits RX8 and TX8 will be used to store the 9th bit of the received and transmitted data respectively.  
 Note that the 9th bit of data if BNO=1, or the 8th bit of data if BNO=0, which is used as the parity bit, does not transfer to RX8 or TXR\_RXR.7 respectively when the parity function is enabled.

Bit 5      **PREN**: Parity function enable control  
             0: Parity function is disabled  
             1: Parity function is enabled  
 This is the parity enable bit. When this bit is equal to “1”, the parity function will be enabled. If the bit is equal to “0”, then the parity function will be disabled.

- Bit 4~3     **PRT1~PRT0**: Parity type selection bits  
               00: Even parity for parity generator  
               01: Odd parity for parity generator  
               10: Mark parity for parity generator  
               11: Space parity for parity generator
- These bits are the parity type selection bits. When these bits are equal to 00b, even parity type will be selected. If these bits are equal to 01b, then odd parity type will be selected. If these bits are equal to 10b, then a 1 (Mark) in the parity bit location will be selected. If these bits are equal to 11b, then a 0 (Space) in the parity bit location will be selected.
- Bit 2        **TXBRK**: Transmit break character  
               0: No break character is transmitted  
               1: Break characters transmit
- The TXBRK bit is the Transmit Break Character bit. When this bit is “0”, there are no break characters and the TX pin operates normally. When the bit is “1”, there are transmit break characters and the transmitter will send logic zeros. When this bit is equal to “1”, after the buffered data has been transmitted, the transmitter output is held low for a minimum of a 13-bit length and until the TXBRK bit is reset.
- Bit 1        **RX8**: Receive data bit 8 for 9-bit data transfer format (read only)
- This bit is only used if 9-bit data transfers are used, in which case this bit location will store the 9th bit of the received data known as RX8. The BNO bit is used to determine whether data transfers are in 8-bit or 9-bit format.
- Bit 0        **TX8**: Transmit data bit 8 for 9-bit data transfer format (write only)
- This bit is only used if 9-bit data transfers are used, in which case this bit location will store the 9th bit of the transmitted data known as TX8. The BNO bit is used to determine whether data transfers are in 8-bit or 9-bit format.

#### • UCR2 Register

The UCR2 register is the second of the two UART control registers and serves several purposes. One of its main functions is to control the basic enable/disable operation of the UART Transmitter and Receiver as well as enabling the various UART interrupts sources. The register also serves to control the receiver STOP bit number selection, receiver wake-up enable and the address detect enable. Further explanation on each of the bits is given below:

| Bit  | 7    | 6    | 5     | 4     | 3    | 2   | 1    | 0    |
|------|------|------|-------|-------|------|-----|------|------|
| Name | TXEN | RXEN | STOPS | ADDEN | WAKE | RIE | TIIE | TEIE |
| R/W  | R/W  | R/W  | R/W   | R/W   | R/W  | R/W | R/W  | R/W  |
| POR  | 0    | 0    | 0     | 0     | 0    | 0   | 0    | 0    |

- Bit 7        **TXEN**: UART transmitter enabled control  
               0: UART transmitter is disabled  
               1: UART transmitter is enabled
- The bit named TXEN is the Transmitter Enable Bit. When this bit is equal to “0”, the transmitter will be disabled with any pending data transmissions being aborted. In addition the buffers will be reset. In this situation the TX pin will be set in a floating state. If the TXEN bit is equal to “1” and the UARTEN bit are also equal to “1”, the transmitter will be enabled and the TX pin will be controlled by the UART. Clearing the TXEN bit during a transmission will cause the data transmission to be aborted and will reset the transmitter. If this situation occurs, the TX pin will be set in a floating state.
- Bit 6        **RXEN**: UART Receiver enabled control  
               0: UART receiver is disabled  
               1: UART receiver is enabled
- The bit named RXEN is the Receiver Enable Bit. When this bit is equal to “0”, the receiver will be disabled with any pending data receptions being aborted. In addition the receive buffers will be reset. In this situation the RX/TX pin will be set in a floating

state. If the RXEN bit is equal to “1” and the UARTEN bit is also equal to “1”, the receiver will be enabled and the RX/TX pin will be controlled by the UART. Clearing the RXEN bit during a reception will cause the data reception to be aborted and will reset the receiver. If this situation occurs, the RX/TX pin will be set in a floating state.

- Bit 5     **STOPS:** Number of stop bits selection for receiver  
           0: One stop bit format is used  
           1: Two stop bits format is used

This bit determines if one or two stop bits are to be used for receiver. When this bit is equal to “1”, two stop bits are used. If this bit is equal to “0”, then only one stop bit is used. Two stop bits are used for transmitter.

- Bit 4     **ADDEN:** Address detect function enable control  
           0: Address detect function is disabled  
           1: Address detect function is enabled

The bit named ADDEN is the address detect function enable control bit. When this bit is equal to “1”, the address detect function is enabled. When it occurs, if the 8th bit, which corresponds to TXR\_RXR.7 if BNO=0 or the 9th bit, which corresponds to RX8 if BNO=1, has a value of “1”, then the received word will be identified as an address, rather than data. If the corresponding interrupt is enabled, an interrupt request will be generated each time the received word has the address bit set, which is the 8th or 9th bit depending on the value of BNO. If the address bit known as the 8th or 9th bit of the received word is “0” with the address detect function being enabled, an interrupt will not be generated and the received data will be discarded.

- Bit 3     **WAKE:** RX/TX pin wake-up UART function enable control  
           0: RX/TX pin wake-up UART function is disabled  
           1: RX/TX pin wake-up UART function is enabled

This bit is used to control the wake-up UART function when a falling edge on the RX/TX pin occurs. Note that this bit is only available when the UART clock ( $f_{H1}$ ) is switched off. There will be no RX/TX pin wake-up UART function if the UART clock ( $f_{H1}$ ) exists. If the WAKE bit is set to 1 as the UART clock ( $f_{H1}$ ) is switched off, a UART wake-up request will be initiated when a falling edge on the RX/TX pin occurs. When this request happens and the corresponding interrupt is enabled, an RX/TX pin wake-up UART interrupt will be generated to inform the MCU to wake up the UART function by switching on the UART clock ( $f_{H1}$ ) via the application program. Otherwise, the UART function cannot resume even if there is a falling edge on the RX/TX pin when the WAKE bit is cleared to 0.

- Bit 2     **RIE:** Receiver interrupt enable control  
           0: Receiver related interrupt is disabled  
           1: Receiver related interrupt is enabled

This bit enables or disables the receiver interrupt. If this bit is equal to “1” and when the receiver overrun flag OERR or receive data available flag RXIF is set, the UART interrupt request flag will be set. If this bit is equal to “0”, the UART interrupt request flag will not be influenced by the condition of the OERR or RXIF flags.

- Bit 1     **TIE:** Transmitter Idle interrupt enable control  
           0: Transmitter idle interrupt is disabled  
           1: Transmitter idle interrupt is enabled

This bit enables or disables the transmitter idle interrupt. If this bit is equal to “1” and when the transmitter idle flag TIDLE is set, due to a transmitter idle condition, the UART interrupt request flag will be set. If this bit is equal to “0”, the UART interrupt request flag will not be influenced by the condition of the TIDLE flag.

- Bit 0     **TEIE:** Transmitter Empty interrupt enable control  
           0: Transmitter empty interrupt is disabled  
           1: Transmitter empty interrupt is enabled

This bit enables or disables the transmitter empty interrupt. If this bit is equal to “1” and when the transmitter empty flag TXIF is set, due to a transmitter empty condition, the UART interrupt request flag will be set. If this bit is equal to “0”, the UART interrupt request flag will not be influenced by the condition of the TXIF flag.

### • UCR3 Register

The UCR3 register is used to enable the UART Single Wire Mode communication. As the name suggests in the single wire mode the UART communication can be implemented in one single line, RX/TX, together with the control of the RXEN and TXEN bits in the UCR2 register.

| Bit  | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0   |
|------|---|---|---|---|---|---|---|-----|
| Name | — | — | — | — | — | — | — | SWM |
| R/W  | — | — | — | — | — | — | — | R/W |
| POR  | — | — | — | — | — | — | — | 0   |

Bit 7~1 Unimplemented, read as “0”

Bit 0 **SWM**: Single Wire Mode enable control

0: Disable, the RX/TX pin is used as UART receiver function only

1: Enable, the RX/TX pin can be used as UART receiver or transmitter function controlled by the RXEN and TXEN bits

Note that when the Single Wire Mode is enabled, if both the RXEN and TXEN bits are high, the RX/TX pin will just be used as UART receiver input.

### • TXR\_RXR Register

The TXR\_RXR register is the data register which is used to store the data to be transmitted on the TX pin or being received from the RX/TX pin.

| Bit  | 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
|------|-----|-----|-----|-----|-----|-----|-----|-----|
| Name | D7  | D6  | D5  | D4  | D3  | D2  | D1  | D0  |
| R/W  | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| POR  | x   | x   | x   | x   | x   | x   | x   | x   |

“x”: Unknown

Bit 7~0 **D7~D0**: UART transmit/receive data bit 7 ~ bit 0

### • BRDH Register

| Bit  | 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
|------|-----|-----|-----|-----|-----|-----|-----|-----|
| Name | D7  | D6  | D5  | D4  | D3  | D2  | D1  | D0  |
| R/W  | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| POR  | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   |

Bit 7~0 **D7~D0**: Baud rate divider high byte

The baud rate divider BRD (BRDH/BRDL) defines the UART clock divider ratio.

$$\text{Baud Rate} = f_{\text{H}} / (\text{BRD} + \text{UMOD} / 8)$$

BRD = 16~65535 or 8~65535 depending on BRDS

Note: 1. The BRD value should not be set to less than 16 when BRDS=0 or less than 8 when BRDS=1, otherwise errors may occur.

2. The BRDL must be written first and then BRDH, otherwise errors may occur.

3. The BRDH register should not be modified during data transmission process.

### • BRDL Register

| Bit  | 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
|------|-----|-----|-----|-----|-----|-----|-----|-----|
| Name | D7  | D6  | D5  | D4  | D3  | D2  | D1  | D0  |
| R/W  | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| POR  | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   |

Bit 7~0 **D7~D0**: Baud rate values low byte

The baud rate divider BRD (BRDH/BRDL) defines the UART clock divider ratio.

$$\text{Baud Rate} = f_{\text{H}} / (\text{BRD} + \text{UMOD} / 8)$$

BRD = 16~65535 or 8~65535 depending on BRDS

- Note: 1. The BRD value should not be set to less than 16 when BRDS=0 or less than 8 when BRDS=1, otherwise errors may occur.  
 2. The BRDL must be written first and then BRDH, otherwise errors may occur.  
 3. The BRDL register should not be modified during data transmission process.

#### • UFCR Register

The UFCR register is the FIFO control register which is used for UART modulation control, BRD range selection and trigger level selection for RXIF and interrupt.

| Bit  | 7 | 6 | 5     | 4     | 3     | 2    | 1      | 0      |
|------|---|---|-------|-------|-------|------|--------|--------|
| Name | — | — | UMOD2 | UMOD1 | UMOD0 | BRDS | RxFTR1 | RxFTR0 |
| R/W  | — | — | R/W   | R/W   | R/W   | R/W  | R/W    | R/W    |
| POR  | — | — | 0     | 0     | 0     | 0    | 0      | 0      |

Bit 7~6 Unimplemented, read as “0”

Bit 5~3 **UMOD2~UMOD0**: UART Modulation Control bits

The modulation control bits are used to correct the baud rate of the received or transmitted UART signal. These bits determine if the extra UART clock cycle should be added in a UART bit time. The UMOD2~ UMOD0 will be added to internal accumulator for every UART bit time. Until a carry to bit 3, the corresponding UART bit time increases a UART clock cycle.

Bit 2 **BRDS**: BGDn range selection

0: BRD range is from 16 to 65535

1: BRD range is from 8 to 65535

The BRDS is used to control the sampling point in a UART bit time. If the BRDS is cleared to zero, the sampling point will be  $BRD/2$ ,  $BRD/2+1 \times f_{Hh}$ , and  $BRD/2+2 \times f_{Hh}$  in a UART bit time. If the BRDS is set high, the sampling point will be  $BRD/2-1 \times f_{Hh}$ ,  $BRD/2$ , and  $BRD/2+2 \times f_{Hh}$  in a UART bit time.

Note that the BRDS bit should not be modified during data transmission process.

Bit 1~0 **RxFTR1~RxFTR0**: Receiver FIFO trigger level (bytes)

00: 4 bytes in Receiver FIFO

01: 1 or more bytes in Receiver FIFO

10: 2 or more bytes in Receiver FIFO

11: 3 or more bytes in Receiver FIFO

For the receiver these bits define the number of received data bytes in the Receiver FIFO that will trigger the RXIF bit being set high, an interrupt will also be generated if the RIE bit is enabled. To prevent OERR from being set high, the receiver FIFO trigger level can be set to 2 bytes, avoiding an overrun state that cannot be processed by the program in time when more than 4 data bytes are received. After the reset the receiver FIFO is empty.

#### • RxCNT Register

The RxCNT register is the counter used to indicate the number of received data bytes in the Receiver FIFO which have not been read by the MCU. This register is read only.

| Bit  | 7 | 6 | 5 | 4 | 3 | 2  | 1  | 0  |
|------|---|---|---|---|---|----|----|----|
| Name | — | — | — | — | — | D2 | D1 | D0 |
| R/W  | — | — | — | — | — | R  | R  | R  |
| POR  | — | — | — | — | — | 0  | 0  | 0  |

Bit 7~3 Unimplemented, read as “0”

Bit 2~0 **D2~D0**: Receiver FIFO counter

The RxCNT register is the counter used to indicate the number of receiver data bytes in Receiver FIFO which is not read by MCU. When Receiver FIFO receives one byte data, the RxCNT will increase by one; when the MCU reads one byte data from Receiver FIFO, the RxCNT will decrease by one. If there are 4 bytes of data in the

Receiver FIFO, the 5<sup>th</sup> data will be saved in the shift register. If there is 6<sup>th</sup> data, the 6<sup>th</sup> data will be saved in the shift register. But the RxCNT remains the value of 4. The RxCNT will be cleared when reset occurs or UARTEN=1. This register is read only.

### Baud Rate Generator

To setup the speed of the serial data communication, the UART function contains its own dedicated baud rate generator. The baud rate is controlled by its own internal free running 16-bit timer, the period of which is determined by two factors. The first of these is the value placed in the BRDH/BRDL register and the second is the UART modulation control bits, UMOD2~UMOD0. To prevent accumulated error of the receiver baud rate frequency, it is recommended to use two stop bits for resynchronization after each byte is received. If a baud rate BR is required with UART clock  $f_H$ .

$$f_H/BR = \text{Integer Part} + \text{Fractional Part}$$

The integer part is loaded into BRD (BRDH/BRDL). The fractional part is multiplied by 8 and rounded, then loaded into UMOD bit field as following:

$$BRD = \text{TRUNC}(f_H/BR)$$

$$UMOD = \text{ROUND}[\text{MOD}(f_H/BR) \times 8]$$

Therefore, the actual baud rate is as following:

$$\text{Baud rate} = f_H / [BRD + (UMOD/8)]$$

### Calculating the Baud Rate and Error Values

For a clock frequency of 4MHz, determine the BRDH/BRDL register value, the actual baud rate and the error value for a desired baud rate of 230400.

From the above formula, the  $BRD = \text{TRUNC}(f_H/BR) = \text{TRUNC}(17.36111) = 17$

The  $UMOD = \text{ROUND}[\text{MOD}(f_H/BR) \times 8] = \text{ROUND}(0.36111 \times 8) = \text{ROUND}(2.88888) = 3$

The actual Baud Rate =  $f_H / [BRD + (UMOD/8)] = 230215.83$

Therefore the error is equal to  $(230215.83 - 230400) / 230400 = -0.08\%$

### Modulation Control Example

To get the best-fitting bit sequence for UART modulation control bits UMOD2~UMOD0, the following algorithm can be used: Firstly, the fractional part of the theoretical division factor is multiplied by 8. Then the product will be rounded and UMOD2~UMOD0 bits will be filled with the rounded value. The UMOD2~UMOD0 will be added to internal accumulator for every UART bit time. Until a carry to bit 3, the corresponding UART bit time increases a UART clock cycle. The following is an example using the fraction 0.36111 previously calculated:  $UMOD[2:0] = \text{ROUND}(0.36111 \times 8) = 011b$ .


| Fraction Addition     | Carry to Bit 3 | UART Bit Time Sequence | Extra UART Clock Cycle |
|-----------------------|----------------|------------------------|------------------------|
| 0000b + 0011b = 0011b | No             | Start bit              | No                     |
| 0011b + 0011b = 0110b | No             | D0                     | No                     |
| 0110b + 0011b = 1001b | Yes            | D1                     | Yes                    |
| 1001b + 0011b = 1100b | No             | D2                     | No                     |
| 1100b + 0011b = 1111b | No             | D3                     | No                     |
| 1111b + 0011b = 0010b | Yes            | D4                     | Yes                    |
| 0010b + 0011b = 0101b | No             | D5                     | No                     |
| 0101b + 0011b = 1000b | Yes            | D6                     | Yes                    |
| 1000b + 0011b = 1011b | No             | D7                     | No                     |
| 1011b + 0011b = 1110b | No             | Parity bit             | No                     |
| 1110b + 0011b = 0001b | Yes            | Stop bit               | Yes                    |

### Baud Rate Correction Example

The following figure presents an example using a baud rate of 230400 generated with UART clock  $f_H$ . The data format for the following figure is: eight data bits, parity enabled, no address bit, two stop bits.

The following figure shows three different frames:

- The upper frame is the correct one, with a bit-length of 17.36  $f_H$  cycles ( $4000000/230400=17.36$ ).
- The middle frame uses a rough estimate, with 17  $f_H$  cycles for the bit length.
- The lower frame shows a corrected frame using the best fit for the UART modulation control bits UMOD2~UMOD0.

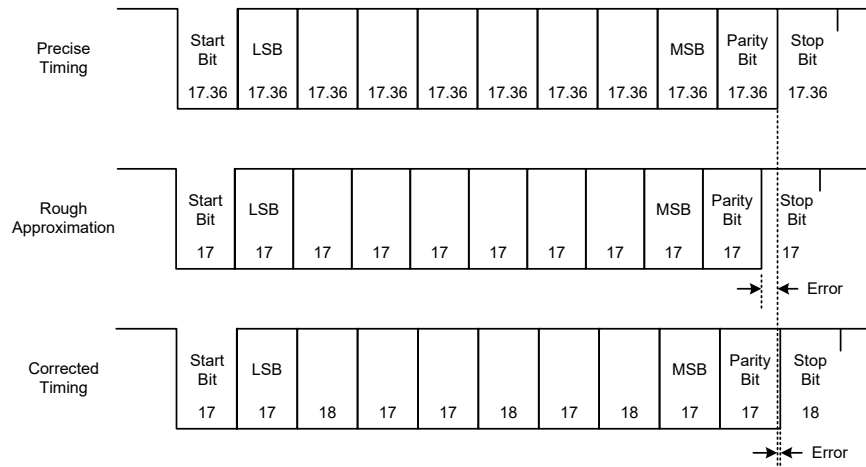

### UART Setup and Control

For data transfer, the UART function utilizes a non-return-to-zero, more commonly known as NRZ, format. This is composed of one start bit, eight or nine data bits, and one or two stop bits. Parity is supported by the UART hardware, and can be setup to be even, odd, mark, space or no parity. For the most common data format, 8 data bits along with no parity and one stop bit, denoted as 8, N, 1, is used as the default setting, which is the setting at power-on. The number of data bits along with the parity are setup by programming the BNO, PRT1~PRT0 and PREN bits. The transmitter always uses two stop bits while the receiver uses one or two stop bits which is determined by the STOPS bit. The baud rate used to transmit and receive data is setup using the internal 16-bit baud rate generator, while the data is transmitted and received LSB first. Although the UART transmitter and receiver are functionally independent, they both use the same data format and baud rate. In all cases stop bits will be used for data transmission.

### Enabling/Disabling the UART Interface

The basic on/off function of the internal UART function is controlled using the UARTEN bit in the UCR1 register. If the UARTEN, TXEN and RXEN bits are set, then these two UART pins will act as normal TX output pin and RX/TX input pin respectively. If no data is being transmitted on the TX pin, then it will default to a logic high value.

Clearing the UARTEN bit will disable the TX and RX/TX pins and allow these two pins to be used as normal I/O or other pin-shared functional pins by configuring the corresponding pin-shared control bits. When the UART function is disabled the buffer will be reset to an empty condition, at the same time discarding any remaining residual data. Disabling the UART will also reset the error and status flags with bits TXEN, RXEN, TXBRK, RXIF, OERR, FERR, PERR and NF as well

as register RxCNT being cleared while bits TIDLE, TXIF and RIDLE will be set. The remaining control bits in the UCR1, UCR2, UCR3, UFCR, BRDH and BRDL registers will remain unaffected. If the UARTEN bit in the UCR1 register is cleared while the UART is active, then all pending transmissions and receptions will be immediately suspended and the UART will be reset to a condition as defined above. If the UART is then subsequently re-enabled, it will restart again in the same configuration.


### Data, Parity and Stop Bit Selection

The format of the data to be transferred is composed of various factors such as data bit length, parity on/off, parity type, address bits and the number of stop bits. These factors are determined by the setup of various bits within the UCR1 and UCR2 registers. The BNO bit controls the number of data bits which can be set to either 8 or 9, the PRT1~PRT0 bits control the choice of odd, even, mark or space parity, the PREN bit controls the parity on/off function and the STOPS bit decides whether one or two stop bits are to be used for the receiver, while the transmitter always uses two stop bits. The following table shows various formats for data transmission. The address bit, which is the MSB of the data byte, identifies the frame as an address character or data if the address detect function is enabled. The number of stop bits, which can be either one or two, is independent of the data length and is only configurable for the receiver. The transmitter uses two stop bits.

| Start Bit                            | Data Bits | Address Bit | Parity Bit | Stop Bit |
|--------------------------------------|-----------|-------------|------------|----------|
| <b>Example of 8-bit Data Formats</b> |           |             |            |          |
| 1                                    | 8         | 0           | 0          | 1 or 2   |
| 1                                    | 7         | 0           | 1          | 1 or 2   |
| 1                                    | 7         | 1           | 0          | 1 or 2   |
| <b>Example of 9-bit Data Formats</b> |           |             |            |          |
| 1                                    | 9         | 0           | 0          | 1 or 2   |
| 1                                    | 8         | 0           | 1          | 1 or 2   |
| 1                                    | 8         | 1           | 0          | 1 or 2   |

**Transmitter Receiver Data Format**

The following diagram shows the transmit and receive waveforms for both 8-bit and 9-bit data formats.

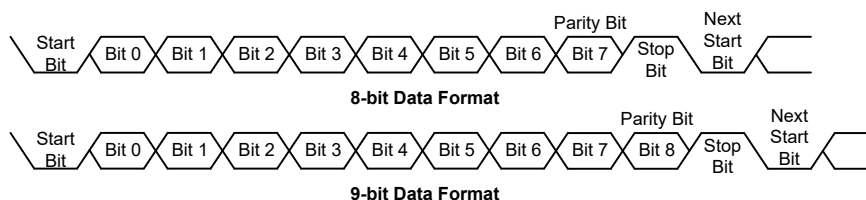

### UART Transmitter

Data word lengths of either 8 or 9 bits can be selected by programming the BNO bit in the UCR1 register. When BNO bit is set, the word length will be set to 9 bits. In this case the 9th bit, which is the MSB, needs to be stored in the TX8 bit in the UCR1 register. At the transmitter core lies the Transmitter Shift Register, more commonly known as the TSR, whose data is obtained from the transmit data register, which is known as the TXR\_RXR register. The data to be transmitted is loaded into this TXR\_RXR register by the application program. The TSR register is not written to with new data until the stop bit from the previous transmission has been sent out. As soon as this stop bit has been transmitted, the TSR can then be loaded with new data from the TXR\_RXR register, if it is available. It should be noted that the TSR register, unlike many other registers, is not directly mapped into the Data Memory area and as such is not available to the application program for direct read/write operations. An actual transmission of data will normally be enabled when the TXEN bit is set, but the data will not be transmitted until the TXR\_RXR register has been loaded

with data and the baud rate generator has defined a shift clock source. However, the transmission can also be initiated by first loading data into the TXR\_RXR register, after which the TXEN bit can be set. When a transmission of data begins, the TSR is normally empty, in which case a transfer to the TXR\_RXR register will result in an immediate transfer to the TSR. If during a transmission the TXEN bit is cleared, the transmission will immediately cease and the transmitter will be reset. The TX output pin can then be configured as the I/O or other pin-shared functions by configuring the corresponding pin-shared control bits.

### Transmitting Data

When the UART is transmitting data, the data is shifted on the TX pin from the shift register, with the least significant bit first. In the transmit mode, the TXR\_RXR register forms a buffer between the internal bus and the transmitter shift register. It should be noted that if 9-bit data format has been selected, then the MSB will be taken from the TX8 bit in the UCR1 register. The steps to initiate a data transfer can be summarized as follows:

- Make the correct selection of the BNO, PRT1~PRT0 and PREN bits to define the required word length and parity type. Two stop bits are used for the transmitter.
- Setup the BRDH, BRDL registers and the UMOD2~UMOD0 bits to select the desired baud rate.
- Set the TXEN bit to ensure that the TX pin is used as a UART transmitter pin.
- Access the USR register and write the data that is to be transmitted into the TXR\_RXR register. Note that this step will clear the TXIF bit.

This sequence of events can now be repeated to send additional data.

It should be noted that when TXIF=0, data will be inhibited from being written to the TXR\_RXR register. Clearing the TXIF flag is always achieved using the following software sequence:

1. A USR register access
2. A TXR\_RXR register write execution

The read-only TXIF flag is set by the UART hardware and if set indicates that the TXR\_RXR register is empty and that other data can now be written into the TXR\_RXR register without overwriting the previous data. If the TEIE bit is set then the TXIF flag will generate an interrupt.

During a data transmission, a write instruction to the TXR\_RXR register will place the data into the TXR\_RXR register, which will be copied to the shift register at the end of the present transmission. When there is no data transmission in progress, a write instruction to the TXR\_RXR register will place the data directly into the shift register, resulting in the commencement of data transmission, and the TXIF bit being immediately set. When a frame transmission is complete, which happens after stop bits are sent or after the break frame, the TIDLE bit will be set.

To clear the TIDLE bit the following software sequence is used:

1. A USR register access
2. A TXR\_RXR register write execution

Note that both the TXIF and TIDLE bits are cleared by the same software sequence.

### Transmitting Break

If the TXBRK bit is set and the state keeps for a time greater than  $(BRD+1) \times t_H$  while TIDLE=1, then break characters will be sent on the next transmission. Break character transmission consists of a start bit, followed by  $13 \times N$  '0' bits and stop bits, where  $N=1, 2$ , etc. If a break character is to be transmitted then the TXBRK bit must be first set by the application program, and then cleared to generate the stop bits. Transmitting a break character will not generate a transmit interrupt. Note that a break condition length is at least 13 bits long. If the TXBRK bit is continually kept at a logic high

level then the transmitter circuitry will transmit continuous break characters. After the application program has cleared the TXBRK bit, the transmitter will finish transmitting the last break character and subsequently send out two stop bits. The automatic logic highs at the end of the last break character will ensure that the start bit of the next frame is recognized.

## UART Receiver

The UART is capable of receiving word lengths of either 8 or 9 bits. If the BNO bit is set, the word length will be set to 9 bits with the MSB being stored in the RX8 bit of the UCR1 register. At the receiver core lies the Receive Serial Shift Register, commonly known as the RSR. The data which is received on the RX/TX pin input is sent to the data recovery block. The data recovery block operating speed is 16 times that of the baud rate, while the main receive serial shifter operates at the baud rate. After the RX/TX pin is sampled for the stop bit, the received data in RSR is transferred to the receive data register, if the register is empty. The data which is received on the external RX/TX pin input is sampled three times by a majority detect circuit to determine the logic level that has been placed onto the RX/TX pin. It should be noted that the RSR register, unlike many other registers, is not directly mapped into the Data Memory area and as such is not available to the application program for direct read/write operations.

## Receiving Data

When the UART receiver is receiving data, the data is serially shifted in on the external RX/TX pin input, LSB first. In the read mode, the TXR\_RXR register forms a buffer between the internal bus and the receiver shift register. The TXR\_RXR register is a four byte deep FIFO data buffer, where four-bytes can be held in the FIFO while a fifth byte can continue to be received. Note that the application program must ensure that the data is read from TXR\_RXR before the fifth byte has been completely shifted in, otherwise this fifth byte will be discarded and an overrun error OERR will be subsequently indicated. For continuous multi-byte data transmission, it is strongly recommended that the receiver uses two stop bits to avoid a receiving error caused by the accumulated error of the receiver baud rate frequency.

The steps to initiate a data transfer can be summarized as follows:

- Make the correct selection of BNO, PRT1~PRT0, PREN and STOPS bits to define the word length and parity type and number of stop bits.
- Setup the BRDH, BRDL registers and the UMOD2~UMOD0 bits to select the desired baud rate.
- Set the RXEN bit to ensure that the RX/TX pin is used as a UART receiver pin.

At this point the receiver will be enabled which will begin to look for a start bit.

When a character is received the following sequence of events will occur:

- The RXIF bit in the USR register will be set when the TXR\_RXR register has data available. The number of the available data bytes can be checked by polling the RxCNT register content.
- When the contents of the shift register have been transferred to the TXR\_RXR register and Receiver FIFO trigger level is reached, if the RIE bit is set, then an interrupt will be generated.
- If during reception, a frame error, noise error, parity error, or an overrun error has been detected, then the error flags can be set.

The RXIF bit can be cleared using the following software sequence:

1. A USR register access
2. A TXR\_RXR register read execution

### Receiving Break

Any break character received by the UART will be managed as a framing error. The receiver will count and expect a certain number of bit times as specified by the values programmed into the BNO bit plus one or two stop bits. If the break is much longer than 13 bit times, the reception will be considered as complete after the number of bit times specified by BNO plus one or two stop bits. The RXIF bit is set, FERR is set, zeros are loaded into the receive data register, interrupts are generated if appropriate and the RIDLE bit is set. A break is regarded as a character that contains only zeros with the FERR flag set. If a long break signal has been detected, the receiver will regard it as a data frame including a start bit, data bits and the invalid stop bit and the FERR flag will be set. The receiver must wait for a valid stop bit before looking for the next start bit. The receiver will not make the assumption that the break condition on the line is the next start bit. The break character will be loaded into the buffer and no further data will be received until one or two stop bits are received. It should be noted that the RIDLE read only flag will go high when the stop bits have not yet been received. The reception of a break character on the UART registers will result in the following:

- The framing error flag, FERR, will be set.
- The receive data register, TXR\_RXR, will be cleared.
- The OERR, NF, PERR, RIDLE or RXIF flags will possibly be set.

### Idle Status

When the receiver is reading data, which means it will be in between the detection of a start bit and the reading of a stop bit, the receiver status flag in the USR register, otherwise known as the RIDLE flag, will have a zero value. In between the reception of a stop bit and the detection of the next start bit, the RIDLE flag will have a high value, which indicates the receiver is in an idle condition.

### Receiver Interrupt

The read only receive interrupt flag RXIF in the USR register is set by an edge generated by the receiver. An interrupt is generated if RIE=1, when a word is transferred from the Receive Shift Register, RSR, to the Receive Data Register, TXR\_RXR. An overrun error can also generate an interrupt if RIE=1.

When a subroutine will be called with an execution time longer than the time for UART to receive five data bytes, if the UART received data could not be read in time during the subroutine execution, clear the RXEN bit to zero in advance to suspend data reception. If the UART interrupt could not be served in time to process the overrun error during the subroutine execution, ensure that both EMI and RXEN bits are disabled during this period, and then enable EMI and RXEN again after the subroutine execution has been completed to continue the UART data reception.

## Managing Receiver Errors

Several types of reception errors can occur within the UART module, the following section describes the various types and how they are managed by the UART.

### Overrun Error – OERR

The TXR\_RXR register is composed of a four-byte deep FIFO data buffer, where four bytes can be held in the FIFO register, while a fifth byte can continue to be received. Before this fifth byte has been entirely shifted in, the data should be read from the TXR\_RXR register. If this is not done, the overrun error flag OERR will be consequently indicated.

In the event of an overrun error occurring, the following will happen:

- The OERR flag in the USR register will be set.
- The TXR\_RXR contents will not be lost.

- The shift register will be overwritten.
- An interrupt will be generated if the RIE bit is set.

When the OERR flag is set to “1”, it is necessary to read five data bytes from the four-byte deep receiver FIFO and the shift register immediately to avoid unexpected errors, such as the UART is unable to receive data. If such an error occurs, clear the RXEN bit to “0” then set it to “1” again to continue data reception.

The OERR flag can be cleared by an access to the USR register followed by a read to the TXR\_RXR register.

#### **Noise Error – NF**

Over-sampling is used for data recovery to identify valid incoming data and noise. If noise is detected within a frame the following will occur:

- The read only noise flag, NF, in the USR register will be set on the rising edge of the RXIF bit.
- Data will be transferred from the Shift register to the TXR\_RXR register.
- No interrupt will be generated. However this bit rises at the same time as the RXIF bit which itself generates an interrupt.

Note that the NF flag is reset by an USR register read operation followed by a TXR\_RXR register read operation.

#### **Framing Error – FERR**

The read only framing error flag, FERR, in the USR register, is set if a zero is detected instead of stop bits. If two stop bits are selected, both stop bits must be high; otherwise the FERR flag will be set. The FERR flag and the received data will be recorded in the USR and TXR\_RXR registers respectively, and the flag is cleared in any reset.

#### **Parity Error – PERR**

The read only parity error flag, PERR, in the USR register, is set if the parity of the received word is incorrect. This error flag is only applicable if the parity is enabled, PREN=1, and if the parity type, odd, even, mark or space, is selected. The read only PERR flag and the received data will be recorded in the USR and TXR\_RXR registers respectively. It is cleared on any reset, it should be noted that the flags, FERR and PERR, in the USR register should first be read by the application program before reading the data word.


### **UART Interrupt Structure**

Several individual UART conditions can generate a UART interrupt. When these conditions exist, a low pulse will be generated to get the attention of the microcontroller. These conditions are a transmitter data register empty, transmitter idle, receiver reaching FIFO trigger level, receiver overrun, address detect and an RX/TX pin wake-up. When any of these conditions are created, if the global interrupt enable bit and its corresponding interrupt control bit are enabled and the stack is not full, the program will jump to its corresponding interrupt vector where it can be serviced before returning to the main program. Four of these conditions have the corresponding USR register flags which will generate a UART interrupt if its associated interrupt enable control bit in the UCR2 register is set. The two transmitter interrupt conditions have their own corresponding enable control bits, while the two receiver interrupt conditions have a shared enable control bit. These enable bits can be used to mask out individual UART interrupt sources.

The address detect condition, which is also a UART interrupt source, does not have an associated flag, but will generate a UART interrupt when an address detect condition occurs if its function is enabled by setting the ADDEN bit in the UCR2 register. An RX/TX pin wake-up, which is also a

UART interrupt source, does not have an associated flag, but will generate a UART interrupt if the UART clock ( $f_{H1}$ ) source is switched off and the WAKE and RIE bits in the UCR2 register are set when a falling edge on the RX/TX pin occurs.

Note that the USR register flags are read only and cannot be cleared or set by the application program, neither will they be cleared when the program jumps to the corresponding interrupt servicing routine, as is the case for some of the other interrupts. The flags will be cleared automatically when certain actions are taken by the UART, the details of which are given in the UART register section. The overall related interrupt can be disabled or enabled by the UART interrupt enable control bits in the interrupt control registers of the microcontroller to decide whether the interrupt requested by the UART module is masked out or allowed.

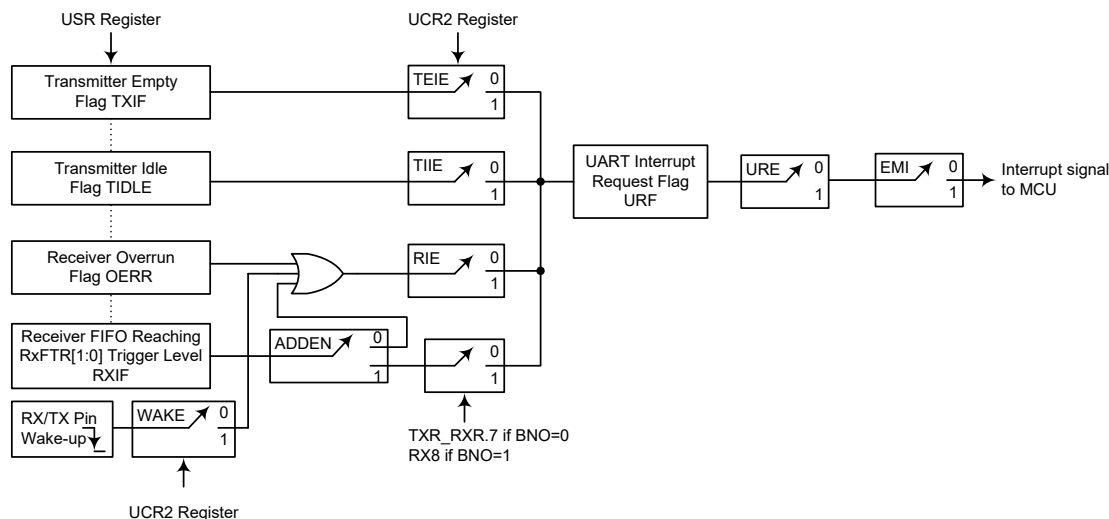

**UART Interrupt Structure**

### Address Detect Mode

Setting the Address Detect Mode bit, ADDEN, in the UCR2 register, enables this special mode. If this bit is enabled then an additional qualifier will be placed on the generation of a Receiver Data Available interrupt, which is requested by the RXIF flag. If the ADDEN bit is enabled, then when data is available, an interrupt will only be generated, if the highest received bit has a high value. Note that the URE and EMI interrupt enable bits must also be enabled for correct interrupt generation. This highest address bit is the 9th bit if BNO=1 or the 8th bit if BNO=0. If this bit is high, then the received word will be defined as an address rather than data. A Data Available interrupt will be generated every time the last bit of the received word is set. If the ADDEN bit is not enabled, then a Receiver Data Available interrupt will be generated each time the RXIF flag is set, irrespective of the data last bit status. The address detect mode and parity enable are mutually exclusive functions. Therefore if the address detect mode is enabled, then to ensure correct operation, the parity function should be disabled by resetting the parity enable bit PREN to zero.

| ADDEN | 9th Bit if BNO=1<br>8th Bit if BNO=0 | UART Interrupt Generated |
|-------|--------------------------------------|--------------------------|
| 0     | 0                                    | √                        |
|       | 1                                    | √                        |
| 1     | 0                                    | ×                        |
|       | 1                                    | √                        |

**ADDEN Bit Function**

## UART Power Down and Wake-up


When the UART clock ( $f_{H}$ ) is off, the UART will cease to function, all clock sources to the module are shutdown. If the UART clock ( $f_{H}$ ) is off while a transmission is still in progress, then the transmission will be paused until the UART clock source derived from the microcontroller is activated. In a similar way, if the MCU enters the IDLE or SLEEP mode while receiving data, then the reception of data will likewise be paused. When the MCU enters the IDLE or SLEEP mode, note that the USR, UCR1, UCR2, UCR3, UFCR, TXR\_RXR, as well as the BRDH and BRDL registers will not be affected. It is recommended to make sure first that the UART data transmission or reception has been finished before the microcontroller enters the IDLE or SLEEP mode.

The UART function contains a receiver RX/TX pin wake-up function, which is enabled or disabled by the WAKE bit in the UCR2 register. If this bit, along with the UART enable bit, UARTEN, the receiver enable bit, RXEN and the receiver interrupt bit, RIE, are all set when the UART clock ( $f_{H}$ ) is off, then a falling edge on the RX/TX pin will trigger an RX/TX pin wake-up UART interrupt. Note that as it takes certain system clock cycles after a wake-up, before normal microcontroller operation resumes, any data received during this time on the RX/TX pin will be ignored.

For a UART wake-up interrupt to occur, in addition to the bits for the wake-up being set, the global interrupt enable bit, EMI, and the UART interrupt enable bit, URE, must be set. If the EMI and URE bits are not set then only a wake-up event will occur and no interrupt will be generated. Note also that as it takes certain system clock cycles after a wake-up before normal microcontroller resumes, the UART interrupt will not be generated until after this time has elapsed.

## 16-bit Multiplication Division Unit – MDU

The device has a 16-bit Multiplication Division Unit, MDU, which integrates a 16-bit unsigned multiplier and a 32-bit/16-bit divider. The MDU, in replacing the software multiplication and division operations, can therefore save large amounts of computing time as well as the Program and Data Memory space. It also reduces the overall microcontroller loading and results in the overall system performance improvements.

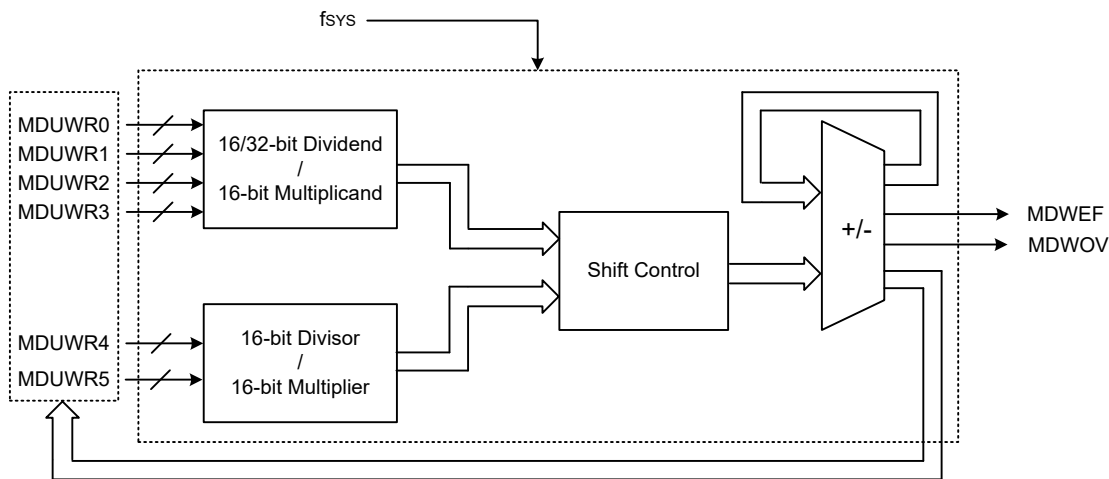

16-Bit MDU Block Diagram

## MDU Registers

The multiplication and division operations are implemented in a specific way, a specific write access sequence of a series of MDU data registers. The status register, MDUWCTRL, provides the

indications for the MDU operation. The data register each is used to store the data regarded as the different operand corresponding to different MDU operations.

| Register Name | Bit   |       |    |    |    |    |    |    |
|---------------|-------|-------|----|----|----|----|----|----|
|               | 7     | 6     | 5  | 4  | 3  | 2  | 1  | 0  |
| MDUWR0        | D7    | D6    | D5 | D4 | D3 | D2 | D1 | D0 |
| MDUWR1        | D7    | D6    | D5 | D4 | D3 | D2 | D1 | D0 |
| MDUWR2        | D7    | D6    | D5 | D4 | D3 | D2 | D1 | D0 |
| MDUWR3        | D7    | D6    | D5 | D4 | D3 | D2 | D1 | D0 |
| MDUWR4        | D7    | D6    | D5 | D4 | D3 | D2 | D1 | D0 |
| MDUWR5        | D7    | D6    | D5 | D4 | D3 | D2 | D1 | D0 |
| MDUWCTRL      | MDWEF | MDWOV | —  | —  | —  | —  | —  | —  |

**MDU Register List**

• **MDUWRn Register (n=0~5)**

| Bit  | 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
|------|-----|-----|-----|-----|-----|-----|-----|-----|
| Name | D7  | D6  | D5  | D4  | D3  | D2  | D1  | D0  |
| R/W  | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| POR  | x   | x   | x   | x   | x   | x   | x   | x   |

“x”: unknown

Bit 7~0      **D7~D0**: 16-bit MDU data register n

• **MDUWCTRL Register**

| Bit  | 7     | 6     | 5 | 4 | 3 | 2 | 1 | 0 |
|------|-------|-------|---|---|---|---|---|---|
| Name | MDWEF | MDWOV | — | — | — | — | — | — |
| R/W  | R     | R     | — | — | — | — | — | — |
| POR  | 0     | 0     | — | — | — | — | — | — |

Bit 7      **MDWEF**: 16-bit MDU error flag

0: Normal  
1: Abnormal

This bit will be set to 1 if the data register MDUWRn is written or read as the MDU operation is executing. This bit should be cleared to 0 by reading the MDUWCTRL register if it is equal to 1 and the MDU operation is completed.

Bit 6      **MDWOV**: 16-bit MDU overflow flag

0: No overflow occurs  
1: Multiplication product > FFFFH or Divisor=0

When an operation is completed, this bit will be updated by hardware to a new value corresponding to the current operation situation.

Bit 5~0      Unimplemented, read as “0”

## MDU Operation

For this MDU the multiplication or division operation is carried out in a specific way and is determined by the write access sequence of the six MDU data registers, MDUWR0~MDUWR5. The low byte data, regardless of the dividend, multiplicand, divisor or multiplier, must first be written into the corresponding MDU data register followed by the high byte data. All MDU operations will be executed after the MDUWR5 register is write-accessed together with the correct specific write access sequence of the MDUWRn. Note that it is not necessary to consecutively write data into the MDU data registers but must be in a correct write access sequence. Therefore, a non-write MDUWRn instruction or an interrupt, etc., can be inserted into the correct write access sequence without destroying the write operation. The relationship between the write access sequence and the MDU operation is shown in the following.

- The overall important points for the MDU read/write access sequence and calculation time are summarized in the following table. Note that the device should not enter the IDLE or SLEEP mode until the MDU operation is totally completed, otherwise the MDU operation will fail.

| Operations<br>Items                                                    | 32-bit / 16-bit Division                                                                                                                                                                                                 | 16-bit / 16-bit Division                                                                                                                       | 16-bit × 16-bit Multiplication                                                                                                                               |
|------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Write Sequence</b><br>First write<br>↓<br>↓<br>↓<br>↓<br>Last write | Dividend Byte 0 written to MDUWR0<br>Dividend Byte 1 written to MDUWR1<br>Dividend Byte 2 written to MDUWR2<br>Dividend Byte 3 written to MDUWR3<br>Divisor Byte 0 written to MDUWR4<br>Divisor Byte 1 written to MDUWR5 | Dividend Byte 0 written to MDUWR0<br>Dividend Byte 1 written to MDUWR1<br>Divisor Byte 0 written to MDUWR4<br>Divisor Byte 1 written to MDUWR5 | Multiplicand Byte 0 written to MDUWR0<br>Multiplier Byte 0 written to MDUWR4<br>Multiplicand Byte 1 written to MDUWR1<br>Multiplier Byte 1 written to MDUWR5 |
| Calculation Time                                                       | $17 \times t_{\text{sys}}$                                                                                                                                                                                               | $9 \times t_{\text{sys}}$                                                                                                                      | $11 \times t_{\text{sys}}$                                                                                                                                   |
| <b>Read Sequence</b><br>First read<br>↓<br>↓<br>↓<br>↓<br>Last read    | Quotient Byte 0 read from MDUWR0<br>Quotient Byte 1 read from MDUWR1<br>Quotient Byte 2 read from MDUWR2<br>Quotient Byte 3 read from MDUWR3<br>Remainder Byte 0 read from MDUWR4<br>Remainder Byte 1 read from MDUWR5   | Quotient Byte 0 read from MDUWR0<br>Quotient Byte 1 read from MDUWR1<br>Remainder Byte 0 read from MDUWR4<br>Remainder Byte 1 read from MDUWR5 | Product Byte 0 written to MDUWR0<br>Product Byte 1 written to MDUWR1<br>Product Byte 2 written to MDUWR2<br>Product Byte 3 written to MDUWR3                 |

May 11, 2024

## Low Voltage Detector

The device has a Low Voltage Detector function, also known as LVD. This enables the device to monitor the power supply voltage,  $V_{DD}$ , and provides a warning signal should it fall below a certain level. This function may be especially useful in battery applications where the supply voltage will gradually reduce as the battery ages, as it allows an early warning battery low signal to be generated. The Low Voltage Detector also has the capability of generating an interrupt signal.

### LVD Register

The Low Voltage Detector function is controlled using a single register with the name LVDC. Three bits in this register, VLVD2 ~VLVD0, are used to select one of three fixed voltages below which a low voltage condition will be determined. A low voltage condition is indicated when the LVDO bit is set. If the LVDO bit is low, this indicates that the  $V_{DD}$  voltage is above the preset low voltage value. The LVDEN bit is used to control the overall on/off function of the low voltage detector. Setting the bit high will enable the low voltage detector. Clearing the bit to zero will switch off the internal low voltage detector circuits. As the low voltage detector will consume a certain amount of power, it may be desirable to switch off the circuit when not in use, an important consideration in power sensitive battery powered applications.

#### • LVDC Register

| Bit  | 7 | 6 | 5    | 4     | 3 | 2     | 1     | 0     |
|------|---|---|------|-------|---|-------|-------|-------|
| Name | — | — | LVDO | LVDEN | — | VLVD2 | VLVD1 | VLVD0 |
| R/W  | — | — | R    | R/W   | — | R/W   | R/W   | R/W   |
| POR  | — | — | 0    | 0     | — | 0     | 0     | 0     |

Bit 7~6 Unimplemented, read as “0”

Bit 5 **LVDO**: LVD output flag  
 0: No Low Voltage Detected  
 1: Low Voltage Detected


Bit 4 **LVDEN**: Low voltage detector enable control  
 0: Disable  
 1: Enable

Bit 3 Unimplemented, read as “0”

Bit 2~0 **VLVD2~VLVD0**: LVD voltage selection  
 000: Reserved  
 001: Reserved  
 010: Reserved  
 011: Reserved  
 100: Reserved  
 101: 3.3V  
 110: 3.6V  
 111: 4.0V

## LVD Operation

The Low Voltage Detector function operates by comparing the power supply voltage,  $V_{DD}$ , with a pre-specified voltage level stored in the LVDC register. This has a range of between 3.3V~4.0V. When the power supply voltage,  $V_{DD}$ , falls below this pre-determined value, the LVDO bit will be set high indicating a low power supply voltage condition. When the device is in the SLEEP mode, the low voltage detector will be disabled even if the LVDEN bit is high. After enabling the Low Voltage Detector, a time delay  $t_{LVDS}$  should be allowed for the circuitry to stabilise before reading the LVDO bit. Note also that as the  $V_{DD}$  voltage may rise and fall rather slowly, at the voltage nears that of  $V_{LVD}$ , there may be multiple bit LVDO transitions.

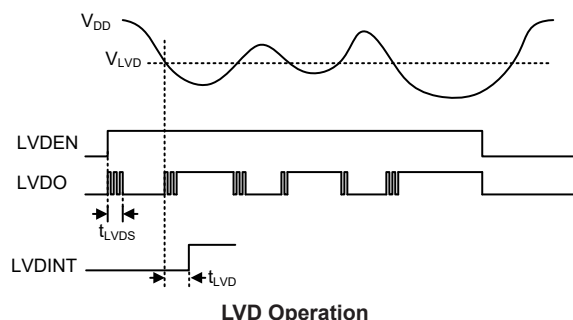


The Low Voltage Detector also has its own interrupt, providing an alternative means of low voltage detection, in addition to polling the LVDO bit. The interrupt will only be generated after a delay of  $t_{LVD}$  after the LVDO bit has been set high by a low voltage condition. In this case, the LVDF interrupt request flag will be set, causing an interrupt to be generated if  $V_{DD}$  falls below the preset LVD voltage. This will cause the device to wake-up from the IDLE Mode, however if the Low Voltage Detector wake up function is not required then the LVDF flag should be first set high before the device enters the IDLE Mode.

## Interrupts

Interrupts are an important part of any microcontroller system. When an external event or an internal function such as a Timer Module or an A/D converter requires microcontroller attention, their corresponding interrupt will enforce a temporary suspension of the main program allowing the microcontroller to direct attention to their respective needs. The device contains several external interrupt and internal interrupt functions. The external interrupts are generated by the action of the external H1, H2, H3, NFIN and INT pins, while the internal interrupts are generated by various internal functions including the TMs, the Comparator 0, 16-bit CAPTM, Time Base, PWM, LVD, UART and A/D converter.

The various interrupt enable bits, together with their associated request flags, are shown in the accompanying diagrams with their order of priority. Some interrupt sources have their own individual interrupt vector while others share the same multi-function interrupt vector.

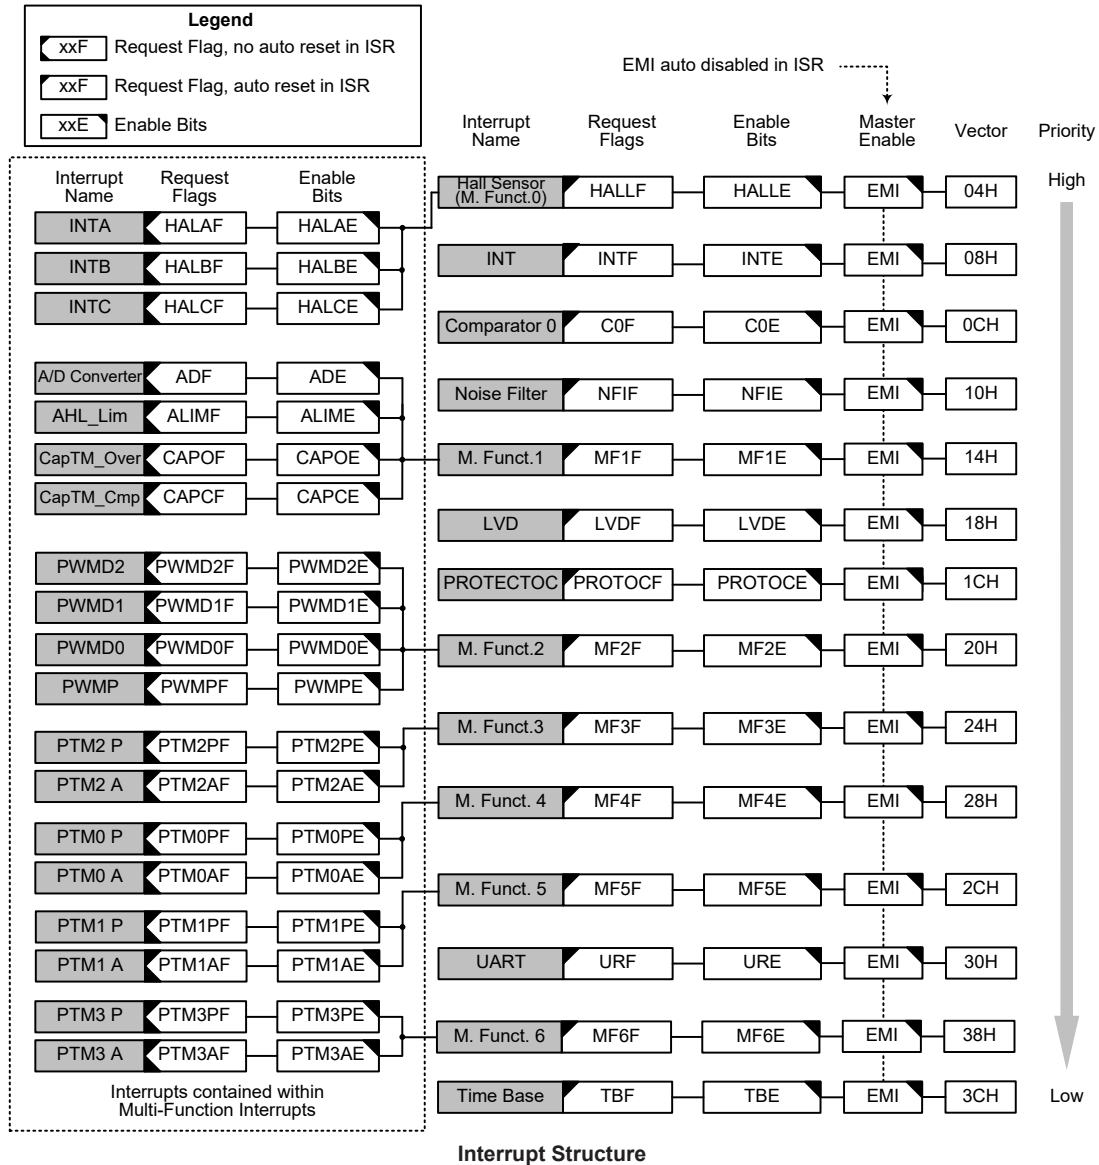

## Interrupt Registers

Overall interrupt control, which basically means the setting of request flags when certain microcontroller conditions occur and the setting of interrupt enable bits by the application program, is controlled by a series of registers, located in the Special Purpose Data Memory, as shown in the accompanying table. The number of registers falls into three categories. The first is the HINTEG and INTEG registers which setup the interrupt trigger edge type for external input interrupts. The second is the INTC0~INTC3 registers which setup the primary interrupts, the third is the MFI0~MFI6 registers which setup the Multi-function interrupts.

Each register contains a number of enable bits to enable or disable individual registers as well as interrupt flags to indicate the presence of an interrupt request. The naming convention of these follows a specific pattern. First is listed an abbreviated interrupt type, then the (optional) number of that interrupt followed by either an “E” for enable/disable bit or “F” for request flag.

| Function                    | Enable Bit | Request Flag | Notes                     |
|-----------------------------|------------|--------------|---------------------------|
| Global                      | EMI        | —            | —                         |
| Hall sensor interrupts      | HALAE      | HALAF        | Hall noise filter outputs |
|                             | HALBE      | HALBF        |                           |
|                             | HALCE      | HALCF        |                           |
| External interrupt          | INTE       | INTF         | —                         |
| Comparator 0                | C0E        | C0F          | —                         |
| Noise Filter input function | NFIE       | NFIF         | Noise filtered input      |
| Low Voltage Detector        | LVDE       | LVDF         | —                         |
| PROTECTOC                   | PROTOCE    | PROTOCF      | Protect OC                |
| Time Base                   | TBE        | TBF          | —                         |
| Multi-function              | MFnE       | MFnF         | n=0~6                     |
| A/D Converter               | ADE        | ADF          | —                         |
|                             | ALIME      | ALIMF        | —                         |
| 16-bit Capture Timer Module | CAPOE      | CAPOF        | —                         |
|                             | CAPCE      | CAPCF        | —                         |
| PWM function                | PWMDnE     | PWMDnF       | n=0~2                     |
|                             | PWMPE      | PWMPF        | —                         |
| Timer Module                | PTMnPE     | PTMnPF       | n=0~3                     |
|                             | PTMnAE     | PTMnAF       |                           |
| UART                        | URE        | URF          | —                         |

**Interrupt Register Bit Naming Conventions**

| Register Name | Bit     |        |        |        |         |        |        |        |
|---------------|---------|--------|--------|--------|---------|--------|--------|--------|
|               | 7       | 6      | 5      | 4      | 3       | 2      | 1      | 0      |
| HINTEG        | —       | HSEL   | INTCS1 | INTCS0 | INTBS1  | INTBS0 | INTAS1 | INTAS0 |
| INTEG         | —       | —      | —      | —      | —       | —      | INTS1  | INTS0  |
| INTC0         | —       | C0F    | INTF   | MF0F   | C0E     | INTE   | MF0E   | EMI    |
| INTC1         | PROTOCF | LVDF   | MF1F   | NFIF   | PROTOCE | LVDE   | MF1E   | NFIE   |
| INTC2         | MF5F    | MF4F   | MF3F   | MF2F   | MF5E    | MF4E   | MF3E   | MF2E   |
| INTC3         | TBF     | MF6F   | —      | URF    | TBE     | MF6E   | —      | URE    |
| MF10          | —       | HALCF  | HALBF  | HALAF  | —       | HALCE  | HALBE  | HALAE  |
| MF11          | CAPCF   | CAPOF  | ALIMF  | ADF    | CAPCE   | CAPOE  | ALIME  | ADE    |
| MF12          | PWMPF   | PWMD2F | PWMD1F | PWMD0F | PWMPE   | PWMD2E | PWMD1E | PWMD0E |
| MF13          | —       | —      | PTM2AF | PTM2PF | —       | —      | PTM2AE | PTM2PE |
| MF14          | —       | —      | PTM0AF | PTM0PF | —       | —      | PTM0AE | PTM0PE |
| MF15          | —       | —      | PTM1AF | PTM1PF | —       | —      | PTM1AE | PTM1PE |
| MF16          | —       | —      | PTM3AF | PTM3PF | —       | —      | PTM3AE | PTM3PE |

**Interrupt Register List**

• **HINTEG Register**

| Bit  | 7 | 6    | 5      | 4      | 3      | 2      | 1      | 0      |
|------|---|------|--------|--------|--------|--------|--------|--------|
| Name | — | HSEL | INTCS1 | INTCS0 | INTBS1 | INTBS0 | INTAS1 | INTAS0 |
| R/W  | — | R/W  | R/W    | R/W    | R/W    | R/W    | R/W    | R/W    |
| POR  | — | 0    | 0      | 0      | 0      | 0      | 0      | 0      |

Bit 7 Unimplemented, read as “0”

Bit 6 **HSEL**: HA/HB/HC source selection  
 0: H1/H2/H3  
 1: CMP1/CMP2/CMP3 output

- Bit 5~4     **INTCS1~INTCS0**: FHC interrupt edge control for INTC  
               00: Disable  
               01: Rising edge trigger  
               10: Falling edge trigger  
               11: Dual edge trigger
- Bit 3~2     **INTBS1~INTBS0**: FHB interrupt edge control for INTB  
               00: Disable  
               01: Rising edge trigger  
               10: Falling edge trigger  
               11: Dual edge trigger
- Bit 1~0     **INTAS1~INTAS0**: FHA interrupt edge control for INTA  
               00: Disable  
               01: Rising edge trigger  
               10: Falling edge trigger  
               11: Dual edge trigger

• **INTEG Register**

| Bit  | 7 | 6 | 5 | 4 | 3 | 2 | 1     | 0     |
|------|---|---|---|---|---|---|-------|-------|
| Name | — | — | — | — | — | — | INTS1 | INTS0 |
| R/W  | — | — | — | — | — | — | R/W   | R/W   |
| POR  | — | — | — | — | — | — | 0     | 0     |

- Bit 7~2     Unimplemented, read as “0”
- Bit 1~0     **INTS1~INTS0**: External Interrupt edge control for INT input  
               00: Disable  
               01: Rising edge trigger  
               10: Falling edge trigger  
               11: Dual edge trigger

• **INTC0 Register**

| Bit  | 7 | 6   | 5    | 4    | 3   | 2    | 1    | 0   |
|------|---|-----|------|------|-----|------|------|-----|
| Name | — | C0F | INTF | MF0F | C0E | INTE | MF0E | EMI |
| R/W  | — | R/W | R/W  | R/W  | R/W | R/W  | R/W  | R/W |
| POR  | — | 0   | 0    | 0    | 0   | 0    | 0    | 0   |

- Bit 7        Unimplemented, read as “0”
- Bit 6        **C0F**: Comparator 0 interrupt request flag  
               0: No request  
               1: Interrupt request
- Bit 5        **INTF**: External interrupt request flag  
               0: No request  
               1: Interrupt request
- Bit 4        **MF0F**: Hall sensor global interrupt request flag  
               0: No request  
               1: Interrupt request
- Bit 3        **C0E**: Comparator 0 interrupt control  
               0: Disable  
               1: Enable
- Bit 2        **INTE**: External interrupt interrupt control  
               0: Disable  
               1: Enable
- Bit 1        **MF0E**: Hall sensor global interrupt control  
               0: Disable  
               1: Enable

Bit 0      **EMI**: Global interrupt control  
0: Disable  
1: Enable

• **INTC1 Register**

| Bit  | 7       | 6    | 5    | 4    | 3       | 2    | 1    | 0    |
|------|---------|------|------|------|---------|------|------|------|
| Name | PROTOCF | LVDF | MF1F | NFIF | PROTOCE | LVDE | MF1E | NFIE |
| R/W  | R/W     | R/W  | R/W  | R/W  | R/W     | R/W  | R/W  | R/W  |
| POR  | 0       | 0    | 0    | 0    | 0       | 0    | 0    | 0    |

Bit 7      **PROTOCF**: PROTECTOC interrupt request flag  
0: No request  
1: Interrupt request

Bit 6      **LVDF**: LVD interrupt request flag  
0: No request  
1: Interrupt request

Bit 5      **MF1F**: Multi-function interrupt 1 request flag  
0: No request  
1: Interrupt request

Bit 4      **NFIF**: Noise Filter NFIN input interrupt request flag  
0: No request  
1: Interrupt request

Bit 3      **PROTOCE**: PROTECTOC interrupt control  
0: Disable  
1: Enable

Bit 2      **LVDE**: LVD interrupt control  
0: Disable  
1: Enable

Bit 1      **MF1E**: Multi-function interrupt 1 control  
0: Disable  
1: Enable

Bit 0      **NFIE**: Noise Filter NFIN input interrupt control  
0: Disable  
1: Enable

• **INTC2 Register**

| Bit  | 7    | 6    | 5    | 4    | 3    | 2    | 1    | 0    |
|------|------|------|------|------|------|------|------|------|
| Name | MF5F | MF4F | MF3F | MF2F | MF5E | MF4E | MF3E | MF2E |
| R/W  | R/W  | R/W  | R/W  | R/W  | R/W  | R/W  | R/W  | R/W  |
| POR  | 0    | 0    | 0    | 0    | 0    | 0    | 0    | 0    |

Bit 7      **MF5F**: Multi-function interrupt 5 request flag  
0: No request  
1: Interrupt request

Bit 6      **MF4F**: Multi-function interrupt 4 request flag  
0: No request  
1: Interrupt request

Bit 5      **MF3F**: Multi-function interrupt 3 request flag  
0: No request  
1: Interrupt request

Bit 4      **MF2F**: Multi-function interrupt 2 request flag  
0: No request  
1: Interrupt request

- Bit 3      **MF5E**: Multi-function interrupt 5 control  
0: Disable  
1: Enable
- Bit 2      **MF4E**: Multi-function interrupt 4 control  
0: Disable  
1: Enable
- Bit 1      **MF3E**: Multi-function interrupt 3 control  
0: Disable  
1: Enable
- Bit 0      **MF2E**: Multi-function interrupt 2 control  
0: Disable  
1: Enable

• **INTC3 Register**

| Bit  | 7   | 6    | 5 | 4   | 3   | 2    | 1 | 0   |
|------|-----|------|---|-----|-----|------|---|-----|
| Name | TBF | MF6F | — | URF | TBE | MF6E | — | URE |
| R/W  | R/W | R/W  | — | R/W | R/W | R/W  | — | R/W |
| POR  | 0   | 0    | — | 0   | 0   | 0    | — | 0   |

- Bit 7      **TBF**: Time Base interrupt request flag  
0: No request  
1: Interrupt request
- Bit 6      **MF6F**: Multi-function interrupt 6 request flag  
0: No request  
1: Interrupt request
- Bit 5      Unimplemented, read as “0”
- Bit 4      **URF**: UART interrupt request flag  
0: No request  
1: Interrupt request
- Bit 3      **TBE**: Time Base interrupt control  
0: Disable  
1: Enable
- Bit 2      **MF6E**: Multi-function interrupt 6 control  
0: Disable  
1: Enable
- Bit 1      Unimplemented, read as “0”
- Bit 0      **URE**: UART interrupt control  
0: Disable  
1: Enable

• **MFI0 Register**

| Bit  | 7 | 6     | 5     | 4     | 3 | 2     | 1     | 0     |
|------|---|-------|-------|-------|---|-------|-------|-------|
| Name | — | HALCF | HALBF | HALAF | — | HALCE | HALBE | HALAE |
| R/W  | — | R/W   | R/W   | R/W   | — | R/W   | R/W   | R/W   |
| POR  | — | 0     | 0     | 0     | — | 0     | 0     | 0     |

- Bit 7      Unimplemented, read as “0”
- Bit 6      **HALCF**: Hall sensor C interrupt (INTC) request flag  
0: No request  
1: Interrupt request
- Note that this bit must be cleared to zero by the application program when the interrupt is serviced.

- Bit 5      **HALBF**: Hall sensor B interrupt (INTB) request flag  
0: No request  
1: Interrupt request  
Note that this bit must be cleared to zero by the application program when the interrupt is serviced.
- Bit 4      **HALAF**: Hall sensor A interrupt (INTA) request flag  
0: No request  
1: Interrupt request  
Note that this bit must be cleared to zero by the application program when the interrupt is serviced.
- Bit 3      Unimplemented, read as “0”
- Bit 2      **HALCE**: Hall sensor C interrupt (INTC) control  
0: Disable  
1: Enable
- Bit 1      **HALBE**: Hall sensor B interrupt (INTB) control  
0: Disable  
1: Enable
- Bit 0      **HALAE**: Hall sensor A interrupt (INTA) control  
0: Disable  
1: Enable

• **MFI1 Register**

| Bit  | 7     | 6     | 5     | 4   | 3     | 2     | 1     | 0   |
|------|-------|-------|-------|-----|-------|-------|-------|-----|
| Name | CAPCF | CAPOF | ALIMF | ADF | CAPCE | CAPOE | ALIME | ADE |
| R/W  | R/W   | R/W   | R/W   | R/W | R/W   | R/W   | R/W   | R/W |
| POR  | 0     | 0     | 0     | 0   | 0     | 0     | 0     | 0   |

- Bit 7      **CAPCF**: CAPTM compare match interrupt request flag  
0: No request  
1: Interrupt request  
Note that this bit must be cleared to zero by the application program when the interrupt is serviced.
- Bit 6      **CAPOF**: CAPTM capture overflow interrupt request flag  
0: No request  
1: Interrupt request  
Note that this bit must be cleared to zero by the application program when the interrupt is serviced.
- Bit 5      **ALIMF**: A/D conversion compare result interrupt request flag  
0: No request  
1: Interrupt request  
Note that this bit must be cleared to zero by the application program when the interrupt is serviced.
- Bit 4      **ADF**: A/D conversion end interrupt request flag  
0: No request  
1: Interrupt request  
Note that this bit must be cleared to zero by the application program when the interrupt is serviced.
- Bit 3      **CAPCE**: CAPTM compare match interrupt control  
0: Disable  
1: Enable
- Bit 2      **CAPOE**: CAPTM capture overflow interrupt control  
0: Disable  
1: Enable

- Bit 1      **ALIME**: A/D conversion compare result interrupt control  
             0: Disable  
             1: Enable
- Bit 0      **ADE**: A/D conversion end interrupt control  
             0: Disable  
             1: Enable

• **MFI2 Register**

| Bit  | 7     | 6      | 5      | 4      | 3     | 2      | 1      | 0      |
|------|-------|--------|--------|--------|-------|--------|--------|--------|
| Name | PWMPF | PWMD2F | PWMD1F | PWMD0F | PWMPE | PWMD2E | PWMD1E | PWMD0E |
| R/W  | R/W   | R/W    | R/W    | R/W    | R/W   | R/W    | R/W    | R/W    |
| POR  | 0     | 0      | 0      | 0      | 0     | 0      | 0      | 0      |

- Bit 7      **PWMPF**: PWM period match interrupt request flag  
             0: No request  
             1: Interrupt request  
     Note that this bit must be cleared to zero by the application program when the interrupt is serviced.
- Bit 6      **PWMD2F**: PWM2 duty match interrupt request flag  
             0: No request  
             1: Interrupt request  
     Note that this bit must be cleared to zero by the application program when the interrupt is serviced.
- Bit 5      **PWMD1F**: PWM1 duty match interrupt request flag  
             0: No request  
             1: Interrupt request  
     Note that this bit must be cleared to zero by the application program when the interrupt is serviced.
- Bit 4      **PWMD0F**: PWM0 duty match interrupt request flag  
             0: No request  
             1: Interrupt request  
     Note that this bit must be cleared to zero by the application program when the interrupt is serviced.
- Bit 3      **PWMPE**: PWM period match interrupt control  
             0: Disable  
             1: Enable
- Bit 2      **PWMD2E**: PWM2 duty match interrupt control  
             0: Disable  
             1: Enable
- Bit 1      **PWMD1E**: PWM1 duty match interrupt control  
             0: Disable  
             1: Enable
- Bit 0      **PWMD0E**: PWM0 duty match interrupt control  
             0: Disable  
             1: Enable

**• MFI3 Register**

| Bit  | 7 | 6 | 5      | 4      | 3 | 2 | 1      | 0      |
|------|---|---|--------|--------|---|---|--------|--------|
| Name | — | — | PTM2AF | PTM2PF | — | — | PTM2AE | PTM2PE |
| R/W  | — | — | R/W    | R/W    | — | — | R/W    | R/W    |
| POR  | — | — | 0      | 0      | — | — | 0      | 0      |

Bit 7~6 Unimplemented, read as “0”

Bit 5 **PTM2AF**: PTM2 comparator A match interrupt request flag

0: No request

1: Interrupt request

Note that this bit must be cleared to zero by the application program when the interrupt is serviced.

Bit 4 **PTM2PF**: PTM2 comparator P match interrupt request flag

0: No request

1: Interrupt request

Note that this bit must be cleared to zero by the application program when the interrupt is serviced.

Bit 3~2 Unimplemented, read as “0”

Bit 1 **PTM2AE**: PTM2 comparator A match interrupt control

0: Disable

1: Enable

Bit 0 **PTM2PE**: PTM2 comparator P match interrupt control

0: Disable

1: Enable

**• MFI4 Register**

| Bit  | 7 | 6 | 5      | 4      | 3 | 2 | 1      | 0      |
|------|---|---|--------|--------|---|---|--------|--------|
| Name | — | — | PTM0AF | PTM0PF | — | — | PTM0AE | PTM0PE |
| R/W  | — | — | R/W    | R/W    | — | — | R/W    | R/W    |
| POR  | — | — | 0      | 0      | — | — | 0      | 0      |

Bit 7~6 Unimplemented, read as “0”

Bit 5 **PTM0AF**: PTM0 comparator A match interrupt request flag

0: No request

1: Interrupt request

Note that this bit must be cleared to zero by the application program when the interrupt is serviced.

Bit 4 **PTM0PF**: PTM0 comparator P match interrupt request flag

0: No request

1: Interrupt request

Note that this bit must be cleared to zero by the application program when the interrupt is serviced.

Bit 3~2 Unimplemented, read as “0”

Bit 1 **PTM0AE**: PTM0 comparator A match interrupt control

0: Disable

1: Enable

Bit 0 **PTM0PE**: PTM0 comparator P match interrupt control

0: Disable

1: Enable

• **MF15 Register**

| Bit  | 7 | 6 | 5      | 4      | 3 | 2 | 1      | 0      |
|------|---|---|--------|--------|---|---|--------|--------|
| Name | — | — | PTM1AF | PTM1PF | — | — | PTM1AE | PTM1PE |
| R/W  | — | — | R/W    | R/W    | — | — | R/W    | R/W    |
| POR  | — | — | 0      | 0      | — | — | 0      | 0      |

Bit 7~6 Unimplemented, read as “0”

Bit 5 **PTM1AF**: PTM1 comparator A match interrupt request flag

0: No request

1: Interrupt request

Note that this bit must be cleared to zero by the application program when the interrupt is serviced.

Bit 4 **PTM1PF**: PTM1 comparator P match interrupt request flag

0: No request

1: Interrupt request

Note that this bit must be cleared to zero by the application program when the interrupt is serviced.

Bit 3~2 Unimplemented, read as “0”

Bit 1 **PTM1AE**: PTM1 comparator A match interrupt control

0: Disable

1: Enable

Bit 0 **PTM1PE**: PTM1 comparator P match interrupt control

0: Disable

1: Enable

• **MF16 Register**

| Bit  | 7 | 6 | 5      | 4      | 3 | 2 | 1      | 0      |
|------|---|---|--------|--------|---|---|--------|--------|
| Name | — | — | PTM3AF | PTM3PF | — | — | PTM3AE | PTM3PE |
| R/W  | — | — | R/W    | R/W    | — | — | R/W    | R/W    |
| POR  | — | — | 0      | 0      | — | — | 0      | 0      |

Bit 7~6 Unimplemented, read as “0”

Bit 5 **PTM3AF**: PTM3 comparator A match interrupt request flag

0: No request

1: Interrupt request

Note that this bit must be cleared to zero by the application program when the interrupt is serviced.

Bit 4 **PTM3PF**: PTM3 comparator P match interrupt request flag

0: No request

1: Interrupt request

Note that this bit must be cleared to zero by the application program when the interrupt is serviced.

Bit 3~2 Unimplemented, read as “0”

Bit 1 **PTM3AE**: PTM3 comparator A match interrupt control

0: Disable

1: Enable

Bit 0 **PTM3PE**: PTM3 comparator P match interrupt control

0: Disable

1: Enable

## Interrupt Operation

When the conditions for an interrupt event occur, such as a TM Comparator P or Comparator A match or A/D conversion completion etc., the relevant interrupt request flag will be set. Whether the request flag actually generates a program jump to the relevant interrupt vector is determined by the condition of the interrupt enable bit. If the enable bit is set high then the program will jump to its relevant vector; if the enable bit is zero then although the interrupt request flag is set an actual interrupt will not be generated and the program will not jump to the relevant interrupt vector. The global interrupt enable bit, if cleared to zero, will disable all interrupts.

When an interrupt is generated, the Program Counter, which stores the address of the next instruction to be executed, will be transferred onto the stack. The Program Counter will then be loaded with a new address which will be the value of the corresponding interrupt vector. The microcontroller will then fetch its next instruction from this interrupt vector. The instruction at this vector will usually be a “JMP” which will jump to another section of program which is known as the interrupt service routine. Here is located the code to control the appropriate interrupt. The interrupt service routine must be terminated with an “RETT”, which retrieves the original Program Counter address from the stack and allows the microcontroller to continue with normal execution at the point where the interrupt occurred.

Once an interrupt subroutine is serviced, all the other interrupts will be blocked, as the global interrupt enable bit, EMI bit will be cleared to zero automatically. This will prevent any further interrupt nesting from occurring. However, if other interrupt requests occur during this interval, although the interrupt will not be immediately serviced, the request flag will still be recorded.

If an interrupt requires immediate servicing while the program is already in another interrupt service routine, the EMI bit should be set after entering the routine, to allow interrupt nesting. If the stack is full, the interrupt request will not be acknowledged, even if the related interrupt is enabled, until the Stack Pointer is decremented. If immediate service is desired, the stack must be prevented from becoming full. In case of simultaneous requests, the interrupt structure diagram shows the priority that is applied. All of the interrupt request flags when set will wake up the device if it is in SLEEP or IDLE Mode, however to prevent a wake-up from occurring the corresponding flag should be set before the device is in SLEEP or IDLE Mode.

## Hall Sensor Interrupts

The Hall sensor interrupts are contained in the Multi-function interrupt. They are controlled by signal transitions on the Hall sensor noise filter output signals, FHA, FHB and FHC. A Hall sensor interrupt request will take place when the Hall sensor interrupt request flag, HALAF, HALBF or HALCF, is set, which will occur when a transition (rising edge, falling edge or both edges selected by the HINTEG register) appears on the Hall sensor noise filter outputs.

To allow the program to branch to their respective interrupt vector address, the global interrupt enable bit, EMI, the Hall sensor global interrupt control bit, MF0E, and the Hall Sensor interrupt enable bit, HALAE/HALBE/HALCE, must first be set. If the Hall noise filter inputs are selected to come from the external input pins, H1, H2 and H3, which are pin-shared with I/O pins, they should be configured as external Hall sensor input pins using the corresponding pin-shared control bits before the Hall sensor interrupt functions are enabled. The pin must also be setup as an input type by setting the corresponding bit in the port control register. When the interrupt is enabled, the stack is not full and either one of the Hall sensor interrupts occurs, a subroutine call to the respective Multi-function interrupt vector will take place. When the interrupt is serviced, the EMI bit will be automatically cleared to disable other interrupts and the related Multi-function interrupt request flag, MF0F, will be automatically reset, but the Hall sensor interrupt request flags, HALAF, HALBF and HALCF, must be manually cleared to zero by the application program.

The HINTEG register is used to select the type of active edge that will trigger the Hall sensor interrupt. A choice of either rising or falling or both edge types can be chosen to trigger a Hall sensor interrupt. Note that the HINTEG register also can be used to disable the Hall sensor input interrupt functions.

### **External Interrupt**

The external interrupt is controlled by signal transitions on the INT pin. An external interrupt request will take place when the external interrupt request flag, INTF, is set, which will occur when a transition appears on the external interrupt pin. Additionally the correct interrupt edge type must be selected using the INTEG register. To allow the program to branch to its respective interrupt vector address, the global interrupt enable bit, EMI, and respective external interrupt enable bit, INTE, must first be set. As the external interrupt pin is pin-shared with I/O pin, it should be configured as external interrupt pin before the external pin interrupt function is enabled. The pin must also be setup as an input type by setting the corresponding bit in the port control register. When the interrupt is enabled, the stack is not full and the correct transition type appears on the external interrupt pin, a subroutine call to the external interrupt vector, will take place. When the interrupt is serviced, the external interrupt request flag, INTF, will be automatically reset and the EMI bit will be automatically cleared to disable other interrupts. Note that any pull-high resistor selections on the external interrupt pin will remain valid even if the pin is used as an external interrupt input.

The INTEG register is used to select the type of active edge that will trigger the external interrupt. A choice of either rising or falling or both edge types can be chosen to trigger an external interrupt. Note that the INTEG register can also be used to disable the external interrupt function.

### **Noise Filter Input Interrupt**

The noise filter input external interrupt is controlled by signal transitions on the NFIN pin. An external noise filtered input interrupt request will take place when the noise filter input interrupt request flag, NFIF, is set, which will occur when a transition appears on the external Noise Filter input pin. Additionally the correct interrupt edge type must be selected using the NFIS1 and NFIS0 bits in the NF\_VIL register. To allow the program to branch to its respective interrupt vector address, the global interrupt enable bit, EMI, and respective NFIN input interrupt enable bit, NFIE, must first be set. As the external noise filter interrupt pin NFIN is pin-shared with I/O pin, it should be configured as the noise filter input pin by the corresponding pin-shared function selection bits before the Noise Filter external interrupt function is enabled. The pin must also be setup as an input by setting the corresponding bit in the port control register. When the interrupt is enabled, the stack is not full and the correct transition type appears on the noise filter interrupt pin, a subroutine call to the noise filter interrupt vector will take place. When the interrupt is serviced, the noise filter input interrupt request flag, NFIF, will be automatically reset and the EMI bit will be automatically cleared to disable other interrupts. Note that any pull-high resistor selections on the NFIN pin will remain valid even if the pin is used as a noise filter interrupt input.

The NF\_VIL register is used to select the type of active edge that will trigger the noise filter interrupt. A choice of either rising or falling or both edge types can be chosen to trigger a noise filter interrupt. Note that the NF\_VIL register can also be used to disable the noise filter interrupt function.

### **Comparator 0 Interrupt**

The comparator interrupt is controlled by the internal comparator 0. A comparator interrupt request will take place when the comparator 0 interrupt request flag, C0F, is set, a situation that will occur when a transition (rising edge, falling edge or both edges selected by the CMP0\_EG1~CMP0\_EG0 bits in the OPOMS register) appears on the comparator 0 output. To allow the program to branch to its respective interrupt vector address, the global interrupt enable bit, EMI, and comparator 0 interrupt

enable bit, C0E, must first be set. When the interrupt is enabled, the stack is not full and the comparator 0 output generates a comparator output transition, a subroutine call to the comparator 0 interrupt vector, will take place. When the interrupt is serviced, the comparator 0 interrupt request flag, C0F, will be automatically reset and the EMI bit will be automatically cleared to disable other interrupts.

### **PROTECTOC Interrupt**

The PROTECTOC interrupt is controlled by the motor protection circuit. A PROTECTOC interrupt request will take place when the PROTECTOC interrupt request flag, PROTOCF, is set, a situation that will occur when a PROTECTOC signal is generated. To allow the program to branch to its respective interrupt vector address, the global interrupt enable bit, EMI, and PROTECTOC interrupt enable bit, PROTOCE, must first be set. When the interrupt is enabled, the stack is not full and a PROTECTOC signal is generated, a subroutine call to the PROTECTOC interrupt vector, will take place. When the interrupt is serviced, the PROTECTOC interrupt request flag, PROTOCF, will be automatically reset and the EMI bit will be automatically cleared to disable other interrupts.

### **Multi-function Interrupts**

Within the device there are several Multi-function interrupts. Unlike the other independent interrupts, these interrupts have no independent source, but rather are formed from other existing interrupt sources, namely the Hall sensor interrupts, PWM period and duty match interrupts, TM interrupts, A/D converter interrupts and CAPTM interrupts.

A Multi-function interrupt request will take place when any of the Multi-function interrupt request flags, MFnF, are set. The Multi-function interrupt request flags will be set when any of its included functions generate an interrupt request flag. To allow the program to branch to its respective interrupt vector address, the global interrupt enable bit, EMI, and the Multi-function interrupt enable bit must first be set. When the Multi-function interrupt is enabled and the stack is not full, and either one of the interrupts contained within each of Multi-function interrupt occurs, a subroutine call to one of the Multi-function interrupt vectors will take place. When the interrupt is serviced, the related Multi-function interrupt request flag will be automatically reset and the EMI bit will be automatically cleared to disable other interrupts.

However, it must be noted that, although the interrupt Multi-function request flags will be automatically reset when the interrupt is serviced, the request flags from the original source of the Multi-function interrupts will not be automatically reset and must be manually reset by the application program.

### **A/D Converter Interrupts**

The A/D Converter has two interrupts which both are contained in Multi-function interrupt. One is the A/D converter compare result interrupt which is controlled by the comparison of the converted data registers (SADOH/SADOL) with the boundary register pairs (ADHVDH/ADHVDL and ADLVDH/ADLVDL) and the compare result interrupt trigger condition is set by ADCHVE and ADCLVE bits in the ADCR2 register. An A/D converter compare result interrupt request will take place when the preset A/D converter compare result trigger condition occurs. The other interrupt is controlled by the end of an A/D conversion process.

An A/D converter interrupt request will take place when the A/D converter interrupt request flag, ADF or ALIMF, is set, which occurs when the A/D conversion process finishes or a compare result interrupt trigger condition occurs. To allow the program to branch to its interrupt vector address, the global interrupt enable bit, EMI, the related Multi-function interrupt enable bit and the A/D converter interrupt enable bit, ADE or ALIME, must first be set. When the interrupt is enabled, the stack is not full and an A/D conversion compare result interrupt trigger condition occurs or an end

of A/D conversion process occurs, a subroutine call to the respective Multi-function interrupt vector will take place. When the A/D converter interrupt is serviced, the related Multi-function interrupt request flag will be automatically reset and the EMI bit will be automatically cleared to disable other interrupts. However the ADF or ALIMF flag will not be automatically cleared to zero, they have to be cleared by the application program.

### **Capture Timer Module Interrupts**

The CAPTM has two interrupts which are contained within the Multi-function Interrupt and known as CapTM\_Over and CapTM\_Cmp. A CAPTM capture overflow interrupt request or compare match interrupt request will take place when the relevant interrupt request flag, CAPOF or CAPCF, is set, which occurs when CAPTM capture overflows or compare matches. To allow the program to branch to their respective interrupt vector address, the global interrupt enable bit, EMI, and the relevant interrupt enable bit and Multi-function interrupt enable bit must first be set. When the interrupt is enabled, the stack is not full and CAPTM capture overflows or compare matches, a subroutine call to the respective Multi-function interrupt vector will take place. When the CAPTM interrupt is serviced, the EMI bit will be automatically cleared to disable other interrupts, however only the Multi-function interrupt request flag will be also automatically cleared to zero. As the CAPOF or CAPCF flag will not be automatically cleared to zero, it has to be cleared by the application program.

### **PWM Module Interrupts**

The PWM module has four interrupts, one PWM Period match interrupt known as PWMP interrupt and three PWM Duty match interrupts known as PWMDn (n=0~2) interrupt. The PWMP and PWMDn interrupts are contained in multi-function interrupt 2. A PWM interrupt request will take place when the PWM interrupt request flag, PWMPF or PWMDnF, are set, which occurs when the PWM Period or Duty n matches. To allow the program to branch to their respective interrupt vector address, the global interrupt enable bit, EMI, the PWM Period or Duty match interrupt enable bit, PWMPE or PWMDnE, and the multi-function interrupt 2 enable bit, must first be set. When the interrupt is enabled, the stack is not full and the PWM Period or Duty matches, a subroutine call to the respective Multi-function interrupt vector will take place. When the interrupt is serviced, the EMI bit will be automatically cleared to disable other interrupts and the multi-function interrupt 2 request flag will also be automatically reset, but the interrupt request flag, PWMDnF or PWMPF, must be manually cleared by the application program.

### **TM Interrupts**


The Periodic Type TMs each have two interrupts, one comes from the comparator A match situation and the other comes from the comparator P match situation. All of the TM interrupts are contained within the multi-function interrupts. For all of the TM types there are two interrupt request flags, PTMnPF and PTMnAF, and two enable control bits, PTMnPE and PTMnAE. A TM interrupt request will take place when any of the TM request flags together with the associated multi-function interrupt request flag are set, a situation which occurs when a TM comparator P or A match situation happens.

To allow the program to branch to their respective interrupt vector address, the global interrupt enable bit, EMI, respective TM Interrupt enable bit, and relevant multi-function interrupt enable bit must first be set. When the interrupt is enabled, the stack is not full and a TM comparator match situation occurs, a subroutine call to the respective Multi-function interrupt vector will take place. When the TM interrupt is serviced, the EMI bit will be automatically cleared to disable other interrupts, however only the related multi-function interrupt flag will be automatically cleared to zero. As the TM interrupt request flags will not be automatically cleared to zero, they have to be cleared by the application program.

## Time Base Interrupt

The function of the Time Base Interrupt is to provide regular time signals in the form of an internal interrupt. It is controlled by the overflow signals from its timer functions. When this happens its interrupt request flag, TBF will be set. To allow the program to branch to its interrupt vector addresses, the global interrupt enable bit, EMI and Time Base enable bit, TBE, must first be set. When the interrupt is enabled, the stack is not full and the Time Base overflows, a subroutine call to its vector location will take place. When the interrupt is serviced, the interrupt request flag, TBF, will be automatically reset and the EMI bit will be cleared to disable other interrupts.

The purpose of the Time Base Interrupt is to provide an interrupt signal at fixed time periods. The clock source,  $f_{PSC}$ , originates from the internal clock source  $f_{SYS}$ ,  $f_{SYS}/4$  or  $f_{SUB}$  and then passes through a divider, the division ratio of which is selected by programming the appropriate bits in the TBC register to obtain longer interrupt periods whose value ranges. The clock source that generates  $f_{PSC}$ , which in turn controls the Time Base interrupt period, is selected using the CLKSEL1~CLKSEL0 bits in the PSCR register.

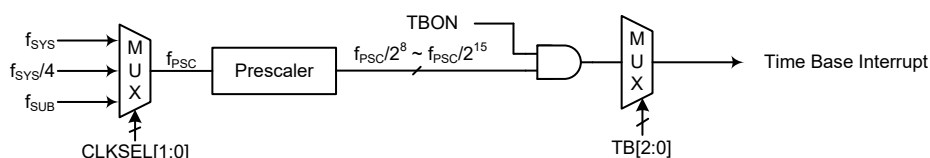

Time Base Interrupt

### • PSCR Register

| Bit  | 7 | 6 | 5 | 4 | 3 | 2 | 1       | 0       |
|------|---|---|---|---|---|---|---------|---------|
| Name | — | — | — | — | — | — | CLKSEL1 | CLKSEL0 |
| R/W  | — | — | — | — | — | — | R/W     | R/W     |
| POR  | — | — | — | — | — | — | 0       | 0       |

Bit 7~2 Unimplemented, read as “0”

Bit 1~0 **CLKSEL1~CLKSEL0**: Prescaler clock source selection

00:  $f_{SYS}$

01:  $f_{SYS}/4$

1x:  $f_{SUB}$

### • TBC Register

| Bit  | 7    | 6 | 5 | 4 | 3 | 2   | 1   | 0   |
|------|------|---|---|---|---|-----|-----|-----|
| Name | TBON | — | — | — | — | TB2 | TB1 | TB0 |
| R/W  | R/W  | — | — | — | — | R/W | R/W | R/W |
| POR  | 0    | — | — | — | — | 0   | 0   | 0   |

Bit 7 **TBON**: Time Base Control

0: Disable

1: Enable

Bit 6~3 Unimplemented, read as “0”

Bit 2~0 **TB2~TB0**: Select Time Base Time-out Period

000:  $2^8/f_{PSC}$

001:  $2^9/f_{PSC}$

010:  $2^{10}/f_{PSC}$

011:  $2^{11}/f_{PSC}$

100:  $2^{12}/f_{PSC}$

101:  $2^{13}/f_{PSC}$

110:  $2^{14}/f_{PSC}$

111:  $2^{15}/f_{PSC}$

## **LVD Interrupt**

An LVD Interrupt request will take place when the LVD Interrupt request flag, LVDF, is set, which occurs when the Low Voltage Detector function detects a low power supply voltage. To allow the program to branch to its respective interrupt vector address, the global interrupt enable bit, EMI, and Low Voltage Interrupt enable bit, LVDE, must first be set. When the interrupt is enabled, the stack is not full and a low voltage condition occurs, a subroutine call to the LVD Interrupt vector, will take place. When the Low Voltage Interrupt is serviced, the interrupt request flag, LVDF, will be automatically reset and the EMI bit will be cleared to disable other interrupts.

## **UART Interrupt**

Several individual UART conditions can generate a UART Interrupt. When any one of these conditions exists, low pulse will be generated to get the attention of the microcontroller. These conditions are a transmitter data register empty, transmitter idle, receiver reaching FIFO trigger level, receiver overrun, address detect and an RX/TX pin wake-up. To allow the program to branch to the respective interrupt vector addresses, the global interrupt enable bit, EMI, and UART Interrupt enable bit, URE, must first be set. When the interrupt is enabled, the stack is not full and any of these conditions are created, a subroutine call to the UART Interrupt vector will take place. When the interrupt is serviced, the UART Interrupt flag, URF, will be automatically cleared. The EMI bit will also be automatically cleared to disable other interrupts. However, the USR register flags will be cleared automatically when certain actions are taken by the UART, the details of which are given in the UART section.

## **Interrupt Wake-up Function**

Each of the interrupt functions has the capability of waking up the microcontroller when in the SLEEP or IDLE Mode. A wake-up is generated when an interrupt request flag changes from low to high and is independent of whether the interrupt is enabled or not. Therefore, even though the device is in the SLEEP or IDLE Mode and its system oscillator stopped, situations such as external edge transitions on the external interrupt pins or a low power supply voltage may cause their respective interrupt flag to be set high and consequently generate an interrupt. Care must therefore be taken if spurious wake-up situations are to be avoided. If an interrupt wake-up function is to be disabled then the corresponding interrupt request flag should be set high before the device enters the SLEEP or IDLE Mode. The interrupt enable bits have no effect on the interrupt wake-up function.

## **Programming Considerations**

By disabling the relevant interrupt enable bits, a requested interrupt can be prevented from being serviced, however, once an interrupt request flag is set, it will remain in this condition in the interrupt register until the corresponding interrupt is serviced or until the request flag is cleared by the application program.

Where a certain interrupt is contained within a Multi-function interrupt, then when the interrupt service routine is executed, as only the Multi-function interrupt request flags will be automatically cleared to zero, the individual request flag for the function needs to be cleared by the application program.

It is recommended that programs do not use the “CALL” instruction within the interrupt service subroutine. Interrupts often occur in an unpredictable manner or need to be serviced immediately. If only one stack is left and the interrupt is not well controlled, the original control sequence will be damaged once a CALL subroutine is executed in the interrupt subroutine.


Every interrupt has the capability of waking up the microcontroller when it is in SLEEP or IDLE Mode, the wake-up being generated when the interrupt request flag changes from low to high. If it is

required to prevent a certain interrupt from waking up the microcontroller then its respective request flag should be first set high before enter SLEEP or IDLE Mode.

As only the Program Counter is pushed onto the stack, then when the interrupt is serviced, if the contents of the accumulator, status register or other registers are altered by the interrupt service program, their contents should be saved to the memory at the beginning of the interrupt service routine.

To return from an interrupt subroutine, either an RET or RETI instruction may be executed. The RETI instruction in addition to executing a return to the main program also automatically sets the EMI bit high to allow further interrupts. The RET instruction however only executes a return to the main program leaving the EMI bit in its present zero state and therefore disabling the execution of further interrupts.

## Application Circuits

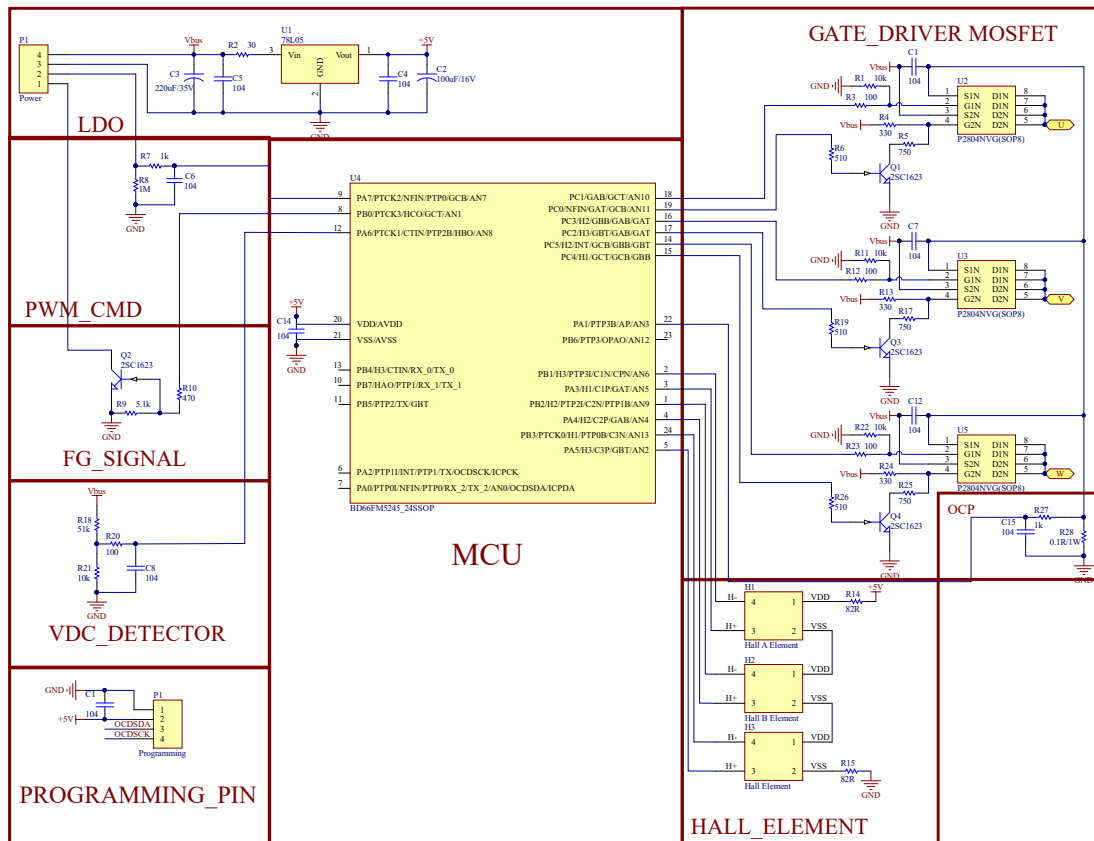

## **Instruction Set**

### **Introduction**

Central to the successful operation of any microcontroller is its instruction set, which is a set of program instruction codes that directs the microcontroller to perform certain operations. In the case of Holtek microcontroller, a comprehensive and flexible set of over 60 instructions is provided to enable programmers to implement their application with the minimum of programming overheads.

For easier understanding of the various instruction codes, they have been subdivided into several functional groupings.

### **Instruction Timing**

Most instructions are implemented within one instruction cycle. The exceptions to this are branch, call, or table read instructions where two instruction cycles are required. One instruction cycle is equal to 4 system clock cycles, therefore in the case of an 8MHz system oscillator, most instructions would be implemented within 0.5 $\mu$ s and branch or call instructions would be implemented within 1 $\mu$ s. Although instructions which require one more cycle to implement are generally limited to the JMP, CALL, RET, RETI and table read instructions, it is important to realize that any other instructions which involve manipulation of the Program Counter Low register or PCL will also take one more cycle to implement. As instructions which change the contents of the PCL will imply a direct jump to that new address, one more cycle will be required. Examples of such instructions would be "CLR PCL" or "MOV PCL, A". For the case of skip instructions, it must be noted that if the result of the comparison involves a skip operation then this will also take one more cycle, if no skip is involved then only one cycle is required.

### **Moving and Transferring Data**

The transfer of data within the microcontroller program is one of the most frequently used operations. Making use of several kinds of MOV instructions, data can be transferred from registers to the Accumulator and vice-versa as well as being able to move specific immediate data directly into the Accumulator. One of the most important data transfer applications is to receive data from the input ports and transfer data to the output ports.

### **Arithmetic Operations**

The ability to perform certain arithmetic operations and data manipulation is a necessary feature of most microcontroller applications. Within the Holtek microcontroller instruction set are a range of add and subtract instruction mnemonics to enable the necessary arithmetic to be carried out. Care must be taken to ensure correct handling of carry and borrow data when results exceed 255 for addition and less than 0 for subtraction. The increment and decrement instructions such as INC, INCA, DEC and DECA provide a simple means of increasing or decreasing by a value of one of the values in the destination specified.

## Logical and Rotate Operation

The standard logical operations such as AND, OR, XOR and CPL all have their own instruction within the Holtek microcontroller instruction set. As with the case of most instructions involving data manipulation, data must pass through the Accumulator which may involve additional programming steps. In all logical data operations, the zero flag may be set if the result of the operation is zero. Another form of logical data manipulation comes from the rotate instructions such as RR, RL, RRC and RLC which provide a simple means of rotating one bit right or left. Different rotate instructions exist depending on program requirements. Rotate instructions are useful for serial port programming applications where data can be rotated from an internal register into the Carry bit from where it can be examined and the necessary serial bit set high or low. Another application which rotate data operations are used is to implement multiplication and division calculations.

## Branches and Control Transfer

Program branching takes the form of either jumps to specified locations using the JMP instruction or to a subroutine using the CALL instruction. They differ in the sense that in the case of a subroutine call, the program must return to the instruction immediately when the subroutine has been carried out. This is done by placing a return instruction “RET” in the subroutine which will cause the program to jump back to the address right after the CALL instruction. In the case of a JMP instruction, the program simply jumps to the desired location. There is no requirement to jump back to the original jumping off point as in the case of the CALL instruction. One special and extremely useful set of branch instructions are the conditional branches. Here a decision is first made regarding the condition of a certain data memory or individual bits. Depending upon the conditions, the program will continue with the next instruction or skip over it and jump to the following instruction. These instructions are the key to decision making and branching within the program perhaps determined by the condition of certain input switches or by the condition of internal data bits.

## Bit Operations

The ability to provide single bit operations on Data Memory is an extremely flexible feature of all Holtek microcontrollers. This feature is especially useful for output port bit programming where individual bits or port pins can be directly set high or low using either the “SET [m].i” or “CLR [m].i” instructions respectively. The feature removes the need for programmers to first read the 8-bit output port, manipulate the input data to ensure that other bits are not changed and then output the port with the correct new data. This read-modify-write process is taken care of automatically when these bit operation instructions are used.

## Table Read Operations

Data storage is normally implemented by using registers. However, when working with large amounts of fixed data, the volume involved often makes it inconvenient to store the fixed data in the Data Memory. To overcome this problem, Holtek microcontrollers allow an area of Program Memory to be setup as a table where data can be directly stored. A set of easy to use instructions provides the means by which this fixed data can be referenced and retrieved from the Program Memory.

## Other Operations

In addition to the above functional instructions, a range of other instructions also exist such as the “HALT” instruction for Power-down operations and instructions to control the operation of the Watchdog Timer for reliable program operations under extreme electric or electromagnetic environments. For their relevant operations, refer to the functional related sections.

## Instruction Set Summary

The instructions related to the data memory access in the following table can be used when the desired data memory is located in Data Memory sector 0.

### Table Conventions

x: Bits immediate data  
m: Data Memory address  
A: Accumulator  
i: 0~7 number of bits  
addr: Program memory address

| Mnemonic                         | Description                                                     | Cycles            | Flag Affected        |
|----------------------------------|-----------------------------------------------------------------|-------------------|----------------------|
| <b>Arithmetic</b>                |                                                                 |                   |                      |
| ADD A,[m]                        | Add Data Memory to ACC                                          | 1                 | Z, C, AC, OV, SC     |
| ADDM A,[m]                       | Add ACC to Data Memory                                          | 1 <sup>Note</sup> | Z, C, AC, OV, SC     |
| ADD A,x                          | Add immediate data to ACC                                       | 1                 | Z, C, AC, OV, SC     |
| ADC A,[m]                        | Add Data Memory to ACC with Carry                               | 1                 | Z, C, AC, OV, SC     |
| ADCM A,[m]                       | Add ACC to Data memory with Carry                               | 1 <sup>Note</sup> | Z, C, AC, OV, SC     |
| SUB A,x                          | Subtract immediate data from the ACC                            | 1                 | Z, C, AC, OV, SC, CZ |
| SUB A,[m]                        | Subtract Data Memory from ACC                                   | 1                 | Z, C, AC, OV, SC, CZ |
| SUBM A,[m]                       | Subtract Data Memory from ACC with result in Data Memory        | 1 <sup>Note</sup> | Z, C, AC, OV, SC, CZ |
| SBC A,x                          | Subtract immediate data from ACC with Carry                     | 1                 | Z, C, AC, OV, SC, CZ |
| SBC A,[m]                        | Subtract Data Memory from ACC with Carry                        | 1                 | Z, C, AC, OV, SC, CZ |
| SBCM A,[m]                       | Subtract Data Memory from ACC with Carry, result in Data Memory | 1 <sup>Note</sup> | Z, C, AC, OV, SC, CZ |
| DAA [m]                          | Decimal adjust ACC for Addition with result in Data Memory      | 1 <sup>Note</sup> | C                    |
| <b>Logic Operation</b>           |                                                                 |                   |                      |
| AND A,[m]                        | Logical AND Data Memory to ACC                                  | 1                 | Z                    |
| OR A,[m]                         | Logical OR Data Memory to ACC                                   | 1                 | Z                    |
| XOR A,[m]                        | Logical XOR Data Memory to ACC                                  | 1                 | Z                    |
| ANDM A,[m]                       | Logical AND ACC to Data Memory                                  | 1 <sup>Note</sup> | Z                    |
| ORM A,[m]                        | Logical OR ACC to Data Memory                                   | 1 <sup>Note</sup> | Z                    |
| XORM A,[m]                       | Logical XOR ACC to Data Memory                                  | 1 <sup>Note</sup> | Z                    |
| AND A,x                          | Logical AND immediate Data to ACC                               | 1                 | Z                    |
| OR A,x                           | Logical OR immediate Data to ACC                                | 1                 | Z                    |
| XOR A,x                          | Logical XOR immediate Data to ACC                               | 1                 | Z                    |
| CPL [m]                          | Complement Data Memory                                          | 1 <sup>Note</sup> | Z                    |
| CPLA [m]                         | Complement Data Memory with result in ACC                       | 1                 | Z                    |
| <b>Increment &amp; Decrement</b> |                                                                 |                   |                      |
| INCA [m]                         | Increment Data Memory with result in ACC                        | 1                 | Z                    |
| INC [m]                          | Increment Data Memory                                           | 1 <sup>Note</sup> | Z                    |
| DECA [m]                         | Decrement Data Memory with result in ACC                        | 1                 | Z                    |
| DEC [m]                          | Decrement Data Memory                                           | 1 <sup>Note</sup> | Z                    |
| <b>Rotate</b>                    |                                                                 |                   |                      |
| RRA [m]                          | Rotate Data Memory right with result in ACC                     | 1                 | None                 |
| RR [m]                           | Rotate Data Memory right                                        | 1 <sup>Note</sup> | None                 |
| RRCA [m]                         | Rotate Data Memory right through Carry with result in ACC       | 1                 | C                    |
| RRC [m]                          | Rotate Data Memory right through Carry                          | 1 <sup>Note</sup> | C                    |
| RLA [m]                          | Rotate Data Memory left with result in ACC                      | 1                 | None                 |
| RL [m]                           | Rotate Data Memory left                                         | 1 <sup>Note</sup> | None                 |
| RLCA [m]                         | Rotate Data Memory left through Carry with result in ACC        | 1                 | C                    |
| RLC [m]                          | Rotate Data Memory left through Carry                           | 1 <sup>Note</sup> | C                    |

| Mnemonic                    | Description                                                                               | Cycles            | Flag Affected |
|-----------------------------|-------------------------------------------------------------------------------------------|-------------------|---------------|
| <b>Data Move</b>            |                                                                                           |                   |               |
| MOV A,[m]                   | Move Data Memory to ACC                                                                   | 1                 | None          |
| MOV [m],A                   | Move ACC to Data Memory                                                                   | 1 <sup>Note</sup> | None          |
| MOV A,x                     | Move immediate data to ACC                                                                | 1                 | None          |
| <b>Bit Operation</b>        |                                                                                           |                   |               |
| CLR [m].i                   | Clear bit of Data Memory                                                                  | 1 <sup>Note</sup> | None          |
| SET [m].i                   | Set bit of Data Memory                                                                    | 1 <sup>Note</sup> | None          |
| <b>Branch Operation</b>     |                                                                                           |                   |               |
| JMP addr                    | Jump unconditionally                                                                      | 2                 | None          |
| SZ [m]                      | Skip if Data Memory is zero                                                               | 1 <sup>Note</sup> | None          |
| SZA [m]                     | Skip if Data Memory is zero with data movement to ACC                                     | 1 <sup>Note</sup> | None          |
| SZ [m].i                    | Skip if bit i of Data Memory is zero                                                      | 1 <sup>Note</sup> | None          |
| SNZ [m]                     | Skip if Data Memory is not zero                                                           | 1 <sup>Note</sup> | None          |
| SNZ [m].i                   | Skip if bit i of Data Memory is not zero                                                  | 1 <sup>Note</sup> | None          |
| SIZ [m]                     | Skip if increment Data Memory is zero                                                     | 1 <sup>Note</sup> | None          |
| SDZ [m]                     | Skip if decrement Data Memory is zero                                                     | 1 <sup>Note</sup> | None          |
| SIZA [m]                    | Skip if increment Data Memory is zero with result in ACC                                  | 1 <sup>Note</sup> | None          |
| SDZA [m]                    | Skip if decrement Data Memory is zero with result in ACC                                  | 1 <sup>Note</sup> | None          |
| CALL addr                   | Subroutine call                                                                           | 2                 | None          |
| RET                         | Return from subroutine                                                                    | 2                 | None          |
| RET A,x                     | Return from subroutine and load immediate data to ACC                                     | 2                 | None          |
| RETI                        | Return from interrupt                                                                     | 2                 | None          |
| <b>Table Read Operation</b> |                                                                                           |                   |               |
| TABRD [m]                   | Read table (specific page) to TBLH and Data Memory                                        | 2 <sup>Note</sup> | None          |
| TABRDL [m]                  | Read table (last page) to TBLH and Data Memory                                            | 2 <sup>Note</sup> | None          |
| ITABRD [m]                  | Increment table pointer TBLP first and Read table (specific page) to TBLH and Data Memory | 2 <sup>Note</sup> | None          |
| ITABRDL [m]                 | Increment table pointer TBLP first and Read table (last page) to TBLH and Data Memory     | 2 <sup>Note</sup> | None          |
| <b>Miscellaneous</b>        |                                                                                           |                   |               |
| NOP                         | No operation                                                                              | 1                 | None          |
| CLR [m]                     | Clear Data Memory                                                                         | 1 <sup>Note</sup> | None          |
| SET [m]                     | Set Data Memory                                                                           | 1 <sup>Note</sup> | None          |
| CLR WDT                     | Clear Watchdog Timer                                                                      | 1                 | TO, PDF       |
| SWAP [m]                    | Swap nibbles of Data Memory                                                               | 1 <sup>Note</sup> | None          |
| SWAPA [m]                   | Swap nibbles of Data Memory with result in ACC                                            | 1                 | None          |
| HALT                        | Enter power down mode                                                                     | 1                 | TO, PDF       |

Note: 1. For skip instructions, if the result of the comparison involves a skip then two cycles are required, if no skip takes place only one cycle is required.

2. Any instruction which changes the contents of the PCL will also require 2 cycles for execution.

## Extended Instruction Set

The extended instructions are used to support the full range address access for the data memory. When the accessed data memory is located in any data memory sector except sector 0, the extended instruction can be used to directly access the data memory instead of using the indirect addressing access. This can not only reduce the use of Flash memory space but also improve the CPU execution efficiency.

| Mnemonic                         | Description                                                     | Cycles            | Flag Affected        |
|----------------------------------|-----------------------------------------------------------------|-------------------|----------------------|
| <b>Arithmetic</b>                |                                                                 |                   |                      |
| LADD A,[m]                       | Add Data Memory to ACC                                          | 2                 | Z, C, AC, OV, SC     |
| LADDM A,[m]                      | Add ACC to Data Memory                                          | 2 <sup>Note</sup> | Z, C, AC, OV, SC     |
| LADC A,[m]                       | Add Data Memory to ACC with Carry                               | 2                 | Z, C, AC, OV, SC     |
| LADCM A,[m]                      | Add ACC to Data memory with Carry                               | 2 <sup>Note</sup> | Z, C, AC, OV, SC     |
| LSUB A,[m]                       | Subtract Data Memory from ACC                                   | 2                 | Z, C, AC, OV, SC, CZ |
| LSUBM A,[m]                      | Subtract Data Memory from ACC with result in Data Memory        | 2 <sup>Note</sup> | Z, C, AC, OV, SC, CZ |
| LSBC A,[m]                       | Subtract Data Memory from ACC with Carry                        | 2                 | Z, C, AC, OV, SC, CZ |
| LSBCM A,[m]                      | Subtract Data Memory from ACC with Carry, result in Data Memory | 2 <sup>Note</sup> | Z, C, AC, OV, SC, CZ |
| LDAA [m]                         | Decimal adjust ACC for Addition with result in Data Memory      | 2 <sup>Note</sup> | C                    |
| <b>Logic Operation</b>           |                                                                 |                   |                      |
| LAND A,[m]                       | Logical AND Data Memory to ACC                                  | 2                 | Z                    |
| LOR A,[m]                        | Logical OR Data Memory to ACC                                   | 2                 | Z                    |
| LXOR A,[m]                       | Logical XOR Data Memory to ACC                                  | 2                 | Z                    |
| LANDM A,[m]                      | Logical AND ACC to Data Memory                                  | 2 <sup>Note</sup> | Z                    |
| LORM A,[m]                       | Logical OR ACC to Data Memory                                   | 2 <sup>Note</sup> | Z                    |
| LXORM A,[m]                      | Logical XOR ACC to Data Memory                                  | 2 <sup>Note</sup> | Z                    |
| LCPL [m]                         | Complement Data Memory                                          | 2 <sup>Note</sup> | Z                    |
| LCPLA [m]                        | Complement Data Memory with result in ACC                       | 2                 | Z                    |
| <b>Increment &amp; Decrement</b> |                                                                 |                   |                      |
| LINCA [m]                        | Increment Data Memory with result in ACC                        | 2                 | Z                    |
| LINC [m]                         | Increment Data Memory                                           | 2 <sup>Note</sup> | Z                    |
| LDECA [m]                        | Decrement Data Memory with result in ACC                        | 2                 | Z                    |
| LDEC [m]                         | Decrement Data Memory                                           | 2 <sup>Note</sup> | Z                    |
| <b>Rotate</b>                    |                                                                 |                   |                      |
| LRRA [m]                         | Rotate Data Memory right with result in ACC                     | 2                 | None                 |
| LRR [m]                          | Rotate Data Memory right                                        | 2 <sup>Note</sup> | None                 |
| LRRCA [m]                        | Rotate Data Memory right through Carry with result in ACC       | 2                 | C                    |
| LRRC [m]                         | Rotate Data Memory right through Carry                          | 2 <sup>Note</sup> | C                    |
| LRLA [m]                         | Rotate Data Memory left with result in ACC                      | 2                 | None                 |
| LRL [m]                          | Rotate Data Memory left                                         | 2 <sup>Note</sup> | None                 |
| LRLCA [m]                        | Rotate Data Memory left through Carry with result in ACC        | 2                 | C                    |
| LRLC [m]                         | Rotate Data Memory left through Carry                           | 2 <sup>Note</sup> | C                    |
| <b>Data Move</b>                 |                                                                 |                   |                      |
| LMOV A,[m]                       | Move Data Memory to ACC                                         | 2                 | None                 |
| LMOV [m],A                       | Move ACC to Data Memory                                         | 2 <sup>Note</sup> | None                 |
| <b>Bit Operation</b>             |                                                                 |                   |                      |
| LCLR [m].i                       | Clear bit of Data Memory                                        | 2 <sup>Note</sup> | None                 |
| LSET [m].i                       | Set bit of Data Memory                                          | 2 <sup>Note</sup> | None                 |

| Mnemonic             | Description                                                                               | Cycles            | Flag Affected |
|----------------------|-------------------------------------------------------------------------------------------|-------------------|---------------|
| <b>Branch</b>        |                                                                                           |                   |               |
| LSZ [m]              | Skip if Data Memory is zero                                                               | 2 <sup>Note</sup> | None          |
| LSZA [m]             | Skip if Data Memory is zero with data movement to ACC                                     | 2 <sup>Note</sup> | None          |
| LSNZ [m]             | Skip if Data Memory is not zero                                                           | 2 <sup>Note</sup> | None          |
| LSZ [m].i            | Skip if bit i of Data Memory is zero                                                      | 2 <sup>Note</sup> | None          |
| LSNZ [m].i           | Skip if bit i of Data Memory is not zero                                                  | 2 <sup>Note</sup> | None          |
| LSIZ [m]             | Skip if increment Data Memory is zero                                                     | 2 <sup>Note</sup> | None          |
| LSDZ [m]             | Skip if decrement Data Memory is zero                                                     | 2 <sup>Note</sup> | None          |
| LSIZA [m]            | Skip if increment Data Memory is zero with result in ACC                                  | 2 <sup>Note</sup> | None          |
| LSDZA [m]            | Skip if decrement Data Memory is zero with result in ACC                                  | 2 <sup>Note</sup> | None          |
| <b>Table Read</b>    |                                                                                           |                   |               |
| LTABRD [m]           | Read table (specific page) to TBLH and Data Memory                                        | 3 <sup>Note</sup> | None          |
| LTABRDL [m]          | Read table (last page) to TBLH and Data Memory                                            | 3 <sup>Note</sup> | None          |
| LITABRD [m]          | Increment table pointer TBLP first and Read table (specific page) to TBLH and Data Memory | 3 <sup>Note</sup> | None          |
| LITABRDL [m]         | Increment table pointer TBLP first and Read table (last page) to TBLH and Data Memory     | 3 <sup>Note</sup> | None          |
| <b>Miscellaneous</b> |                                                                                           |                   |               |
| LCLR [m]             | Clear Data Memory                                                                         | 2 <sup>Note</sup> | None          |
| LSET [m]             | Set Data Memory                                                                           | 2 <sup>Note</sup> | None          |
| LSWAP [m]            | Swap nibbles of Data Memory                                                               | 2 <sup>Note</sup> | None          |
| LSWAPA [m]           | Swap nibbles of Data Memory with result in ACC                                            | 2                 | None          |

Note: 1. For these extended skip instructions, if the result of the comparison involves a skip then three cycles are required, if no skip takes place two cycles is required.

2. Any extended instruction which changes the contents of the PCL register will also require three cycles for execution.

## Instruction Definition

|                   |                                                                                                                                             |
|-------------------|---------------------------------------------------------------------------------------------------------------------------------------------|
| <b>ADC A,[m]</b>  | Add Data Memory to ACC with Carry                                                                                                           |
| Description       | The contents of the specified Data Memory, Accumulator and the carry flag are added. The result is stored in the Accumulator.               |
| Operation         | $ACC \leftarrow ACC + [m] + C$                                                                                                              |
| Affected flag(s)  | OV, Z, AC, C, SC                                                                                                                            |
| <b>ADCM A,[m]</b> | Add ACC to Data Memory with Carry                                                                                                           |
| Description       | The contents of the specified Data Memory, Accumulator and the carry flag are added. The result is stored in the specified Data Memory.     |
| Operation         | $[m] \leftarrow ACC + [m] + C$                                                                                                              |
| Affected flag(s)  | OV, Z, AC, C, SC                                                                                                                            |
| <b>ADD A,[m]</b>  | Add Data Memory to ACC                                                                                                                      |
| Description       | The contents of the specified Data Memory and the Accumulator are added. The result is stored in the Accumulator.                           |
| Operation         | $ACC \leftarrow ACC + [m]$                                                                                                                  |
| Affected flag(s)  | OV, Z, AC, C, SC                                                                                                                            |
| <b>ADD A,x</b>    | Add immediate data to ACC                                                                                                                   |
| Description       | The contents of the Accumulator and the specified immediate data are added. The result is stored in the Accumulator.                        |
| Operation         | $ACC \leftarrow ACC + x$                                                                                                                    |
| Affected flag(s)  | OV, Z, AC, C, SC                                                                                                                            |
| <b>ADDM A,[m]</b> | Add ACC to Data Memory                                                                                                                      |
| Description       | The contents of the specified Data Memory and the Accumulator are added. The result is stored in the specified Data Memory.                 |
| Operation         | $[m] \leftarrow ACC + [m]$                                                                                                                  |
| Affected flag(s)  | OV, Z, AC, C, SC                                                                                                                            |
| <b>AND A,[m]</b>  | Logical AND Data Memory to ACC                                                                                                              |
| Description       | Data in the Accumulator and the specified Data Memory perform a bitwise logical AND operation. The result is stored in the Accumulator.     |
| Operation         | $ACC \leftarrow ACC \text{ "AND" } [m]$                                                                                                     |
| Affected flag(s)  | Z                                                                                                                                           |
| <b>AND A,x</b>    | Logical AND immediate data to ACC                                                                                                           |
| Description       | Data in the Accumulator and the specified immediate data perform a bit wise logical AND operation. The result is stored in the Accumulator. |
| Operation         | $ACC \leftarrow ACC \text{ "AND" } x$                                                                                                       |
| Affected flag(s)  | Z                                                                                                                                           |
| <b>ANDM A,[m]</b> | Logical AND ACC to Data Memory                                                                                                              |
| Description       | Data in the specified Data Memory and the Accumulator perform a bitwise logical AND operation. The result is stored in the Data Memory.     |
| Operation         | $[m] \leftarrow ACC \text{ "AND" } [m]$                                                                                                     |
| Affected flag(s)  | Z                                                                                                                                           |

|                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>CALL addr</b> | Subroutine call                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Description      | Unconditionally calls a subroutine at the specified address. The Program Counter then increments by 1 to obtain the address of the next instruction which is then pushed onto the stack. The specified address is then loaded and the program continues execution from this new address. As this instruction requires an additional operation, it is a two cycle instruction.                                                                                                                                                                                                                                                                                                                                                    |
| Operation        | Stack $\leftarrow$ Program Counter + 1<br>Program Counter $\leftarrow$ addr                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Affected flag(s) | None                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>CLR [m]</b>   | Clear Data Memory                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Description      | Each bit of the specified Data Memory is cleared to 0.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Operation        | [m] $\leftarrow$ 00H                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Affected flag(s) | None                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>CLR [m].i</b> | Clear bit of Data Memory                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Description      | Bit i of the specified Data Memory is cleared to 0.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Operation        | [m].i $\leftarrow$ 0                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Affected flag(s) | None                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>CLR WDT</b>   | Clear Watchdog Timer                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Description      | The TO, PDF flags and the WDT are all cleared.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Operation        | WDT cleared<br>TO $\leftarrow$ 0<br>PDF $\leftarrow$ 0                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Affected flag(s) | TO, PDF                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>CPL [m]</b>   | Complement Data Memory                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Description      | Each bit of the specified Data Memory is logically complemented (1's complement). Bits which previously contained a 1 are changed to 0 and vice versa.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Operation        | [m] $\leftarrow$ $\overline{[m]}$                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Affected flag(s) | Z                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>CPLA [m]</b>  | Complement Data Memory with result in ACC                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Description      | Each bit of the specified Data Memory is logically complemented (1's complement). Bits which previously contained a 1 are changed to 0 and vice versa. The complemented result is stored in the Accumulator and the contents of the Data Memory remain unchanged.                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Operation        | ACC $\leftarrow$ $\overline{[m]}$                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Affected flag(s) | Z                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>DAA [m]</b>   | Decimal-Adjust ACC for addition with result in Data Memory                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Description      | Convert the contents of the Accumulator value to a BCD (Binary Coded Decimal) value resulting from the previous addition of two BCD variables. If the low nibble is greater than 9 or if AC flag is set, then a value of 6 will be added to the low nibble. Otherwise the low nibble remains unchanged. If the high nibble is greater than 9 or if the C flag is set, then a value of 6 will be added to the high nibble. Essentially, the decimal conversion is performed by adding 00H, 06H, 60H or 66H depending on the Accumulator and flag conditions. Only the C flag may be affected by this instruction which indicates that if the original BCD sum is greater than 100, it allows multiple precision decimal addition. |
| Operation        | [m] $\leftarrow$ ACC + 00H or<br>[m] $\leftarrow$ ACC + 06H or<br>[m] $\leftarrow$ ACC + 60H or<br>[m] $\leftarrow$ ACC + 66H                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Affected flag(s) | C                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |

|                  |                                                                                                                                                                                                                                                            |
|------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>DEC [m]</b>   | Decrement Data Memory                                                                                                                                                                                                                                      |
| Description      | Data in the specified Data Memory is decremented by 1.                                                                                                                                                                                                     |
| Operation        | $[m] \leftarrow [m] - 1$                                                                                                                                                                                                                                   |
| Affected flag(s) | Z                                                                                                                                                                                                                                                          |
| <b>DECA [m]</b>  | Decrement Data Memory with result in ACC                                                                                                                                                                                                                   |
| Description      | Data in the specified Data Memory is decremented by 1. The result is stored in the Accumulator. The contents of the Data Memory remain unchanged.                                                                                                          |
| Operation        | $ACC \leftarrow [m] - 1$                                                                                                                                                                                                                                   |
| Affected flag(s) | Z                                                                                                                                                                                                                                                          |
| <b>HALT</b>      | Enter power down mode                                                                                                                                                                                                                                      |
| Description      | This instruction stops the program execution and turns off the system clock. The contents of the Data Memory and registers are retained. The WDT and prescaler are cleared. The power down flag PDF is set and the WDT time-out flag TO is cleared.        |
| Operation        | $TO \leftarrow 0$<br>$PDF \leftarrow 1$                                                                                                                                                                                                                    |
| Affected flag(s) | TO, PDF                                                                                                                                                                                                                                                    |
| <b>INC [m]</b>   | Increment Data Memory                                                                                                                                                                                                                                      |
| Description      | Data in the specified Data Memory is incremented by 1.                                                                                                                                                                                                     |
| Operation        | $[m] \leftarrow [m] + 1$                                                                                                                                                                                                                                   |
| Affected flag(s) | Z                                                                                                                                                                                                                                                          |
| <b>INCA [m]</b>  | Increment Data Memory with result in ACC                                                                                                                                                                                                                   |
| Description      | Data in the specified Data Memory is incremented by 1. The result is stored in the Accumulator. The contents of the Data Memory remain unchanged.                                                                                                          |
| Operation        | $ACC \leftarrow [m] + 1$                                                                                                                                                                                                                                   |
| Affected flag(s) | Z                                                                                                                                                                                                                                                          |
| <b>JMP addr</b>  | Jump unconditionally                                                                                                                                                                                                                                       |
| Description      | The contents of the Program Counter are replaced with the specified address. Program execution then continues from this new address. As this requires the insertion of a dummy instruction while the new address is loaded, it is a two cycle instruction. |
| Operation        | Program Counter $\leftarrow$ addr                                                                                                                                                                                                                          |
| Affected flag(s) | None                                                                                                                                                                                                                                                       |
| <b>MOV A,[m]</b> | Move Data Memory to ACC                                                                                                                                                                                                                                    |
| Description      | The contents of the specified Data Memory are copied to the Accumulator.                                                                                                                                                                                   |
| Operation        | $ACC \leftarrow [m]$                                                                                                                                                                                                                                       |
| Affected flag(s) | None                                                                                                                                                                                                                                                       |
| <b>MOV A,x</b>   | Move immediate data to ACC                                                                                                                                                                                                                                 |
| Description      | The immediate data specified is loaded into the Accumulator.                                                                                                                                                                                               |
| Operation        | $ACC \leftarrow x$                                                                                                                                                                                                                                         |
| Affected flag(s) | None                                                                                                                                                                                                                                                       |
| <b>MOV [m],A</b> | Move ACC to Data Memory                                                                                                                                                                                                                                    |
| Description      | The contents of the Accumulator are copied to the specified Data Memory.                                                                                                                                                                                   |
| Operation        | $[m] \leftarrow ACC$                                                                                                                                                                                                                                       |
| Affected flag(s) | None                                                                                                                                                                                                                                                       |

|                  |                                                                                                                                                                                                                                                                                                                  |
|------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>NOP</b>       | No operation                                                                                                                                                                                                                                                                                                     |
| Description      | No operation is performed. Execution continues with the next instruction.                                                                                                                                                                                                                                        |
| Operation        | No operation                                                                                                                                                                                                                                                                                                     |
| Affected flag(s) | None                                                                                                                                                                                                                                                                                                             |
| <b>OR A,[m]</b>  | Logical OR Data Memory to ACC                                                                                                                                                                                                                                                                                    |
| Description      | Data in the Accumulator and the specified Data Memory perform a bitwise logical OR operation. The result is stored in the Accumulator.                                                                                                                                                                           |
| Operation        | $ACC \leftarrow ACC \text{ "OR" } [m]$                                                                                                                                                                                                                                                                           |
| Affected flag(s) | Z                                                                                                                                                                                                                                                                                                                |
| <b>OR A,x</b>    | Logical OR immediate data to ACC                                                                                                                                                                                                                                                                                 |
| Description      | Data in the Accumulator and the specified immediate data perform a bitwise logical OR operation. The result is stored in the Accumulator.                                                                                                                                                                        |
| Operation        | $ACC \leftarrow ACC \text{ "OR" } x$                                                                                                                                                                                                                                                                             |
| Affected flag(s) | Z                                                                                                                                                                                                                                                                                                                |
| <b>ORM A,[m]</b> | Logical OR ACC to Data Memory                                                                                                                                                                                                                                                                                    |
| Description      | Data in the specified Data Memory and the Accumulator perform a bitwise logical OR operation. The result is stored in the Data Memory.                                                                                                                                                                           |
| Operation        | $[m] \leftarrow ACC \text{ "OR" } [m]$                                                                                                                                                                                                                                                                           |
| Affected flag(s) | Z                                                                                                                                                                                                                                                                                                                |
| <b>RET</b>       | Return from subroutine                                                                                                                                                                                                                                                                                           |
| Description      | The Program Counter is restored from the stack. Program execution continues at the restored address.                                                                                                                                                                                                             |
| Operation        | Program Counter $\leftarrow$ Stack                                                                                                                                                                                                                                                                               |
| Affected flag(s) | None                                                                                                                                                                                                                                                                                                             |
| <b>RET A,x</b>   | Return from subroutine and load immediate data to ACC                                                                                                                                                                                                                                                            |
| Description      | The Program Counter is restored from the stack and the Accumulator loaded with the specified immediate data. Program execution continues at the restored address.                                                                                                                                                |
| Operation        | Program Counter $\leftarrow$ Stack<br>$ACC \leftarrow x$                                                                                                                                                                                                                                                         |
| Affected flag(s) | None                                                                                                                                                                                                                                                                                                             |
| <b>RETI</b>      | Return from interrupt                                                                                                                                                                                                                                                                                            |
| Description      | The Program Counter is restored from the stack and the interrupts are re-enabled by setting the EMI bit. EMI is the master interrupt global enable bit. If an interrupt was pending when the RETI instruction is executed, the pending Interrupt routine will be processed before returning to the main program. |
| Operation        | Program Counter $\leftarrow$ Stack<br>$EMI \leftarrow 1$                                                                                                                                                                                                                                                         |
| Affected flag(s) | None                                                                                                                                                                                                                                                                                                             |
| <b>RL [m]</b>    | Rotate Data Memory left                                                                                                                                                                                                                                                                                          |
| Description      | The contents of the specified Data Memory are rotated left by 1 bit with bit 7 rotated into bit 0.                                                                                                                                                                                                               |
| Operation        | $[m].(i+1) \leftarrow [m].i; (i=0\sim6)$<br>$[m].0 \leftarrow [m].7$                                                                                                                                                                                                                                             |
| Affected flag(s) | None                                                                                                                                                                                                                                                                                                             |

|                  |                                                                                                                                                                                                                                                                           |
|------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>RLA [m]</b>   | Rotate Data Memory left with result in ACC                                                                                                                                                                                                                                |
| Description      | The contents of the specified Data Memory are rotated left by 1 bit with bit 7 rotated into bit 0. The rotated result is stored in the Accumulator and the contents of the Data Memory remain unchanged.                                                                  |
| Operation        | $ACC.(i+1) \leftarrow [m].i; (i=0\sim6)$<br>$ACC.0 \leftarrow [m].7$                                                                                                                                                                                                      |
| Affected flag(s) | None                                                                                                                                                                                                                                                                      |
| <b>RLC [m]</b>   | Rotate Data Memory left through Carry                                                                                                                                                                                                                                     |
| Description      | The contents of the specified Data Memory and the carry flag are rotated left by 1 bit. Bit 7 replaces the Carry bit and the original carry flag is rotated into bit 0.                                                                                                   |
| Operation        | $[m].(i+1) \leftarrow [m].i; (i=0\sim6)$<br>$[m].0 \leftarrow C$<br>$C \leftarrow [m].7$                                                                                                                                                                                  |
| Affected flag(s) | C                                                                                                                                                                                                                                                                         |
| <b>RLCA [m]</b>  | Rotate Data Memory left through Carry with result in ACC                                                                                                                                                                                                                  |
| Description      | Data in the specified Data Memory and the carry flag are rotated left by 1 bit. Bit 7 replaces the Carry bit and the original carry flag is rotated into the bit 0. The rotated result is stored in the Accumulator and the contents of the Data Memory remain unchanged. |
| Operation        | $ACC.(i+1) \leftarrow [m].i; (i=0\sim6)$<br>$ACC.0 \leftarrow C$<br>$C \leftarrow [m].7$                                                                                                                                                                                  |
| Affected flag(s) | C                                                                                                                                                                                                                                                                         |
| <b>RR [m]</b>    | Rotate Data Memory right                                                                                                                                                                                                                                                  |
| Description      | The contents of the specified Data Memory are rotated right by 1 bit with bit 0 rotated into bit 7.                                                                                                                                                                       |
| Operation        | $[m].i \leftarrow [m].(i+1); (i=0\sim6)$<br>$[m].7 \leftarrow [m].0$                                                                                                                                                                                                      |
| Affected flag(s) | None                                                                                                                                                                                                                                                                      |
| <b>RRA [m]</b>   | Rotate Data Memory right with result in ACC                                                                                                                                                                                                                               |
| Description      | Data in the specified Data Memory is rotated right by 1 bit with bit 0 rotated into bit 7. The rotated result is stored in the Accumulator and the contents of the Data Memory remain unchanged.                                                                          |
| Operation        | $ACC.i \leftarrow [m].(i+1); (i=0\sim6)$<br>$ACC.7 \leftarrow [m].0$                                                                                                                                                                                                      |
| Affected flag(s) | None                                                                                                                                                                                                                                                                      |
| <b>RRC [m]</b>   | Rotate Data Memory right through Carry                                                                                                                                                                                                                                    |
| Description      | The contents of the specified Data Memory and the carry flag are rotated right by 1 bit. Bit 0 replaces the Carry bit and the original carry flag is rotated into bit 7.                                                                                                  |
| Operation        | $[m].i \leftarrow [m].(i+1); (i=0\sim6)$<br>$[m].7 \leftarrow C$<br>$C \leftarrow [m].0$                                                                                                                                                                                  |
| Affected flag(s) | C                                                                                                                                                                                                                                                                         |

|                   |                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|-------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>RRCA [m]</b>   | Rotate Data Memory right through Carry with result in ACC                                                                                                                                                                                                                                                                                                                                                                                 |
| Description       | Data in the specified Data Memory and the carry flag are rotated right by 1 bit. Bit 0 replaces the Carry bit and the original carry flag is rotated into bit 7. The rotated result is stored in the Accumulator and the contents of the Data Memory remain unchanged.                                                                                                                                                                    |
| Operation         | $ACC.i \leftarrow [m].(i+1); (i=0\sim6)$<br>$ACC.7 \leftarrow C$<br>$C \leftarrow [m].0$                                                                                                                                                                                                                                                                                                                                                  |
| Affected flag(s)  | C                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>SBC A,[m]</b>  | Subtract Data Memory from ACC with Carry                                                                                                                                                                                                                                                                                                                                                                                                  |
| Description       | The contents of the specified Data Memory and the complement of the carry flag are subtracted from the Accumulator. The result is stored in the Accumulator. Note that if the result of subtraction is negative, the C flag will be cleared to 0, otherwise if the result is positive or zero, the C flag will be set to 1.                                                                                                               |
| Operation         | $ACC \leftarrow ACC - [m] - \overline{C}$                                                                                                                                                                                                                                                                                                                                                                                                 |
| Affected flag(s)  | OV, Z, AC, C, SC, CZ                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>SBC A, x</b>   | Subtract immediate data from ACC with Carry                                                                                                                                                                                                                                                                                                                                                                                               |
| Description       | The immediate data and the complement of the carry flag are subtracted from the Accumulator. The result is stored in the Accumulator. Note that if the result of subtraction is negative, the C flag will be cleared to 0, otherwise if the result is positive or zero, the C flag will be set to 1.                                                                                                                                      |
| Operation         | $ACC \leftarrow ACC - [m] - \overline{C}$                                                                                                                                                                                                                                                                                                                                                                                                 |
| Affected flag(s)  | OV, Z, AC, C, SC, CZ                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>SBCM A,[m]</b> | Subtract Data Memory from ACC with Carry and result in Data Memory                                                                                                                                                                                                                                                                                                                                                                        |
| Description       | The contents of the specified Data Memory and the complement of the carry flag are subtracted from the Accumulator. The result is stored in the Data Memory. Note that if the result of subtraction is negative, the C flag will be cleared to 0, otherwise if the result is positive or zero, the C flag will be set to 1.                                                                                                               |
| Operation         | $[m] \leftarrow ACC - [m] - \overline{C}$                                                                                                                                                                                                                                                                                                                                                                                                 |
| Affected flag(s)  | OV, Z, AC, C, SC, CZ                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>SDZ [m]</b>    | Skip if decrement Data Memory is 0                                                                                                                                                                                                                                                                                                                                                                                                        |
| Description       | The contents of the specified Data Memory are first decremented by 1. If the result is 0 the following instruction is skipped. As this requires the insertion of a dummy instruction while the next instruction is fetched, it is a two cycle instruction. If the result is not 0 the program proceeds with the following instruction.                                                                                                    |
| Operation         | $[m] \leftarrow [m] - 1$<br>Skip if $[m]=0$                                                                                                                                                                                                                                                                                                                                                                                               |
| Affected flag(s)  | None                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>SDZA [m]</b>   | Skip if decrement Data Memory is zero with result in ACC                                                                                                                                                                                                                                                                                                                                                                                  |
| Description       | The contents of the specified Data Memory are first decremented by 1. If the result is 0, the following instruction is skipped. The result is stored in the Accumulator but the specified Data Memory contents remain unchanged. As this requires the insertion of a dummy instruction while the next instruction is fetched, it is a two cycle instruction. If the result is not 0, the program proceeds with the following instruction. |
| Operation         | $ACC \leftarrow [m] - 1$<br>Skip if $ACC=0$                                                                                                                                                                                                                                                                                                                                                                                               |
| Affected flag(s)  | None                                                                                                                                                                                                                                                                                                                                                                                                                                      |

|                  |                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>SET [m]</b>   | Set Data Memory                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Description      | Each bit of the specified Data Memory is set to 1.                                                                                                                                                                                                                                                                                                                                                                                       |
| Operation        | $[m] \leftarrow FFH$                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Affected flag(s) | None                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>SET [m].i</b> | Set bit of Data Memory                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Description      | Bit i of the specified Data Memory is set to 1.                                                                                                                                                                                                                                                                                                                                                                                          |
| Operation        | $[m].i \leftarrow 1$                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Affected flag(s) | None                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>SIZ [m]</b>   | Skip if increment Data Memory is 0                                                                                                                                                                                                                                                                                                                                                                                                       |
| Description      | The contents of the specified Data Memory are first incremented by 1. If the result is 0, the following instruction is skipped. As this requires the insertion of a dummy instruction while the next instruction is fetched, it is a two cycle instruction. If the result is not 0 the program proceeds with the following instruction.                                                                                                  |
| Operation        | $[m] \leftarrow [m] + 1$<br>Skip if $[m]=0$                                                                                                                                                                                                                                                                                                                                                                                              |
| Affected flag(s) | None                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>SIZA [m]</b>  | Skip if increment Data Memory is zero with result in ACC                                                                                                                                                                                                                                                                                                                                                                                 |
| Description      | The contents of the specified Data Memory are first incremented by 1. If the result is 0, the following instruction is skipped. The result is stored in the Accumulator but the specified Data Memory contents remain unchanged. As this requires the insertion of a dummy instruction while the next instruction is fetched, it is a two cycle instruction. If the result is not 0 the program proceeds with the following instruction. |
| Operation        | $ACC \leftarrow [m] + 1$<br>Skip if $ACC=0$                                                                                                                                                                                                                                                                                                                                                                                              |
| Affected flag(s) | None                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>SNZ [m].i</b> | Skip if bit i of Data Memory is not 0                                                                                                                                                                                                                                                                                                                                                                                                    |
| Description      | If bit i of the specified Data Memory is not 0, the following instruction is skipped. As this requires the insertion of a dummy instruction while the next instruction is fetched, it is a two cycle instruction. If the result is 0 the program proceeds with the following instruction.                                                                                                                                                |
| Operation        | Skip if $[m].i \neq 0$                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Affected flag(s) | None                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>SNZ [m]</b>   | Skip if Data Memory is not 0                                                                                                                                                                                                                                                                                                                                                                                                             |
| Description      | The contents of the specified Data Memory are read out and then written back to the specified Data Memory again. If the specified Data Memory is not 0, the following instruction is skipped. As this requires the insertion of a dummy instruction while the next instruction is fetched, it is a two cycle instruction. If the result is 0 the program proceeds with the following instruction.                                        |
| Operation        | Skip if $[m] \neq 0$                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Affected flag(s) | None                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>SUB A,[m]</b> | Subtract Data Memory from ACC                                                                                                                                                                                                                                                                                                                                                                                                            |
| Description      | The specified Data Memory is subtracted from the contents of the Accumulator. The result is stored in the Accumulator. Note that if the result of subtraction is negative, the C flag will be cleared to 0, otherwise if the result is positive or zero, the C flag will be set to 1.                                                                                                                                                    |
| Operation        | $ACC \leftarrow ACC - [m]$                                                                                                                                                                                                                                                                                                                                                                                                               |
| Affected flag(s) | OV, Z, AC, C, SC, CZ                                                                                                                                                                                                                                                                                                                                                                                                                     |

|                   |                                                                                                                                                                                                                                                                                                                                                                                                                   |
|-------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>SUBM A,[m]</b> | Subtract Data Memory from ACC with result in Data Memory                                                                                                                                                                                                                                                                                                                                                          |
| Description       | The specified Data Memory is subtracted from the contents of the Accumulator. The result is stored in the Data Memory. Note that if the result of subtraction is negative, the C flag will be cleared to 0, otherwise if the result is positive or zero, the C flag will be set to 1.                                                                                                                             |
| Operation         | $[m] \leftarrow ACC - [m]$                                                                                                                                                                                                                                                                                                                                                                                        |
| Affected flag(s)  | OV, Z, AC, C, SC, CZ                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>SUB A,x</b>    | Subtract immediate data from ACC                                                                                                                                                                                                                                                                                                                                                                                  |
| Description       | The immediate data specified by the code is subtracted from the contents of the Accumulator. The result is stored in the Accumulator. Note that if the result of subtraction is negative, the C flag will be cleared to 0, otherwise if the result is positive or zero, the C flag will be set to 1.                                                                                                              |
| Operation         | $ACC \leftarrow ACC - x$                                                                                                                                                                                                                                                                                                                                                                                          |
| Affected flag(s)  | OV, Z, AC, C, SC, CZ                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>SWAP [m]</b>   | Swap nibbles of Data Memory                                                                                                                                                                                                                                                                                                                                                                                       |
| Description       | The low-order and high-order nibbles of the specified Data Memory are interchanged.                                                                                                                                                                                                                                                                                                                               |
| Operation         | $[m].3 \sim [m].0 \leftrightarrow [m].7 \sim [m].4$                                                                                                                                                                                                                                                                                                                                                               |
| Affected flag(s)  | None                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>SWAPA [m]</b>  | Swap nibbles of Data Memory with result in ACC                                                                                                                                                                                                                                                                                                                                                                    |
| Description       | The low-order and high-order nibbles of the specified Data Memory are interchanged. The result is stored in the Accumulator. The contents of the Data Memory remain unchanged.                                                                                                                                                                                                                                    |
| Operation         | $ACC.3 \sim ACC.0 \leftarrow [m].7 \sim [m].4$<br>$ACC.7 \sim ACC.4 \leftarrow [m].3 \sim [m].0$                                                                                                                                                                                                                                                                                                                  |
| Affected flag(s)  | None                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>SZ [m]</b>     | Skip if Data Memory is 0                                                                                                                                                                                                                                                                                                                                                                                          |
| Description       | The contents of the specified Data Memory are read out and then written back to the specified Data Memory again. If the contents of the specified Data Memory is 0, the following instruction is skipped. As this requires the insertion of a dummy instruction while the next instruction is fetched, it is a two cycle instruction. If the result is not 0 the program proceeds with the following instruction. |
| Operation         | Skip if $[m]=0$                                                                                                                                                                                                                                                                                                                                                                                                   |
| Affected flag(s)  | None                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>SZA [m]</b>    | Skip if Data Memory is 0 with data movement to ACC                                                                                                                                                                                                                                                                                                                                                                |
| Description       | The contents of the specified Data Memory are copied to the Accumulator. If the value is zero, the following instruction is skipped. As this requires the insertion of a dummy instruction while the next instruction is fetched, it is a two cycle instruction. If the result is not 0 the program proceeds with the following instruction.                                                                      |
| Operation         | $ACC \leftarrow [m]$<br>Skip if $[m]=0$                                                                                                                                                                                                                                                                                                                                                                           |
| Affected flag(s)  | None                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>SZ [m].i</b>   | Skip if bit i of Data Memory is 0                                                                                                                                                                                                                                                                                                                                                                                 |
| Description       | If bit i of the specified Data Memory is 0, the following instruction is skipped. As this requires the insertion of a dummy instruction while the next instruction is fetched, it is a two cycle instruction. If the result is not 0, the program proceeds with the following instruction.                                                                                                                        |
| Operation         | Skip if $[m].i=0$                                                                                                                                                                                                                                                                                                                                                                                                 |
| Affected flag(s)  | None                                                                                                                                                                                                                                                                                                                                                                                                              |

|                    |                                                                                                                                                                                                                  |
|--------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>TABRD [m]</b>   | Read table (specific page) to TBLH and Data Memory                                                                                                                                                               |
| Description        | The low byte of the program code (specific page) addressed by the table pointer (TBLP and TBHP) is moved to the specified Data Memory and the high byte moved to TBLH.                                           |
| Operation          | [m] ← program code (low byte)<br>TBLH ← program code (high byte)                                                                                                                                                 |
| Affected flag(s)   | None                                                                                                                                                                                                             |
| <b>TABRDL [m]</b>  | Read table (last page) to TBLH and Data Memory                                                                                                                                                                   |
| Description        | The low byte of the program code (last page) addressed by the table pointer (TBLP) is moved to the specified Data Memory and the high byte moved to TBLH.                                                        |
| Operation          | [m] ← program code (low byte)<br>TBLH ← program code (high byte)                                                                                                                                                 |
| Affected flag(s)   | None                                                                                                                                                                                                             |
| <b>ITABRD [m]</b>  | Increment table pointer low byte first and read table (specific page) to TBLH and Data Memory                                                                                                                    |
| Description        | Increment table pointer low byte, TBLP, first and then the program code (specific page) addressed by the table pointer (TBHP and TBLP) is moved to the specified Data Memory and the high byte moved to TBLH.    |
| Operation          | [m] ← program code (low byte)<br>TBLH ← program code (high byte)                                                                                                                                                 |
| Affected flag(s)   | None                                                                                                                                                                                                             |
| <b>ITABRDL [m]</b> | Increment table pointer low byte first and read table (last page) to TBLH and Data Memory                                                                                                                        |
| Description        | Increment table pointer low byte, TBLP, first and then the low byte of the program code (last page) addressed by the table pointer (TBLP) is moved to the specified Data Memory and the high byte moved to TBLH. |
| Operation          | [m] ← program code (low byte)<br>TBLH ← program code (high byte)                                                                                                                                                 |
| Affected flag(s)   | None                                                                                                                                                                                                             |
| <b>XOR A,[m]</b>   | Logical XOR Data Memory to ACC                                                                                                                                                                                   |
| Description        | Data in the Accumulator and the specified Data Memory perform a bitwise logical XOR operation. The result is stored in the Accumulator.                                                                          |
| Operation          | ACC ← ACC "XOR" [m]                                                                                                                                                                                              |
| Affected flag(s)   | Z                                                                                                                                                                                                                |
| <b>XORM A,[m]</b>  | Logical XOR ACC to Data Memory                                                                                                                                                                                   |
| Description        | Data in the specified Data Memory and the Accumulator perform a bitwise logical XOR operation. The result is stored in the Data Memory.                                                                          |
| Operation          | [m] ← ACC "XOR" [m]                                                                                                                                                                                              |
| Affected flag(s)   | Z                                                                                                                                                                                                                |
| <b>XOR A,x</b>     | Logical XOR immediate data to ACC                                                                                                                                                                                |
| Description        | Data in the Accumulator and the specified immediate data perform a bitwise logical XOR operation. The result is stored in the Accumulator.                                                                       |
| Operation          | ACC ← ACC "XOR" x                                                                                                                                                                                                |
| Affected flag(s)   | Z                                                                                                                                                                                                                |

## Extended Instruction Definition

The extended instructions are used to directly access the data stored in any data memory sections.

|                    |                                                                                                                                         |
|--------------------|-----------------------------------------------------------------------------------------------------------------------------------------|
| <b>LADC A,[m]</b>  | Add Data Memory to ACC with Carry                                                                                                       |
| Description        | The contents of the specified Data Memory, Accumulator and the carry flag are added. The result is stored in the Accumulator.           |
| Operation          | $ACC \leftarrow ACC + [m] + C$                                                                                                          |
| Affected flag(s)   | OV, Z, AC, C, SC                                                                                                                        |
| <b>LADCM A,[m]</b> | Add ACC to Data Memory with Carry                                                                                                       |
| Description        | The contents of the specified Data Memory, Accumulator and the carry flag are added. The result is stored in the specified Data Memory. |
| Operation          | $[m] \leftarrow ACC + [m] + C$                                                                                                          |
| Affected flag(s)   | OV, Z, AC, C, SC                                                                                                                        |
| <b>LADD A,[m]</b>  | Add Data Memory to ACC                                                                                                                  |
| Description        | The contents of the specified Data Memory and the Accumulator are added. The result is stored in the Accumulator.                       |
| Operation          | $ACC \leftarrow ACC + [m]$                                                                                                              |
| Affected flag(s)   | OV, Z, AC, C, SC                                                                                                                        |
| <b>LADDM A,[m]</b> | Add ACC to Data Memory                                                                                                                  |
| Description        | The contents of the specified Data Memory and the Accumulator are added. The result is stored in the specified Data Memory.             |
| Operation          | $[m] \leftarrow ACC + [m]$                                                                                                              |
| Affected flag(s)   | OV, Z, AC, C, SC                                                                                                                        |
| <b>LAND A,[m]</b>  | Logical AND Data Memory to ACC                                                                                                          |
| Description        | Data in the Accumulator and the specified Data Memory perform a bitwise logical AND operation. The result is stored in the Accumulator. |
| Operation          | $ACC \leftarrow ACC \text{ "AND" } [m]$                                                                                                 |
| Affected flag(s)   | Z                                                                                                                                       |
| <b>LANDM A,[m]</b> | Logical AND ACC to Data Memory                                                                                                          |
| Description        | Data in the specified Data Memory and the Accumulator perform a bitwise logical AND operation. The result is stored in the Data Memory. |
| Operation          | $[m] \leftarrow ACC \text{ "AND" } [m]$                                                                                                 |
| Affected flag(s)   | Z                                                                                                                                       |
| <b>LCLR [m]</b>    | Clear Data Memory                                                                                                                       |
| Description        | Each bit of the specified Data Memory is cleared to 0.                                                                                  |
| Operation          | $[m] \leftarrow 00H$                                                                                                                    |
| Affected flag(s)   | None                                                                                                                                    |
| <b>LCLR [m].i</b>  | Clear bit of Data Memory                                                                                                                |
| Description        | Bit i of the specified Data Memory is cleared to 0.                                                                                     |
| Operation          | $[m].i \leftarrow 0$                                                                                                                    |
| Affected flag(s)   | None                                                                                                                                    |

|                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>LCPL [m]</b>  | Complement Data Memory                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Description      | Each bit of the specified Data Memory is logically complemented (1's complement). Bits which previously contained a 1 are changed to 0 and vice versa.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Operation        | $[m] \leftarrow \overline{[m]}$                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Affected flag(s) | Z                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>LCPLA [m]</b> | Complement Data Memory with result in ACC                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Description      | Each bit of the specified Data Memory is logically complemented (1's complement). Bits which previously contained a 1 are changed to 0 and vice versa. The complemented result is stored in the Accumulator and the contents of the Data Memory remain unchanged.                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Operation        | $ACC \leftarrow \overline{[m]}$                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Affected flag(s) | Z                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>LDAA [m]</b>  | Decimal-Adjust ACC for addition with result in Data Memory                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Description      | Convert the contents of the Accumulator value to a BCD (Binary Coded Decimal) value resulting from the previous addition of two BCD variables. If the low nibble is greater than 9 or if AC flag is set, then a value of 6 will be added to the low nibble. Otherwise the low nibble remains unchanged. If the high nibble is greater than 9 or if the C flag is set, then a value of 6 will be added to the high nibble. Essentially, the decimal conversion is performed by adding 00H, 06H, 60H or 66H depending on the Accumulator and flag conditions. Only the C flag may be affected by this instruction which indicates that if the original BCD sum is greater than 100, it allows multiple precision decimal addition. |
| Operation        | $[m] \leftarrow ACC + 00H$ or<br>$[m] \leftarrow ACC + 06H$ or<br>$[m] \leftarrow ACC + 60H$ or<br>$[m] \leftarrow ACC + 66H$                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Affected flag(s) | C                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>LDEC [m]</b>  | Decrement Data Memory                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Description      | Data in the specified Data Memory is decremented by 1.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Operation        | $[m] \leftarrow [m] - 1$                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Affected flag(s) | Z                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>LDECA [m]</b> | Decrement Data Memory with result in ACC                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Description      | Data in the specified Data Memory is decremented by 1. The result is stored in the Accumulator. The contents of the Data Memory remain unchanged.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Operation        | $ACC \leftarrow [m] - 1$                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Affected flag(s) | Z                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>LINC [m]</b>  | Increment Data Memory                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Description      | Data in the specified Data Memory is incremented by 1.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Operation        | $[m] \leftarrow [m] + 1$                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Affected flag(s) | Z                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>LINCA [m]</b> | Increment Data Memory with result in ACC                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Description      | Data in the specified Data Memory is incremented by 1. The result is stored in the Accumulator. The contents of the Data Memory remain unchanged.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Operation        | $ACC \leftarrow [m] + 1$                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Affected flag(s) | Z                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |

|                   |                                                                                                                                                                                                                                                                           |
|-------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>LMOV A,[m]</b> | Move Data Memory to ACC                                                                                                                                                                                                                                                   |
| Description       | The contents of the specified Data Memory are copied to the Accumulator.                                                                                                                                                                                                  |
| Operation         | $ACC \leftarrow [m]$                                                                                                                                                                                                                                                      |
| Affected flag(s)  | None                                                                                                                                                                                                                                                                      |
| <b>LMOV [m],A</b> | Move ACC to Data Memory                                                                                                                                                                                                                                                   |
| Description       | The contents of the Accumulator are copied to the specified Data Memory.                                                                                                                                                                                                  |
| Operation         | $[m] \leftarrow ACC$                                                                                                                                                                                                                                                      |
| Affected flag(s)  | None                                                                                                                                                                                                                                                                      |
| <b>LOR A,[m]</b>  | Logical OR Data Memory to ACC                                                                                                                                                                                                                                             |
| Description       | Data in the Accumulator and the specified Data Memory perform a bitwise logical OR operation. The result is stored in the Accumulator.                                                                                                                                    |
| Operation         | $ACC \leftarrow ACC \text{ "OR" } [m]$                                                                                                                                                                                                                                    |
| Affected flag(s)  | Z                                                                                                                                                                                                                                                                         |
| <b>LORM A,[m]</b> | Logical OR ACC to Data Memory                                                                                                                                                                                                                                             |
| Description       | Data in the specified Data Memory and the Accumulator perform a bitwise logical OR operation. The result is stored in the Data Memory.                                                                                                                                    |
| Operation         | $[m] \leftarrow ACC \text{ "OR" } [m]$                                                                                                                                                                                                                                    |
| Affected flag(s)  | Z                                                                                                                                                                                                                                                                         |
| <b>LRL [m]</b>    | Rotate Data Memory left                                                                                                                                                                                                                                                   |
| Description       | The contents of the specified Data Memory are rotated left by 1 bit with bit 7 rotated into bit 0.                                                                                                                                                                        |
| Operation         | $[m].(i+1) \leftarrow [m].i; (i=0\sim6)$<br>$[m].0 \leftarrow [m].7$                                                                                                                                                                                                      |
| Affected flag(s)  | None                                                                                                                                                                                                                                                                      |
| <b>LRLA [m]</b>   | Rotate Data Memory left with result in ACC                                                                                                                                                                                                                                |
| Description       | The contents of the specified Data Memory are rotated left by 1 bit with bit 7 rotated into bit 0. The rotated result is stored in the Accumulator and the contents of the Data Memory remain unchanged.                                                                  |
| Operation         | $ACC.(i+1) \leftarrow [m].i; (i=0\sim6)$<br>$ACC.0 \leftarrow [m].7$                                                                                                                                                                                                      |
| Affected flag(s)  | None                                                                                                                                                                                                                                                                      |
| <b>LRLC [m]</b>   | Rotate Data Memory left through Carry                                                                                                                                                                                                                                     |
| Description       | The contents of the specified Data Memory and the carry flag are rotated left by 1 bit. Bit 7 replaces the Carry bit and the original carry flag is rotated into bit 0.                                                                                                   |
| Operation         | $[m].(i+1) \leftarrow [m].i; (i=0\sim6)$<br>$[m].0 \leftarrow C$<br>$C \leftarrow [m].7$                                                                                                                                                                                  |
| Affected flag(s)  | C                                                                                                                                                                                                                                                                         |
| <b>LRLCA [m]</b>  | Rotate Data Memory left through Carry with result in ACC                                                                                                                                                                                                                  |
| Description       | Data in the specified Data Memory and the carry flag are rotated left by 1 bit. Bit 7 replaces the Carry bit and the original carry flag is rotated into the bit 0. The rotated result is stored in the Accumulator and the contents of the Data Memory remain unchanged. |
| Operation         | $ACC.(i+1) \leftarrow [m].i; (i=0\sim6)$<br>$ACC.0 \leftarrow C$<br>$C \leftarrow [m].7$                                                                                                                                                                                  |
| Affected flag(s)  | C                                                                                                                                                                                                                                                                         |

|                    |                                                                                                                                                                                                                                                                                                                             |
|--------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>LRR [m]</b>     | Rotate Data Memory right                                                                                                                                                                                                                                                                                                    |
| Description        | The contents of the specified Data Memory are rotated right by 1 bit with bit 0 rotated into bit 7.                                                                                                                                                                                                                         |
| Operation          | $[m].i \leftarrow [m].(i+1); (i=0\sim6)$<br>$[m].7 \leftarrow [m].0$                                                                                                                                                                                                                                                        |
| Affected flag(s)   | None                                                                                                                                                                                                                                                                                                                        |
| <b>LRRA [m]</b>    | Rotate Data Memory right with result in ACC                                                                                                                                                                                                                                                                                 |
| Description        | Data in the specified Data Memory is rotated right by 1 bit with bit 0 rotated into bit 7. The rotated result is stored in the Accumulator and the contents of the Data Memory remain unchanged.                                                                                                                            |
| Operation          | $ACC.i \leftarrow [m].(i+1); (i=0\sim6)$<br>$ACC.7 \leftarrow [m].0$                                                                                                                                                                                                                                                        |
| Affected flag(s)   | None                                                                                                                                                                                                                                                                                                                        |
| <b>LRRC [m]</b>    | Rotate Data Memory right through Carry                                                                                                                                                                                                                                                                                      |
| Description        | The contents of the specified Data Memory and the carry flag are rotated right by 1 bit. Bit 0 replaces the Carry bit and the original carry flag is rotated into bit 7.                                                                                                                                                    |
| Operation          | $[m].i \leftarrow [m].(i+1); (i=0\sim6)$<br>$[m].7 \leftarrow C$<br>$C \leftarrow [m].0$                                                                                                                                                                                                                                    |
| Affected flag(s)   | C                                                                                                                                                                                                                                                                                                                           |
| <b>LRRCA [m]</b>   | Rotate Data Memory right through Carry with result in ACC                                                                                                                                                                                                                                                                   |
| Description        | Data in the specified Data Memory and the carry flag are rotated right by 1 bit. Bit 0 replaces the Carry bit and the original carry flag is rotated into bit 7. The rotated result is stored in the Accumulator and the contents of the Data Memory remain unchanged.                                                      |
| Operation          | $ACC.i \leftarrow [m].(i+1); (i=0\sim6)$<br>$ACC.7 \leftarrow C$<br>$C \leftarrow [m].0$                                                                                                                                                                                                                                    |
| Affected flag(s)   | C                                                                                                                                                                                                                                                                                                                           |
| <b>LSBC A,[m]</b>  | Subtract Data Memory from ACC with Carry                                                                                                                                                                                                                                                                                    |
| Description        | The contents of the specified Data Memory and the complement of the carry flag are subtracted from the Accumulator. The result is stored in the Accumulator. Note that if the result of subtraction is negative, the C flag will be cleared to 0, otherwise if the result is positive or zero, the C flag will be set to 1. |
| Operation          | $ACC \leftarrow ACC - [m] - \overline{C}$                                                                                                                                                                                                                                                                                   |
| Affected flag(s)   | OV, Z, AC, C, SC, CZ                                                                                                                                                                                                                                                                                                        |
| <b>LSBCM A,[m]</b> | Subtract Data Memory from ACC with Carry and result in Data Memory                                                                                                                                                                                                                                                          |
| Description        | The contents of the specified Data Memory and the complement of the carry flag are subtracted from the Accumulator. The result is stored in the Data Memory. Note that if the result of subtraction is negative, the C flag will be cleared to 0, otherwise if the result is positive or zero, the C flag will be set to 1. |
| Operation          | $[m] \leftarrow ACC - [m] - \overline{C}$                                                                                                                                                                                                                                                                                   |
| Affected flag(s)   | OV, Z, AC, C, SC, CZ                                                                                                                                                                                                                                                                                                        |

|                   |                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|-------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>LSDZ [m]</b>   | Skip if decrement Data Memory is 0                                                                                                                                                                                                                                                                                                                                                                                                          |
| Description       | The contents of the specified Data Memory are first decremented by 1. If the result is 0 the following instruction is skipped. As this requires the insertion of a dummy instruction while the next instruction is fetched, it is a three cycle instruction. If the result is not 0 the program proceeds with the following instruction.                                                                                                    |
| Operation         | $[m] \leftarrow [m] - 1$<br>Skip if $[m]=0$                                                                                                                                                                                                                                                                                                                                                                                                 |
| Affected flag(s)  | None                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>LSDZA [m]</b>  | Skip if decrement Data Memory is zero with result in ACC                                                                                                                                                                                                                                                                                                                                                                                    |
| Description       | The contents of the specified Data Memory are first decremented by 1. If the result is 0, the following instruction is skipped. The result is stored in the Accumulator but the specified Data Memory contents remain unchanged. As this requires the insertion of a dummy instruction while the next instruction is fetched, it is a three cycle instruction. If the result is not 0, the program proceeds with the following instruction. |
| Operation         | $ACC \leftarrow [m] - 1$<br>Skip if $ACC=0$                                                                                                                                                                                                                                                                                                                                                                                                 |
| Affected flag(s)  | None                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>LSET [m]</b>   | Set Data Memory                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Description       | Each bit of the specified Data Memory is set to 1.                                                                                                                                                                                                                                                                                                                                                                                          |
| Operation         | $[m] \leftarrow FFH$                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Affected flag(s)  | None                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>LSET [m].i</b> | Set bit of Data Memory                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Description       | Bit i of the specified Data Memory is set to 1.                                                                                                                                                                                                                                                                                                                                                                                             |
| Operation         | $[m].i \leftarrow 1$                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Affected flag(s)  | None                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>LSIZ [m]</b>   | Skip if increment Data Memory is 0                                                                                                                                                                                                                                                                                                                                                                                                          |
| Description       | The contents of the specified Data Memory are first incremented by 1. If the result is 0, the following instruction is skipped. As this requires the insertion of a dummy instruction while the next instruction is fetched, it is a three cycle instruction. If the result is not 0 the program proceeds with the following instruction.                                                                                                   |
| Operation         | $[m] \leftarrow [m] + 1$<br>Skip if $[m]=0$                                                                                                                                                                                                                                                                                                                                                                                                 |
| Affected flag(s)  | None                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>LSIZA [m]</b>  | Skip if increment Data Memory is zero with result in ACC                                                                                                                                                                                                                                                                                                                                                                                    |
| Description       | The contents of the specified Data Memory are first incremented by 1. If the result is 0, the following instruction is skipped. The result is stored in the Accumulator but the specified Data Memory contents remain unchanged. As this requires the insertion of a dummy instruction while the next instruction is fetched, it is a three cycle instruction. If the result is not 0 the program proceeds with the following instruction.  |
| Operation         | $ACC \leftarrow [m] + 1$<br>Skip if $ACC=0$                                                                                                                                                                                                                                                                                                                                                                                                 |
| Affected flag(s)  | None                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>LSNZ [m].i</b> | Skip if bit i of Data Memory is not 0                                                                                                                                                                                                                                                                                                                                                                                                       |
| Description       | If bit i of the specified Data Memory is not 0, the following instruction is skipped. As this requires the insertion of a dummy instruction while the next instruction is fetched, it is a three cycle instruction. If the result is 0 the program proceeds with the following instruction.                                                                                                                                                 |
| Operation         | Skip if $[m].i \neq 0$                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Affected flag(s)  | None                                                                                                                                                                                                                                                                                                                                                                                                                                        |

|                    |                                                                                                                                                                                                                                                                                                                                                                                                                |
|--------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>LSNZ [m]</b>    | Skip if Data Memory is not 0                                                                                                                                                                                                                                                                                                                                                                                   |
| Description        | The contents of the specified Data Memory are read out and then written to the specified Data Memory again. If the content of the specified Data Memory is not 0, the following instruction is skipped. As this requires the insertion of a dummy instruction while the next instruction is fetched, it is a three cycle instruction. If the result is 0 the program proceeds with the following instruction.  |
| Operation          | Skip if [m] $\neq$ 0                                                                                                                                                                                                                                                                                                                                                                                           |
| Affected flag(s)   | None                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>LSUB A,[m]</b>  | Subtract Data Memory from ACC                                                                                                                                                                                                                                                                                                                                                                                  |
| Description        | The specified Data Memory is subtracted from the contents of the Accumulator. The result is stored in the Accumulator. Note that if the result of subtraction is negative, the C flag will be cleared to 0, otherwise if the result is positive or zero, the C flag will be set to 1.                                                                                                                          |
| Operation          | $ACC \leftarrow ACC - [m]$                                                                                                                                                                                                                                                                                                                                                                                     |
| Affected flag(s)   | OV, Z, AC, C, SC, CZ                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>LSUBM A,[m]</b> | Subtract Data Memory from ACC with result in Data Memory                                                                                                                                                                                                                                                                                                                                                       |
| Description        | The specified Data Memory is subtracted from the contents of the Accumulator. The result is stored in the Data Memory. Note that if the result of subtraction is negative, the C flag will be cleared to 0, otherwise if the result is positive or zero, the C flag will be set to 1.                                                                                                                          |
| Operation          | $[m] \leftarrow ACC - [m]$                                                                                                                                                                                                                                                                                                                                                                                     |
| Affected flag(s)   | OV, Z, AC, C, SC, CZ                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>LSWAP [m]</b>   | Swap nibbles of Data Memory                                                                                                                                                                                                                                                                                                                                                                                    |
| Description        | The low-order and high-order nibbles of the specified Data Memory are interchanged.                                                                                                                                                                                                                                                                                                                            |
| Operation          | $[m].3 \sim [m].0 \leftrightarrow [m].7 \sim [m].4$                                                                                                                                                                                                                                                                                                                                                            |
| Affected flag(s)   | None                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>LSWAPA [m]</b>  | Swap nibbles of Data Memory with result in ACC                                                                                                                                                                                                                                                                                                                                                                 |
| Description        | The low-order and high-order nibbles of the specified Data Memory are interchanged. The result is stored in the Accumulator. The contents of the Data Memory remain unchanged.                                                                                                                                                                                                                                 |
| Operation          | $ACC.3 \sim ACC.0 \leftarrow [m].7 \sim [m].4$<br>$ACC.7 \sim ACC.4 \leftarrow [m].3 \sim [m].0$                                                                                                                                                                                                                                                                                                               |
| Affected flag(s)   | None                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>LSZ [m]</b>     | Skip if Data Memory is 0                                                                                                                                                                                                                                                                                                                                                                                       |
| Description        | The contents of the specified Data Memory are read out and then written to the specified Data Memory again. If the contents of the specified Data Memory is 0, the following instruction is skipped. As this requires the insertion of a dummy instruction while the next instruction is fetched, it is a three cycle instruction. If the result is not 0 the program proceeds with the following instruction. |
| Operation          | Skip if [m]=0                                                                                                                                                                                                                                                                                                                                                                                                  |
| Affected flag(s)   | None                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>LSZA [m]</b>    | Skip if Data Memory is 0 with data movement to ACC                                                                                                                                                                                                                                                                                                                                                             |
| Description        | The contents of the specified Data Memory are copied to the Accumulator. If the value is zero, the following instruction is skipped. As this requires the insertion of a dummy instruction while the next instruction is fetched, it is a three cycle instruction. If the result is not 0 the program proceeds with the following instruction.                                                                 |
| Operation          | $ACC \leftarrow [m]$<br>Skip if [m]=0                                                                                                                                                                                                                                                                                                                                                                          |
| Affected flag(s)   | None                                                                                                                                                                                                                                                                                                                                                                                                           |

|                     |                                                                                                                                                                                                                                                                                              |
|---------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>LSZ [m].i</b>    | Skip if bit i of Data Memory is 0                                                                                                                                                                                                                                                            |
| Description         | If bit i of the specified Data Memory is 0, the following instruction is skipped. As this requires the insertion of a dummy instruction while the next instruction is fetched, it is a three cycle instruction. If the result is not 0, the program proceeds with the following instruction. |
| Operation           | Skip if [m].i=0                                                                                                                                                                                                                                                                              |
| Affected flag(s)    | None                                                                                                                                                                                                                                                                                         |
| <b>LTABRD [m]</b>   | Read table (specific page) to TBLH and Data Memory                                                                                                                                                                                                                                           |
| Description         | The low byte of the program code (specific page) addressed by the table pointer (TBHP and TBLP) is moved to the specified Data Memory and the high byte moved to TBLH.                                                                                                                       |
| Operation           | [m] ← program code (low byte)<br>TBLH ← program code (high byte)                                                                                                                                                                                                                             |
| Affected flag(s)    | None                                                                                                                                                                                                                                                                                         |
| <b>LTABRDL [m]</b>  | Read table (last page) to TBLH and Data Memory                                                                                                                                                                                                                                               |
| Description         | The low byte of the program code (last page) addressed by the table pointer (TBLP) is moved to the specified Data Memory and the high byte moved to TBLH.                                                                                                                                    |
| Operation           | [m] ← program code (low byte)<br>TBLH ← program code (high byte)                                                                                                                                                                                                                             |
| Affected flag(s)    | None                                                                                                                                                                                                                                                                                         |
| <b>LITABRD [m]</b>  | Increment table pointer low byte first and read table (specific page) to TBLH and Data Memory                                                                                                                                                                                                |
| Description         | Increment table pointer low byte, TBLP, first and then the program code (specific page) addressed by the table pointer (TBHP and TBLP) is moved to the specified Data Memory and the high byte moved to TBLH.                                                                                |
| Operation           | [m] ← program code (low byte)<br>TBLH ← program code (high byte)                                                                                                                                                                                                                             |
| Affected flag(s)    | None                                                                                                                                                                                                                                                                                         |
| <b>LITABRDL [m]</b> | Increment table pointer low byte first and read table (last page) to TBLH and Data Memory                                                                                                                                                                                                    |
| Description         | Increment table pointer low byte, TBLP, first and then the low byte of the program code (last page) addressed by the table pointer (TBLP) is moved to the specified Data Memory and the high byte moved to TBLH.                                                                             |
| Operation           | [m] ← program code (low byte)<br>TBLH ← program code (high byte)                                                                                                                                                                                                                             |
| Affected flag(s)    | None                                                                                                                                                                                                                                                                                         |
| <b>LXOR A,[m]</b>   | Logical XOR Data Memory to ACC                                                                                                                                                                                                                                                               |
| Description         | Data in the Accumulator and the specified Data Memory perform a bitwise logical XOR operation. The result is stored in the Accumulator.                                                                                                                                                      |
| Operation           | ACC ← ACC "XOR" [m]                                                                                                                                                                                                                                                                          |
| Affected flag(s)    | Z                                                                                                                                                                                                                                                                                            |
| <b>LXORM A,[m]</b>  | Logical XOR ACC to Data Memory                                                                                                                                                                                                                                                               |
| Description         | Data in the specified Data Memory and the Accumulator perform a bitwise logical XOR operation. The result is stored in the Data Memory.                                                                                                                                                      |
| Operation           | [m] ← ACC "XOR" [m]                                                                                                                                                                                                                                                                          |
| Affected flag(s)    | Z                                                                                                                                                                                                                                                                                            |


## Package Information

Note that the package information provided here is for consultation purposes only. As this information may be updated at regular intervals users are reminded to consult the [Holtek website](#) for the latest version of the [Package/Carton Information](#).

Additional supplementary information with regard to packaging is listed below. Click on the relevant section to be transferred to the relevant website page.

- [Package Information \(include Outline Dimensions, Product Tape and Reel Specifications\)](#)
- [The Operation Instruction of Packing Materials](#)
- [Carton information](#)


**16-pin NSOP (150mil) Outline Dimensions**

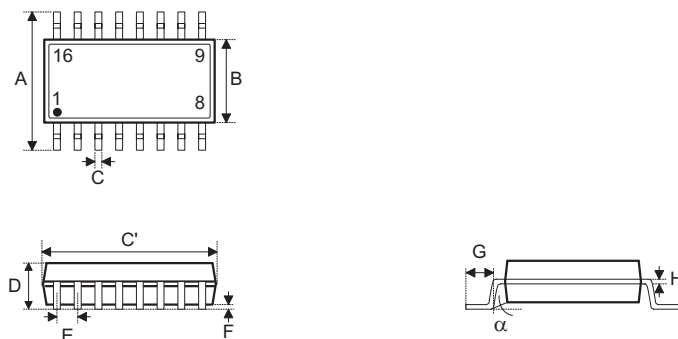

| Symbol   | Dimensions in inch |      |       |
|----------|--------------------|------|-------|
|          | Min.               | Nom. | Max.  |
| A        | 0.236 BSC          |      |       |
| B        | 0.154 BSC          |      |       |
| C        | 0.012              | —    | 0.020 |
| C'       | 0.390 BSC          |      |       |
| D        | —                  | —    | 0.069 |
| E        | 0.050 BSC          |      |       |
| F        | 0.004              | —    | 0.010 |
| G        | 0.016              | —    | 0.050 |
| H        | 0.004              | —    | 0.010 |
| $\alpha$ | 0°                 | —    | 8°    |

| Symbol   | Dimensions in mm |      |      |
|----------|------------------|------|------|
|          | Min.             | Nom. | Max. |
| A        | 6.00 BSC         |      |      |
| B        | 3.90 BSC         |      |      |
| C        | 0.31             | —    | 0.51 |
| C'       | 9.90 BSC         |      |      |
| D        | —                | —    | 1.75 |
| E        | 1.27 BSC         |      |      |
| F        | 0.10             | —    | 0.25 |
| G        | 0.40             | —    | 1.27 |
| H        | 0.10             | —    | 0.25 |
| $\alpha$ | 0°               | —    | 8°   |


**20-pin SSOP (150mil) Outline Dimensions**

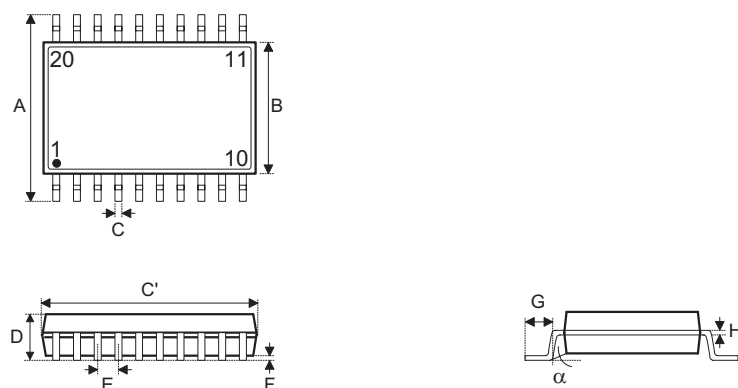

| Symbol   | Dimensions in inch |      |       |
|----------|--------------------|------|-------|
|          | Min.               | Nom. | Max.  |
| A        | 0.236 BSC          |      |       |
| B        | 0.154 BSC          |      |       |
| C        | 0.008              | —    | 0.012 |
| C'       | 0.341 BSC          |      |       |
| D        | —                  | —    | 0.069 |
| E        | 0.025 BSC          |      |       |
| F        | 0.004              | —    | 0.010 |
| G        | 0.016              | —    | 0.050 |
| H        | 0.004              | —    | 0.010 |
| $\alpha$ | 0°                 | —    | 8°    |

| Symbol   | Dimensions in mm |      |      |
|----------|------------------|------|------|
|          | Min.             | Nom. | Max. |
| A        | 6.00 BSC         |      |      |
| B        | 3.90 BSC         |      |      |
| C        | 0.20             | —    | 0.30 |
| C'       | 8.66 BSC         |      |      |
| D        | —                | —    | 1.75 |
| E        | 0.635 BSC        |      |      |
| F        | 0.10             | —    | 0.25 |
| G        | 0.41             | —    | 1.27 |
| H        | 0.10             | —    | 0.25 |
| $\alpha$ | 0°               | —    | 8°   |

### 24-pin SSOP (150mil) Outline Dimensions

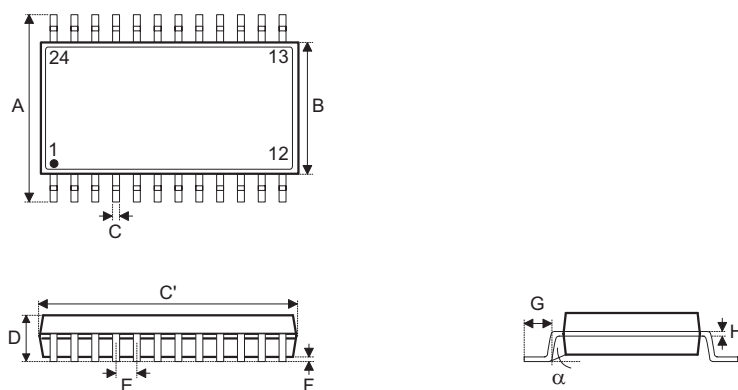

| Symbol | Dimensions in inch |      |       |
|--------|--------------------|------|-------|
|        | Min.               | Nom. | Max.  |
| A      | 0.236 BSC          |      |       |
| B      | 0.154 BSC          |      |       |
| C      | 0.008              | —    | 0.012 |
| C'     | 0.341 BSC          |      |       |
| D      | —                  | —    | 0.069 |
| E      | 0.025 BSC          |      |       |
| F      | 0.004              | —    | 0.010 |
| G      | 0.016              | —    | 0.050 |
| H      | 0.004              | —    | 0.010 |
| α      | 0°                 | —    | 8°    |

| Symbol | Dimensions in mm |      |      |
|--------|------------------|------|------|
|        | Min.             | Nom. | Max. |
| A      | 6.00 BSC         |      |      |
| B      | 3.90 BSC         |      |      |
| C      | 0.20             | —    | 0.30 |
| C'     | 8.66 BSC         |      |      |
| D      | —                | —    | 1.75 |
| E      | 0.635 BSC        |      |      |
| F      | 0.10             | —    | 0.25 |
| G      | 0.41             | —    | 1.27 |
| H      | 0.10             | —    | 0.25 |
| α      | 0°               | —    | 8°   |

Copyright© 2024 by HOLTEK SEMICONDUCTOR INC. All Rights Reserved.

The information provided in this document has been produced with reasonable care and attention before publication, however, HOLTEK does not guarantee that the information is completely accurate. The information contained in this publication is provided for reference only and may be superseded by updates. HOLTEK disclaims any expressed, implied or statutory warranties, including but not limited to suitability for commercialization, satisfactory quality, specifications, characteristics, functions, fitness for a particular purpose, and non-infringement of any third-party's rights. HOLTEK disclaims all liability arising from the information and its application. In addition, HOLTEK does not recommend the use of HOLTEK's products where there is a risk of personal hazard due to malfunction or other reasons. HOLTEK hereby declares that it does not authorise the use of these products in life-saving, life-sustaining or safety critical components. Any use of HOLTEK's products in life-saving/sustaining or safety applications is entirely at the buyer's risk, and the buyer agrees to defend, indemnify and hold HOLTEK harmless from any damages, claims, suits, or expenses resulting from such use. The information provided in this document, including but not limited to the content, data, examples, materials, graphs, and trademarks, is the intellectual property of HOLTEK (and its licensors, where applicable) and is protected by copyright law and other intellectual property laws. No license, express or implied, to any intellectual property right, is granted by HOLTEK herein. HOLTEK reserves the right to revise the information described in the document at any time without prior notice. For the latest information, please contact us.