

isc Silicon NPN Darlington Power Transistors
BDT61/A/B/C
DESCRIPTION

- DC Current Gain $-h_{FE} = 750(\text{Min})@ I_C = 1.5\text{A}$
- Collector-Emitter Sustaining Voltage-
: $V_{CEO(\text{SUS})} = 60\text{V}(\text{Min})$ - BDT61; $80\text{V}(\text{Min})$ - BDT61A;
100V(Min)- BDT61B; $120\text{V}(\text{Min})$ - BDT61C
- Complement to Type BDT60/A/B/C
- Minimum Lot-to-Lot variations for robust device performance and reliable operation

APPLICATIONS



- Designed for use in audio amplifier output stages , general purpose amplifier and high speed switching applications

ABSOLUTE MAXIMUM RATINGS($T_a=25^\circ\text{C}$)

SYMBOL	PARAMETER	VALUE	UNIT	
V_{CBO}	Collector-Base Voltage	BDT61	60	V
		BDT61A	80	
		BDT61B	100	
		BDT61C	120	
V_{CEO}	Collector-Emitter Voltage	BDT61	60	V
		BDT61A	80	
		BDT61B	100	
		BDT61C	120	
V_{EBO}	Emitter-Base Voltage	5	V	
I_C	Collector Current-Continuous	4	A	
I_B	Base Current	0.1	A	
P_C	Collector Power Dissipation $T_a=25^\circ\text{C}$	2	W	
	Collector Power Dissipation $T_c=25^\circ\text{C}$	50		
T_j	Junction Temperature	150	$^\circ\text{C}$	
T_{stg}	Storage Temperature Range	-65~150	$^\circ\text{C}$	

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
$R_{\text{th}j-c}$	Thermal Resistance, Junction to Case	2.5	$^\circ\text{C}/\text{W}$
$R_{\text{th}j-a}$	Thermal Resistance, Junction to Ambient	62.5	$^\circ\text{C}/\text{W}$

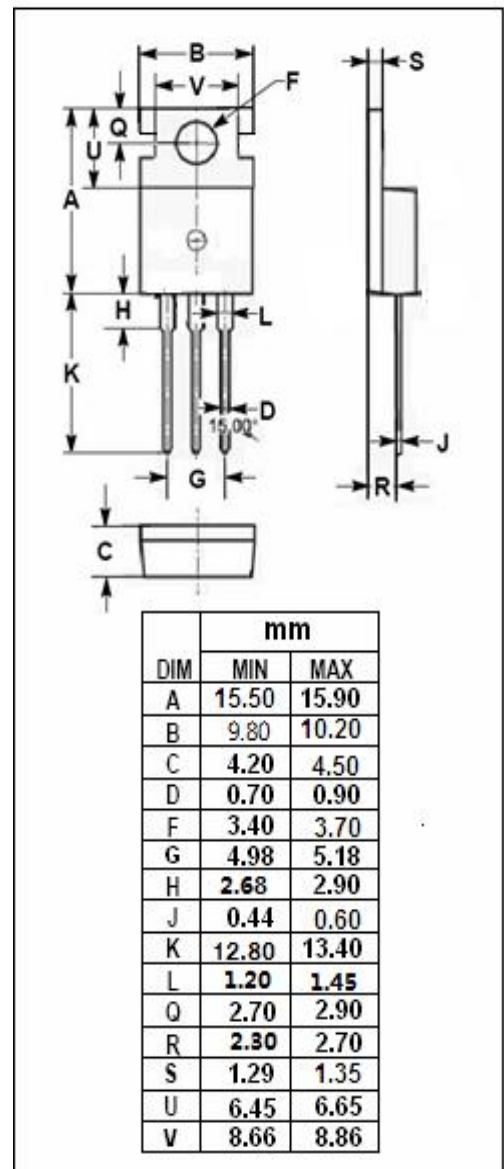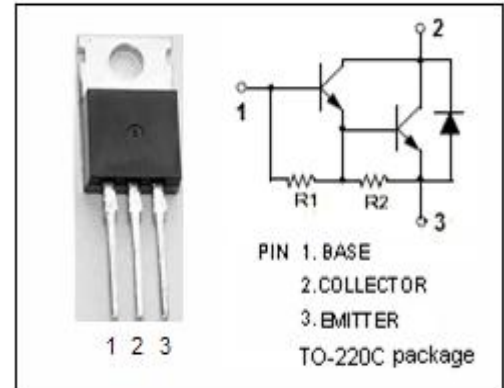

isc Silicon NPN Darlington Power Transistors
BDT61/A/B/C
ELECTRICAL CHARACTERISTICS

 T_C=25°C unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
V _{(BR)CEO}	Collector-Emitter Breakdown Voltage	BDT61	I _C = 30mA; I _B = 0			V
		BDT61A				
		BDT61B				
		BDT61C				
V _{CE(sat)}	Collector-Emitter Saturation Voltage	I _C = 1.5A; I _B = 6mA			2.5	V
V _{BE(on)}	Base-Emitter On Voltage	I _C = 1.5A ; V _{CE} = 3V			2.5	V
I _{CBO}	Collector Cutoff Current	BDT61				mA
		BDT61A				
		BDT61B				
		BDT61C				
I _{CEO}	Collector Cutoff Current	BDT61				mA
		BDT61A				
		BDT61B				
		BDT61C				
I _{EBO}	Emitter Cutoff Current	V _{EB} = 5V; I _C = 0			5	mA
h _{FE}	DC Current Gain	I _C = 1.5A; V _{CE} = 3V	750			
V _{ECF}	C-E Diode Forward Voltage	I _E = 1.5A			2.0	V
Switching Times						
t _{on}	Turn-On Time	I _C = 2A; I _{B1} = -I _{B2} = 8mA; V _{BE(off)} = -5V; R _L = 20 Ω		1.0		μ s
t _{off}	Turn-Off Time			4.5		μ s

NOTICE:

ISC reserves the rights to make changes of the content herein the datasheet at any time without notification. The information contained herein is presented only as a guide for the applications of our products.

ISC products are intended for usage in general electronic equipment. The products are not designed for use in equipment which require specialized quality and/or reliability, or in equipment which could have applications in hazardous environments, aerospace industry, or medical field. Please contact us if you intend our products to be used in these special applications.

ISC makes no warranty or guarantee regarding the suitability of its products for any particular purpose, nor does ISC assume any liability arising from the application or use of any products, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages.