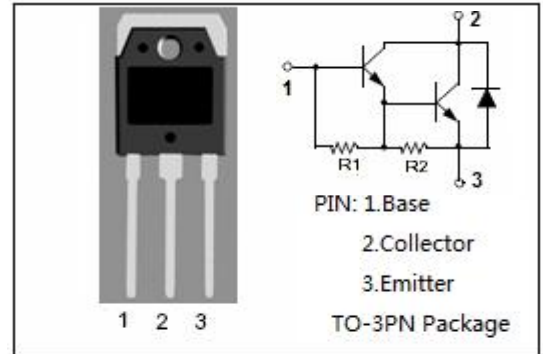


**isc Silicon NPN Darlington Power Transistor**
**BDW83/A/B/C**
**DESCRIPTION**


- Collector Current  $-I_C = 15A$
- High DC Current Gain  $-h_{FE} = 750(\text{Min}) @ I_C = 6A$
- Complement to Type BDW84/A/B/C
- Minimum Lot-to-Lot variations for robust device performance and reliable operation

**APPLICATIONS**

- Designed for general purpose amplifier and low speed switching applications


**ABSOLUTE MAXIMUM RATINGS( $T_a = 25^\circ\text{C}$ )**

SYMBOL	PARAMETER	VALUE	UNIT	
$V_{CER}$	Collector-Emitter Voltage	BDW83	45	V
		BDW83A	60	
		BDW83B	80	
		BDW83C	100	
$V_{CEO}$	Collector-Emitter Voltage	BDW83	45	V
		BDW83A	60	
		BDW83B	80	
		BDW83C	100	
$V_{EBO}$	Emitter-Base Voltage	5	V	
$I_C$	Collector Current-Continuous	15	A	
$I_B$	Base Current-Continuous	0.5	A	
$P_C$	Collector Power Dissipation @ $T_a = 25^\circ\text{C}$	3.5	W	
	Collector Power Dissipation @ $T_c = 25^\circ\text{C}$	150		
$T_J$	Junction Temperature	150	$^\circ\text{C}$	
$T_{stg}$	Storage Temperature Range	-65~150	$^\circ\text{C}$	

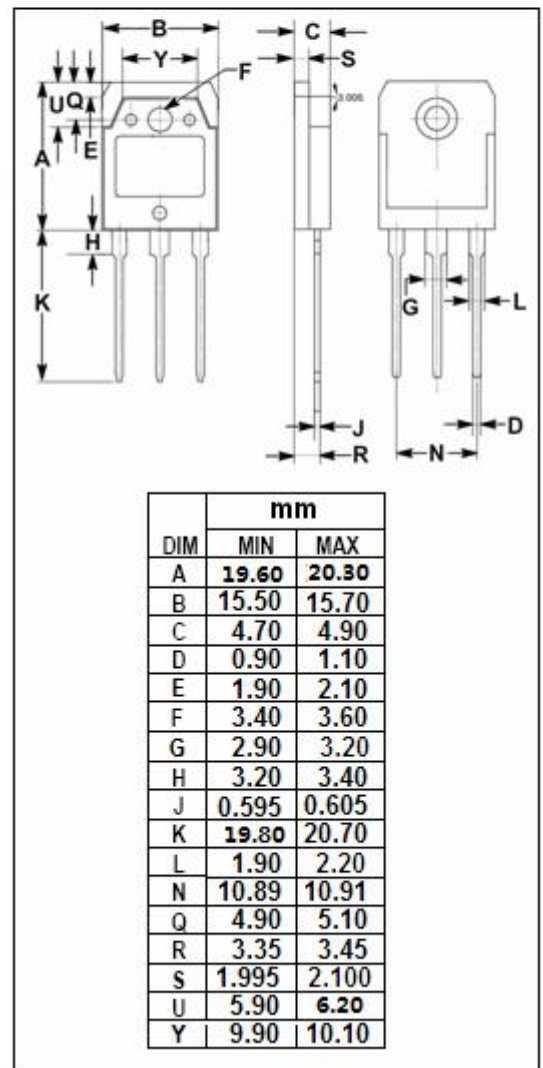
**THERMAL CHARACTERISTICS**

SYMBOL	PARAMETER	MAX	UNIT
$R_{th\ j-c}$	Thermal Resistance, Junction to Case	0.83	$^\circ\text{C}/\text{W}$
$R_{th\ j-a}$	Thermal Resistance, Junction to Ambient	35.7	$^\circ\text{C}/\text{W}$

**isc Silicon NPN Darlington Power Transistor**
**BDW83/A/B/C**
**ELECTRICAL CHARACTERISTICS**

 T<sub>C</sub>=25°C unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT	
V <sub>(BR)CEO</sub>	Collector-Emitter Breakdown Voltage	BDW83	45			V	
		BDW83A	60				
		BDW83B	80				
		BDW83C	100				
V <sub>CE(sat)-1</sub>	Collector-Emitter Saturation Voltage	I <sub>C</sub> = 6A; I <sub>B</sub> = 12mA			2.5	V	
V <sub>CE(sat)-2</sub>	Collector-Emitter Saturation Voltage	I <sub>C</sub> = 15A; I <sub>B</sub> = 150mA			4.0	V	
V <sub>BE(on)</sub>	Base-Emitter On Voltage	I <sub>C</sub> = 6A; V <sub>CE</sub> = 3V			2.5	V	
V <sub>ECF</sub>	C-E Diode Forward Voltage	I <sub>F</sub> = 15A			3.5	V	
I <sub>CEO</sub>	Collector Cutoff Current	BDW83	V <sub>CE</sub> = 30V; I <sub>B</sub> = 0			1.0	mA
		BDW83A	V <sub>CE</sub> = 30V; I <sub>B</sub> = 0				
		BDW83B	V <sub>CE</sub> = 40V; I <sub>B</sub> = 0				
		BDW83C	V <sub>CE</sub> = 50V; I <sub>B</sub> = 0				
I <sub>CBO</sub>	Collector Cutoff Current	BDW83	V <sub>CB</sub> = 45V; I <sub>E</sub> = 0 V <sub>CB</sub> = 45V; I <sub>E</sub> = 0; T <sub>C</sub> = 150°C			0.5 5.0	mA
		BDW83A	V <sub>CB</sub> = 60V; I <sub>E</sub> = 0 V <sub>CB</sub> = 60V; I <sub>E</sub> = 0; T <sub>C</sub> = 150°C			0.5 5.0	
		BDW83B	V <sub>CB</sub> = 80V; I <sub>E</sub> = 0 V <sub>CB</sub> = 80V; I <sub>E</sub> = 0; T <sub>C</sub> = 150°C			0.5 5.0	
		BDW83C	V <sub>CB</sub> = 100V; I <sub>E</sub> = 0 V <sub>CB</sub> = 100V; I <sub>E</sub> = 0; T <sub>C</sub> = 150°C			0.5 5.0	
I <sub>EBO</sub>	Emitter Cutoff Current	V <sub>EB</sub> = 5V; I <sub>C</sub> =0			2.0	mA	
h <sub>FE-1</sub>	DC Current Gain	I <sub>C</sub> = 6A; V <sub>CE</sub> = 3V	750		20000		
h <sub>FE-2</sub>	DC Current Gain	I <sub>C</sub> = 15A; V <sub>CE</sub> = 3V	100				
Switching times							
t <sub>on</sub>	Turn-on Time	I <sub>C</sub> = 10A; I <sub>B1</sub> = -I <sub>B2</sub> = 40mA; R <sub>L</sub> = 3 Ω; V <sub>BE(OFF)</sub> = -4.2V		0.9		μ s	
t <sub>off</sub>	Turn-off Time			7.0		μ s	

**NOTICE:**

ISC reserves the rights to make changes of the content herein the datasheet at any time without notification. The information contained herein is presented only as a guide for the applications of our products.

ISC products are intended for usage in general electronic equipment. The products are not designed for use in equipment which require specialized quality and/or reliability, or in equipment which could have applications in hazardous environments, aerospace industry, or medical field. Please contact us if you intend our products to be used in these special applications.

ISC makes no warranty or guarantee regarding the suitability of its products for any particular purpose, nor does ISC assume any liability arising from the application or use of any products, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages.