




BF422

NPNEPITAXIAL SILICON TRANSISTOR


HIGH VOLTAGE TRANSISTOR

FEATURES

- * Collector-Emitter Voltage: $V_{CE0}=250V$.
- * Complementary to UTC BF423.



SOT-23
(JEDEC TO-236)




TO-92



ORDERING INFORMATION

Ordering Number		Package	Pin Assignment			Packing
Lead Free	Halogen Free		1	2	3	
BF422L-AE3-R	BF422G-AE3-R	SOT-23	B	E	C	Tape Reel
BF422L-T92-B	BF422G-T92-B	TO-92	E	C	B	Tape Box
BF422L-T92-K	BF422G-T92-K	TO-92	E	C	B	Bulk

Note: Pin Assignment: B: Base C: Collector E: Emitter

BF422G-AE3-R 	(1) R: Tape Reel, B: Tape Box, K: Bulk (2) AE3: SOT-23, T92: TO-92 (3) G: Halogen Free and Lead Free, L: Lead Free
---	---

MARKING

SOT-23	TO-92
	

■ **ABSOLUTE MAXIMUM RATING** ($T_A=25^{\circ}\text{C}$, unless otherwise specified)

PARAMETER		SYMBOL	RATINGS	UNIT
Collector-Base Voltage		V_{CBO}	250	V
Collector-Emitter Voltage		V_{CEO}	250	V
Emitter-base voltage		V_{EBO}	5	V
Collector current (DC)		I_C	50	mA
collector current (Peak)		I_{CP}	100	mA
base current		I_B	50	mA
Collector Power dissipation	SOT-23	P_C	350	mW
	TO-92		625	mW
Junction Temperature		T_J	+150	$^{\circ}\text{C}$
Storage Temperature		T_{STG}	-40 ~ +150	$^{\circ}\text{C}$







Notes: 1. Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.

2. The device is guaranteed to meet performance specification within 0°C ~ 70°C operating temperature range and assured by design from -20°C ~ 85°C .





■ **ELECTRICAL CHARACTERISTICS** ($T_A=25^{\circ}\text{C}$, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Collector Cut-Off Current	I_{CBO}	$V_{CB}=200\text{V}$, $I_E=0$			10	nA
Emitter Cut-Off Current	I_{EBO}	$V_{EB}=5\text{V}$, $I_C=0$			50	nA
DC current gain	h_{FE}	$V_{CE}=20\text{V}$, $I_C=25\text{mA}$	50			
Collector-Emitter Saturation Voltage	$V_{CE(SAT)}$	$I_C=30\text{mA}$, $I_B=5\text{mA}$			0.6	V
Base-Emitter Voltage	V_{BE}	$V_{CE}=-20\text{V}$, $I_C=25\text{mA}$		0.75		V
Transition frequency	f_T	$V_{CE}=10\text{V}$, $I_C=10\text{mA}$	60			MHz
Reverse Transfer Capacitance	C_{re}	$V_{CB}=30\text{V}$, $I_E=0$, $f=1\text{MHz}$			1.6	pF

■ TYPICAL CHARACTERISTICS

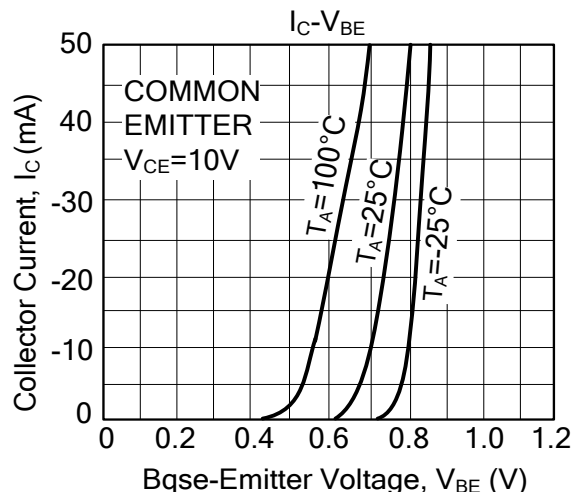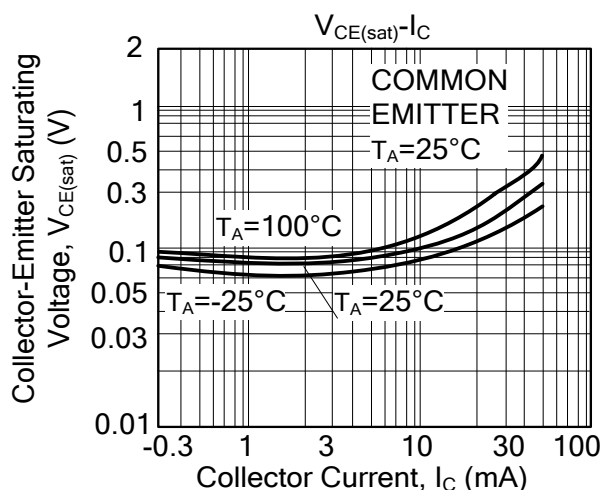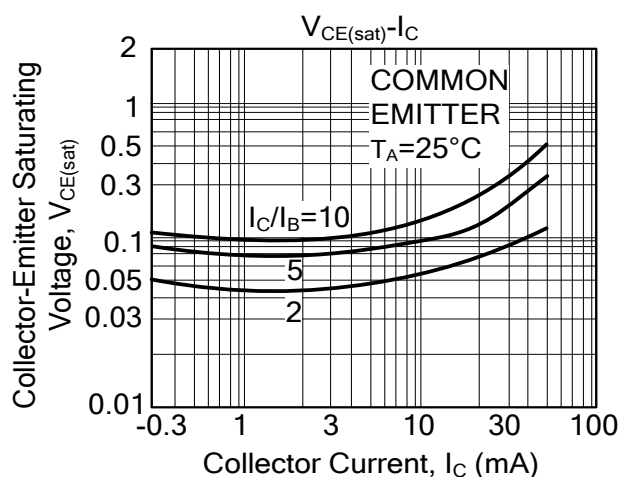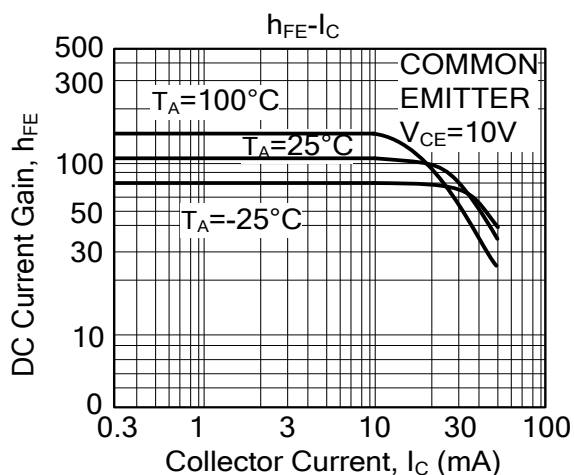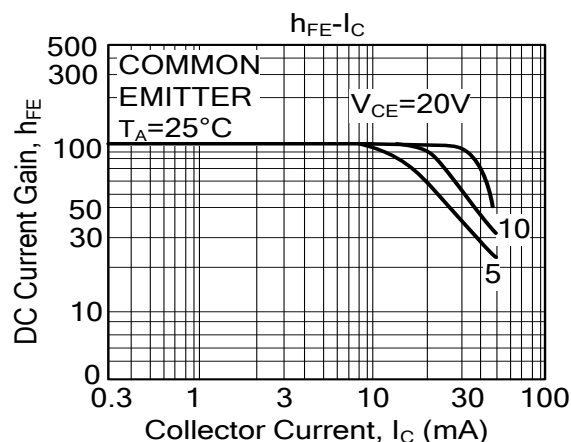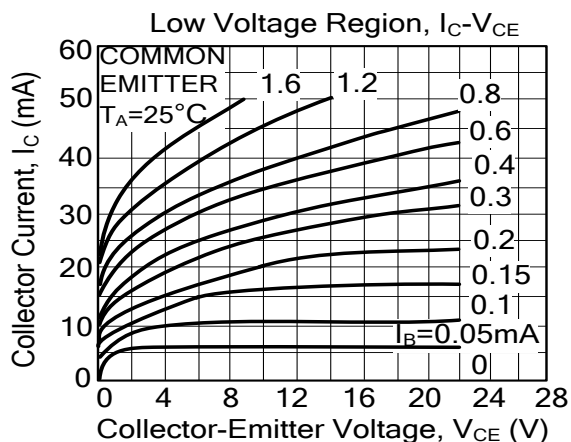

■ TYPICAL CHARACTERISTICS (Cont.)

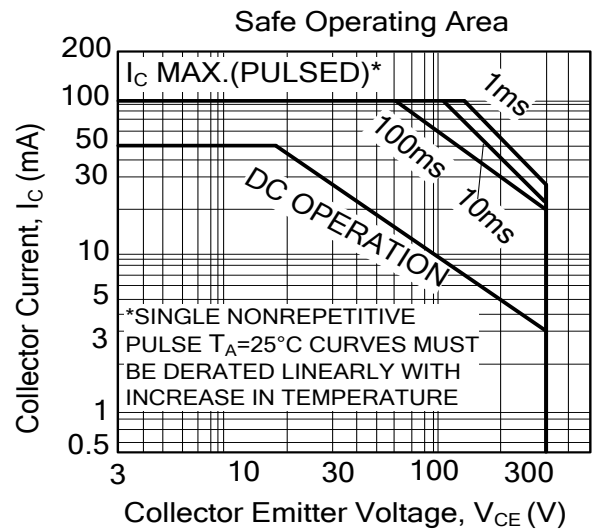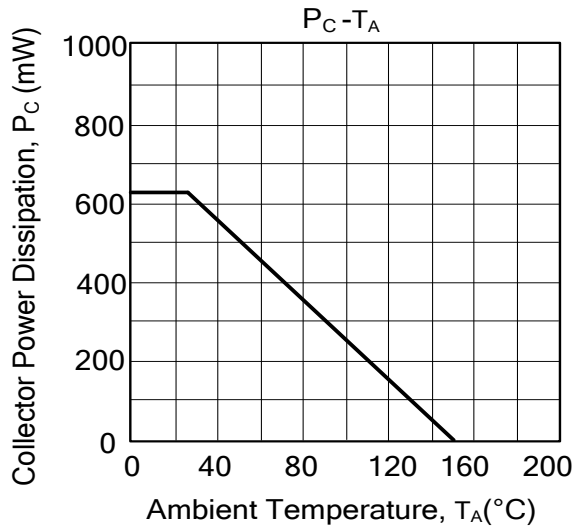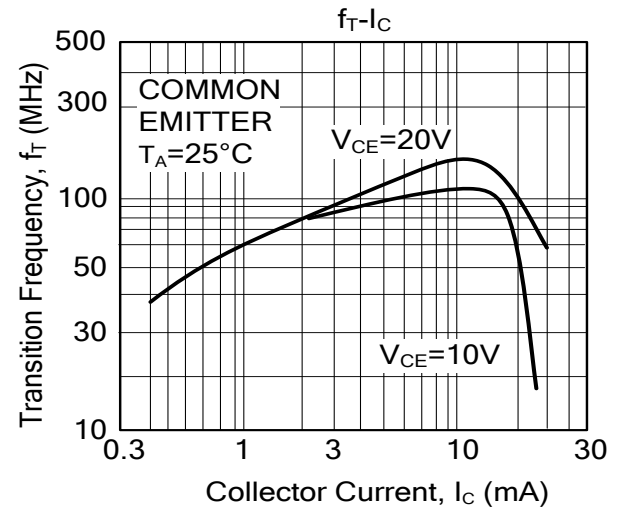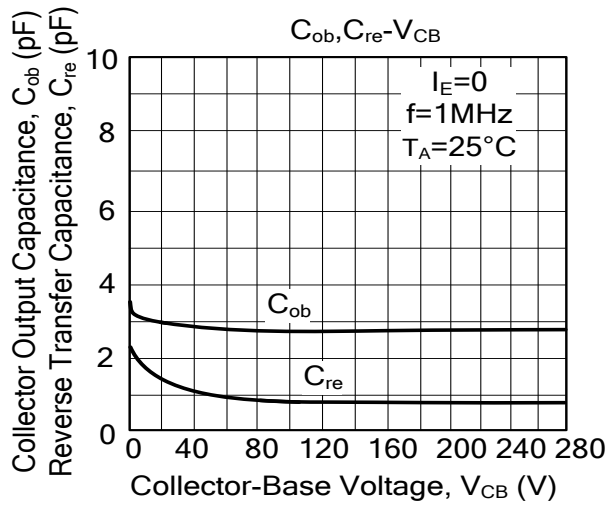

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.