


## 1.SCOPE

Shoulder's SAW filter series have broad line up products meeting all broadcast standard including NTSC,PAL and SECAM systems. These filters are composed of two interdigital transducers on a single-crystal piezoelectrical chip. they are used in electronic equipments such as TV and so on.

## 2.Construction


### 2.1 Dimension and materials

Type : BF44A6M

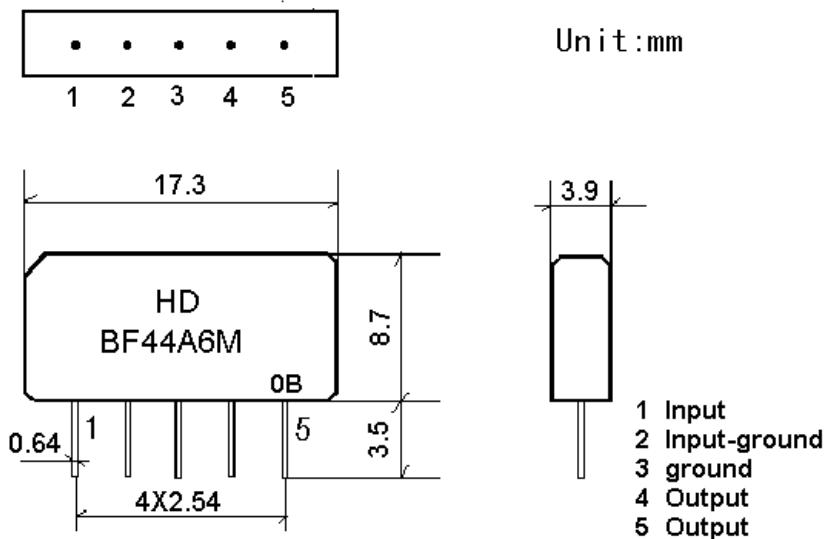


0: year(0,1,2,3,4,5,6,7,8,9)

B:product in this quarter(A:1~3,B:4~6,C:7~9,D:10~12)

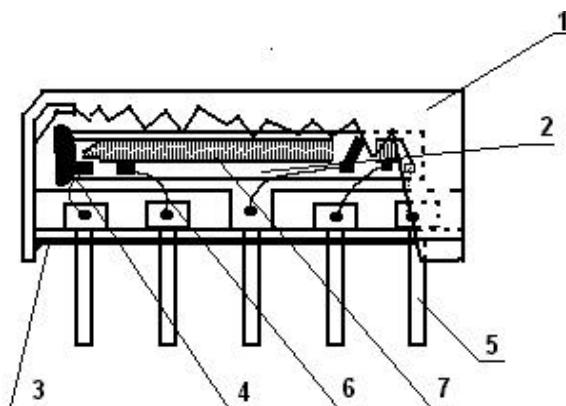

Components	Materials
1. Outer casing	PPS
2. Substrate	Lithium niobate
3. Base	Epoxy resin
4. Absorber	Epoxy resin
5. Lead	Cu alloy+Au plate
6. Bonding wire	AlSi alloy
7. Electrode	Al

## 2.2. Circuit construction, measurement circuit

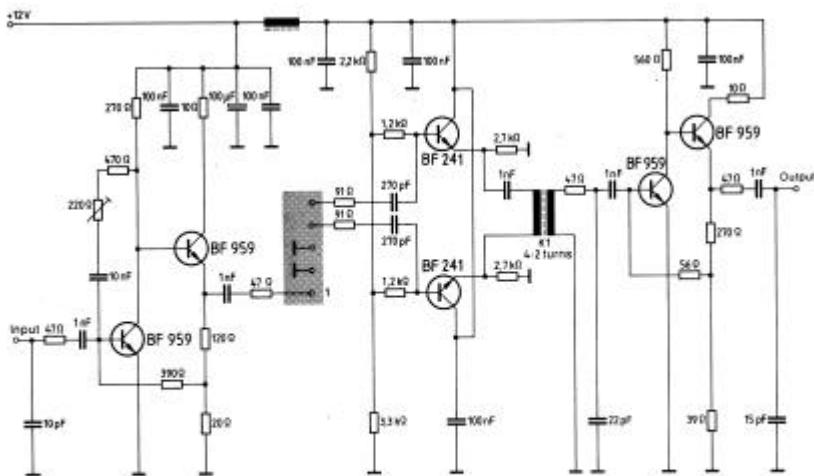

Test circuit for SIP-5 filter  
Input impedance of the symmetrical post-amplifier: 2 kΩ in parallel with 3 pF

## 3.Characteristics

### Standard atmospheric conditions

Unless otherwise specified , the standard rang of atmospheric conditions for making measurements and tests is as follows;

Ambient temperature : 15 to 35

Relative humidity : 25% to 85%

Air pressure : 86kPa to 106kPa

### Operating temperature rang

Operating temperature rang is the rang of ambient temperatures in which the filter can be operated continuously. -10 ~ +60

### Storage temperature rang

Storage temperature rang is the rang of ambient temperatures at which the filter can be stored without damage.

Conditions are as specified elsewhere in these specifications. -40 ~ +70

Reference temperature                           +25

### 3.1 Maximum Rating

<b>DC voltage</b>	<b>VDC</b>	<b>12</b>	<b>V</b>	<b>Between any terminals</b>
<b>AC voltage</b>	<b>Vpp</b>	<b>10</b>	<b>V</b>	<b>Between any terminals</b>

### 3.2 Electrical Characteristics

Source impedance	Zs=50				
Load impedance	Z <sub>L</sub> =2k	//3pF		T <sub>A</sub> =25	
Item	Freq	min	typ	max	
Center frequency	F <sub>o</sub>	-	44.00	-	MHz
Insertion attenuation Reference level	44.00MHz	14.0	17.0	20.0	dB
Pass bandwidth	B <sub>3dB</sub>	7.9	8.0	-	MHz
	B <sub>30dB</sub>	-	9.8	10.0	MHz
Relative attenuation	39.05	35.0	48.0		dB
	48.95	35.0	52.0		dB
Sidelobe	35.00~39.00MHz	33.0	40.0		dB
	49.00~55.00MHz	32.0	39.0		dB
Temperature coefficient		-72		ppm/k	

### 3.3 Environmental Performance Characteristics

Item Test condition	Allowable change of absolute Level at center frequency(dB)
High temperature test 70 1000H	< 1.0
Low temperature test -40 1000H	< 1.0
Humidity test 40 90-95% 1000H	< 1.0
Thermal shock -20 ==25 ==80 20 cycle 30M 10M 30M	< 1.0
Solder temperature test Sold temp.260 for 10 sec.	< 1.0
Soldering Immerse the pins melt solder at 260 +5/-0 for 5 sec.	More than 95% of total area of the pins should be covered with solder


### 3.4 Mechanical Test

Item Test condition	Allowable change of absolute Level at center frequency(dB)
Vibration test 600-3300rpm amplitude 1.5mm 3 directions 2 H each	<1.0
Drop test On maple plate from 1 m high 3 times	<1.0
Lead pull test Pull with 1 kg force for 30 seconds	<1.0
Lead bend test 90° bending with 500g weigh 2 times	<1.0

### 3.5 Voltage Discharge Test

Item Test condition	Allowable change of absolute Level at center frequency(dB)
Surge test Between any two electrode	<1.0

### 3.6 Frequency response:

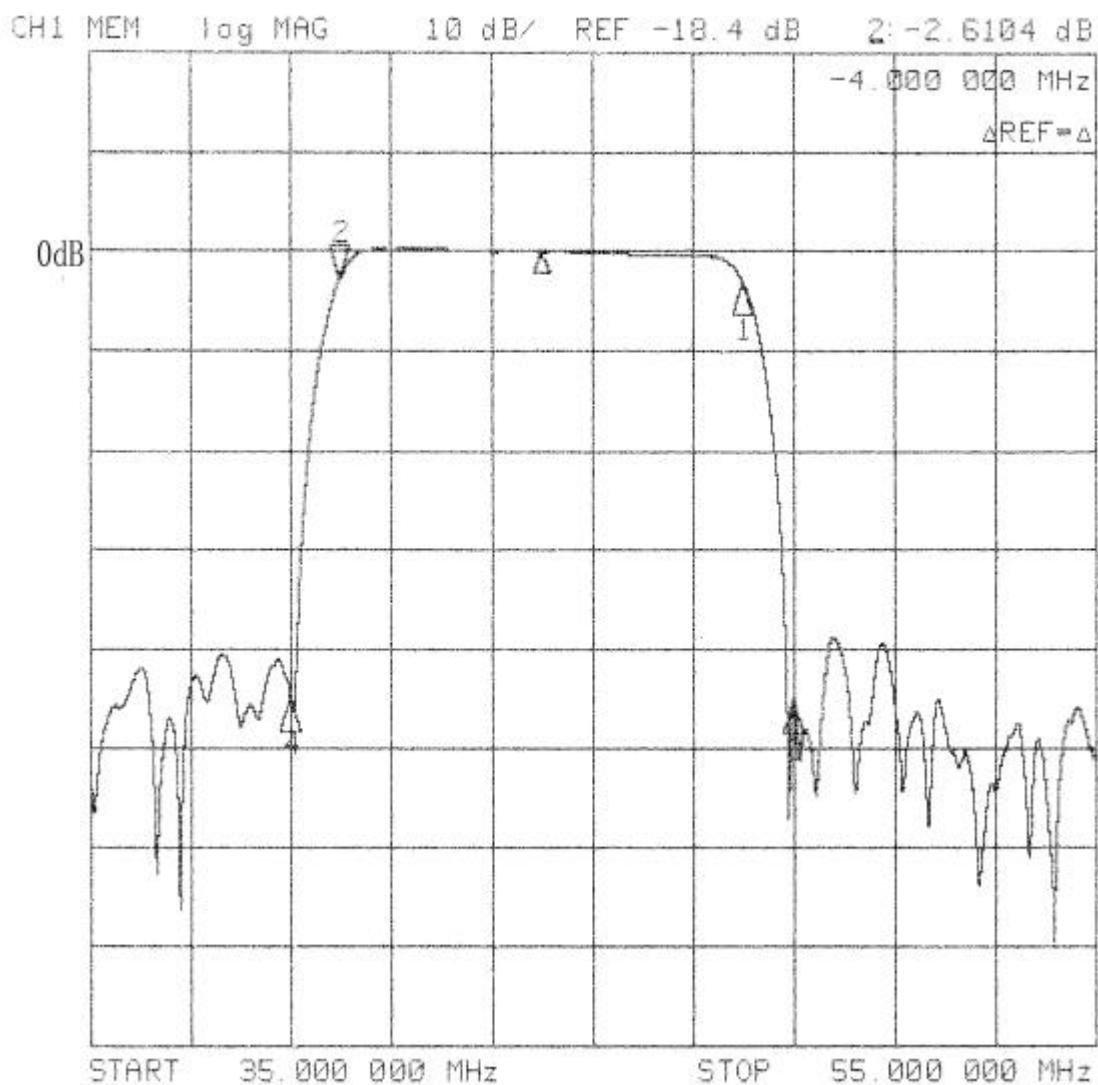


CH1 S21 Log MAG  
CH2 S21 delay 1 dB/  
30 ns/ REF -18.15 dB 2: -2.6134 dB


REF 1.168  $\mu$ s 2 10.719 ns

-4.000 000 MHz

$\Delta$ REF=Δ

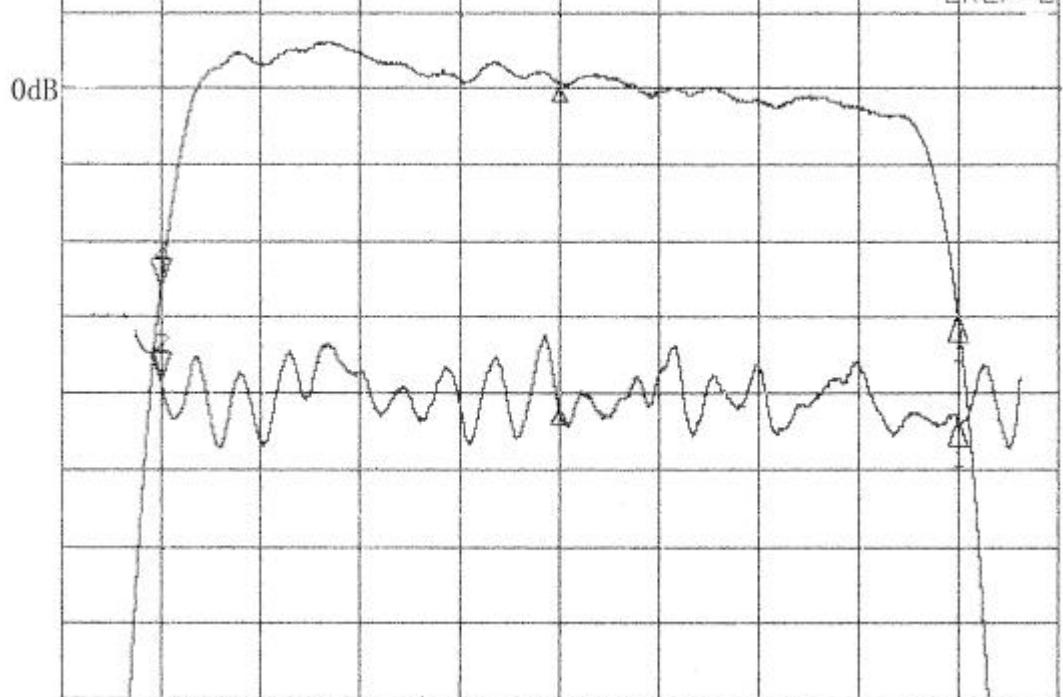

START 39.000 000 MHz STOP 49.000 000 MHz  
CH1 S21 Log MAG 10 dB/ REF -18.09 dB

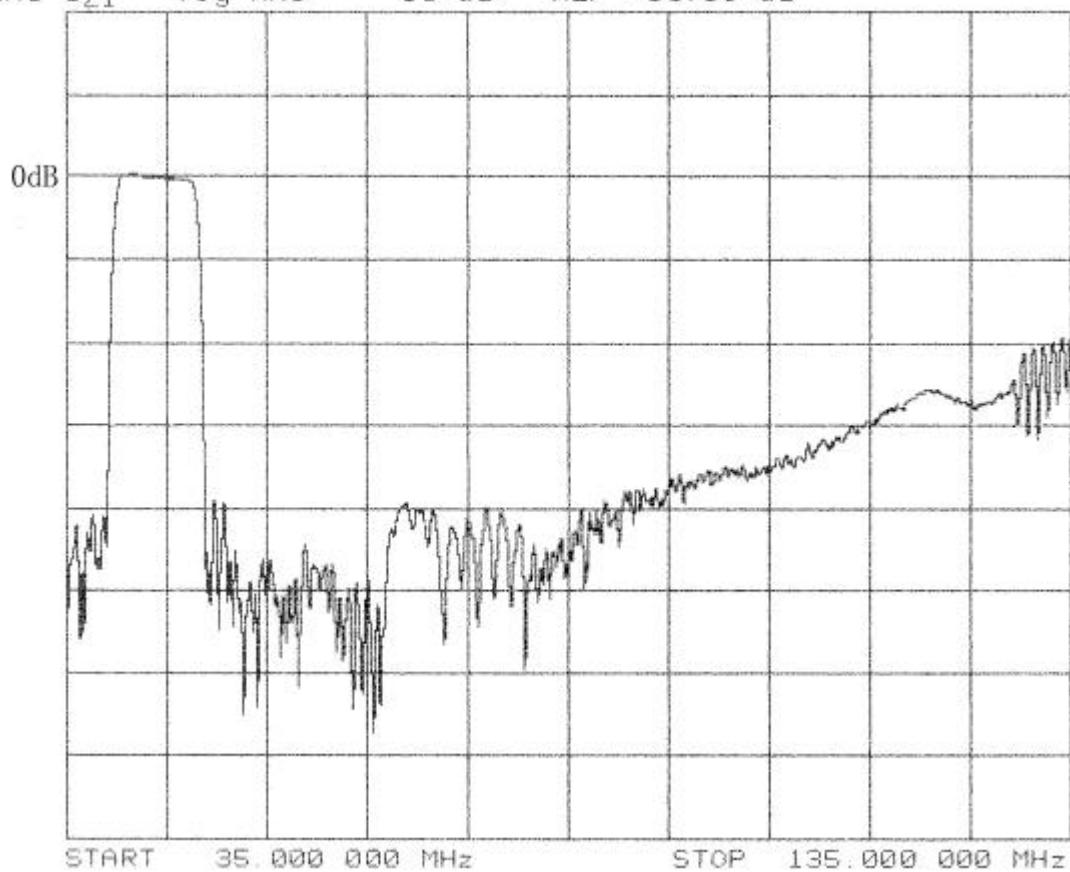

---

**Time domain response:**

