

isc Silicon NPN RF Transistor

BF775

DESCRIPTION


- Low Noise Figure
NF = 1.8 dB TYP. @ $V_{CE} = 6\text{ V}$, $I_C = 2\text{ mA}$, $f = 900\text{ MHz}$
- High Gain
 $|S_{21e}|^2 = 13\text{ dB}$ TYP. @ $V_{CE} = 8\text{ V}$, $I_C = 10\text{ mA}$, $f = 900\text{ MHz}$
- 100% avalanche tested
- Minimum Lot-to-Lot variations for robust device performance and reliable operation

APPLICATIONS

- Designed for use in TV-sat and UHF tuners.

ABSOLUTE MAXIMUM RATINGS($T_a=25^\circ\text{C}$)

SYMBOL	PARAMETER	VALUE	UNIT
V_{CBO}	Collector-Base Voltage	20	V
V_{CES}	Collector-Emitter Voltage	20	V
V_{CEO}	Collector-Emitter Voltage	15	V
V_{EBO}	Emitter-Base Voltage	2.5	V
I_C	Collector Current-Continuous	30	mA
I_B	Base Current-Continuous	4	mA
P_C	Collector Power Dissipation @ $T_C=25^\circ\text{C}$	0.28	W
T_J	Junction Temperature	150	$^\circ\text{C}$
T_{stg}	Storage Temperature Range	-65~150	$^\circ\text{C}$

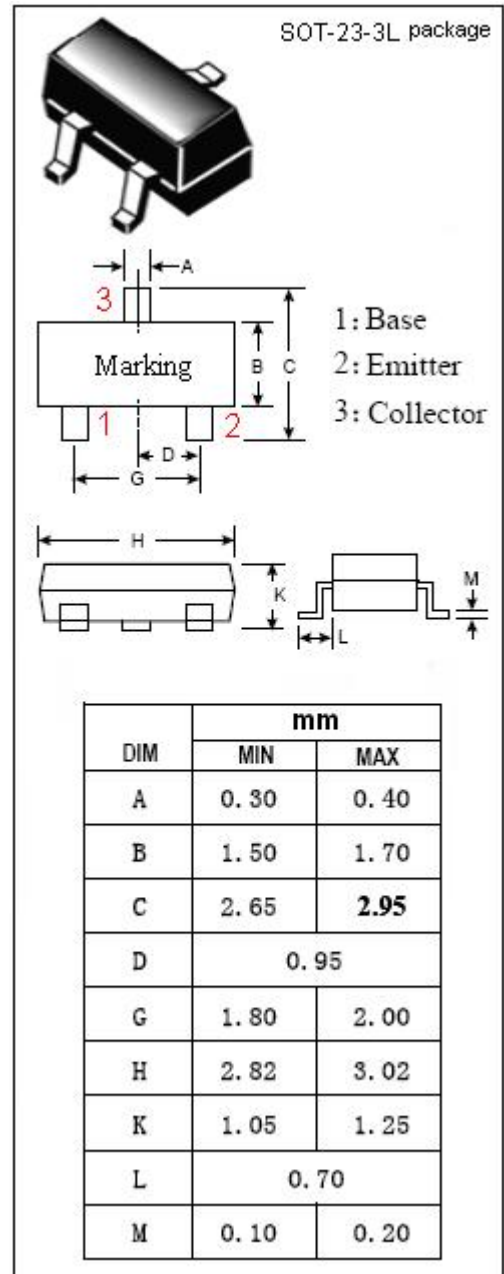

isc Silicon NPN RF Transistor**BF775****ELECTRICAL CHARACTERISTICS****T_C=25°C unless otherwise specified**

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
V _{(BR)CEO}	Collector-Emitter Breakdown Voltage	I _C = 1mA ; I _B = 0	15			V
I _{CES}	Collector Cutoff Current	V _{CE} = 20V; V _{BE} = 0			10	μ A
I _{CBO}	Collector Cutoff Current	V _{CB} = 10V; I _E = 0			0.1	μ A
I _{EBO}	Emitter Cutoff Current	V _{EB} = 2.5V; I _C = 0			0.1	μ A
h _{FE}	DC Current Gain	I _C = 10mA ; V _{CE} = 8V	40		200	
f _T	Current-Gain—Bandwidth Product	I _C = 10mA ; V _{CE} = 8V; f= 500MHz	3.5	5		GHz
C _{OB}	Output Capacitance	I _E = 0 ; V _{CB} = 10V; f= 1MHz		0.38	0.6	pF
PG	Power Gain	I _C = 10mA ; V _{CE} = 8V; f= 900MHz		16		dB
PG	Power Gain	I _C = 10mA ; V _{CE} = 8V; f= 1.8GHz		10.5		dB
S _{21e} ²	Insertion Power Gain	I _C = 10mA ; V _{CE} = 8V; f= 900MHz		13		dB
S _{21e} ²	Insertion Power Gain	I _C = 10mA ; V _{CE} = 8V; f= 1.8GHz		7.5		dB
NF	Noise Figure	I _C = 2mA ; V _{CE} = 6V; f= 900MHz		1.8		dB
NF	Noise Figure	I _C = 2mA ; V _{CE} = 6V; f= 1.8GHz		2.9		dB

**NOTICE:**

ISC reserves the rights to make changes of the content herein the datasheet at any time without notification. The information contained herein is presented only as a guide for the applications of our products.

ISC products are intended for usage in general electronic equipment. The products are not designed for use in equipment which require specialized quality and/or reliability, or in equipment which could have applications in hazardous environments, aerospace industry, or medical field. Please contact us if you intend our products to be used in these special applications.

ISC makes no warranty or guarantee regarding the suitability of its products for any particular purpose, nor does ISC assume any liability arising from the application or use of any products, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages.