

GDT Product Specification

BF***M SMD Gas Discharge Tube (5×5×4.2mm)

RoHS

1、FEATURES


- ☐ Surface Mounting Design UL Certificated E232249
- ☐ Size Design EIA 2018 5×5×4.2mm
- ☐ High Current Handling Capability 5,000A @ 8/20μs
- ☐ Low Capacitance and Insertion Loss
- ☐ Fast Response and Long Service Life
- ☐ Reliable to Protect Electrostatic Surge
- ☐ Moisture sensitivity level: Level 1



2、AVAILABLE PART NUMBER AND ELECTRICAL PARAMETER @ T=25℃ RH = 45%-75%

Part Number	DC Breakdown Voltage①	Tolerance	Impulse Spark-over Voltage	Impulse Discharge Current②	Insulation Resistance		C③ (1MHz)
	100V/s④				GΩ	DC	
BF071M	70V	±20%	≤ 650V	5,000A	≥1	25V	≤1pF
BF091M	90V	±20%	≤650V	5,000A	≥1	50V	≤1pF
BF151M	150V	±20%	≤ 650V	5,000A	≥1	50V	≤1pF
BF201M	200V	±20%	≤ 650V	5,000A	≥1	100V	≤1pF
BF231M	230V	±20%	≤ 700V	5,000A	≥1	100V	≤1pF
BF301M	300V	±20%	≤ 700V	5,000A	≥1	100V	≤1pF
BF351M	350V	±20%	≤900V	5,000A	≥1	100V	≤1pF
BF401M	400V	±20%	≤ 950V	5,000A	≥1	100V	≤1pF
BF471M	470V	±20%	≤ 1000V	5,000A	≥1	100V	≤1pF
BF601M	600V	±20%	≤ 1200V	5,000A	≥1	100V	≤1pF
BF801M	800V	±20%	≤ 1600V	3,000A	≥1	100V	≤1.5pF
BF102M	1000V	±20%	≤ 1800V	3,000A	≥1	100V	≤1.5pF
BF122M	1200V	±20%	≤ 2000V	3,000A	≥1	100V	≤1.5pF

- ①、The parameters of all are tested by ITU-T K12
- ②、Total Impulse Discharge Current 5,000A @ 8/20μs by IEC 61000-4-5, 10 shots
- ③、The capacitance are tested by 1MHzHz @ DC= 0.3V
- ④、The V-T waveform of DCBV and IPBV mus lie between the shades.

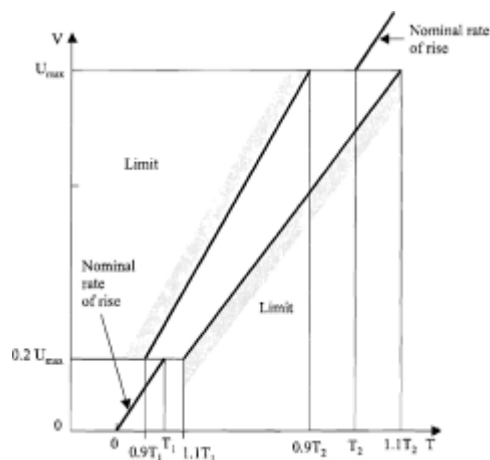


3、PART NUMBERING SYSTEM

BF XXX M
(1) (2) (3)

- (1) LangTuo SMD Gas Discharge Tube in 5×5×4.2 (L×W×H) (mm),
Total Impulse Discharge Current5,000A @8/20μs
- (2) DC Breakdown Voltage, e.g., 151=15×10¹=150V
- (3) Tolerance is DC Breakdown Voltage, M=+-20%, N=+-30%

4、DIMENSIONS


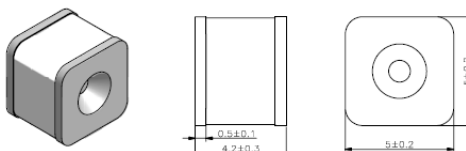


Unit:mm

GDT Product Specification


BF*M SMD Gas Discharge Tube (5×5×4.2mm)**


5、RECOMMENDED SOLDERING PAD AND REFLOW PROFILE

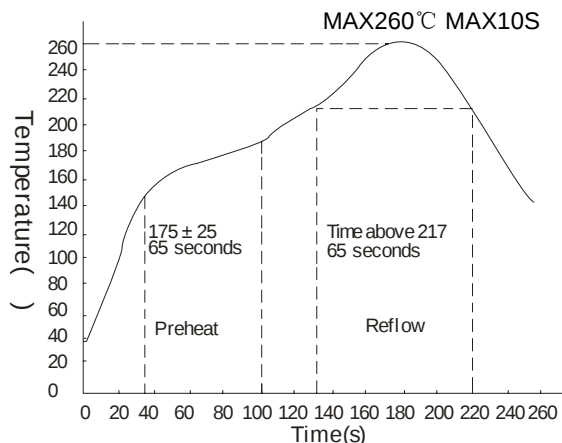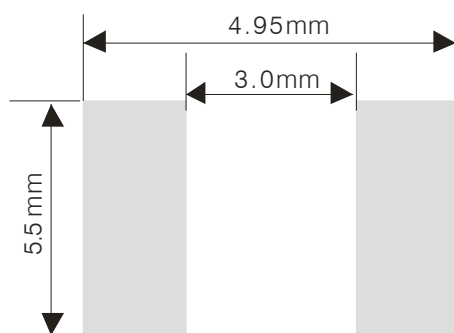

6、OPERATION AND STORAGE TEMPERATURE: -40℃ ~ +85℃

7、PACKAGE REEL INFORMATION

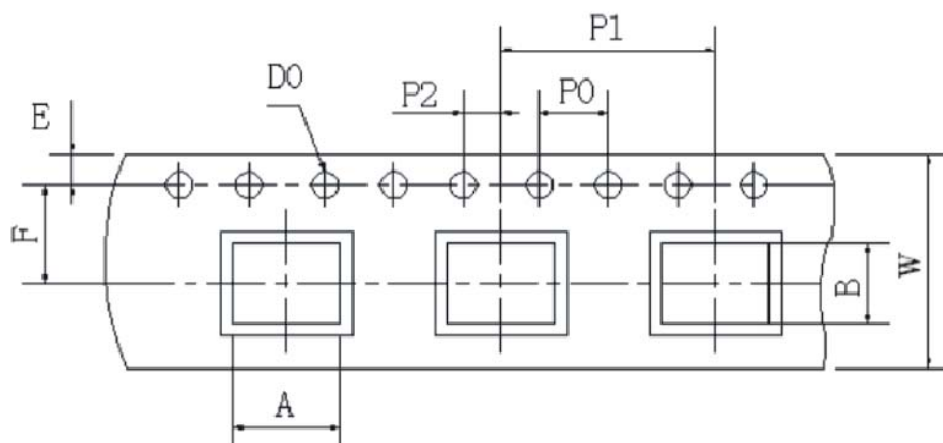

Item	DIM(mm)
A	5.3 ± 0.10
B	4.5 ± 0.20
D0	φ1.50 ± 0.10
E	1.75 ± 0.10
F	5.5 ± 0.1
P0	4.0 ± 0.1
P1	8.0 ± 0.10
P2	2.0 ± 0.1
W	12.0 ± 0.30

OUTLINE	UNIT WEIGHT (g)	REEL (PCS)	PER CARTON (PCS)	REEL DIAMETERS (mm)	CARTON SIZE(mm)		
					L	W	H
TAPING	~0.5	1,000	16,000	330	360	360	360

Remark:

- 1、 Company name change from *Bencent Electronics Limited* to *Shenzhen Lanq Electronics Co., Ltd*
- 2、 Add items of Operation and Storage Temperature
- 3、 Add items of UNIT WEIGHT

Special Notes

Date Issued:2010/07