

# **1064nm DFB Laser Diode Module**

## **1. Description:**

The BFLD-D1064-30SM-FA 1064nm laser module utilizes a planar construction with chip on subcarrier. The high power chip is hermetically sealed in a epoxy-free and flux-free 14-pin butterfly package and fitted with a thermistor, thermoelectric cooler, and monitor diode.

The BFLD-D1064-30SM-FA 1064nm laser provides a noise-free narrowband spectrum, even under changes in temperature, drive current, and optical feedback. Wavelength selection is available for applications that require the highest performance in spectrum control with the highest available powers. This module complies described in Telcordia GR-468-CORE requirement.

## **2. Features:**

- Stabilized wavelength single mode laser;
- CW or pulsed operation;
- Operating temperature range -40°C to +50°C;
- Wavelength/temperature coefficient 0.01nm/°C;
- Built-in monitor photodiode, thermo-electric cooler and thermistor;
- Single mode fiber pigtail (Corning HI1060, NA=0.14, MFD=6.2um@1060nm);
- Optional FC/APC connector.

## **3. Applications:**

- Spectroscopy;
- Telecom;
- Illumination;
- Sensing.

## **4. Electro-Optical Characteristics(25°C laser temperature):**

Parameter	Symbol	Min	Typical	Max	Unit
Output power from pigtail	P <sub>f</sub>	20	30		mW
Range of available wavelengths	I <sub>c</sub>	1061		1065	nm
Spectral width (FWHM)				3	MHz
Sidemode suppression ratio at P <sub>f</sub>	SMSR	40	45		dB
Wavelength shift with current			3	5	pm/mA
Wavelength shift with temperature			0.08	0.1	nm/°C
Operating current	I <sub>OP</sub>		100	150	mA
Threshold current	I <sub>th</sub>		22	30	mA
Forward voltage	V <sub>f</sub>		2	2.3	V
Polarization extinction ratio	PER	15	20		dB
Thermoelectric cooler current	I <sub>TEC</sub>			3	A


**1064nm DFB Laser Diode Module**  
BFLD-D1064-30SM-FA

Thermoelectric cooler voltage	$V_{TEC}$			4	V
Chip operating temperature range	$T_{OP}$	15	25	40	°C
Case operating temperature range	$T_C$	10	25	50	°C
Storage temperature	$T_S$	5		80	°C


### 5. Optical Fiber Specifications:

Parameters	Description
Fiber type	Hi1060 fiber or PM fiber
Pigtail type	Bare fiber
Pigtail length	$1.5 \pm 0.1$ m
Connector type	Without

### 6. Package drawing&PIN-OUT Definition(Unit:mm):

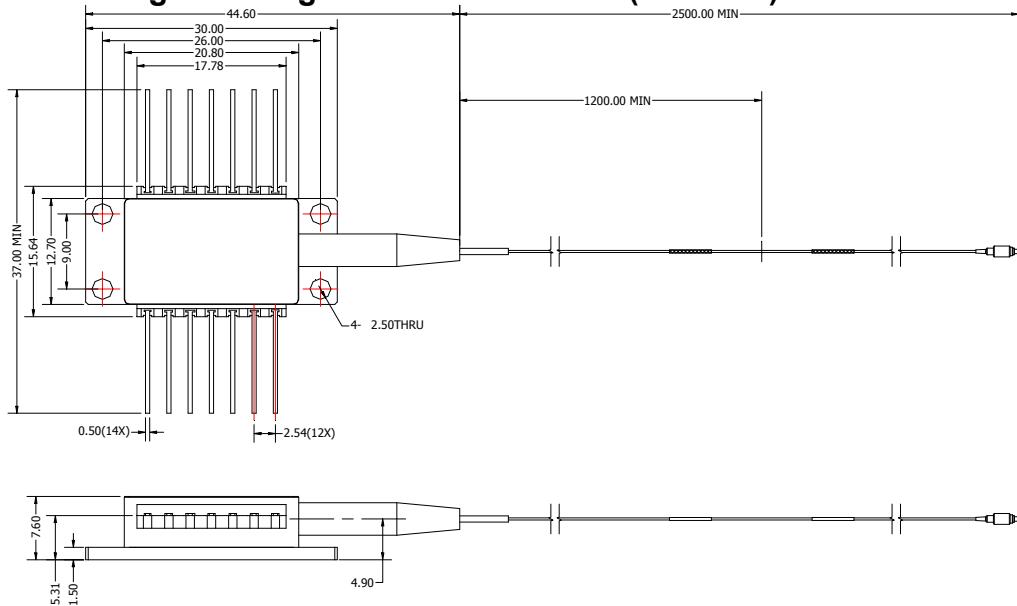

DIMENSION: MM  
GENERAL TOLERANCE: 0.1

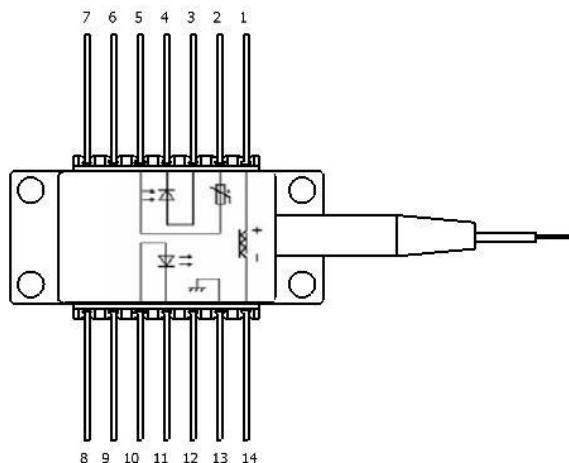

PIN	DESIGNATIONS	PIN	DESIGNATIONS
1	TEC(+)	14	TEC(-)
2	Thermistor	13	Case Ground
3	PD Anode	12	NC
4	PD Cathode	11	LD Cathode
5	Thermistor	10	LD Anode
6	NC	9	NC
7	NC	8	NC