


Features

- Super low gate charge
- Green device available
- Excellent C_{dv} / d_t effect decline
- Advanced high cell density trench technology

HF

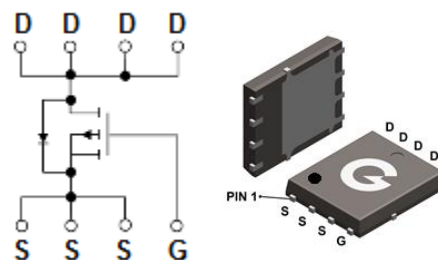

PDFN5×6-8L

Mechanical Data

- Case: PDFN5×6-8L
- Molding Compound: UL Flammability Classification Rating 94V-0
- Terminals: Matte tin-plated leads; solderability-per MIL-STD-202, Method 208

Ordering Information

Part Number	Package	Shipping Quantity	Marking Code
BL130P04-5DL8	PDFN5×6-8L	5000 pcs / Tape & Reel	130P04

Maximum Ratings (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Value	Unit
Drain-to-Source Voltage	V_{DS}	-40	V
Gate-to-Source Voltage	V_{GS}	± 20	V
Continuous Drain Current ($V_{GS} = -10\text{V}$, $T_C = 25^\circ\text{C}$)	I_D	-49	A
Continuous Drain Current ($V_{GS} = -10\text{V}$, $T_C = 100^\circ\text{C}$)		-31	A
Pulsed Drain Current ^{*2 *4}	I_{DM}	-268	A
Single Pulse Avalanche Energy ^{*3}	E_{AS}	125	mJ

Thermal Characteristics

Parameter	Symbol	Value	Unit
Power Dissipation ($T_C = 25^\circ\text{C}$)	P_D	50	W
Thermal Resistance Junction-to-Air ^{*1}	$R_{\theta JA}$	96	$^\circ\text{C/W}$
Thermal Resistance Junction-to-Case	$R_{\theta JC}$	2.5	$^\circ\text{C/W}$
Operating Junction Temperature Range	T_J	-55 ~ +150	$^\circ\text{C}$
Storage Temperature Range	T_{STG}	-55 ~ +150	$^\circ\text{C}$

Electrical Characteristics (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

Symbol	Parameter	Test Condition	Min.	Typ.	Max.	Unit
Static Characteristics						
V _{DSS}	Drain-Source Breakdown Voltage	V _{GS} = 0V, I _D = -250μA	-40	-	-	V
I _{DSS}	Zero Gate Voltage Drain Current	V _{DS} = -32V, V _{GS} = 0V, T _C = 25°C	-	-	-1	μA
I _{GSS}	Gate-Body Leakage Current	V _{GS} = ±20V, V _{DS} = 0V	-	-	±100	nA
On Characteristics						
R _{DS(ON)}	Static Drain-Source On-resistance *2	V _{GS} = -10V,I _D = -15A	-	-	13	mΩ
		V _{GS} = -4.5V,I _D = -10A	-	-	20	mΩ
V _{GS(th)}	Gate Threshold Voltage	V _{DS} = V _{GS} , I _D = -250 μA	-1	-1.47	-2.5	V
Dynamic Characteristics						
C _{ISS}	Input Capacitance	V _{GS} = 0V V _{DS} = -25V f = 1.0MHz	-	3941	-	pF
C _{OSS}	Output Capacitance		-	262	-	
C _{RSS}	Reverse Transfer Capacitance		-	237	-	
Switching Characteristics						
t _{d(ON)}	Turn-on Delay Time	V _{DD} =-15V V _{GS} = -10V R _G = 3.3Ω, R _L = 15Ω I _D = -1A	-	40	-	ns
t _r	Turn-on Rise Time		-	35	-	
t _{d(OFF)}	Turn-Off Delay Time		-	100	-	
t _f	Turn-Off Fall Time		-	9.6	-	
Q _G	Total Gate-Charge	V _{DD} = -32V V _{GS} = -10V I _D = -50A	-	67.5	-	nC
Q _{GS}	Gate to Source Charge		-	16	-	
Q _{GD}	Gate to Drain (Miller) Charge		-	9	-	
Source-Drain Diode Characteristics						
V _{SD}	Diode Forward Voltage	I _{SD} = -1.7A, V _{GS} = 0V, T _J = 25°C	-	-	-1.2	V
I _{SD}	Diode Continuous Forward Current *1,4		-	-	-49	A

Notes:

1. Device mounted on FR-4 PC board, with minimum recommended pad layout, single sided.
2. The data tested by pulsed, pulse width $\leq 10\mu s$, duty cycle $\leq 2\%$
3. The E_{AS} data shows Max. rating. The test condition is $V_{DD} = -25V, V_{GS} = -10V, L = 0.5mH$
4. The data is theoretically the same as I_D and I_{DM} , in real applications, should be limited by total power dissipation

Ratings and Characteristics Curves (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

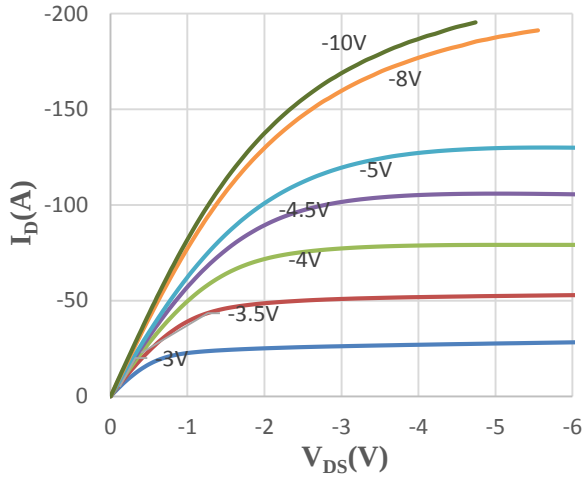


Fig 1 Typical Output Characteristics

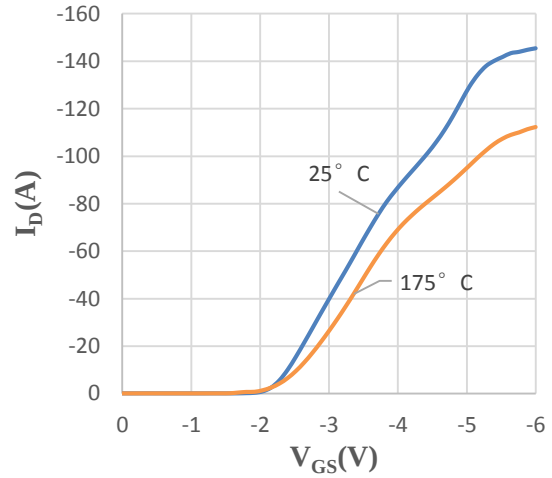


Fig 2 Transfer Characteristics

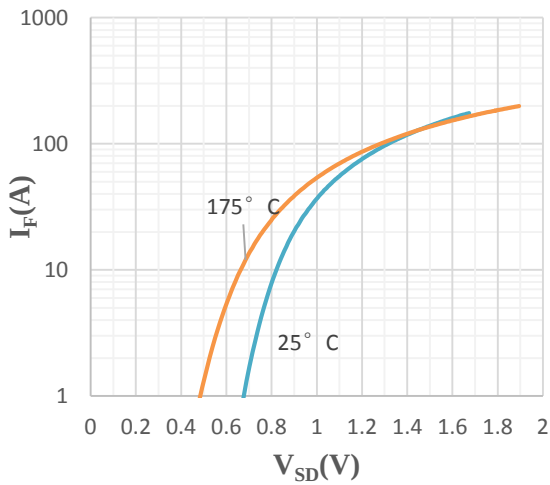


Fig 3 Body-Diode Characteristics

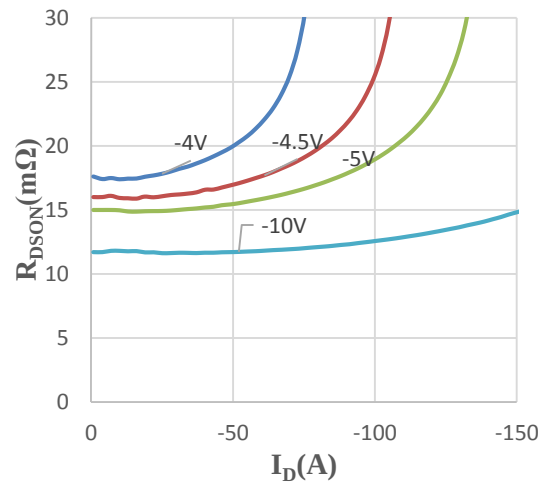


Fig 4 Drain-source on-state resistance

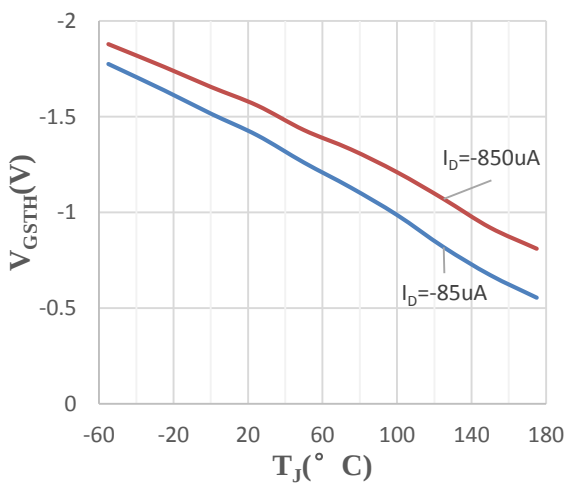


Fig 5 Gate Voltage vs. Junction Temperature

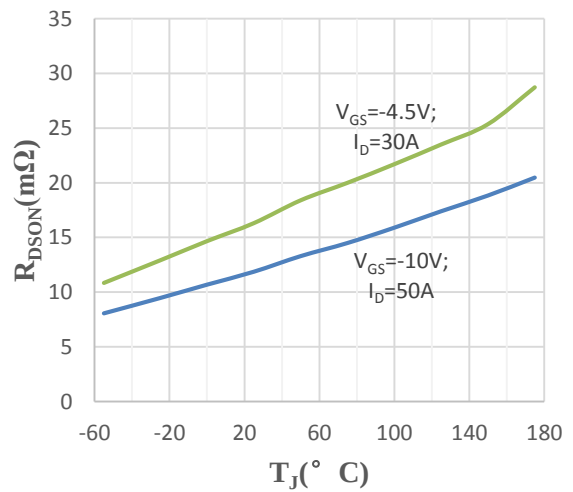


Fig 6 On-Resistance vs. Junction Temperature

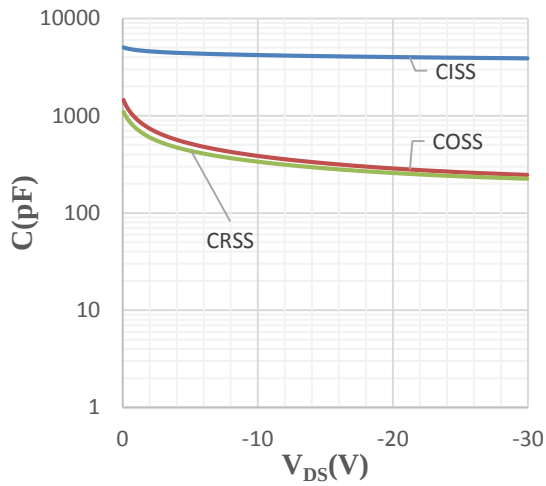


Fig 7 Capacitance Characteristics

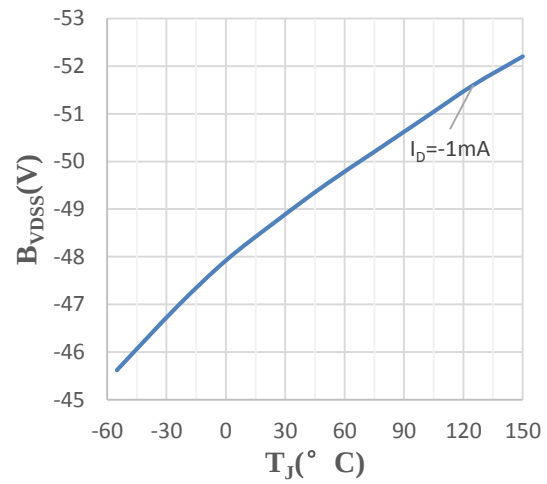


Fig 8 Drain-Source breakdown voltage

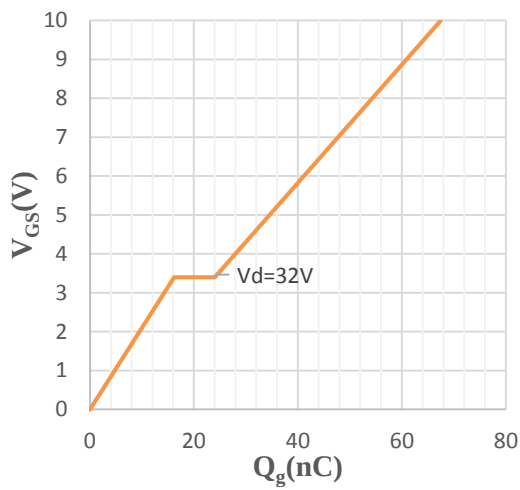


Fig 9 Gate-charge Characteristics


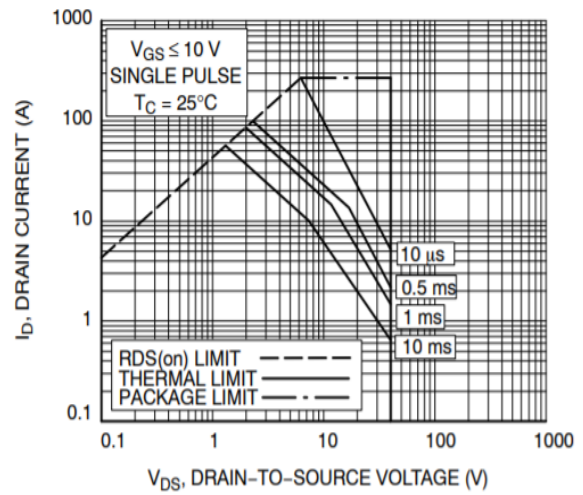


Fig 10 SOA


Package Outline Dimensions (Unit: mm)

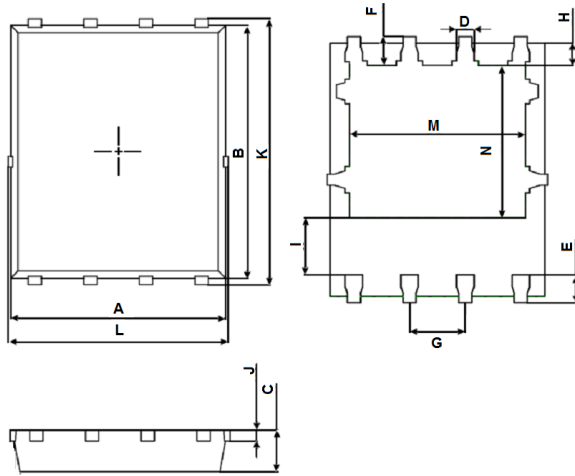

PDFN5x6-8L		
Dimension	Min.	Max.
A	4.824	4.976
B	5.674	5.826
C	0.900	1.000
D	0.350	0.450
E	0.559	0.711
F	0.574	0.726
G	1.250	1.290
H	0.424	0.576
I	1.190	1.390
J	0.154	0.354
K	5.974	6.126
L	4.944	5.096
M	3.910	4.110
N	3.375	3.575

Mounting Pad Layout (Unit: mm)

PDFN5x6-8L

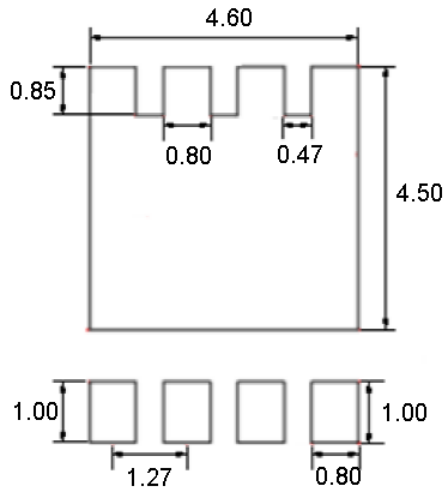

IMPORTANT NOTICE

Changzhou Galaxy Century Microelectronics (GME) reserves the right to make changes without further notice to any product information (copyrighted) herein to make corrections, modifications, improvements, or other changes. GME does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others.