

4A,650V N-Channel Power Mosfet


BL4N65F

FEATURES

- $R_{DS(ON)} = 2.5\Omega @ V_{GS} = 10V$
- Ultra low gate charge (typical 15 nC)
- Low reverse transfer Capacitance ($CRSS = \text{typical } 8.0 \text{ pF}$)
- Fast switching capability
- Avalanche energy specified
- Improved dv/dt capability, high ruggedness



Lead-free

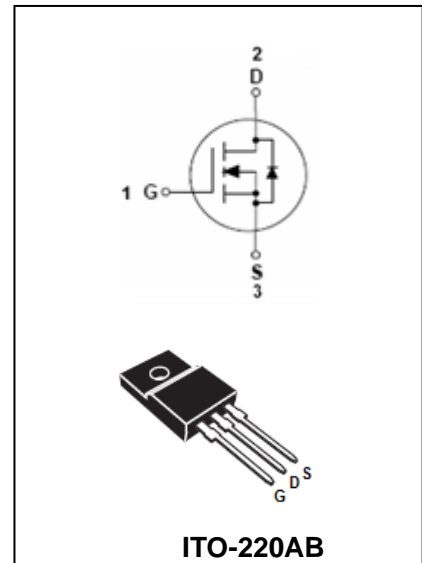

MAXIMUM RATING @ $T_a = 25^\circ\text{C}$ unless otherwise specified

Symbol	Parameter	Value	Units
V_{DSS}	Drain-Source voltage	650	V
V_{GSS}	Gate -Source voltage	± 30	V
I_D	Continuous Drain Current	4.0	A
I_{DM}	Pulsed Drain Current	16	A
E_{AS} E_{AR}	Avalanche Energy	260 10.6	mJ
	Single Pulsed Repetitive		
dv/dt	Peak Diode Recovery dv/dt	4.5	V/ns
P_D	Power Dissipation	36	W
$R_{\theta JA}$	Thermal resistance, Junction-to-Ambient	62.5	$^\circ\text{C}/\text{W}$
T_J	Junction Temperature	+150	$^\circ\text{C}$
T_{OPR}, T_{stg}	Operating and Storage Temperature	-55 to +150	$^\circ\text{C}$

4A,650V N-Channel Power Mosfet

BL4N65F







ELECTRICAL CHARACTERISTICS @ Ta=25°C unless otherwise specified

Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT
OFF CHARACTERISTICS						
Drain-Source Breakdown Voltage	BV_{DSS}	$V_{GS}=0V, I_D=250\mu A$	650	-	-	V
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS}=650V, V_{GS}=0V$	-	-	10	μA
Gate-body Leakage	I_{GSS}	$V_{DS}=0V, V_{GS}=\pm 30V$	-	-	± 100	nA
ON CHARACTERISTICS						
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS}=V_{GS}, I_D=250\mu A$	2.0	-	4.0	V
Static drain-Source on-resistance	$R_{DS(ON)}$	$V_{GS}=10V, I_D=2.2A$	-	2.4	2.5	Ω
DYNAMIC CHARACTERISTICS						
Input capacitance	C_{ISS}	$V_{DS}=25V, V_{GS}=0V, f=1.0MHz$	-	520	670	pF
Output capacitance	C_{OSS}		-	70	90	
Reverse transfer capacitance	C_{RSS}		-	8	11	
SWITCHING CHARACTERISTICS						
Turn-On Delay Time	$t_{D(ON)}$	$V_{DD} = 325V,$ $I_D = 4.0A,$ $R_G = 25\Omega$	-	13	35	ns
Rise Time	tr		-	45	100	ns
Turn-Off Delay Time	$t_{D(OFF)}$		-	25	60	ns
Fall Time	tf		-	35	80	ns
Total Gate Charge	Qg	$V_{DS} = 520V$ $I_D = 4.0A$ $V_{GS} = 10V,$	-	15	20	nC
Gate-Source Charge	Qgs		-	3.4	-	nC
Gate-Drain Charge	Qgd		-	7.1	-	nC
SOURCE- DRAIN DIODE RATINGS AND CHARACTERISTICS						
Drain-Source diode forward voltage	V_{SD}	$V_{GS}=0V, I_s=4.4A$	-	-	1.4	V
Maximum Continuous Drain-Source Diode Forward Current	I_s		-	-	4.4	A
Maximum Pulsed Drain-Source Diode Forward Current	I_{SM}		-	-	17.6	A
Body Diode Reverse Recovery Time	trr	$V_{GS}=0V, I_s=4.4A,$	-	250	-	nS
Body Diode Reverse Recovery Charge	Qrr	$di/dt=100A/\mu s$	-	1.5	-	μC

4A,650V N-Channel Power Mosfet

BL4N65F


TYPICAL CHARACTERISTICS @ Ta=25°C unless otherwise specified

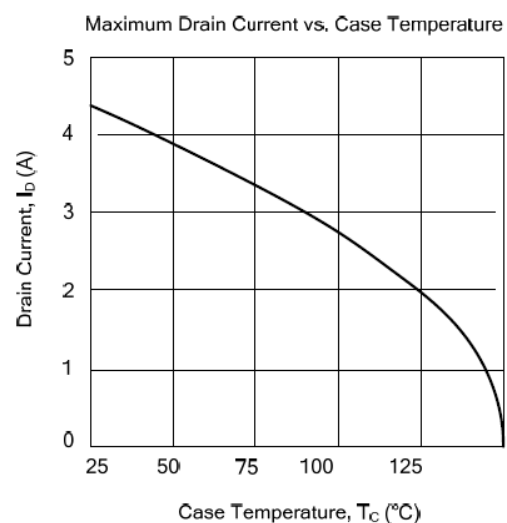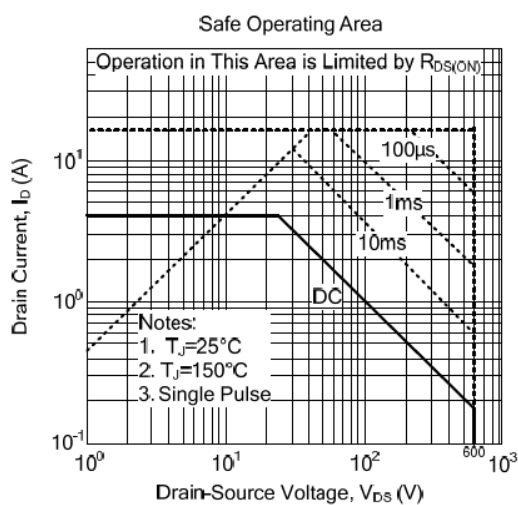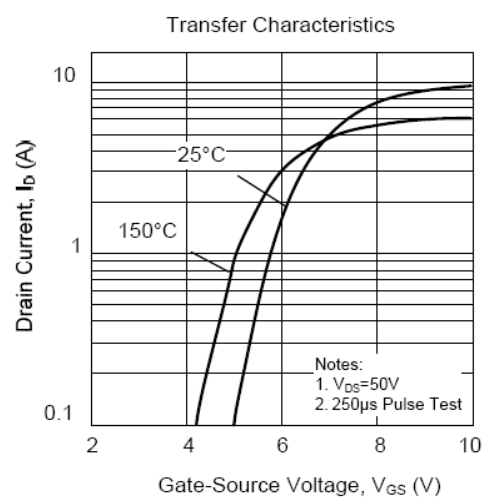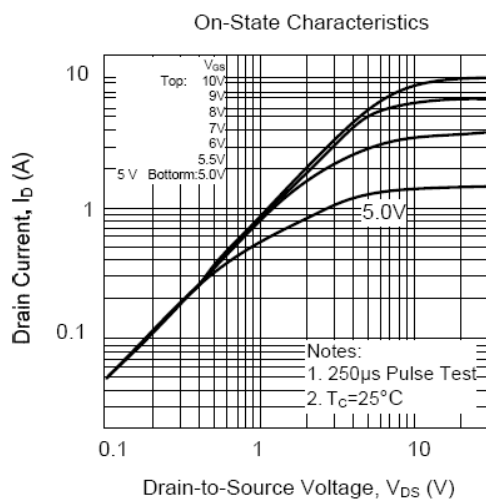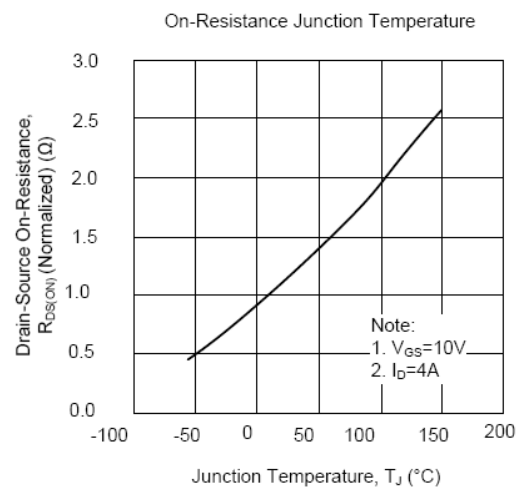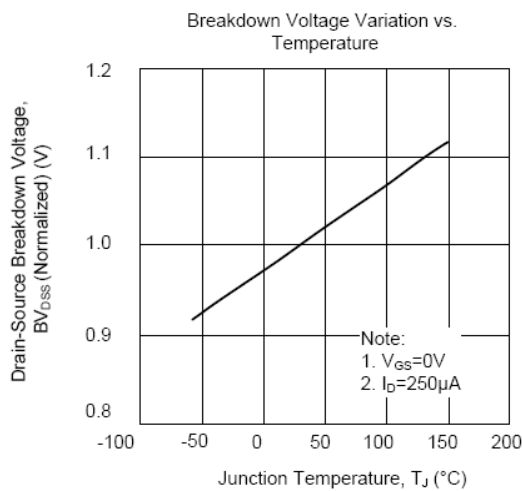


4A,650V N-Channel Power Mosfet

BL4N65F


On-Resistance Variation vs. Drain Current and Gate Voltage

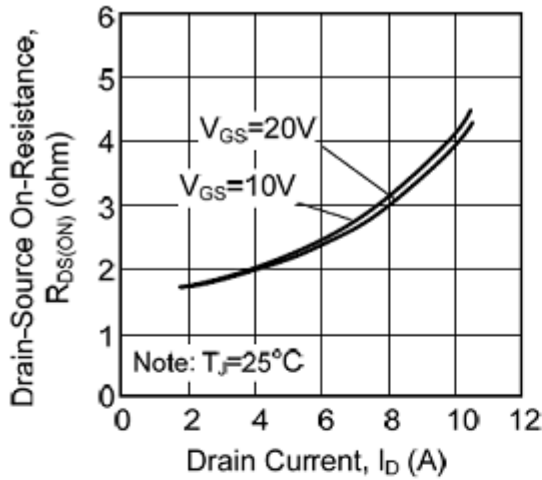


On State Current vs. Allowable Case Temperature

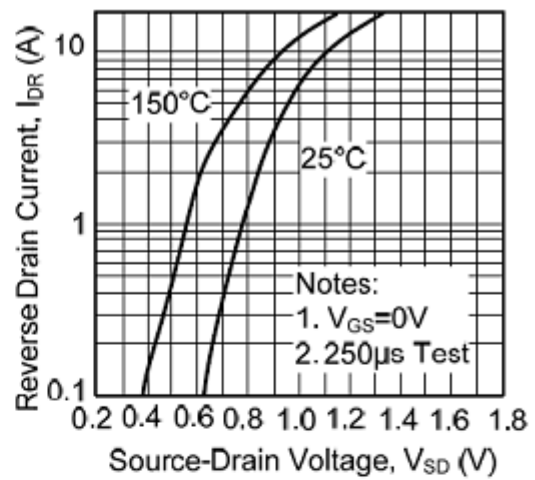


Capacitance Characteristics (Non-Repetitive)

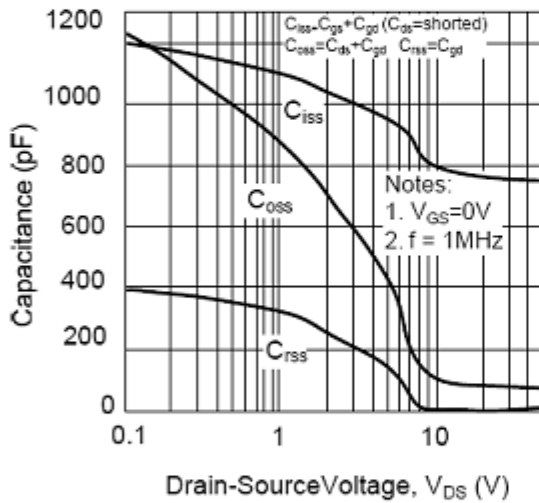

Gate Charge Characteristics

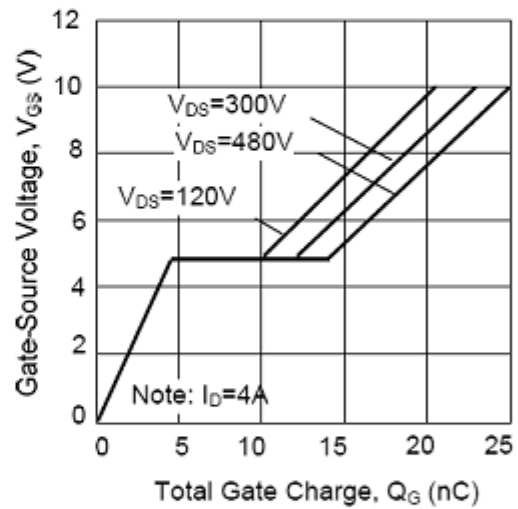

Transient Thermal Response Curve

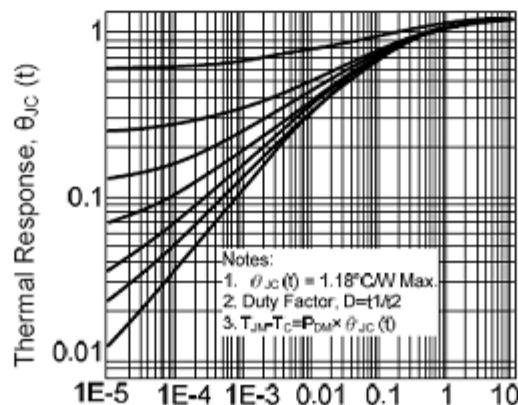


4A,650V N-Channel Power Mosfet

BL4N65F

PACKAGE OUTLINE

Plastic surface mounted package

ITO-220AB

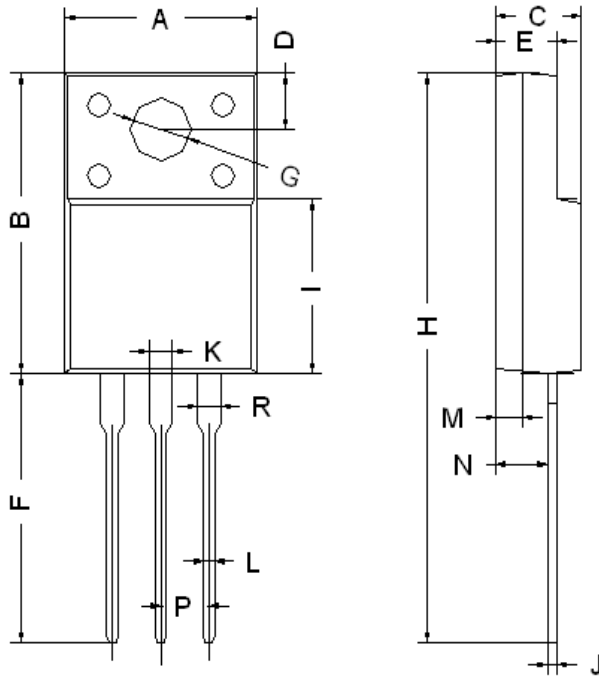

ITO-220AB		
Dim	Min	Max
A	9.90	10.30
B	14.80	15.20
C	4.50 Typical	
D	2.70 Typical	
E	2.80	3.30
F	13.00	13.60
G	3.2 Typical	
H	28.00	28.60
I	7.90	8.90
J	0.50 Typical	
L	0.70	0.90
M	1.40 Typical	
N	2.60	2.80
P	2.45	2.65
K/R	1.20 Typical	
All Dimensions in mm		