

300mA, Wide Input Voltage, Low Consumption Linear Regulator

GENERAL DESCRIPTION

BL8567 series are a group of positive voltage output, high precise, and high PSRR and low power consumption voltage regulator. Voltages are selectable in 100mV steps within a range of 2.5V to 5.5V. It also can be customized on command.

BL8567 series have excellent load and line transient response and good temperature characteristics, which can assure the stability of chip and power system. And it uses trimming technique to guarantee output voltage accuracy within $\pm 2\%$.

BL8567 series are available in SOT-23-3, SOT-23-5, SOT-89-3 packages, which are lead (Pb)- free.


FEATURES

- Low Quiescent Current: 8uA at 5V
- High PSRR: 60dB range to 10KHz
- Low Output Noise: 44uVRMS
- Low Dropout: 270mV at 150mA load
- Low Temperature Coefficient: $\pm 100\text{ppm}/^\circ\text{C}$
- Excellent Line Regulation: 0.05%/V
- Highly Accurate: $\pm 2\%$

APPLICATIONS


- Reference Voltage Source
- Battery Powered Equipment
- Hand-Hold Equipment
- Wireless LAN
- GPS Receivers

TYPICAL APPLICATION

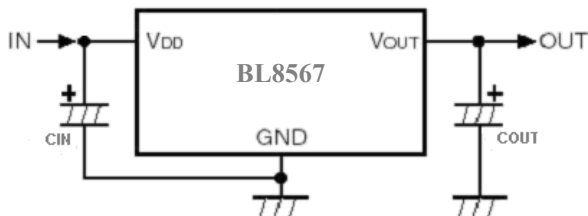


Note 1: Input capacitor (CIN=1uF) is recommended in all applications.
Note 2: Output capacitor (COUT=1uF/6.8uF) is recommended in all applications to assure the stability of circuit. 1uF Tantalum capacitor or 6.8uF ceramic capacitor is recommended.

BLOCK DIAGRAM

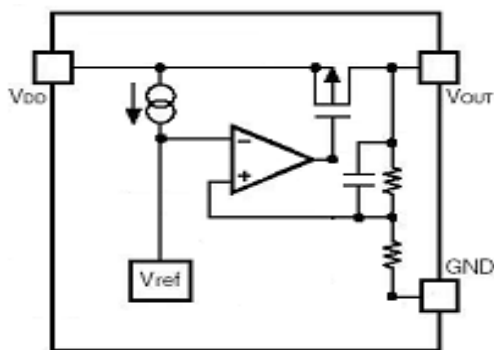

Supply Current vs. Input Voltage

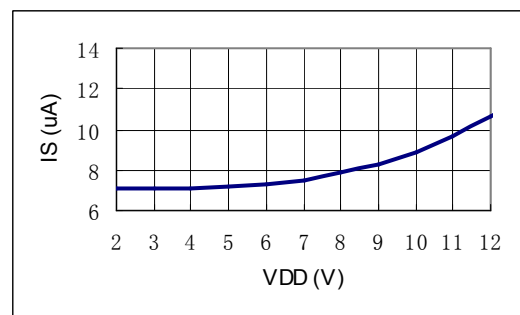

ORDERING INFORMATION

BL8567 1 2 3 4

Code	Description
1	Temperature & Rohs: C: -40~85°C, Pb Free Rohs Std.
2	Package type: B3: SOT-23-3 B5: SOT-23-5 C3:SOT-89-3 C3B:SOT-89-3
3	Packing type: TR: Tape&Reel (Standard)
4	Output voltage: e.g. 25=2.5V 33=3.3V 50=5.0V



Output Voltage Code

VOUT	Code	VOUT	Code	VOUT	Code
1.2V	2	3.4V	4	4.5V	5
1.5V	5	3.5V	5	4.6V	6
2.5V	5	3.6V	6	4.7V	7
2.6V	6	3.7V	7	4.8V	8
2.7V	7	3.8V	8	4.9V	9
2.8V	8	3.9V	9	5.0V	0
2.9V	9	4.0V	0	5.1V	1
3.0V	0	4.1V	1	5.2V	2
3.1V	1	4.2V	2	5.3V	3
3.2V	2	4.3V	3	5.4V	4
3.3V	3	4.4V	4	5.5V	5

NOTE 3:

E: Product Code; X: Output Voltage;
Z: The Year of manufacturing, "7" stands for year 2007, "8" stands for year 2008;
Z: The week of manufacturing. "A" stands for week 1, "Z" stands for week 26, "A" stands for week 27, "Z" stands for week 52.

MARKING DESCRIPTION

Product Classification		BL8567CB3TR□□
Marking		SOT-23-3  1 GND 2 VOUT 3 VDD
Product Classification		BL8567CB5TR□□
Marking (NOTE 3)		SOT-23-5  1 GND 2 VDD 3 VOUT 4 NC 5 NC
Product Classification		BL8567CC3TR□□
Marking		SOT-89-3  1 GND 2 VDD 3 VOUT
Product Classification		BL8567CC3BTR□□
Marking		SOT-89-3  1 VOUT 2 GND 3 VDD
GND	Ground	
VOUT	Output Voltage	
VDD	Supply Voltage Input	
NC	Not Connected	

ABSOLUTE MAXIMUM RATING

Parameter	Value
Max Input Voltage	14V
Operating Junction Temperature (T _J)	125°C
Ambient Temperature (T _A)	-40°C~85°C
Power Dissipation	SOT-23-3,SOT-23-5
	SOT-89-3
	250mW
	500mW
Storage Temperature (T _S)	-40°C~150°C
Lead Temperature & Time	260°C, 10 Sec

Note 4: Exceed these limits to damage to the device.

Note 5: Exposure to absolute maximum rating conditions may affect device reliability.

RECOMMENDED WORK CONDITIONS

Parameter	Value
Input Voltage Range	Max. 12V
Ambient Temperature	-40°C~85°C

ELECTRICAL CHARACTERISTICS


Test Conditions: C_{IN}=1uF,C_{OUT}=1uF,T_A=25°C, unless otherwise specified.

Symbol	Parameter	Conditions	Min	Typ	Max	Units
V _{DD}	Input Voltage				12	V
V _{OUT}	Output Voltage	V _{DD} =Set V _{OUT} +1V 1mA≤I _{OUT} ≤10mA	V _{OUT} X0.98	V _{OUT} X 1	V _{OUT} X1.02	V
I _{OUT} (Max.) Note 6	Maximum Output Current	V _{DD} -V _{OUT} =1V	300			mA
V _{DROP}	Dropout Voltage	I _{OUT} =150mA		270		mV
$\frac{\Delta V_{out}}{\Delta V_{in} \cdot V_{out}}$	Line Regulation	I _{OUT} =10mA 4V≤V _{DD} ≤6V		0.05	0.2	%/V
ΔV_{out}	Load Regulation	V _{DD} =Set V _{OUT} +1V 1mA≤I _{OUT} ≤300mA		60		mV
I _S	Supply Current	V _{DD} =Set V _{OUT} +1V V _{OUT} Floating		8	15	uA
$\frac{\Delta V_{out}}{\Delta T \cdot V_{out}}$	Output Voltage Temperature Coefficient	I _{OUT} =10mA		± 100		ppm/°C
PSRR	Ripple Rejection	f=100Hz, Ripple=0.5Vp-p, V _{DD} =Set V _{OUT} +1V		60		dB
en	Output Noise	BW=10Hz~100KHz		44		uVrms


Note 6: The maximum power rating of each package is a constant, so along with the change of I_{LOAD}, the V_{DD}-V_{OUT} should be controlled to a certain range to ensure the normal operation.

TYPICAL PERFORMANCE CHARACTERISTICS


Supply Current vs. Input Voltage

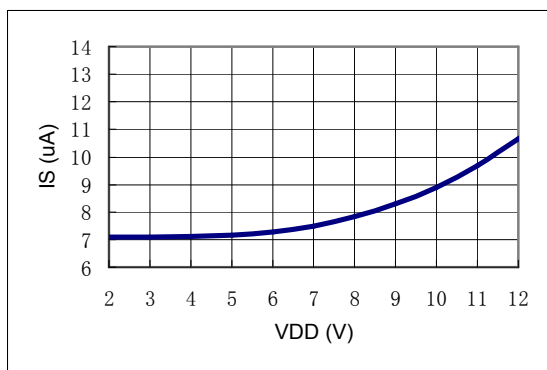


Ripple Rejection vs. Frequency

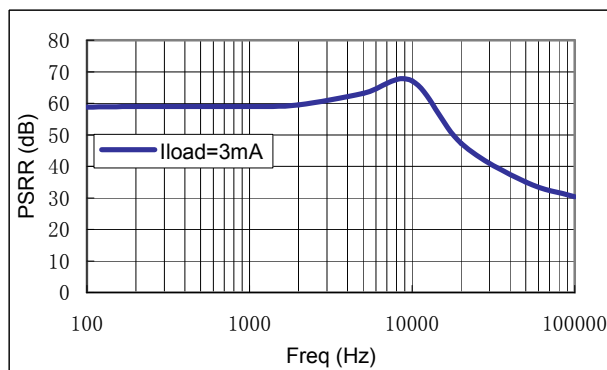


Output Voltage vs. Input Voltage

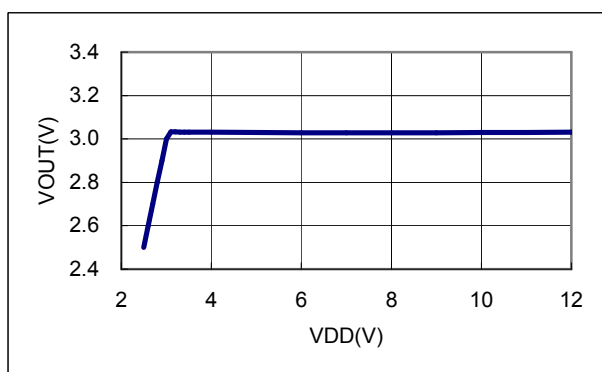

Dropout Voltage vs. Output Current

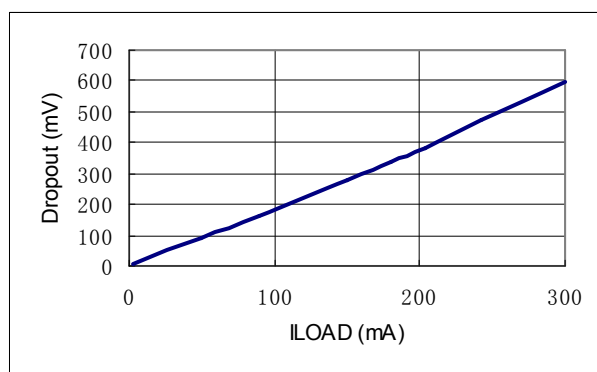


Output Voltage vs. Temperature

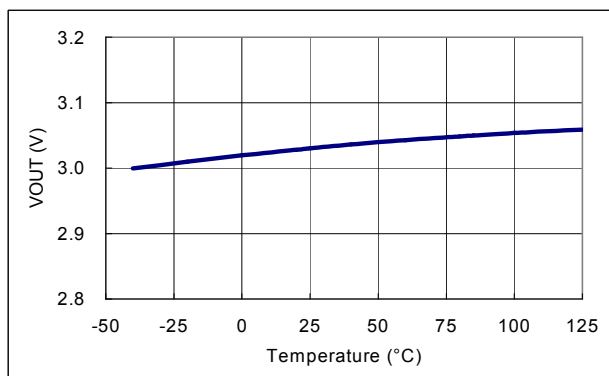


TEST WAVEFORMS


Line Transient Response
 $C_{IN}=C_{OUT}=1\mu F$, $V_{IN}=4\leftrightarrow 5V$, $V_{OUT}=3V$

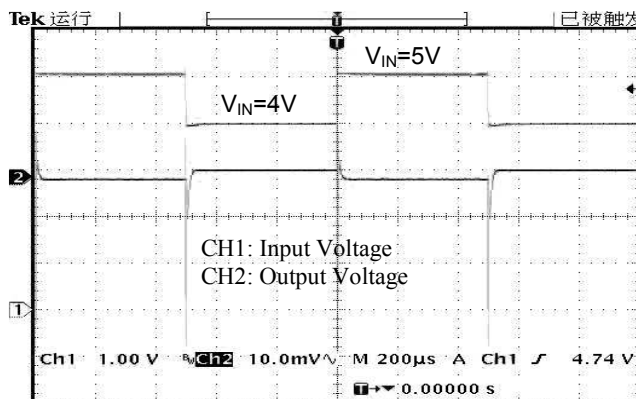


Load Transient Response
 $C_{IN}=C_{OUT}=1\mu F$, $I_{OUT}=10\leftrightarrow 100mA$, $V_{OUT}=3V$

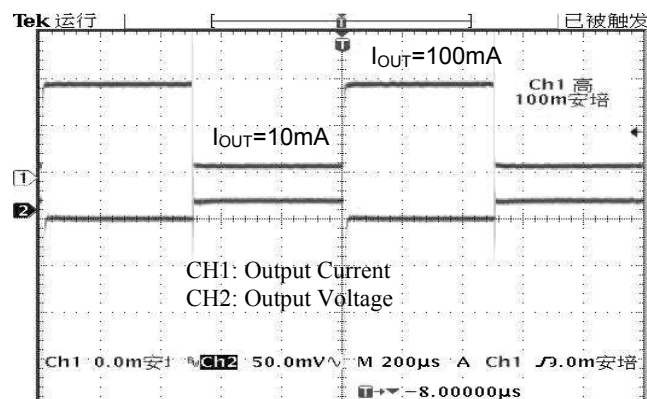



Power On Sequence ($V_{IN}: 0\rightarrow 5V$)
 $C_{IN}=C_{OUT}=1\mu F$, $I_{OUT}=10\leftrightarrow 100mA$, $V_{OUT}=3V$

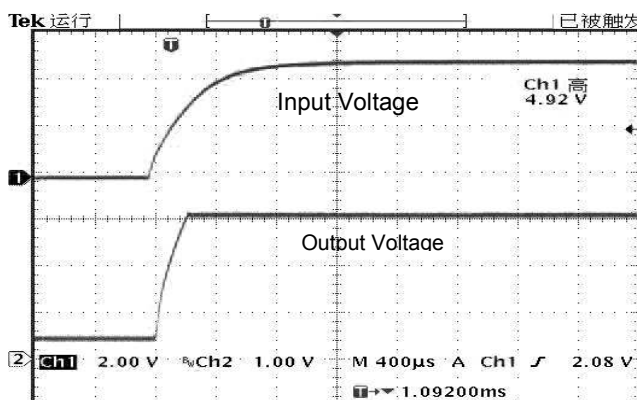


Power Off Sequence ($V_{IN}: 5\rightarrow 0V$)
 $C_{IN}=C_{OUT}=1\mu F$, $I_{OUT}=10\leftrightarrow 100mA$, $V_{OUT}=3V$

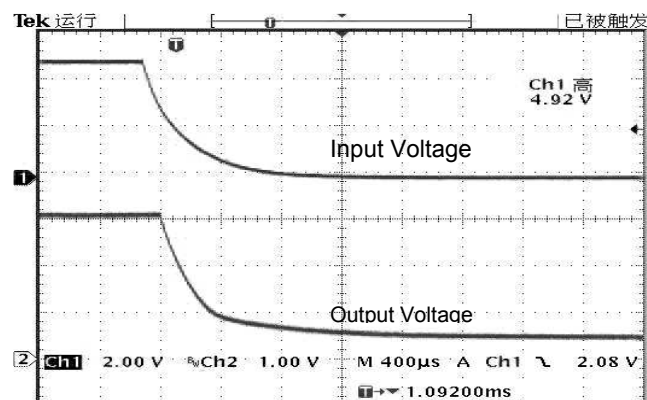

PACKAGE LINE

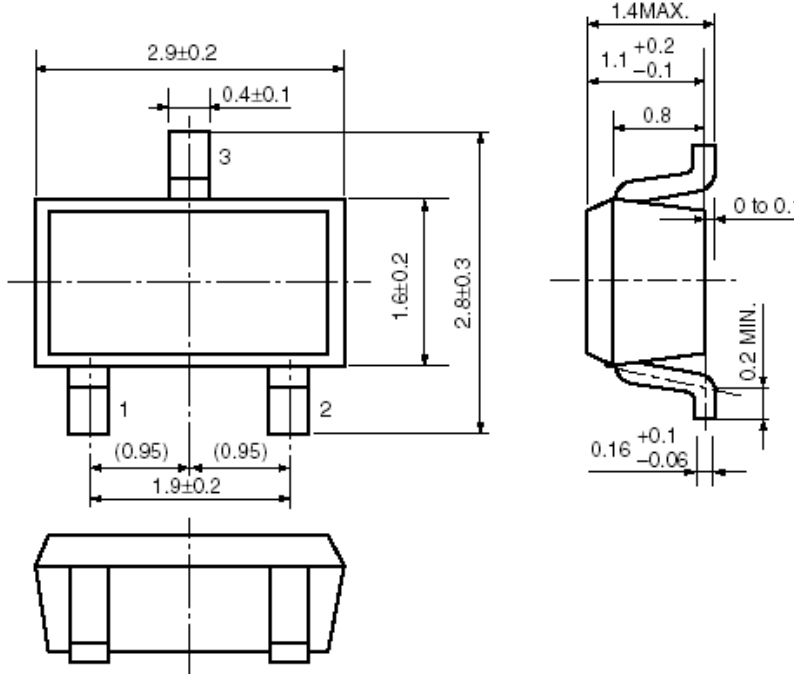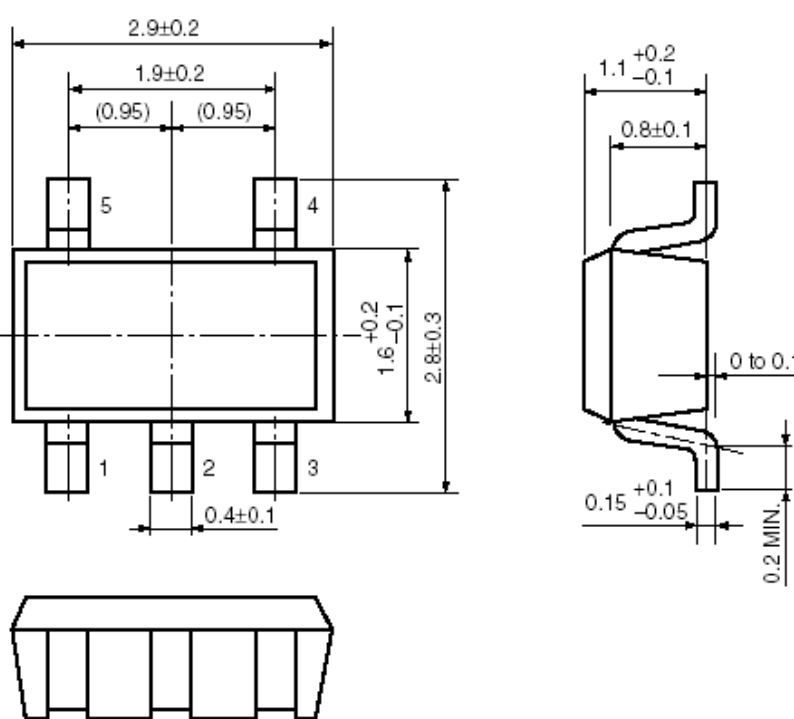Package	SOT23-3	Devices per reel	3000Pcs	Unit	mm
Package dimension:					
 Top view dimensions: Overall width 2.9 ± 0.2, Pin 3 width 0.4 ± 0.1, Pin 1 and 2 spacing 1.9 ± 0.2 (each pin width 0.95), Body width 1.6 ± 0.2, Total height 2.8 ± 0.3. Side view dimensions: Max height 1.4 MAX., Pin 3 height $1.1^{+0.2}_{-0.1}$, Pin 1 and 2 height 0.8, Lead thickness $0 \text{ to } 0.1$, Lead height 0.2 MIN., Pin 1 and 2 width $0.16^{+0.1}_{-0.06}$. Bottom view shows the package footprint with three pins.					
Package	SOT-23-5	Devices per reel	3000Pcs	Unit	mm
Package Dimension:					
 Top view dimensions: Overall width 2.9 ± 0.2, Pin 5 and 4 spacing 1.9 ± 0.2 (each pin width 0.95), Pin 1, 2, and 3 spacing 0.4 ± 0.1, Body width $1.6^{+0.2}_{-0.1}$, Total height 2.8 ± 0.3. Side view dimensions: Pin 5 height $1.1^{+0.2}_{-0.1}$, Pin 4 height 0.8 ± 0.1, Lead thickness $0 \text{ to } 0.1$, Lead height 0.2 MIN., Pin 1, 2, and 3 width $0.15^{+0.1}_{-0.05}$. Bottom view shows the package footprint with five pins.					

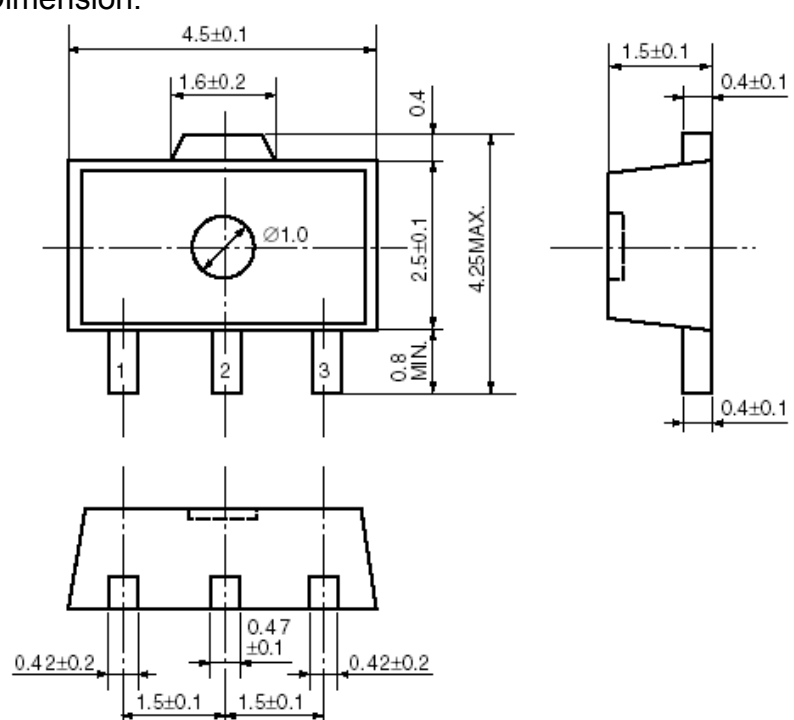Package	SOT-89-3	Devices per reel	1000Pcs	Unit	mm
Package Dimension:  The technical drawing illustrates the dimensions of the BL8567 package in millimeters. It includes three views: a top view, a side view, and a bottom view. The top view shows a rectangular body with a central circular feature of diameter 1.0 mm. The overall width is 4.5±0.1 mm, and the overall height is 4.25 MAX. mm. The side view shows a profile with a width of 1.5±0.1 mm and a height of 0.4±0.1 mm. The bottom view shows the package with three pins, with dimensions for pin spacing and width. Top View Dimensions: - Overall Width: 4.5 ± 0.1 - Pin 1 to Pin 2 Distance: 1.6 ± 0.2 - Pin 2 to Pin 3 Distance: 1.5 ± 0.1 - Pin 3 to Right Edge Distance: 0.42 ± 0.2 - Overall Height: 4.25 MAX. - Central Feature Diameter: $\varnothing 1.0$ - Pin 1 Width: 0.8 MIN. - Pin 2 Width: 0.8 MIN. - Pin 3 Width: 0.8 MIN. Side View Dimensions: - Overall Width: 1.5 ± 0.1 - Overall Height: 0.4 ± 0.1 Bottom View Dimensions: - Pin 1 to Pin 2 Distance: 1.5 ± 0.1 - Pin 2 to Pin 3 Distance: 1.5 ± 0.1 - Pin 3 to Right Edge Distance: 0.42 ± 0.2 - Pin 1 Width: 0.42 ± 0.2 - Pin 2 Width: 0.47 ± 0.1 - Pin 3 Width: 0.42 ± 0.2					