

DATA SHEET

BLU60/12 UHF power transistor

Product specification

March 1986

UHF power transistor

BLU60/12

DESCRIPTION

N-P-N silicon planar epitaxial transistor in SOT-119 envelope primarily intended for use in mobile radio transmitters in the 470 MHz communications band.

FEATURES

- multi-base structure and emitter-ballasting resistors for an optimum temperature profile.
- internal matching to achieve an optimum wideband capability and high power gain.
- gold metallization ensures excellent reliability.


The transistor has a 6-lead flange envelope with a ceramic cap. All leads are isolated from the flange.

QUICK REFERENCE DATA

R.F. performance up to $T_h = 25\text{ }^{\circ}\text{C}$ in a common-emitter class-B circuit

MODE OF OPERATION	V_{CE} V	f MHz	P_L W	G_p dB	η_c %
narrow band; c.w.	12,5	470	60	> 4,4	> 55

PIN CONFIGURATION

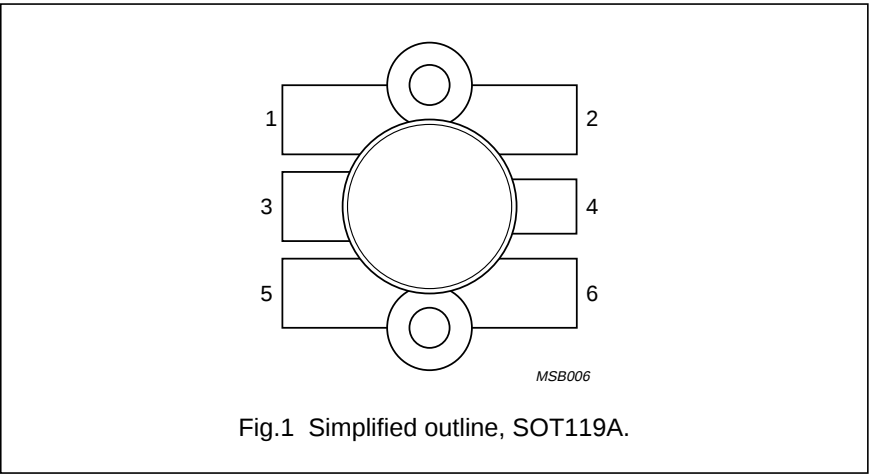

PINNING

PIN	DESCRIPTION
1	emitter
2	emitter
3	base
4	collector
5	emitter
6	emitter

PRODUCT SAFETY This device incorporates beryllium oxide, the dust of which is toxic. The device is entirely safe provided that the BeO disc is not damaged.


UHF power transistor

BLU60/12

RATINGS

Limiting values in accordance with the Absolute Maximum System (IEC 134)

Collector-base voltage (open emitter)				
peak value	V_{CBOM}	max.	36	V
Collector-emitter voltage (open base)	V_{CEO}	max.	16,5	V
Emitter-base voltage (open collector)	V_{EBO}	max.	4	V
Collector current				
d.c. or average	I_C	max.	12	A
(peak value); $f > 1$ MHz	I_{CM}	max.	36	A
Total power dissipation				
at $T_{mb} = 25\text{ }^{\circ}\text{C}$; $f > 1$ MHz	P_{tot}	max.	110	W
Storage temperature	T_{stg}		-65 to +150	$^{\circ}\text{C}$
Operating junction temperature	T_j	max.	200	$^{\circ}\text{C}$

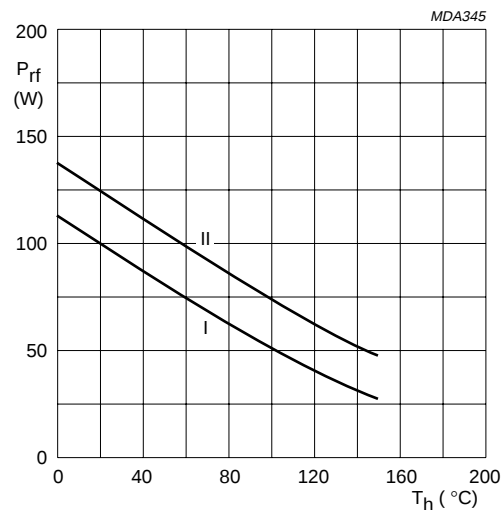

- I Continuous operation ($f > 1$ MHz).
- II Short-time operation during mismatch ($f > 1$ MHz).

Fig.2 Power/temperature derating curves.

MAXIMUM THERMAL RESISTANCE

Dissipation = 72 W; $T_{amb} = 25\text{ }^{\circ}\text{C}$

From junction to mounting base (r.f. operation)	$R_{th\ j-mb}$	max.	1,4	K/W
From mounting base to heatsink	$R_{th\ mb-h}$	max.	0,2	K/W

UHF power transistor

BLU60/12

CHARACTERISTICS

T_j = 25 °C unless otherwise specified

Collector-base breakdown voltage

open emitter; I_C = 100 mA

V_{(BR)CBO} min. 36 V

Collector-emitter breakdown voltage

open base; I_C = 200 mA

V_{(BR)CEO} min. 16,5 V

Emitter-base breakdown voltage

open collector; I_E = 20 mA

V_{(BR)EBO} min. 4 V

Collector cut-off current

V_{BE} = 0; V_{CE} = 16 V

I_{CES} max. 44 mA

Second breakdown energy

L = 25 mH; f = 50 Hz; R_{BE} = 10 Ω

E_{SBR} min. 15 mJ

D.C. current gain

V_{CE} = 10 V; I_C = 8 A

h_{FE} min. 15
typ. 60

Collector capacitance at f = 1 MHz

I_E = i_e = 0; V_{CB} = 12,5 V

C_C typ. 170 pF

Feedback capacitance at f = 1 MHz

I_C = 0; V_{CE} = 12,5

C_{re} typ. 100 pF

Collector-flange capacitance

C_{cf} typ. 3 pF

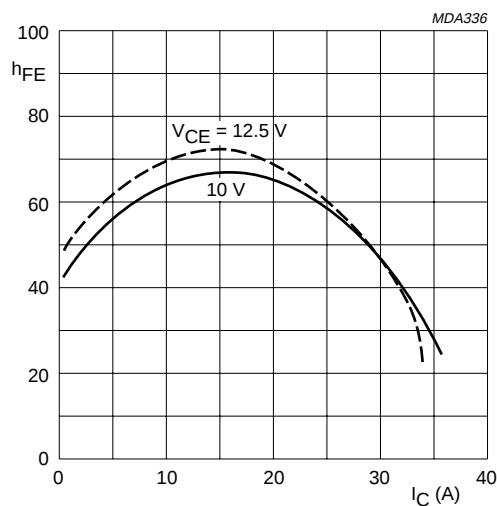


Fig.3 D.C. current gain versus collector current; T_j = 25 °C.

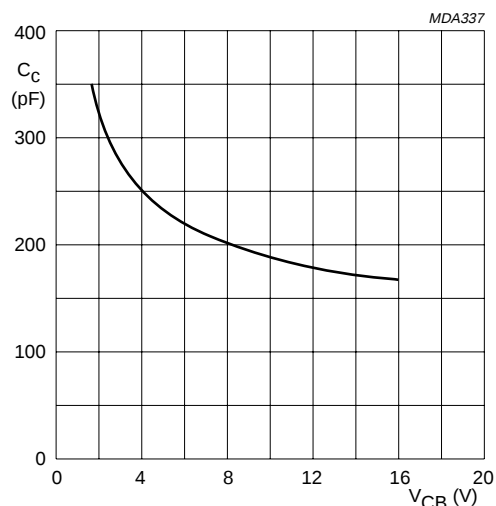


Fig.4 Output capacitance versus V_{CB}; I_E = i_e = 0; f = 1 MHz.


UHF power transistor

BLU60/12

APPLICATION INFORMATION

R.F. performance at $T_h = 25^\circ\text{C}$ in a common-emitter class-B circuit

MODE OF OPERATION	V_{CE} V	f MHz	P_L W	G_p dB	η_c %
narrow band; c.w.	12,5	470	60	> 4,4 typ. 5,5	> 55 typ. 62

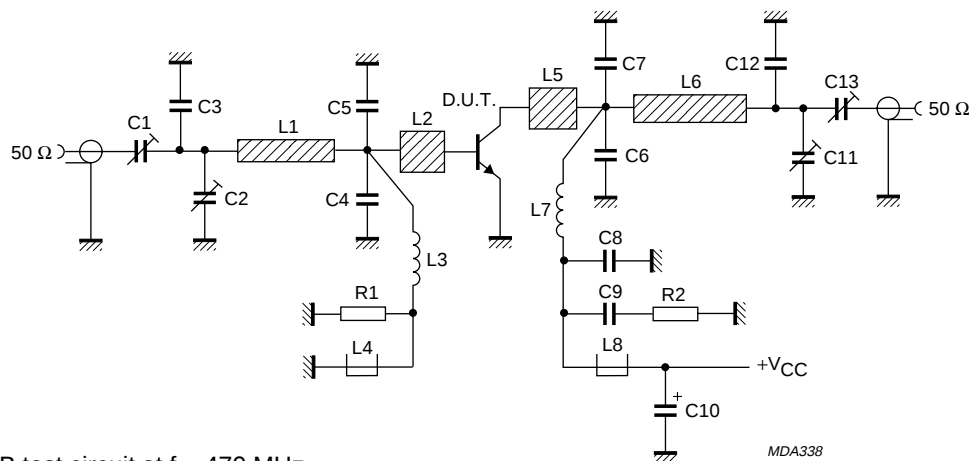Fig.5 Class-B test circuit at $f = 470\text{ MHz}$.

List of components:

- C1 = C13 = 1,8 to 10 pF film dielectric trimmer (cat. no. 2222 809 05002)
- C2 = C11 = 1,4 to 5,5 pF film dielectric trimmer (cat. no. 2222 809 09001)
- C3 = 12 pF multilayer ceramic chip capacitor⁽¹⁾
- C4 = C5 = 8, 2 pF multilayer ceramic chip capacitor⁽²⁾
- C6 = C7 = 15 pF multilayer ceramic chip capacitor⁽¹⁾
- C8 = 110 pF multilayer ceramic chip capacitor⁽¹⁾
- C9 = $3 \times 100\text{ nF}$ multilayer ceramic chip capacitor in parallel
- C10 = 2,2 μF (35 V) electrolytic capacitor
- C12 = 5,6 pF multilayer ceramic chip capacitor⁽¹⁾
- L1 = 34,6 Ω stripline (17 mm $\times$ 4 mm)
- L2 = L5 = 25,3 stripline (6 mm $\times$ 6 mm)
- L3 = 45 nH; 4 turns, closely wound enamelled Cu-wire (0,5 mm); int. dia. 2,5 mm; leads 2 $\times$ 5 mm
- L4 = L8 = Ferroxcube wideband h.f. choke, grade 3B (cat. no. 4312 020 36642)
- L6 = 29,2 Ω stripline (25,5 mm $\times$ 5 mm)
- L7 = 10 nH; 1 turn Cu-wire (1,0 mm); int. dia. 5 mm; leads 2 $\times$ 5 mm
- R1 = 1 $\Omega \pm 5\%$ (0,4 W) metal film resistor
- R2 = 10 $\Omega \pm 5\%$ (1,0 W) metal film resistor



Notes

1. American Technical Ceramics capacitor type B or capacitor of the same quality.
2. Idem type A.

UHF power transistor

BLU60/12

Striplines are on a double Cu-clad printed circuit board with P.T.F.E. fibre-glass dielectric ($\epsilon_r = 2,2$); thickness 1/32 inch.

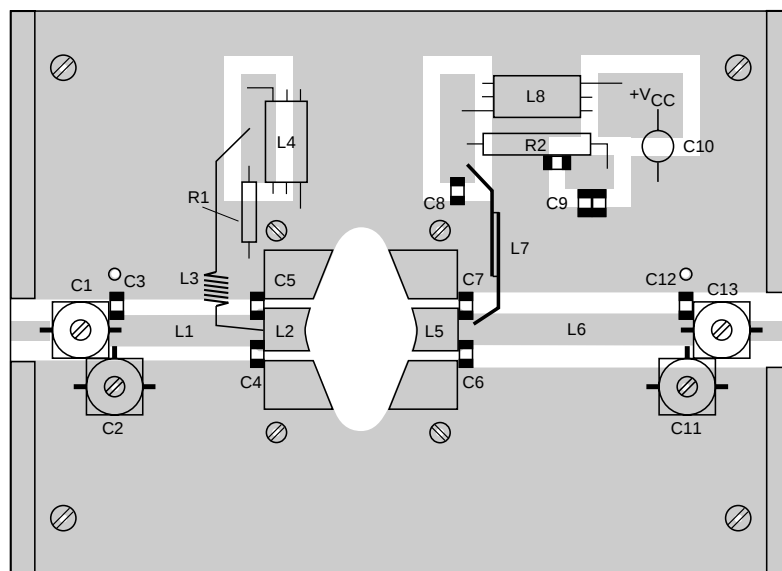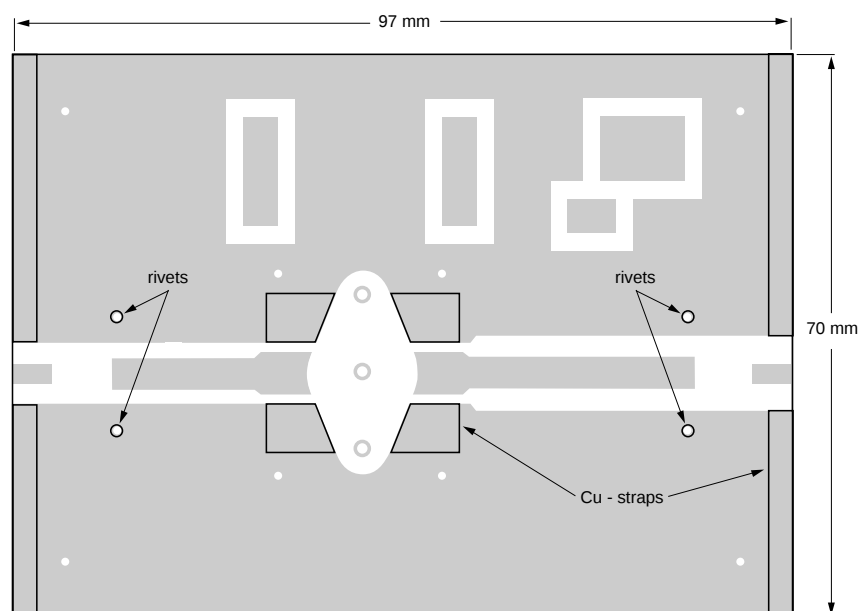



MDA339

The circuit and the components are on one side of the PTFE fibre-glass board; the other side is unetched copper serving as a ground plane. Earth connections are made by fixing screws, hollow rivets and copper straps around the board and under the bases to provide a direct contact between the copper on the component side and the ground plane.

Fig.6 Printed circuit board and component layout for 470 MHz class-B test circuit.

UHF power transistor

BLU60/12

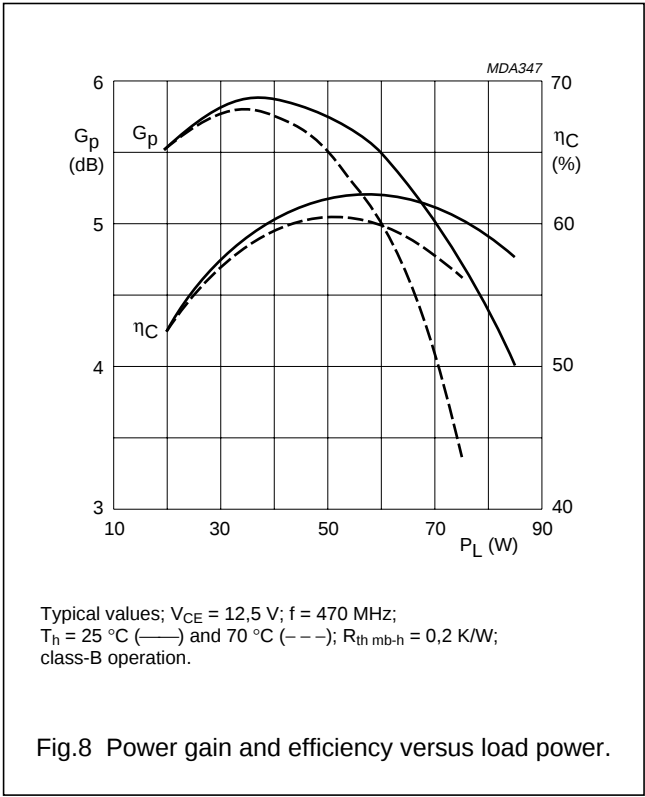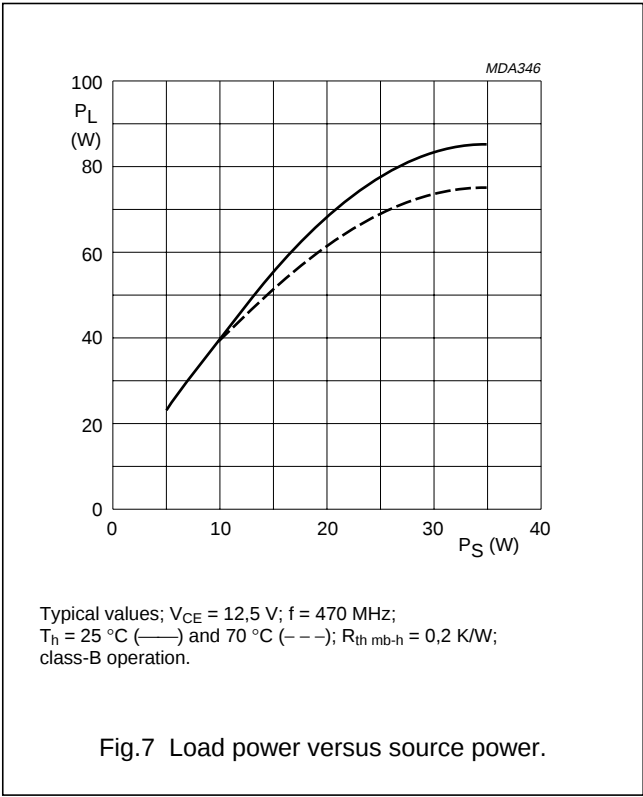


RUGGEDNESS

The BLU60/12 is capable of withstanding a full load mismatch (VSWR = 50 through all phases) up to 70 W under the following conditions; $V_{CE} = 15,5\text{ V}$; $f = 470\text{ MHz}$; $T_h = 25^\circ\text{C}$; $R_{th\text{ mb-h}} = 0,2\text{ K/W}$.


UHF power transistor

BLU60/12

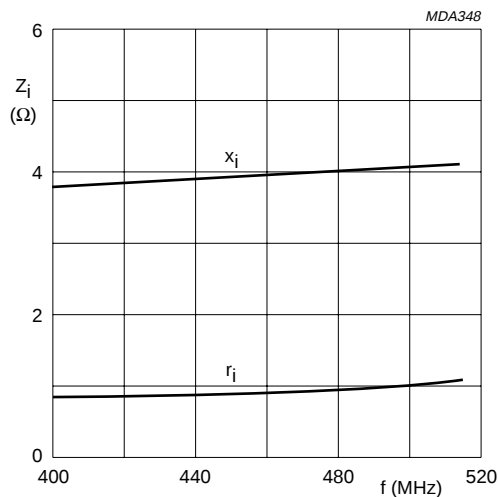


Typical values; $V_{CE} = 12,5$ V; $P_L = 60$ W; $f = 400$ to 512 MHz;
 $T_h = 25$ °C; $R_{th\ mb-h} = 0,2$ K/W; class-B operation.

Fig.9 Input impedance (series components).

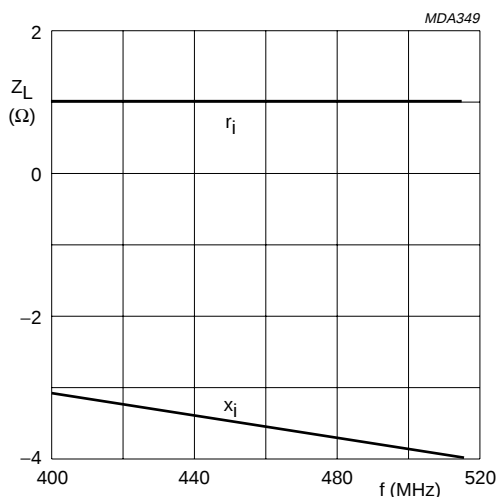

Typical values; $V_{CE} = 12,5$ V; $P_L = 60$ W; $f = 400$ to 512 MHz;
 $T_h = 25$ °C; $R_{th\ mb-h} = 0,2$ K/W; class-B operation.

Fig.10 Load impedance (series components).

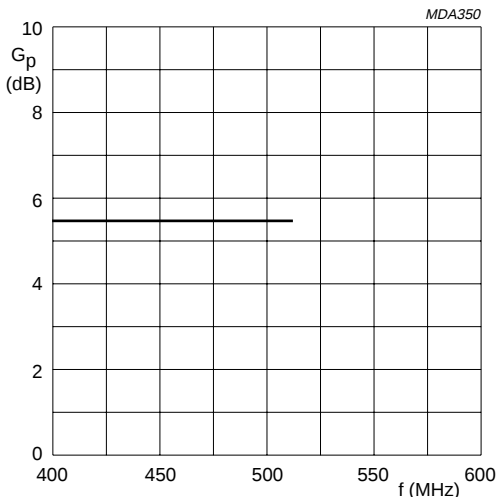

Typical values; $V_{CE} = 12,5$ V; $P_L = 60$ W; $f = 400$ to 512 MHz;
 $T_h = 25$ °C; $R_{th\ mb-h} = 0,2$ K/W; class-B operation.

Fig.11 Power gain versus frequency.


UHF power transistor

BLU60/12

PACKAGE OUTLINE


Flanged ceramic package; 2 mounting holes; 6 leads

SOT119A

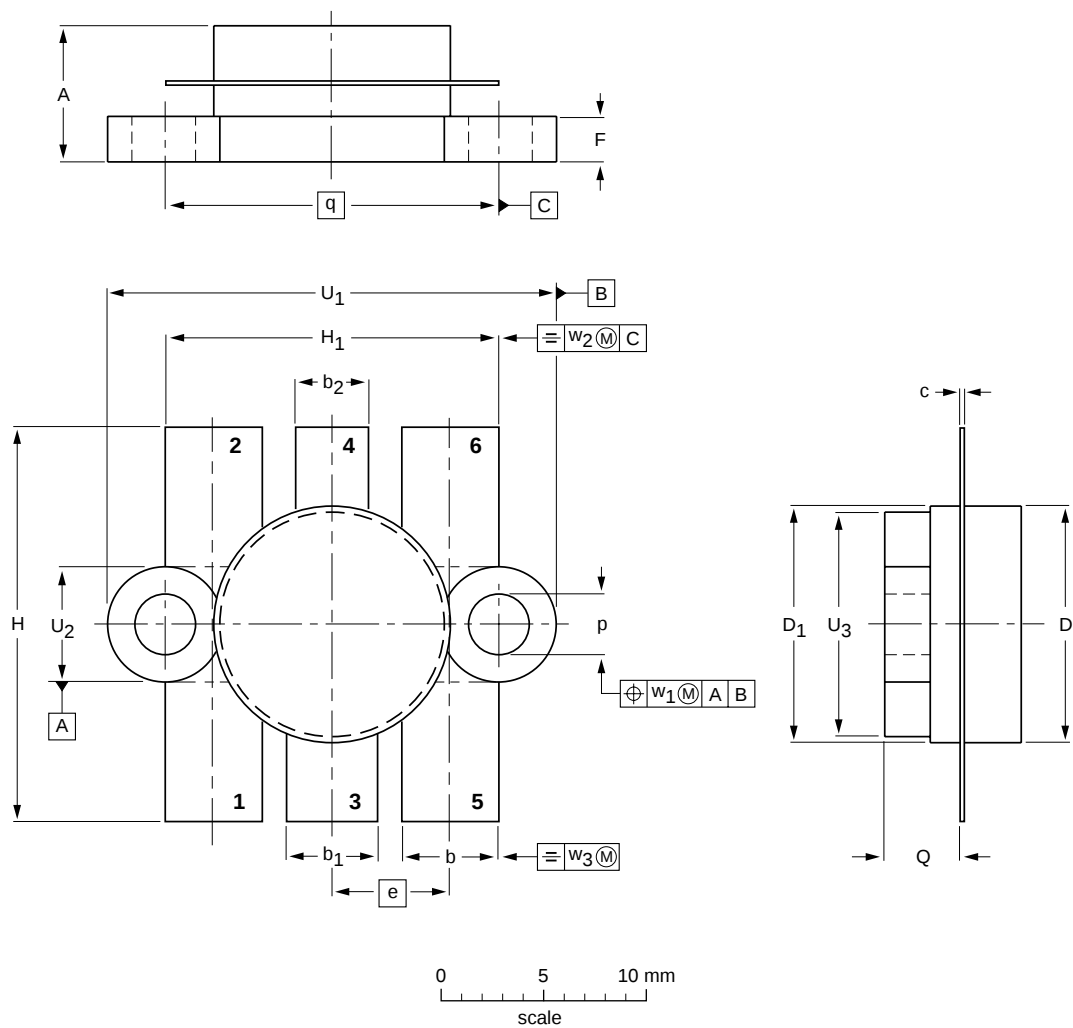

DIMENSIONS (millimetre dimensions are derived from the original inch dimensions)

UNIT	A	b	b ₁	b ₂	c	D	D ₁	e	F	H	H ₁	p	Q	q	U ₁	U ₂	U ₃	w ₁	w ₂	w ₃
mm	7.39 6.32	5.59 5.33	5.34 5.08	4.07 3.81	0.18 0.07	12.86 12.59	12.83 12.57	6.48	2.54 2.28	22.10 21.08	18.55 18.28	3.31 2.97	4.58 3.98	18.42	25.23 23.95	6.48 6.07	12.76 12.06	0.51	1.02	0.26
inches	0.291 0.249	0.220 0.210	0.210 0.200	0.160 0.150	0.007 0.003	0.505 0.496	0.505 0.495	0.255	0.100 0.090	0.870 0.830	0.730 0.720	0.130 0.117	0.180 0.157	0.725	0.993 0.943	0.255 0.239	0.502 0.475	0.02	0.04	0.01

OUTLINE VERSION	REFERENCES				EUROPEAN PROJECTION	ISSUE DATE
	IEC	JEDEC	EIAJ			
SOT119A						97-06-28

UHF power transistor

BLU60/12

DEFINITIONS

Data Sheet Status	
Objective specification	This data sheet contains target or goal specifications for product development.
Preliminary specification	This data sheet contains preliminary data; supplementary data may be published later.
Product specification	This data sheet contains final product specifications.
Limiting values	
Limiting values given are in accordance with the Absolute Maximum Rating System (IEC 134). Stress above one or more of the limiting values may cause permanent damage to the device. These are stress ratings only and operation of the device at these or at any other conditions above those given in the Characteristics sections of the specification is not implied. Exposure to limiting values for extended periods may affect device reliability.	
Application information	
Where application information is given, it is advisory and does not form part of the specification.	

LIFE SUPPORT APPLICATIONS

These products are not designed for use in life support appliances, devices, or systems where malfunction of these products can reasonably be expected to result in personal injury. Philips customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Philips for any damages resulting from such improper use or sale.